

Comus Group of Companies

PRODUCT DATA SHEET

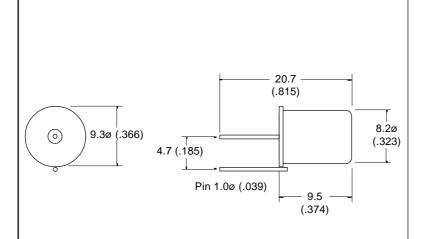



CM4400 switch is non-position sensitive.

Drawings not to scale
All dimensions in mm (inches) nominal

SPECIFICATION

CONTACT FORM/STYLE		See above	
SWITCHING VOLTAGE	Max. Vac	240	
SWITCHING CURRENT	Max. A	0.5	
SWITCHING CAPACITY	Max. VA	100	
CONTACT RESISTANCE	Max. m Ω	5	
OPERATING TEMPERATURE	Deg. °C	-37° +100°	
STORAGE TEMPERATURE	Deg. °C	-40° +125°	
CASE MATERIAL		Steel-tin plated	
CABLE/TERMINATION		Pin	
FEATURES		Standard Omni-Directional	

These switches contain toxic material and should not be opened.

NOTE: When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.

MOVEMENT / VIBRATION SWITCH - Mercury Contacts

Rev. No.	Revision Note	Date	Signature
C	Web Site 2001	1-2-01	RG

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

PART NUMBER CM 4400-1

The Comus Group of Companies consist of:
Assemtech Europe Limited
E. Bachem GmbH
Comus International
W. Gunther GmbH
Gunther Belgium
Gunther France
S.T.G.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Board Mount Pressure Sensors category:

Click to view products by Assemtech manufacturer:

Other Similar products are found below:

80527-25.0H2-05 80541-B00000150-01 80541-B00000200-05 80554-00700100-05 80568-00300050-01 81618-B00000040-01 81739-B00000900-01 81807-B00000020-01 81808-B00000150-14 82903-B00000020-01 93.631.4253.0 93.731.4353.0 93.932.4553.0 136PC150G2 136PC15A1 142PC95AW71 142PC05DW70 MPXV2202DPT1 15PSI-G-4V 1805-01A-L0N-B 2000317-1 26PCBKT 26PCCFA6D26 26PCCFS2G 26PCCVA6D 93.632.7353.0 93.731.3653.0 93.931.4853.0 93.932.4853.0 SCDA120-XSC05DC SP370-23-156-0 185PC30DH 192992-0059 20INCH-G-MV-MINI 26PCAFJ3G 26PCAFS2G54 26PCCEP5G24 26PCJEU5G19 30INCH-D1-MV-MINI ASCX15AN-90 TSCSAAN001PDUCV DCAL401DN DCAL401GN XZ202798SSC XZ203676HSC SP370-25-116-0 81717-00000050-05 81794-B00001200-01 HSCDLNN100PGAA5 81618-B000000040-05