
	TECHNICAL DATA SHEET	Code	H126A00
		version	6
		date	2008-09-17
	COAX RG6CU AL PVC	page	1/2

APPLICATION

Coaxial cables used in cabled distribution networks designed according the European Standard EN 50117 operating at frequencies between 5 MHz and 3000 MHz and the International Standard IEC 1196.

CONSTRUCTION

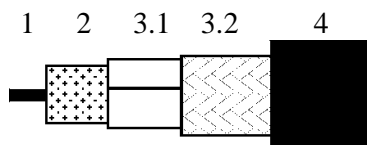


1	Inner conductor	Solid soft annealed copper
2	Dielectric	Gas injected PE
3.1	Foil	AL-PET-AL
3.2	Braid	Annealed tinned copper
4	Sheath	PVC according the European Standard HD 624.

REQUIREMENTS AND TEST METHODS

Test methods in accordance with European standard EN 50117-1.

Mechanical characteristics

1. Inner conductor:		
Diameter:		1.00 mm ± 0.03 mm
2. Dielectric:		
Diameter:		4.57 mm ± 0.15 mm
Adhesion:		No shrinkback
3. Outer conductor:		
Diameter screen:		5.25 mm
Foil overlap:		≥ 1 mm
Coverage braid:		35 % ± 5 %
4. Sheath:		
Diameter:		6.9 mm ± 0.2 mm
Tensile strength:		≥ 12.5 N/mm ²
Elongation at break:		≥ 150 %
5. Cable:		
Crush resistance of cable:		< 1% (load of 700N)
Storage/operating temperature:		-40°C to +70°C
Minimum installation temperature:		-5 °C
Minimum static bend radius:		35 mm

	TECHNICAL DATA SHEET	Code	H126A00
		version	6
		date	2008-09-17
	COAX RG6CU AL PVC	page	2/2

Electrical characteristics

Mean characteristic impedance:	75 ± 3 Ω
Regularity of impedance:	> 40 dB
DC loop resistance:	≤ 49 Ω/km
DC resistance inner conductor:	≤ 23 Ω/km
DC resistance outer conductor:	≤ 26 Ω/km
Capacitance:	54 pF/m ± 2 pF/m
Velocity ratio:	0.82 ± 0.02
Insulation resistance:	> 10 ⁴ MΩ.km
Voltage test of dielectric:	2 kVdc
Screening efficiency 100-1000 MHz:	≥ 75 dB
Transfer impedance:	≤ 40 mΩ/m
Screening class:	C
Return loss at 5-30 MHz:	≥ 20 dB*
30-470 MHz:	≥ 20 dB*
470-1000 MHz:	≥ 18 dB*
1000-2000 MHz:	≥ 16 dB*
2000-3000 MHz:	≥ 15 dB*

*Max. 3 peak values 4 dB lower than specified.


Attenuation at	Nominal	Attenuation at	Nominal
5 MHz:	1.8 dB/100m	800 MHz:	18.7 dB/100m
50 MHz:	4.7 dB/100m	1000 MHz:	21.1 dB/100m
100 MHz:	6.5 dB/100m	1350 MHz:	24.9 dB/100m
200 MHz:	9.8 dB/100m	1750 MHz:	28.8 dB/100m
400 MHz:	13.0 dB/100m	2150 MHz:	32.3 dB/100m
600 MHz:	16.2 dB/100m	2400 MHz:	34.4 dB/100m

Maximum attenuation is 10 % higher.

REVISIONS

#	Description	Date	Initials
6	Added Transfer impedance and screening class, changed screening efficiency to ≥75dB, changed temperature to -40C	2008-09-17	PBo



	TECHNICAL DATA SHEET	Code	H126A00
		version	6
		date	2008-09-17
	COAX RG6CU AL PVC	page	3/2

Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Coaxial Cables](#) category:

Click to view products by [Belden](#) manufacturer:

Other Similar products are found below :

[89880-003-1000](#) [633948-877-1000](#) [CY2389-000](#) [8213-010-1000](#) [8221-010-U1000](#) [8233-010-1000](#) [88281-010-500](#) [1322R-010-1000](#) [177799-000](#) [1807A-B59-U1000](#) [9167-010-1000](#) [9251-010-1000](#) [9275-010-U1000](#) [935240-000](#) [9659-010-1000](#) [980704-001](#) [CF2823-000](#) [33312-010-500](#) [CZ1589-000](#) [5022W0809-0CS3263](#) [10610-4-4](#) [EF8108-000](#) [1673B TIN100](#) [672525-001](#) [144517-000](#) [8-1616396-1](#) [8263-010-U1000](#) [8263 010U500](#) [8268-010-500](#) [8262 010U1000](#) [7915A 009U1000](#) [5024A1311-0](#) [TRC-75-1](#) [1281S5 010250](#) [1281S5 000250](#) [1530A 010U1000](#) [1505A 0081000](#) [9248 010U1000](#) [CO-142BNCX200-001](#) [7809WB 010500](#) [9244 0101000](#) [1694A 0081000](#) [9204 0101000](#) [8241F J5C1000](#) [1530A 0101000](#) [1674A TIN50](#) [7915A 0091000](#) [7915A 010500](#) [TWCH-78-2](#) [TWC-78-1](#)