

80.61

80.82



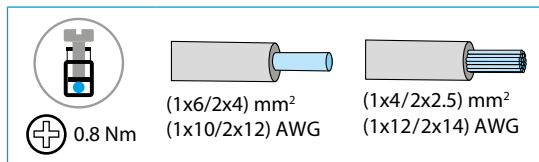
	<b>80.61.0.240.0000</b> $U_N$ (24...240)V AC (50/60 Hz) $U_N$ (24...220)V DC $U_{min}$ - $U_{max}$ (16.8–265)V AC $U_{min}$ - $U_{max}$ (16.8–242)V DC $P$ 0.6 VA / 0.6 W	<b>80.82.0.240.0000</b> $U_N$ (24...240)V AC (50/60 Hz) / DC $U_{min}$ 16.8 V AC / DC $U_{max}$ 265 V AC / DC $P$ 1.3 VA / 0.8 W
	1 CO (SPDT) 8 A 250 V AC AC1 2000 VA AC15 (230 V AC) 400 VA (M) (230 V AC) 0.3 kW DC1 (30/110/220) V (8/0.3/0.12) A	2 NO (SPST-NO) 6 A 250 V AC AC1 1500 VA AC15 (230 V AC) 300 VA DC1 (30/110/220)V (6/0.2/0.12)A
	(-10...+50)°C	(-10...+50)°C
IP20		

80.61

LED	$U_N$	15 - 18
	-	
	✓	
	⌚	

80.82


LED	$U_N$	17 - 18	17 - 28
	-		
	✓		
	✓		




- Open Type Device
- Pollution degree 2 Installation Environment
- Maximum Surrounding Air Temperature 40°C
- Use 60/75°C copper (Cu) conductor only and wire ranges No. 14–18 AWG, stranded or solid
- Terminal tightening torque of 7.1 lb.in. (0.8 Nm)

Utility Model - IB8061001 - 02/18 - FINDER S.p.A. - 10040 ALMESE (TO) - ITALY




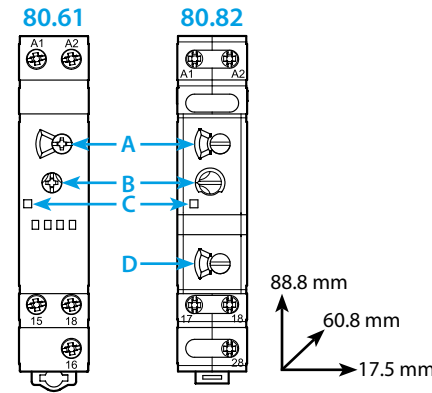
1



2

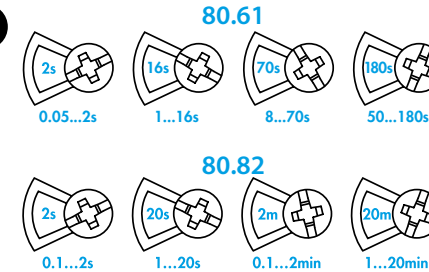

3

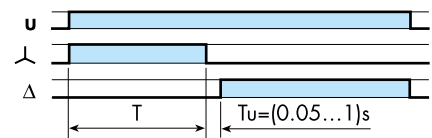BI  
80.61SD  
80.82

## ENGLISH

80.61 - 80.82  
MODULAR TIMER, MONO-FUNCTION

## 1 FRONT VIEW

- A Time scale selector (T)
- B Time setting (T)
- C LED (80.61): continuous: supply ON, relay ON  
LED (80.82): - blinking:  $\lambda$  ON  
- continuous:  $\Delta$  ON
- D Time scale selector (Tu)

## 2 TIME SCALES

## 3 WIRING DIAGRAM AND FUNCTIONS

- 3a 80.61: Start via contact in supply line (A1)  
BI Power off-delay (True off-delay)
- 3b 80.82: Start via contact in supply line (A1)  
SD Star-delta

## NOTE

Time scales and functions must be set before energising the timer

## OTHER DATA

- The LED on type 80.61 is illuminated only when the supply voltage is applied to the timer. During the timing period the LED is not illuminated
- Minimum control impulse (type 80.61): 500 ms (A1-A2)
- 35 mm rail mount (EN 60715)

## WORKING CONDITIONS

In conformity with the European Directive on EMC 2014/30/EC, the timer relay has a level of immunity, against radiated and conducted disturbances, considerably higher than requirements of EN 61812-1 standard.

However, devices like transformers, motors, contactors, switches and power cables may cause disturbances and even damage the timer electronic circuit.

For that reason, the wiring cables must be as short as possible, and, when necessary, the timer shall be protected by the relevant RC network, varistor or surge voltage protector.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Timers](#) category:*

*Click to view products by [Finder](#) manufacturer:*

Other Similar products are found below :

[79237785 H3DS-GL AC24-230/DC24-48](#) [H5AN-4DM DC12-24](#) [H5CN-XDNM AC100-240](#) [H5CN-YAN AC100-240](#) [H5CX-L8S-N AC100-240](#) [H3AMNSCAC100240](#) [H3AM-NSR-B AC100-240](#) [H3CA-8 DC12](#) [H3CR-A8-302 DC24](#) [H3CR-F AC24-48/DC12-48](#) [H3CR-G8EL AC200-240](#) [H5AN-4D DC12-24](#) [81506944](#) [88225029](#) [H5S-YB4-X](#) [H3CR-A-301 AC100-240/DC100-125](#) [H3CR-AS AC24-48/DC12-48](#) [H3DK-GE AC240-440](#) [H3RN-2 AC24](#) [H3RN-21 AC24](#) [H3CR-H8RL AC/DC24 M](#) [H3CR-H8RL AC100-120 S](#) [H3CR-G8EL-31 AC100-120](#) [H3CR-H8RL AC100-120 M](#) [H3CR-HRL AC100-120 M](#) [H3CR-A8-301 AC24-48/DC12-48](#) [H3CR-H8RL AC/DC24 S](#) [H7AN-2D DC12-24](#) [H5CN-XANS DC12-48](#) [H3CA-8 DC110](#) [H7AN-W4DM DC12-24](#) [H7AN-4DM DC12-24](#) [H7AN-4D DC12-24](#) [H7AN-RT6M AC100-240](#) [H3CA-8H AC200/220/240](#) [MTR17-BA-U240-116](#) [PM4HSDM-S-AC240VS](#) [PM4HSDM-S-AC240VSW](#) [PO-405](#) [600DT-CU](#) [H3Y-2-B DC24 30S](#) [PM4HF8-M-DC24V](#) [PM4HS-H-DC12VSW](#) [H3Y-2-B AC100-120 10S](#) [H3Y-2-B AC100-120 30S](#) [H3C-R](#) [H3CR-A8-301 24-48AC/12-48DC](#) [H3CR-A8E 24-48AC/DC](#) [H3CR-F8 100-240AC/100-125DC](#)