



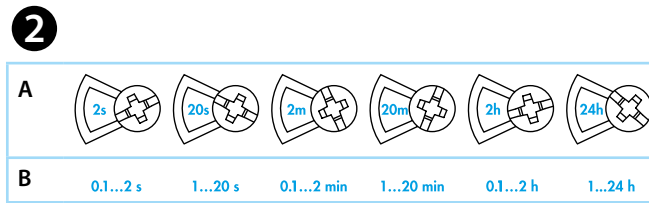

80.91

|      |   |
|------|---|
|      | <b>80.91.0.240.0000</b><br>$U_N$ (12...240) V AC (50/60 Hz) / DC<br>$U_{min}$ 10.8 V AC/DC<br>$U_{max}$ 265 V AC/DC<br>$P < 1.8$ VA (50 Hz) / $< 1$ W |
|      | 1 CO (SPDT)<br>16 A 250 V AC<br>AC1 4000 VA<br>AC15 (230 V AC) 750 VA<br>(M) (230 V AC) 0.55 kW<br>DC1 (30/110/220) V (16/0.3/0.12) A                 |
|      | (-10...+50)°C   |
| IP20 |   |

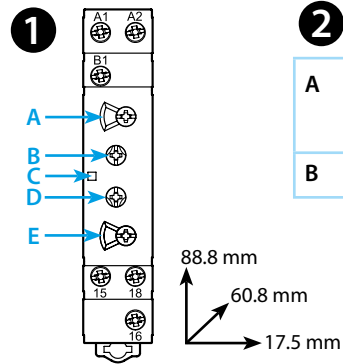

| LED | $U_N$ |         |         |
|-----|-------|---------|---------|
|     | -     | 15 - 18 | 15 - 16 |
|     | ✓     | 15 - 18 | 15 - 16 |
|     | ✓     |         | 15 - 16 |
|     | ✓     | 15 - 16 | 15 - 18 |



- Open Type Device
- Pollution degree 2 Installation Environment
- Maximum Surrounding Air Temperature 40°C
- Use 60/75°C copper (Cu) conductor only and wire ranges No. 14–18 AWG, stranded or solid
- Terminal tightening torque of 7.1 lb.in. (0.8 Nm)

Utility Model - IB8091001 - 02/18 - FINDER S.p.A. - 10040 ALMESE (TO) - ITALY

# ENGLISH

80.91  
MODULAR TIMER ASYMMETRICAL RECYCLING

## 1 FRONT VIEW

- A Time scales rotary selector (T1)
- B Time setting (T1)
- C LED
- D Functions rotary selector (T2)
- E Time scales rotary selector (T2)

## 2 TIME SCALES

(Eg. T=20 min: set A=20 m and B=T max)

## 3 WIRING DIAGRAM AND FUNCTIONS

(WARNING: the functions must be set before energising the timer)

### 3a Without signal START function

Start via contact in supply line (A1)

LI = Asymmetrical flasher (starting pulse on)

### 3b With signal START function

Start via contact into control terminal (B1)

LE = Asymmetrical flasher (starting pulse on) with control signal

3c Possible to control an external load, such as another relay coil or timer, connected to the signal start terminal B1

3d With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1)

3e A voltage other than the supply voltage can be applied to the command Start (B1), example:

A1-A2 = 230 V AC

B1-A2 = 12 V DC

## OTHER DATA

Minimum control impulse: 50 ms

Recovery time: 100 ms

35 mm rail mount (EN 60715)

## WORKING CONDITIONS

In conformity with the European Directive on EMC 2014/30/EC, the timer relay has a level of immunity, against radiated and conducted disturbances, considerably higher than requirements of EN 61812-1 standard. However, devices like transformers, motors, contactors, switches and power cables may cause disturbances and even damage the timer electronic circuit. For that reason, the wiring cables must be as short as possible, and, when necessary, the timer shall be protected by the relevant RC network, varistor or surge voltage protector.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Timers](#) category:*

*Click to view products by [Finder](#) manufacturer:*

Other Similar products are found below :

[79237785 H3DS-GL AC24-230/DC24-48](#) [H5AN-4DM DC12-24](#) [H5CN-XDNM AC100-240](#) [H5CN-YAN AC100-240](#) [H5CX-L8S-N AC100-240](#) [H3AMNSCAC100240](#) [H3AM-NSR-B AC100-240](#) [H3CA-8 DC12](#) [H3CR-A8-302 DC24](#) [H3CR-F AC24-48/DC12-48](#) [H3CR-G8EL AC200-240](#) [H5AN-4D DC12-24](#) [81506944](#) [88225029](#) [H5S-YB4-X](#) [H3CR-A-301 AC100-240/DC100-125](#) [H3CR-AS AC24-48/DC12-48](#) [H3DK-GE AC240-440](#) [H3RN-2 AC24](#) [H3RN-21 AC24](#) [H3CR-H8RL AC/DC24 M](#) [H3CR-H8RL AC100-120 S](#) [H3CR-G8EL-31 AC100-120](#) [H3CR-H8RL AC100-120 M](#) [H3CR-HRL AC100-120 M](#) [H3CR-A8-301 AC24-48/DC12-48](#) [H3CR-H8RL AC/DC24 S](#) [H7AN-2D DC12-24](#) [H5CN-XANS DC12-48](#) [H3CA-8 DC110](#) [H7AN-W4DM DC12-24](#) [H7AN-4DM DC12-24](#) [H7AN-4D DC12-24](#) [H7AN-RT6M AC100-240](#) [H3CA-8H AC200/220/240](#) [MTR17-BA-U240-116](#) [PM4HSDM-S-AC240VS](#) [PM4HSDM-S-AC240VSW](#) [PO-405](#) [600DT-CU](#) [H3Y-2-B DC24 30S](#) [PM4HF8-M-DC24V](#) [PM4HS-H-DC12VSW](#) [H3Y-2-B AC100-120 10S](#) [H3Y-2-B AC100-120 30S](#) [H3C-R](#) [H3CR-A8-301 24-48AC/12-48DC](#) [H3CR-A8E 24-48AC/DC](#) [H3CR-F8 100-240AC/100-125DC](#)