

# DTMSS-16 SENDUST POWER INDUCTORS



## APPLICATIONS:


- interference suppressing chokes (DC - 300kHz)
- energy storage inductors (DC - 300kHz)
- DC/DC converters
- SMPS
- EMI filters (DC - 1 MHz)
- acoustic filters

## ORDERING CODE:

DTMSS- 16 /0,68/0,2 - V

mounting: V - vertical, H - horizontal, BV - base vertical, CV - case vertical, CH - case horizontal, KM3 - base vertical  
 rated current in Amps  
 inductance in mH@ $I_{DC} = 0A$   
 sendust core outer diameter  
 product symbol

## DIMENSIONS:

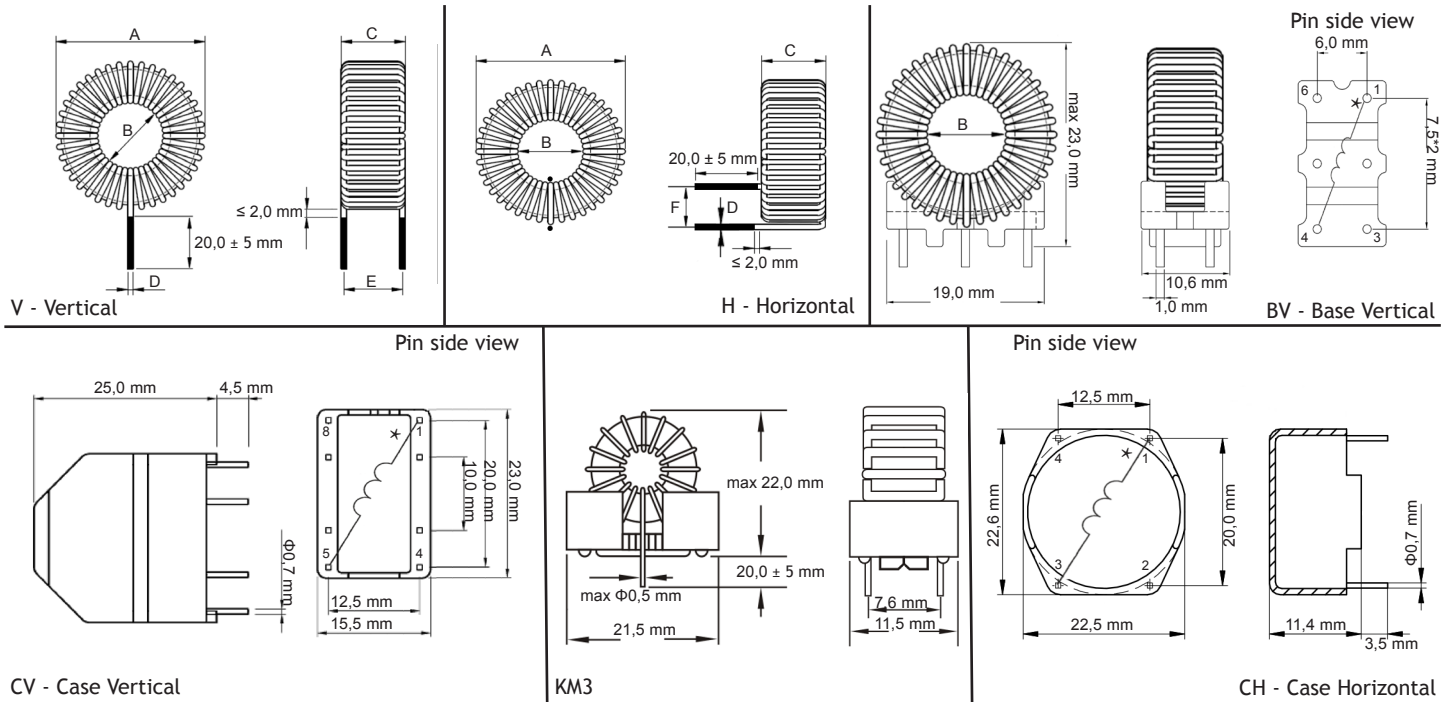


Part number	Dimensions ( $\pm 10\%$ )						Mounting version					
	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	V	H	BV	CV	CH	KM3
DTMSS-16/0,68/0,2	17,5	8,5	7,5	0,16	7,0	4,5	✓	✓	✓	✓	✓	✓
DTMSS-16/0,47/0,3	18,0	8,5	7,5	0,20	7,0	4,5	✓	✓	✓	✓	✓	✓
DTMSS-16/0,33/0,4	18,0	8,5	7,5	0,25	7,0	4,5	✓	✓	✓	✓	✓	✓
DTMSS-16/0,22/0,7	18,0	8,0	8,0	0,30	7,0	5,0	✓	✓	✓	✓	✓	✓
DTMSS-16/0,15/1,0	18,5	8,0	8,0	0,35	7,0	5,0	✓	✓	✓	✓	✓	✓
DTMSS-16/0,10/1,6	18,5	7,0	9,0	0,45	8,0	5,0	✓	✓	✓	✓	✓	✓
DTMSS-16/0,068/2,0	18,5	7,0	9,0	0,50	8,0	5,0	✓	✓	✓	✓	✓	✓
DTMSS-16/0,047/4,0	20,0	5,5	9,5	1,00	8,0	7,0	✓	✓	-	✓	✓	-
DTMSS-16/0,033/6,0	20,0	5,0	10,0	1,25	9,0	7,5	✓	✓	-	-	-	-
DTMSS-16/0,022/8,0	20,0	4,5	10,0	1,50	9,0	8,0	✓	✓	-	-	-	-
DTMSS-16/0,015/10	21,0	3,5	10,5	1,60	9,0	8,0	✓	✓	-	-	-	-
DTMSS-16/0,010/15	22,0	2,25	11,0	2,00	9,0	8,0	✓	✓	-	-	-	-
DTMSS-16/0,0068/20	22,0	1,2	12,0	2,80	9,0	10,5	✓	✓	-	-	-	-

**ELECTRICAL PROPERTIES:**


Part number	Lmax [μH]	I <sub>max</sub> [A]	L@I <sub>max</sub> [μH]	RDC [Ω]	Δt [°C]
DTMSS-16/0,68/0,2	680	0,20	673	2,48	6,6
DTMSS-16/0,47/0,3	470	0,30	464	1,23	7,6
DTMSS-16/0,33/0,4	330	0,40	324	0,907	10,6
DTMSS-16/0,22/0,7	220	0,70	212	0,460	12,6
DTMSS-16/0,15/1,0	150	1,00	140	0,239	13,0
DTMSS-16/0,10/1,6	100	1,60	89	0,123	16,0
DTMSS-16/0,068/2,0	68	2,00	61	0,0876	20,0
DTMSS-16/0,047/4,0	47	4,00	36	0,0453	36,3
DTMSS-16/0,033/6,0	33	6,00	23	0,0245	41,3
DTMSS-16/0,022/8,0	22	8,00	15	0,0166	46,3
DTMSS-16/0,015/10	15	10,0	10	0,00856	31,6
DTMSS-16/0,010/15	10	15,0	5,3	0,00430	37,1
DTMSS-16/0,0068/20	7	20,0	3,5	0,00318	37,7

**CHARACTERISTICS:**

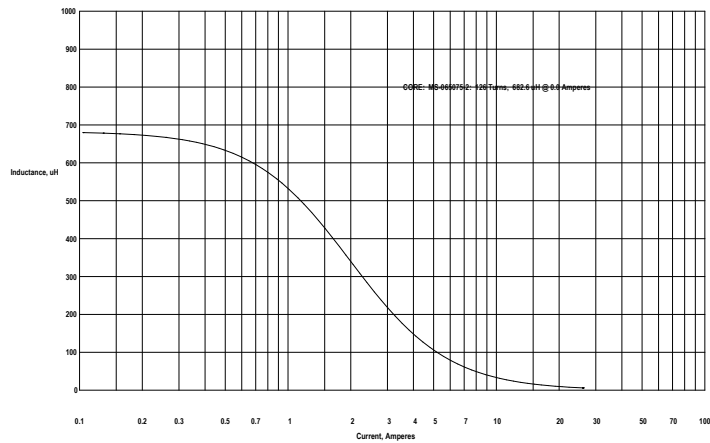


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:29:43 2011

DTMSS-16/0,68/0,2

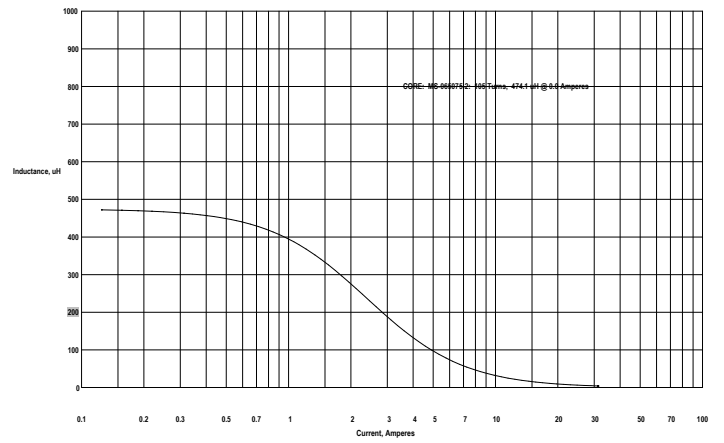


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:24:35 2011

DTMSS-16/0,47/0,3

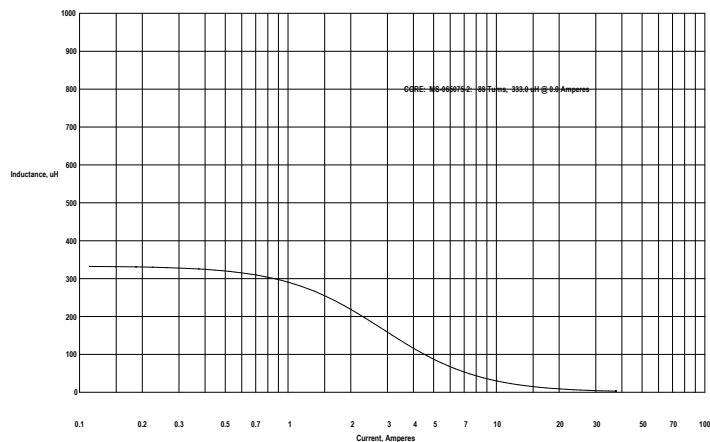

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:28:05 2011


DTMSS-16/0,33/0,4

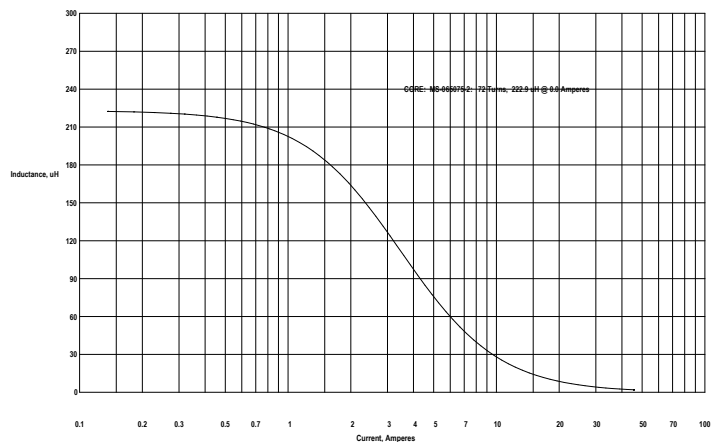

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:27:26 2011


DTMSS-16/0,22/0,7

**CHARACTERISTICS:**

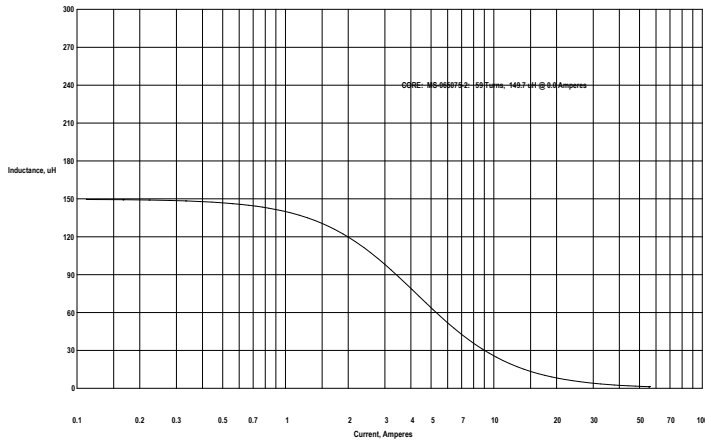


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:29:10 2011

DTSS-16/0,15/1,0

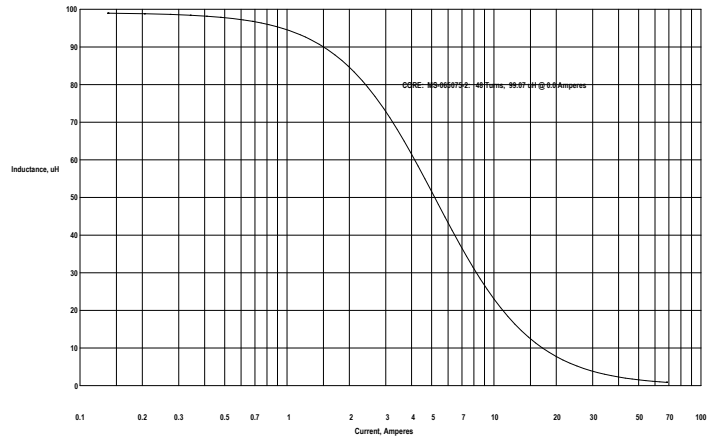


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:30:58 2011

DTSS-16/0,1/1,6

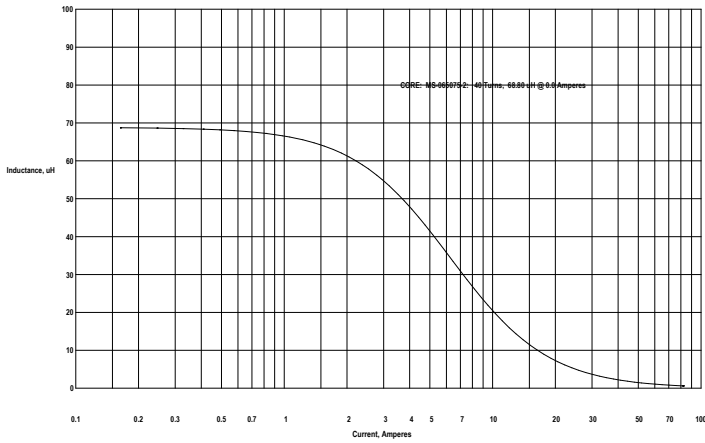


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:32:50 2011

DTSS-16/0,068/2,0

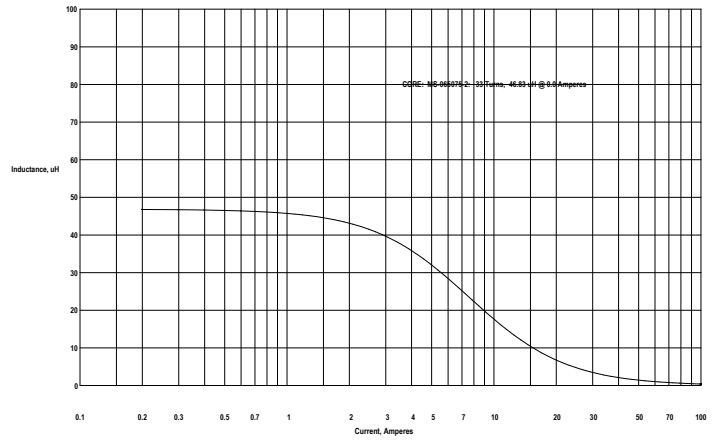


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:34:28 2011

DTSS-16/0,047/4,0

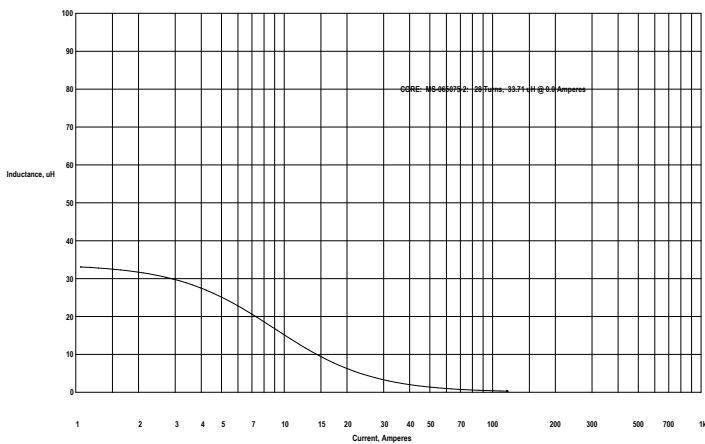

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:35:49 2011


DTSS-16/0,033/6,0

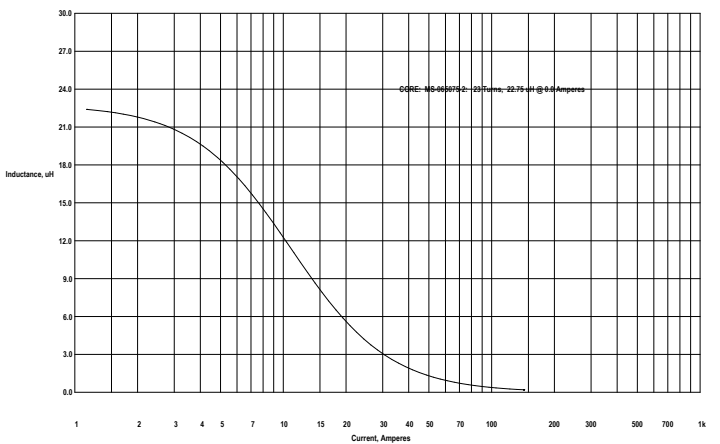

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:37:38 2011


DTSS-16/0,022/8,0

**CHARACTERISTICS:**

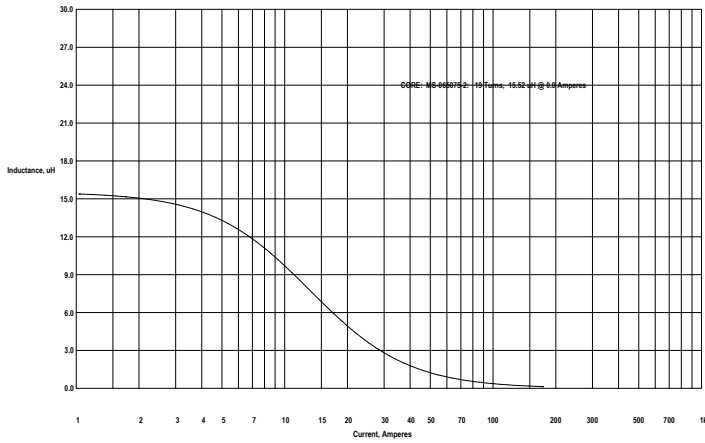


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:39:20 2011

DTMS-16/0,015/10

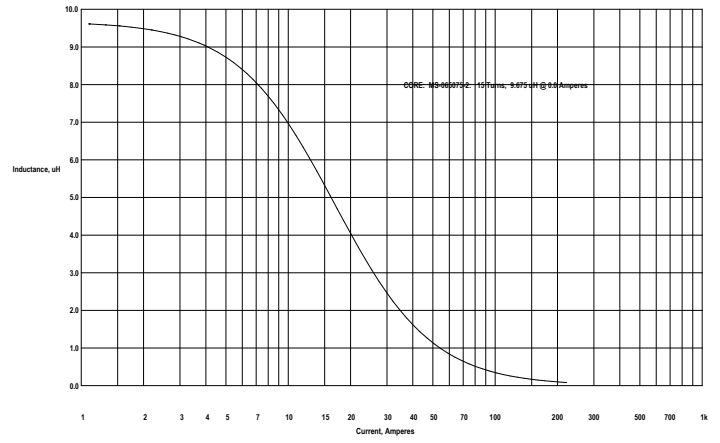

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:41:33 2011

DTMS-16/0,01/15

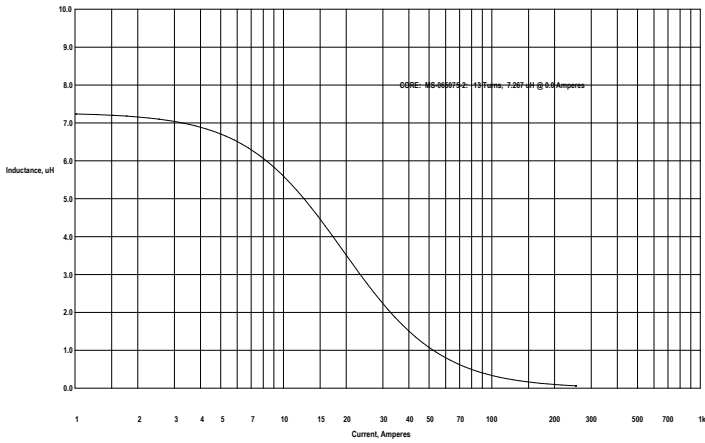

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Wed Nov 23 12:43:28 2011

DTMS-16/0,0068/20

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Fixed Inductors](#) category:*

*Click to view products by [Feryster](#) manufacturer:*

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)