


VIDEO AMPLIFIER

■ GENERAL DESCRIPTION


The NJM592 is a video amplifier of differential input and differential output.

The NJM592 is suitable for a preamplifier of memory equipment and video and pulse signal amplifier.


■ PACKAGE OUTLINE




NJM592D



NJM592M



NJM592D8



NJM592M8



NJM592V8




NJM592V

■ FEATURES

- Wide Frequency Range (40MHz, 90MHz typ.)
- Differential Input, Differential Output.
- With Gain Select Terminal
- Package Outline DIP8/14, DMP8/14, SSOP8/14.
- Bipolar Technology


■ PIN CONFIGURATION

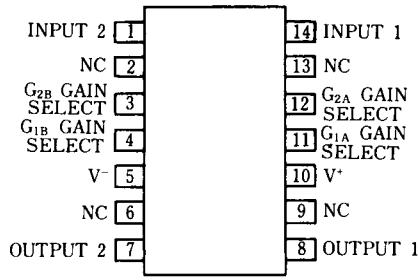

NJM592D

NJM592M

NJM592V

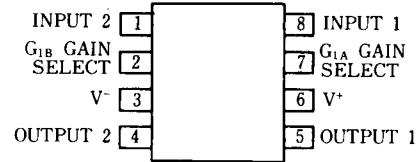


NJM592D8

NJM592M8

NJM592V8

■ EQUIVALENT CIRCUIT

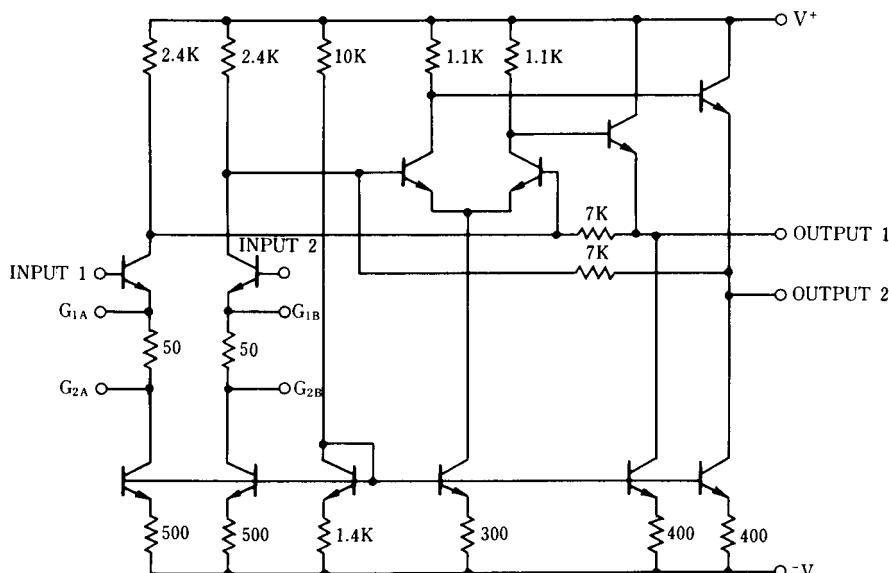

NJM592

■ ABSOLUTE MAXIMUM RATINGS

(T_a=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺ /V ⁻	±8	V
Differential Input Voltage	V _{DIFF}	±5	V
Common Mode Input Voltage	V _{CM}	±6	V
Output Current	I _O	10	mA
Operating Temperature Range	T _{opr}	-40 to +85	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C
Power Dissipation	P _D	(DIP14) 500 (DMP14) 300 (SSOP14) 300 (DIP8) 500 (DMP8) 300 (SSOP8) 250	mW

■ ELECTRICAL CHARACTERISTICS

(T_a=25°C, V⁺=±6V, V_{CM}=0)

PARAMETER	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Differential Voltage Gain 1 (note 1)	R _L =2kΩ, V _{OUT} =3V _{P-P}	250	400	600	V/V
Differential Voltage Gain 2 (note 2, 4)		80	100	120	
Bandwidth (note 1)		-	40	-	MHz
Bandwidth 2 Gain 2 (note 2, 4)		-	90	-	
Rise Time Gain 1 (note 1)	V _{OUT} =1V _{P-P}	-	10.5	-	ns
Rise Time Gain 2 (note 2, 4)		-	4.5	-	
Propagation Delay 1 Gain 1 (note 1)	V _{OUT} =1V _{P-P}		7.5	-	ns
Propagation Delay 2 Gain 2 (note 2, 4)		-	6.0	-	
Input Resistance Gain 1 (note1)		-	4.0	-	kΩ
Input Resistance Gain 2 (note 2, 4)		-	30	-	
Input Capacitance Gain 2 (note2, 4)		-	2.0	-	pF
Input Offset Current		-	0.4	5.0	μA
Input Bias Current		-	9.0	30	μA
Input Noise Voltage	BW=1kHz to 10MHz	-	12	-	μVrms
Input Voltage Range		-	-	±1.0	V
Common Mode Rejection Radio Gain 2 (note 4)	V _{CM} =±1V, f<100kHz	60	86	-	dB
Common Mode Rejection Radio Gain 2 (note 4)	V _{CM} =±1V, f=5MHz	-	60	-	
Supply Voltage Rejection Radio Gain 2 (note 4)	ΔV ⁺ /V=±0.5V	50	70	-	dB
Output Offset Voltage Gain 1 (note 1)	R _L =∞	-	-	1.5	
Output Offset Voltage Gain 2 (note2, 4)	R _L =∞	-	-	1.5	V
Output Offset Voltage Gain 3 (note 3)	R _L =∞	-	0.35	0.75	
Output Common Mode Voltage	R _L =∞	2.4	2.9	3.4	V
Output Voltage Swing	R _L =2kΩ	3.0	4.0	-	V
Output Resistance		-	20	-	Ω
Output Current	R _L =∞	-	18	24	mA







(note 1) : Gain select pins G_{1A} and G_{1B} connected together. (Gain 1)(note 2) : Gain select pins G_{2A} and G_{2B} connected together. (Gain 2)

(note 3) : All gain select pins open.

(note 4) : Apply to only 14 pins package.




NJM592

■ TYPICAL CHARACTERISTICS

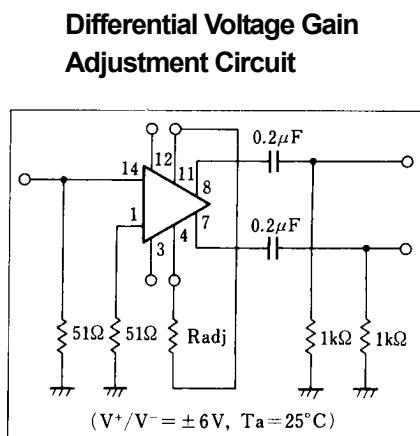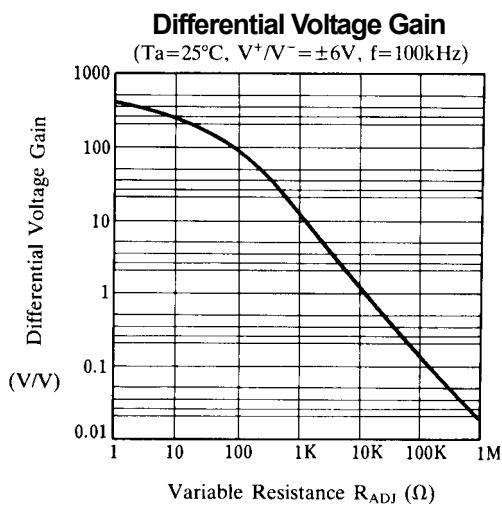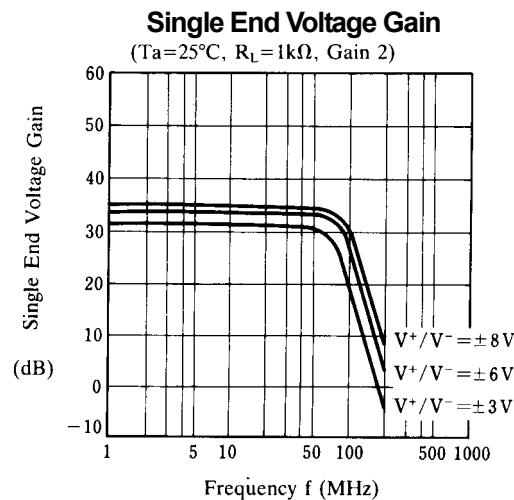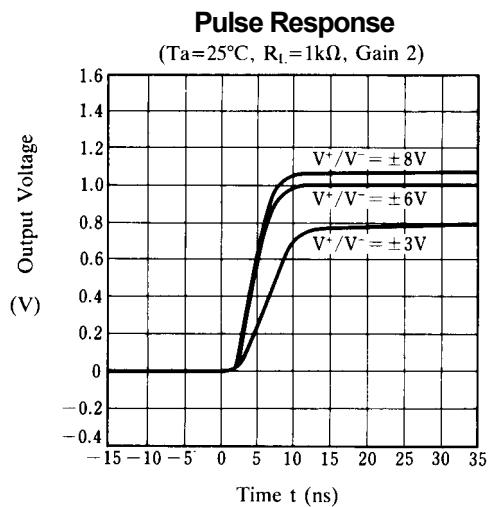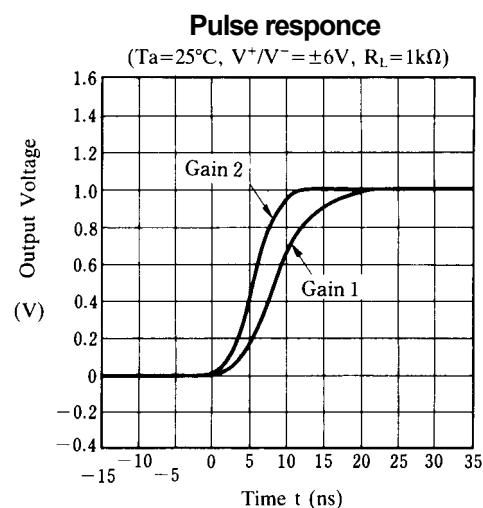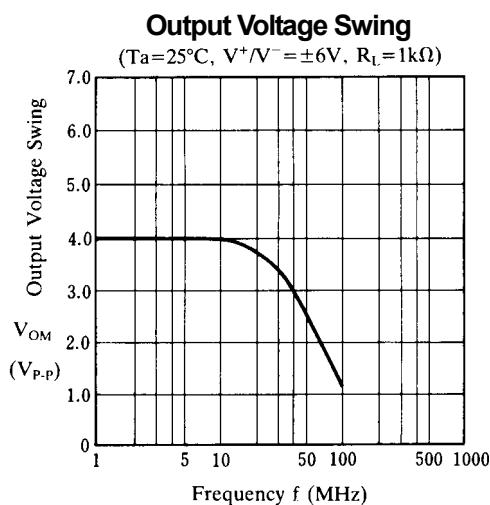



■ TYPICAL CHARACTERISTICS**Operating Current**

(Ta=25°C)

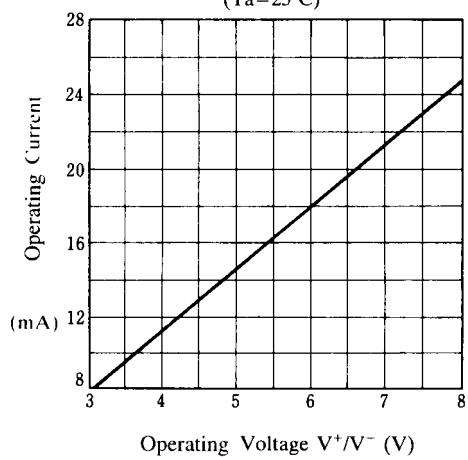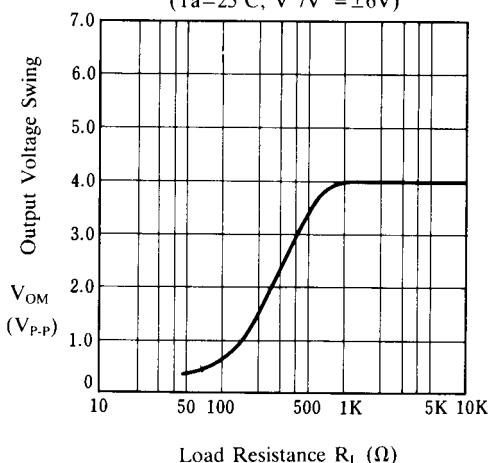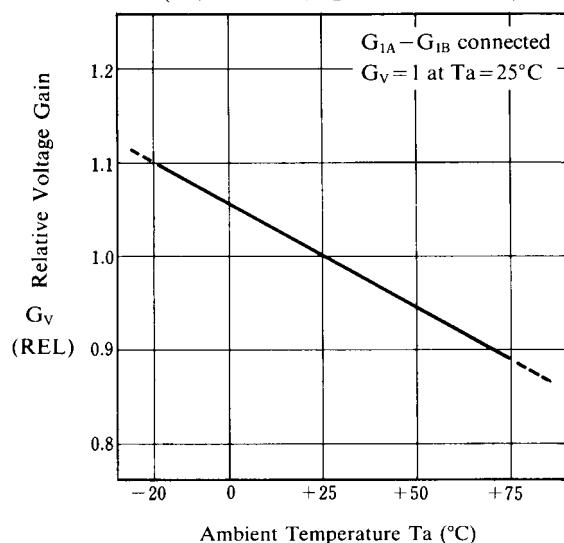**Output Voltage Swing**(Ta=25°C, V⁺/V⁻=±6V)**Voltage Gain**(V⁺/V⁻=±6V, R_L=1kΩ, f=100kHz)


NJM592

■ TEST CIRCUIT

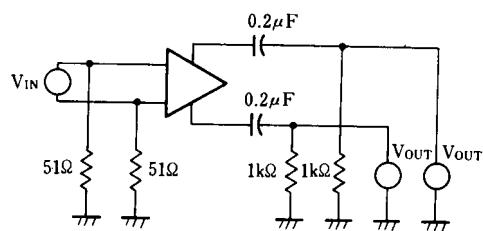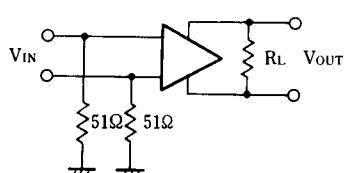

■ TYPICAL APPLICATION

Basic Circuit

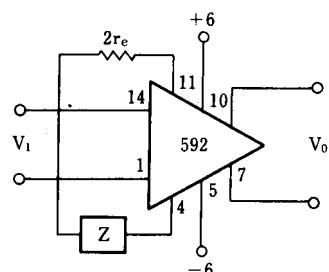


$$\frac{V_o(s)}{V_i(s)} \approx \frac{1.4 \times 10^4}{Z(s) + 2r_e}$$


$$\approx \frac{1.4 \times 10^4}{Z(s) + 32}$$

Filter Network		
Z NETWORK	FILTER TYPE	$\frac{V_o(s)}{V_i(s)}$ TRANSFER FUNCTION
	LOW PASS	$\frac{1.0 \times 10^4}{L} \left[\frac{1}{s+R/L} \right]$
	HIGH PASS	$\frac{1.4 \times 10^4}{R} \left[\frac{s}{s+1/RC} \right]$
	BAND PASS	$\frac{1.4 \times 10^4}{L} \left[\frac{s}{s^2+R/L \cdot s+1/LC} \right]$
	BAND REJECT	$\frac{1.4 \times 10^4}{R} \left[\frac{s^2+1/LC}{s^2+1/LC+s/RC} \right]$

Disk/Tape Phase Modulated Readback Systems

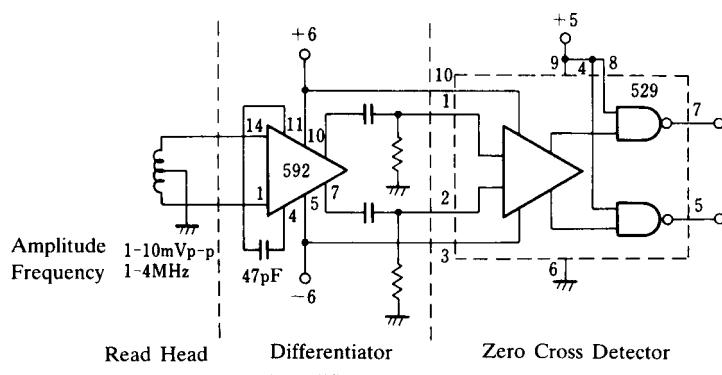

Differentiation with High Common Mode Noise Rejection

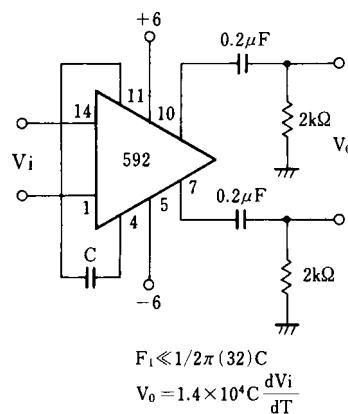

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Video Amplifiers](#) category:

Click to view products by [NJR manufacturer:](#)

Other Similar products are found below :

[LT1193CN8](#) [NJW1351RB1-TE1](#) [MAX452ESA+](#) [5962-9313101M2A](#) [CGB7011-SC-0G00](#) [MAX9583AZT+T](#) [MAX5679ETJ+](#)
[MAX4312EEE+](#) [NJM592D8](#) [LT6552IDD#PBF](#) [LT1252CN8#PBF](#) [LT6559CUD#PBF](#) [LT1256CN#PBF](#) [AD8372ACPZ-R7](#)
[LT6553CGN#PBF](#) [LT1675CGN#PBF](#) [MAX454CPD+](#) [AD8145WYCPZ-R7](#) [ISL59110IEZ-T7](#) [LT1256CS#PBF](#) [LT1251CS#PBF](#) [ADA4856-3YCPZ-R7](#) [LT6552CDD#PBF](#) [LT1254CN#PBF](#) [LT1253CN8#PBF](#) [LT1675CMS8-1#PBF](#) [HMC3587LP3BETR](#) [HMC453QS16GETR](#)
[LM324AM](#) [5962-9313201MPA](#) [AD829SQ/883B](#) [AD8001ANZ](#) [AD8001AQ](#) [AD8001AR](#) [AD8001ARTZ-REEL7](#) [AD8001ARZ](#)
[AD8001ARZ-REEL7](#) [AD8013ARZ-14](#) [AD8023ARZ](#) [AD8072ARMZ](#) [AD8072JNZ](#) [AD8072JRZ](#) [AD8073JRZ](#) [AD810AN](#) [AD810ANZ](#)
[AD810ARZ](#) [AD810ARZ-REEL7](#) [AD810TRZ-EP](#) [AD811ANZ](#) [AD811ARZ-16](#)