

**FILTER - TUNABLE, BAND PASS SMT
5.9 - 11.2 GHz**




Typical Applications

The HMC894LP5E is ideal for:

- Test & Measurement Equipment
- Military RADAR & EW/ECM
- SATCOM & Space
- Industrial & Medical Equipment

Functional Diagram

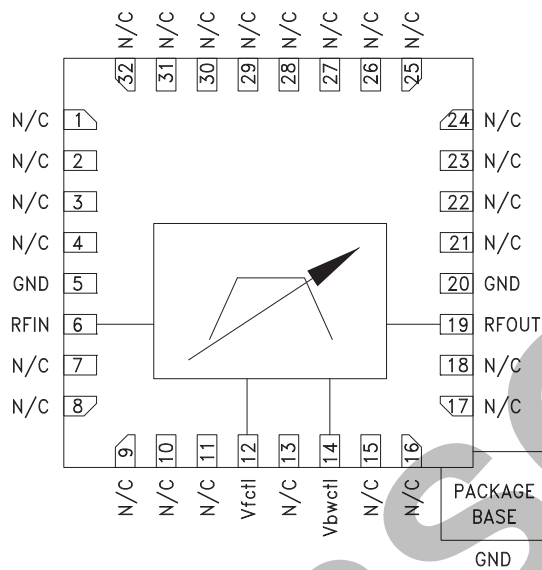

Features

- Fast Tuning Response; 200 ns
- Excellent Wideband Rejection; >30 dB
- Single Chip Replacement for Mechanically Tuned Designs
- 32 Lead 5x5 mm SMT Package

General Description

The HMC894LP5E is a MMIC band pass filter which features a user selectable passband frequency. The 3 dB filter bandwidth is approximately 6%. The 20 dB filter bandwidth is approximately 16.5%. The center frequency can be varied between 5.9 and 11.2 GHz by applying an analog tune voltage between 0 and 14V. This tunable filter can be used as a much smaller alternative to physically large switched filter banks and cavity tuned filters. The HMC894LP5E has excellent microphonics due to the monolithic design, and provides a dynamically adjustable solution in advanced communications applications.

Electrical Specifications, $T_A = +25^\circ\text{C}$, $V_{ctl} = V_{bwtl}$ Unless Otherwise Stated

Parameter	Min.	Typ.	Max.	Units
F_{center} Tuning Range	5.9		11.2	GHz
3 dB Bandwidth		6		%
Low Side Rejection Frequency (Rejection >20 dB)		$0.92 \cdot F_{center}$		GHz
High Side Rejection Frequency (Rejection >20 dB)		$1.08 \cdot F_{center}$		GHz
Re-entry Frequency (Rejection <30 dB)		25		GHz
3 dB Bandwidth Control (V_{bwtl})		± 3		%
Insertion Loss		9		dB
Return Loss (2 dB Bandwidth)		7.5		dB
Maximum Input Power for Linear Operation			10	dBm
Frequency Control Voltage (V_{ctl})	0		14	V
Source/Sink Current (I_{ctl})			± 1	mA
Bandwidth Control Voltage (V_{bwtl})	0		14	V
Source/Sink Current (I_{bwtl})			± 1	mA
Residual Phase Noise [1] (1 MHz Offset)		-165		dBc/Hz
F_{center} Drift Rate		-0.86		MHz/ $^\circ\text{C}$
Tuning Characteristics [2] tFULLBAND (0% V_{ctl} to 90% RF)		200		ns


[1] Optimum residual phase noise performance requires the use of a low noise driver circuit.

[2] Tuning speed is dependent on driver circuit. Data measured with a high speed op-amp driver and includes driver slew rate delay.


**FILTER - TUNABLE, BAND PASS SMT
5.9 - 11.2 GHz**




Broadband Insertion Loss vs. Control Voltages, Vfctl = Vbwctl

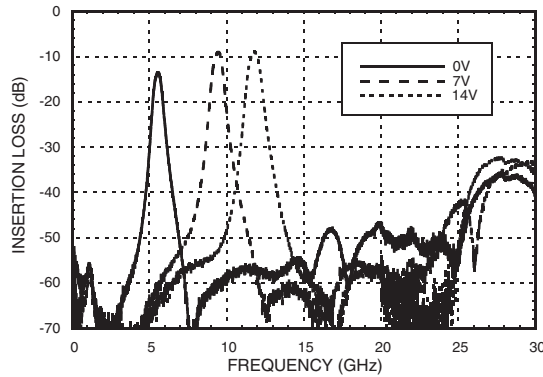


Broadband Return Loss vs. Control Voltages, Vfctl = Vbwctl

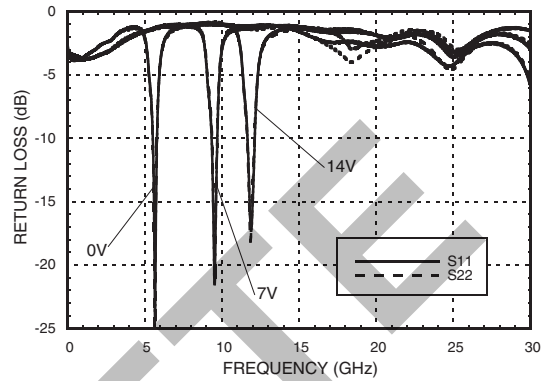


Insertion Loss vs. Control Voltages, Vfctl = Vbwctl

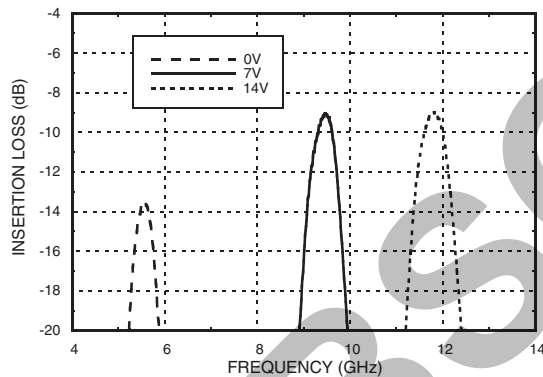


Return Loss vs. Control Voltages, Vfctl = Vbwctl

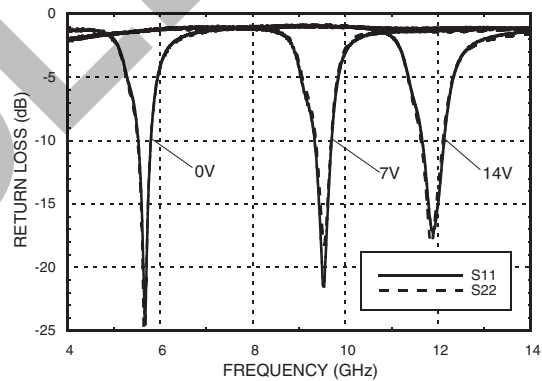

Insertion Loss vs. Temperature, Vfctl = Vbwctl = 7V

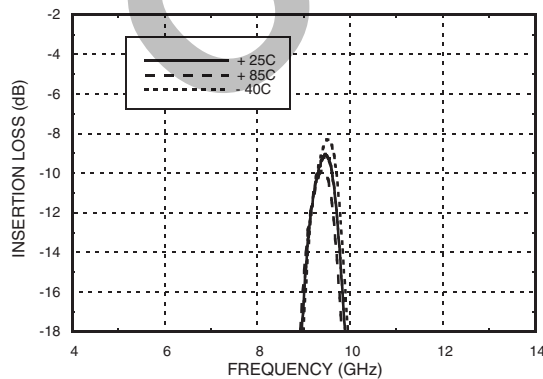

Return Loss vs. Temperature, Vfctl = Vbwctl = 7V

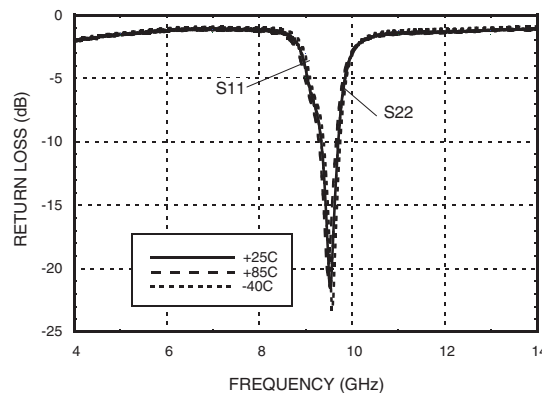

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




**FILTER - TUNABLE, BAND PASS SMT
5.9 - 11.2 GHz**


3

FILTERS - TUNABLE - SMT


Broadband Insertion Loss vs. Vbwctl, Vfctl = 7V

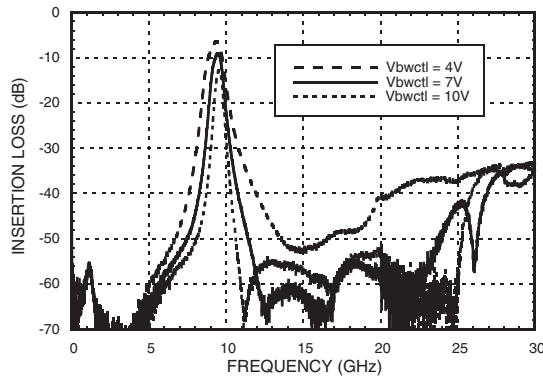


Broadband Return Loss vs. Vbwctl, Vfctl = 7V

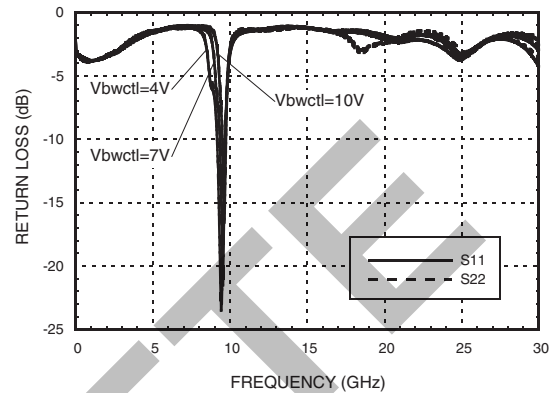


Insertion Loss vs. Vbwctl, Vfctl = 7V

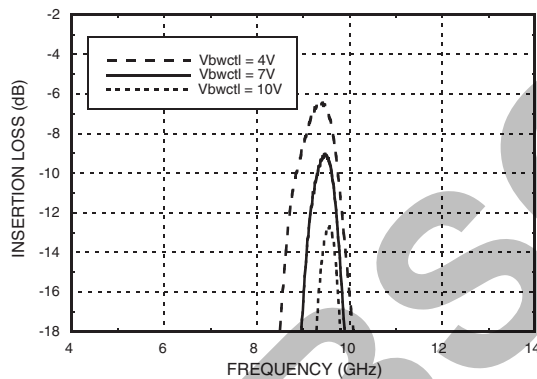


Return Loss vs. Vbwctl, Vfctl = 7V

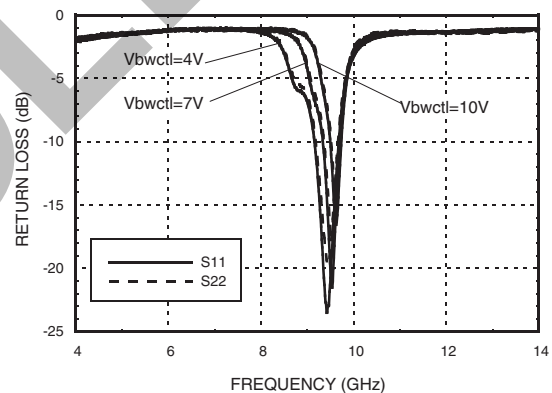

Center Frequency vs. Temperature, Vfctl = Vbwctl

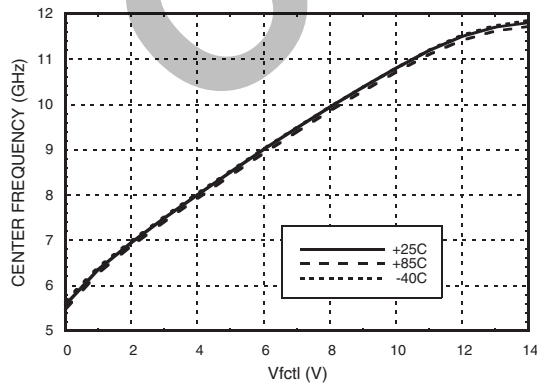

Insertion Loss vs. Temperature, Vfctl = Vbwctl

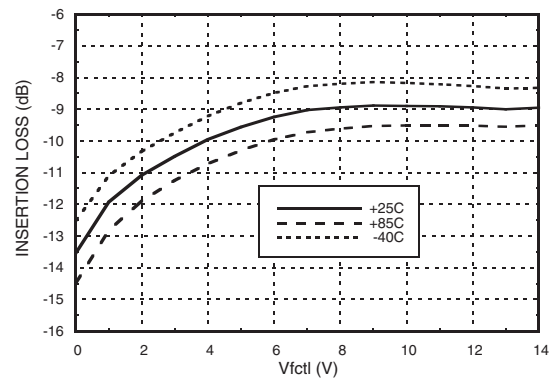


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




**FILTER - TUNABLE, BAND PASS SMT
5.9 - 11.2 GHz**


**3 dB Bandwidth vs. Temperature,
 $V_{fctl} = V_{bwctl}$**

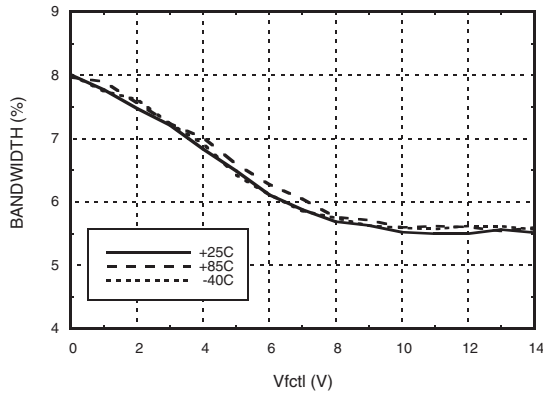


**Maximum Return Loss in a 2 dB Bandwidth
vs. Temperature, $V_{fctl} = V_{bwctl}$**

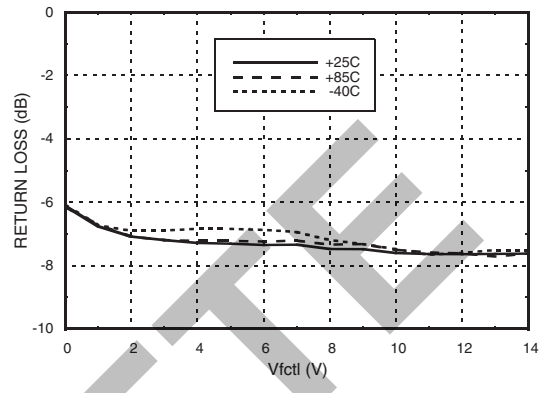


**Low Side Rejection Ratio vs.
Temperature, $V_{fctl} = V_{bwctl}$ [1]**

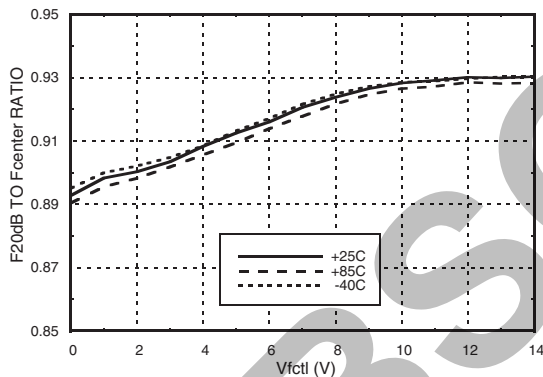


**High Side Rejection Ratio vs.
Temperature, $V_{fctl} = V_{bwctl}$ [1]**

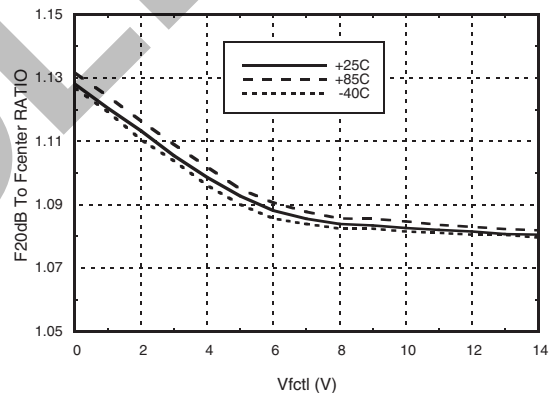

**Tuning Sensitivity vs.
Temperature, $V_{fctl} = V_{bwctl}$**

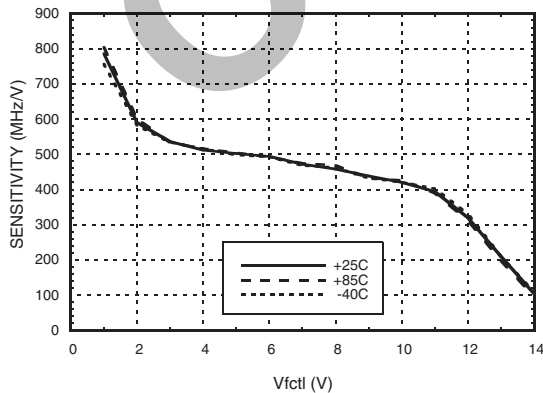

Group Delay, $V_{ctl} = V_{bwctl}$

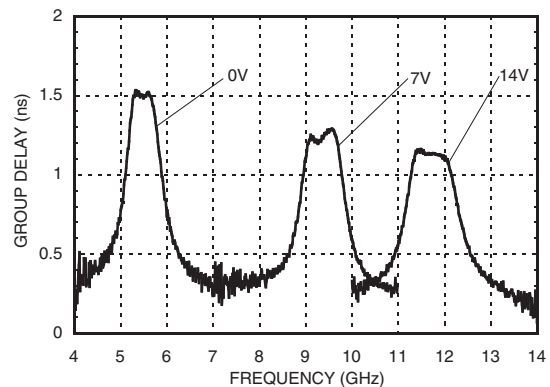

[1] Rejection ratio is defined as the ratio of the frequency at which the relative insertion loss is 20 dB to f_{center}




**FILTER - TUNABLE, BAND PASS SMT
5.9 - 11.2 GHz**


3

FILTERS - TUNABLE - SMT


Group Delay vs. Fcenter vs. Temperature

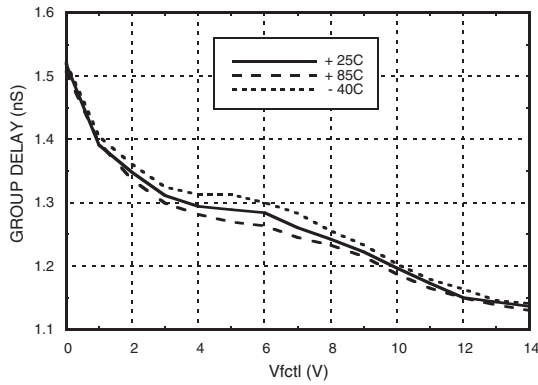


3 dB Bandwidth vs. Bandwidth Control

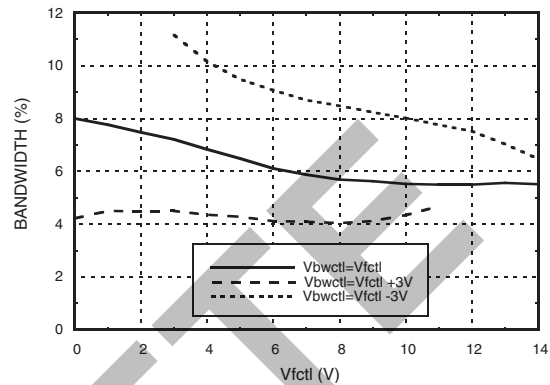


Insertion Loss vs. Bandwidth Control

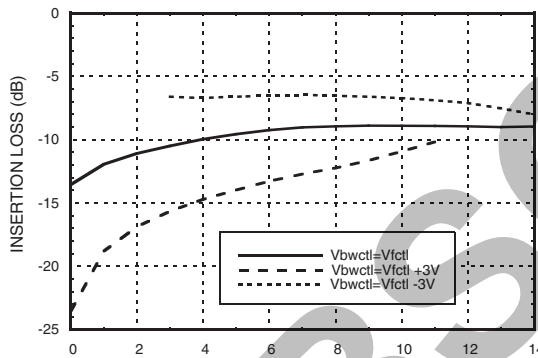


Low Side Rejection Ratio vs. Bandwidth Control [1]

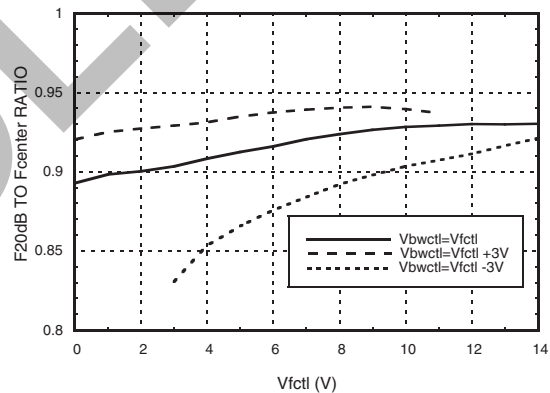

High Side Rejection Ratio vs. Bandwidth Control [1]

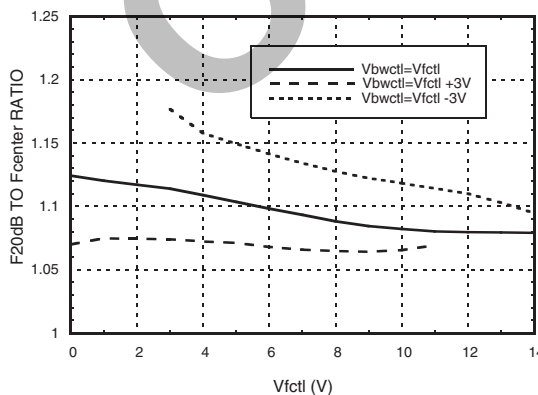

Maximum Return Loss in a 2 dB Bandwidth vs. Bandwidth Control

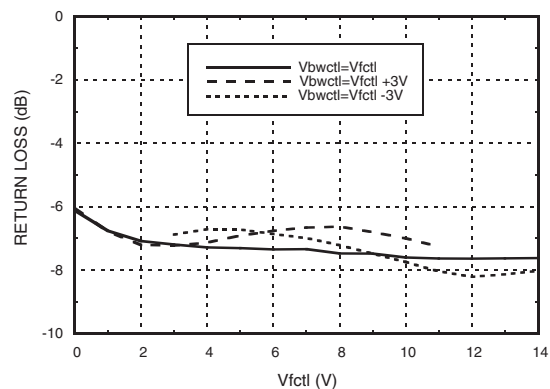


[1] Rejection ratio is defined as the ratio of the frequency at which the relative insertion loss is 20 dB to fcenter


**FILTER - TUNABLE, BAND PASS SMT
5.9 - 11.2 GHz**



Input IP3 vs. Power Input
 $V_{fctl} = V_{bwctl}$

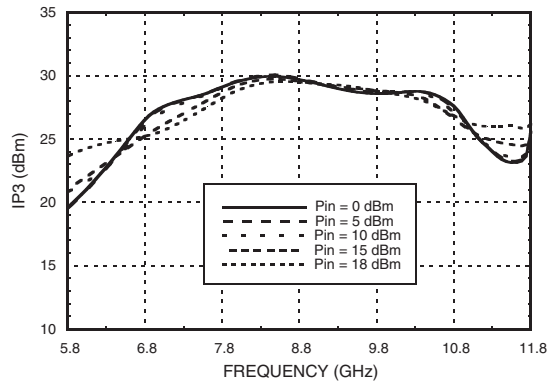

Residual Phase Noise
 $V_{fctl} = V_{bwctl}$

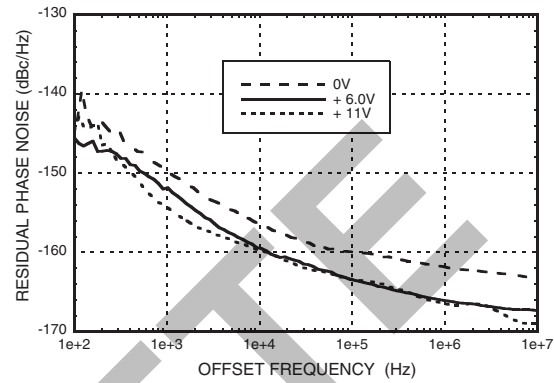

Absolute Maximum Ratings

Frequency Control Voltage (V_{fctl})	-0.5 to +15V
Bandwidth Control Voltage (V_{bwctl})	-0.5 to +15V
RF Power Input	26 dBm
Storage Temperature	-65 to +150 °C
ESD Rating (HBM)	Class 1B

Reliability Information

Junction Temperature to Maintain 1 Million Hour MTTF	150 °C
Nominal Junction Temperature ($T = 85$ °C and $P_{in} = 10$ dBm)	90 °C
Operating Temperature	-40 to +85 °C



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**




**FILTER - TUNABLE, BAND PASS SMT
5.9 - 11.2 GHz**

3

FILTERS - TUNABLE - SMT

Outline Drawing

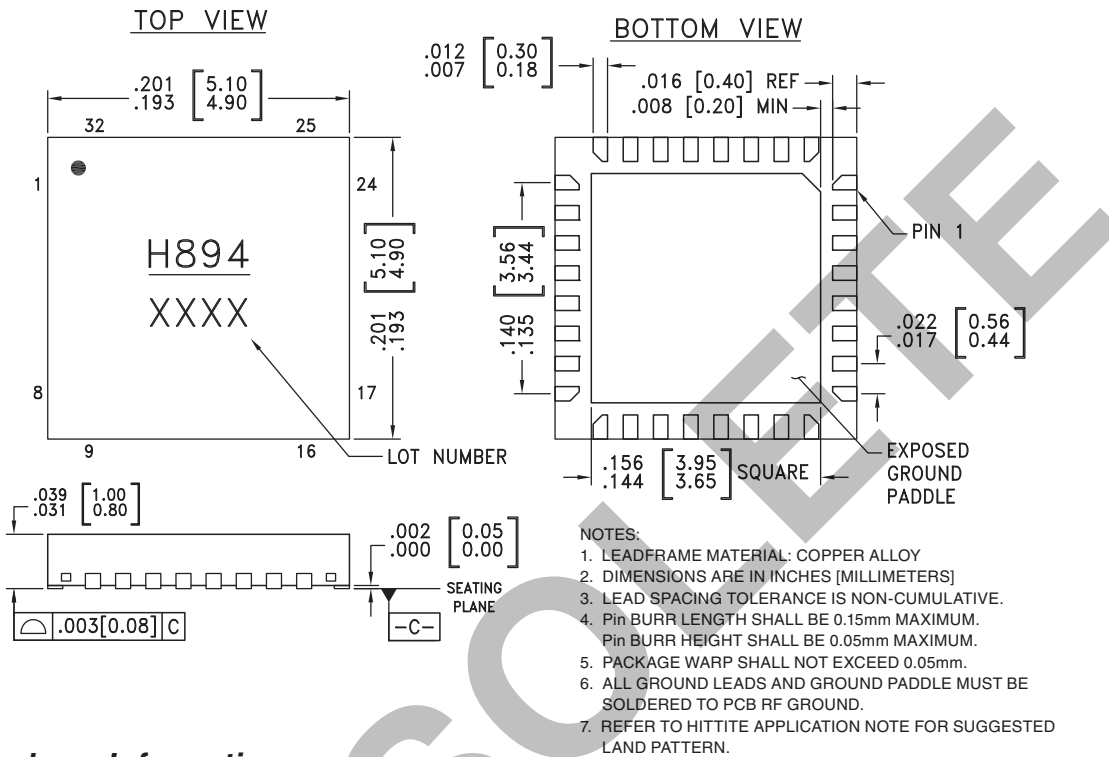

Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[1]
HMC894LP5E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	H894 XXXX

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C


**FILTER - TUNABLE, BAND PASS SMT
5.9 - 11.2 GHz**



Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1 - 4, 7 - 11, 13 15 - 18, 21 - 32	N/C	The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally.	
5, 20	GND	These pins and exposed paddle must be connected to RF/DC ground.	
6	RFIN	This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin.	
12	Vfctl	Center frequency control voltage.	
14	Vbwctl	Bandwidth control voltage.	
19	RFOUT	This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin.	

Application Circuit

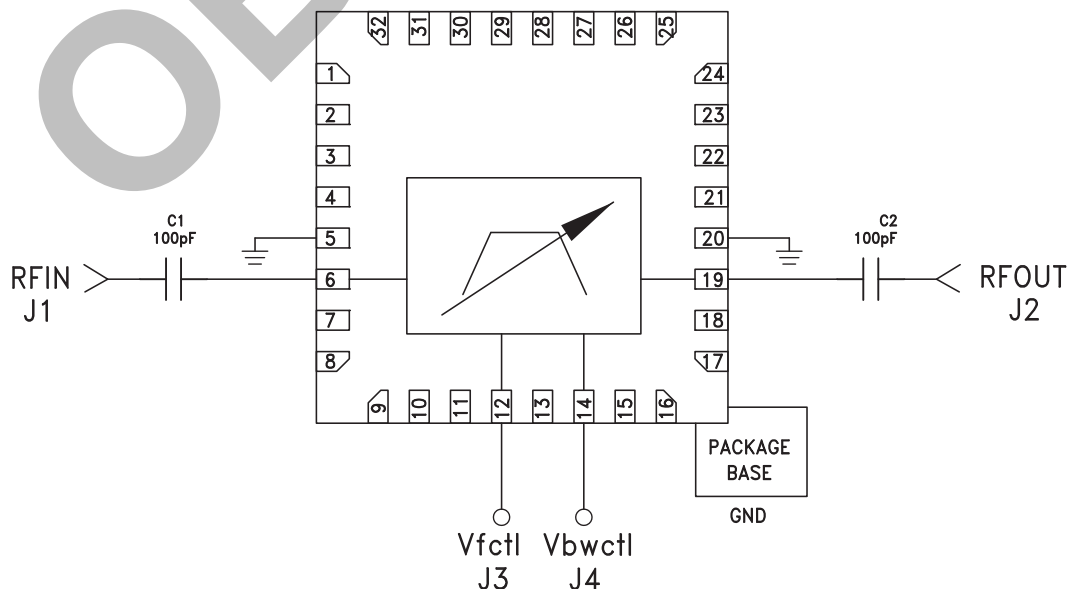

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D




**FILTER - TUNABLE, BAND PASS SMT
5.9 - 11.2 GHz**

3

Evaluation PCB

FILTERS - TUNABLE - SMT

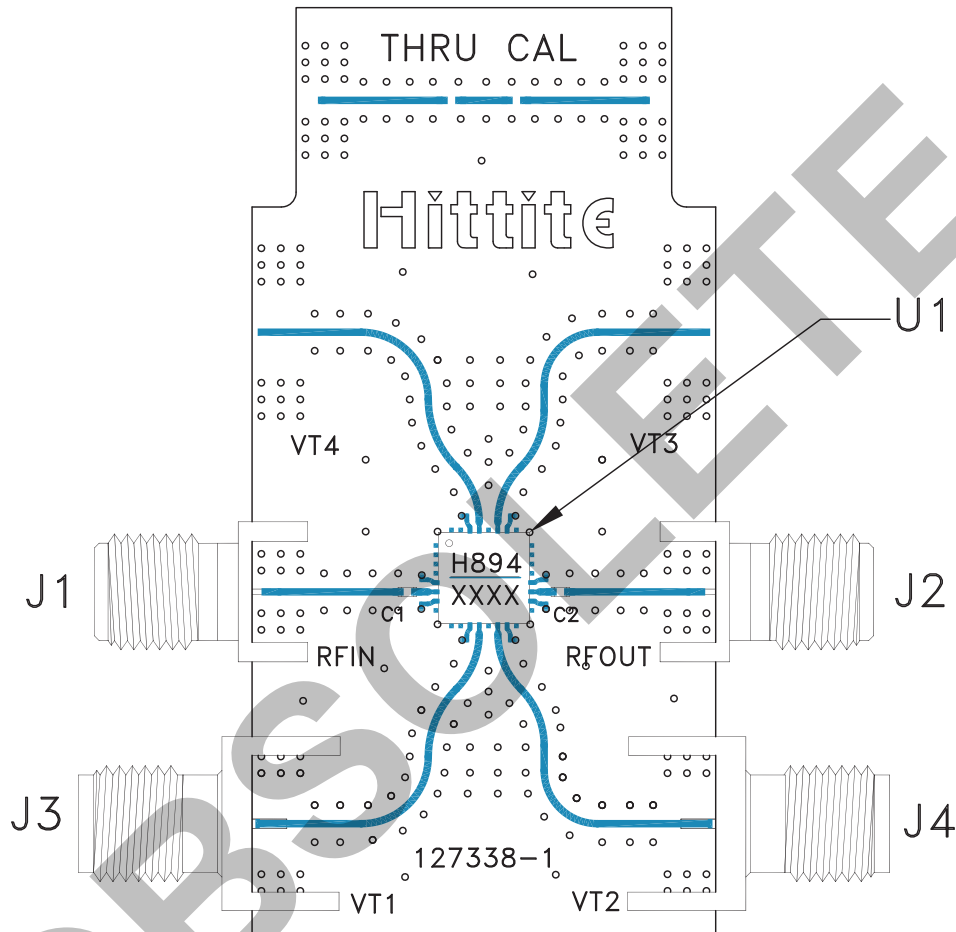

List of Materials for Evaluation PCB 128531 [1]

Item	Description
J1, J2	SMA - SRI
J3, J4	SMA - Johnson
C1, C2	100 pF Capacitor, 0402 Pkg.
U1	HMC894LP5E Filter - Tunable
PCB [2]	127338 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 25FR

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohms impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

**Notes:**

OBSOLETE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Active Filter](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[1D38810GQ2](#) [1D73312GQ22](#) [1D38830GQ3](#) [D51510GQ1](#) [D45015GQ42](#) [HMC894LP5ETR](#) [HMC896LP4ETR](#) [HMC891LP5ETR](#)
[MAX7491CEE+](#) [MAX7415CUA+](#) [MAX7413CPA+](#) [MAX7411CPA+](#) [MAX7410CPA+](#) [MAX7405EPA+](#) [MAX7413CUA+](#) [MAX7411CUA+](#)
[MAX7408CPA+](#) [MAX7405CPA+](#) [MAX7401EPA+](#) [MAX293CWE+](#) [MAX281AEWE+](#) [MAX275ACPP+](#) [MAX264BEPI+](#) [MAX263BEPI+](#)
[MAX293ESA+](#) [MAX280EPA+](#) [MAX275AEPP+](#) [MAX268BCWG+](#) [MAX263AEPI+](#) [MAX7423EUA+T](#) [LT1568CGN#PBF](#)
[LTC1062CSW#PBF](#) [LTC1562CG-2#PBF](#) [HMC881LP5ETR](#) [HMC882LP5ETR](#) [HMC1000LP5ETR](#) [LTC1569CS8-6#PBF](#) [LTC1563-](#)
[2IGN#PBF](#) [MAX7426EPA+](#) [MAX7426CPA+](#) [MAX7410EPA+](#) [MAX7407EPA+](#) [MAX7407CPA+](#) [MAX7427CPA+](#) [MAX7412CPA+](#)
[MAX7404EPA+](#) [MAX7404CPA+](#) [MAX7400EPA+](#) [MAX7400CPA+](#) [MAX296EPA+](#)