



### Typical Applications


The HMC881LP5E is ideal for:

- Test & Measurement Equipment
- Military RADAR & EW/ECM
- SATCOM & Space
- Industrial & Medical Equipment

### Features

- Fast Tuning Response; 150 ns
- Excellent Wideband Rejection; 40 dB
- Single Positive Frequency Control: 0 to +14V
- Low Insertion Loss & User Selectable Cutoff Frequency
- Single Chip Replacement for Mechanically Tuned Designs
- 32 Lead 5x5 mm SMT Package

### Functional Diagram

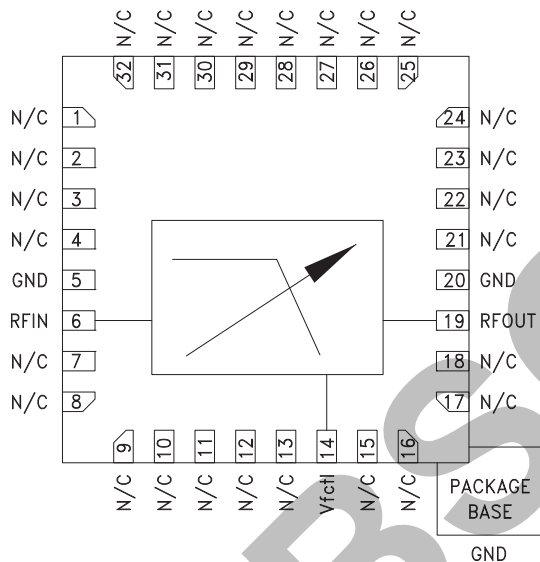

### General Description

The HMC881LP5E is a MMIC low pass filter which features a user selectable cutoff frequency. The cutoff frequency can be varied from 2.2 to 4.0 GHz by applying a single analog tuning voltage between 0 and 14V. This low pass filter provides a low 3.8 dB insertion loss, 10 dB return loss and 1.25 x  $f_{cutoff}$  stopband attenuation of >20 dB. This tunable filter can be used as a much smaller alternative to physically large switched filter banks and cavity tuned filters. The HMC881LP5E has excellent microphonics due to the monolithic design, and provides a dynamically adjustable solution in advanced communications applications. The low pass tunable filter is packaged in a RoHS compliant 5x5mm QFN leadless package.

### Electrical Specifications, $T_A = +25^\circ\text{C}$

| Parameter   | Min. | Typ.                | Max. | Units  |
|---|------|---------------------|------|--------|
| Passband  | 0    |                     | 4    | GHz    |
| $f_{cutoff}$ [1] Tuning Range                                 | 2.2  |                     | 4    | GHz    |
| Stopband Frequency (Rejection >20 dB)                         |      | 1.25 x $f_{cutoff}$ |      | GHz    |
| Re-entry Frequency (Rejection <30 dB)                         |      | 30                  |      | GHz    |
| Insertion Loss  |      | 3.8                 |      | dB     |
| Return Loss   |      | 10                  |      | dB     |
| Maximum Input Power for Linear Operation                      |      |                     | 10   | dBm    |
| Frequency Control Voltage (Vfcctl)                            | 0    |                     | 14   | V      |
| Frequency Control Port Source/Sink Current ( $I_{fcctl}$ )    |      |                     | ±1   | mA     |
| Residual Phase Noise [2] (1 MHz offset)                       |      | -165                |      | dBc/Hz |
| $f_{cutoff}$ Drift Rate (Fixed Vfcctl)                        |      | -0.8                |      | MHz/°C |
| Tuning Characteristics [3]<br>tFULLBAND (0% Vfcctl to 90% RF) |      | 150                 |      | ns     |

[1]  $f_{cutoff}$  defined as the point at which the insertion loss is 3 dB below the minimum passband insertion loss.


[2] Optimum residual phase noise performance requires the use of a low noise driver circuit.

[3] Tuning speed is dependent on driver circuit. Data measured with a high speed op-amp driver and includes driver slew rate delay.




**FILTER - TUNABLE, LOW PASS SMT  
2.2 - 4.0 GHz**


**Broadband Insertion Loss vs. Control Voltage**

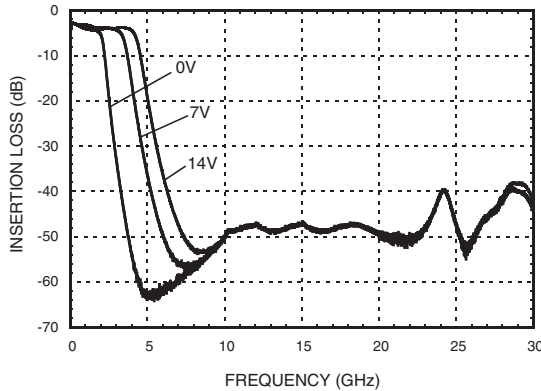


**Broadband Return Loss vs. Control Voltage**

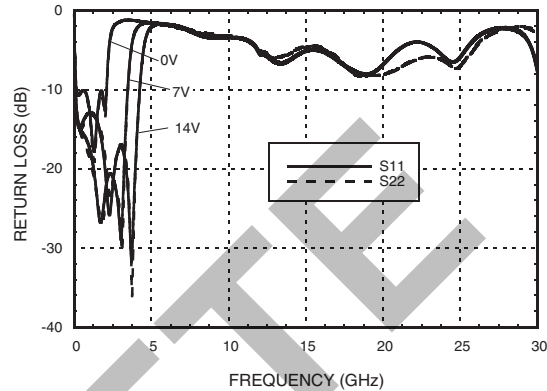


**Insertion Loss vs. Control Voltage [1]**

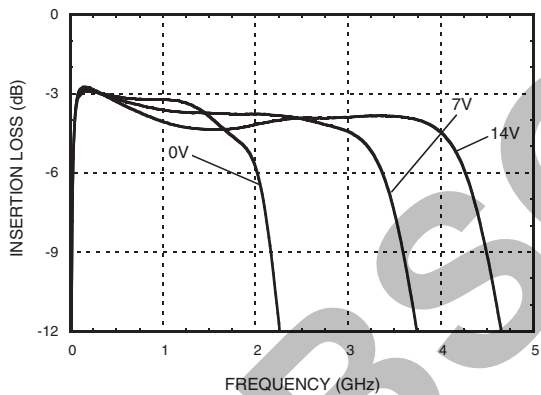


**Return Loss vs. Control Voltage [1]**

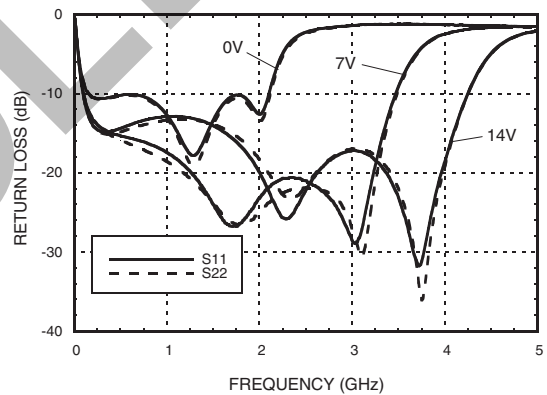

**Insertion Loss vs. Temperature, Vctl @ 7V [1]**

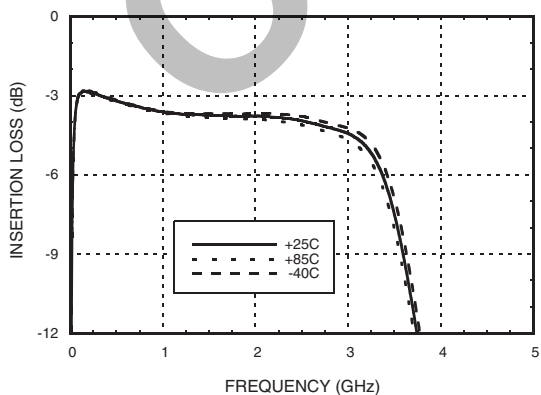

**Return Loss vs. Temperature, Vctl @ 7V [1]**

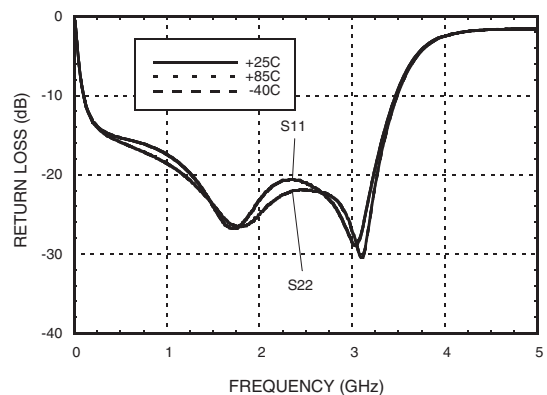

[1] Low frequency performance limited by external DC blocking capacitors at RF input and output.




**FILTER - TUNABLE, LOW PASS SMT  
2.2 - 4.0 GHz**


3

FILTERS - TUNABLE - SMT


**Cutoff Frequency vs. Temperature**

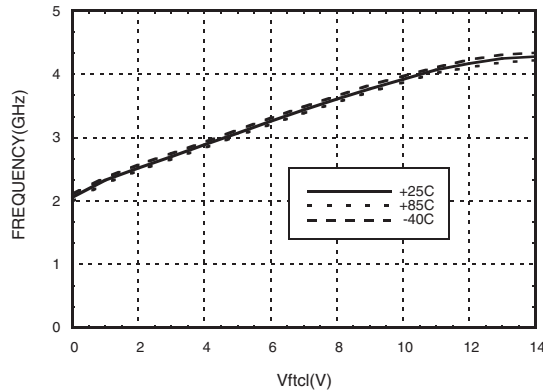


**Average Insertion Loss vs. Temperature in a 2 dB Bandwidth**

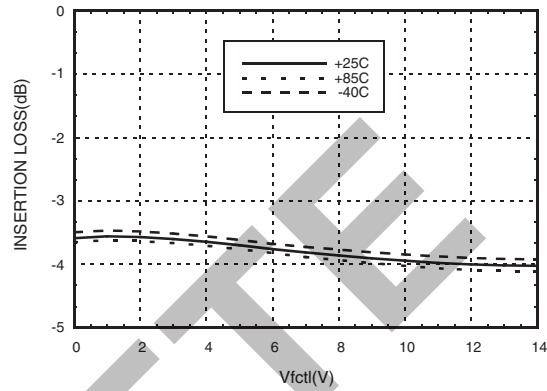


**Rejection Ratio vs. Temperature<sup>[1]</sup>**

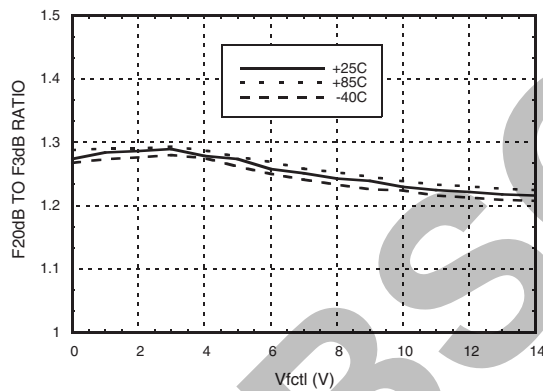


**Maximum Return Loss in a 2 dB Bandwidth vs. Temperature**

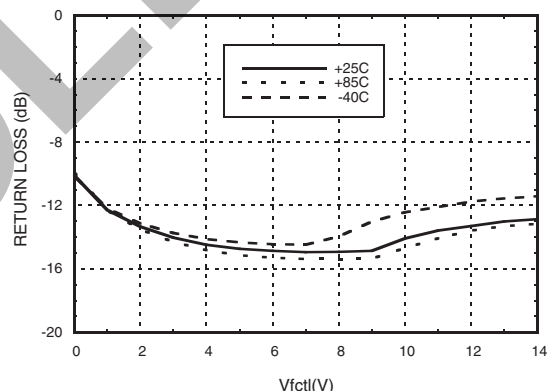

**Tuning Sensitivity vs. Temperature**

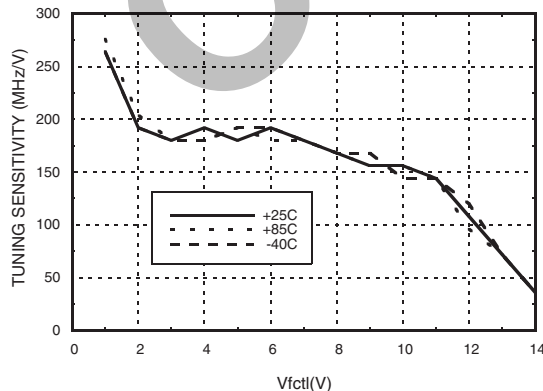

**Group Delay**

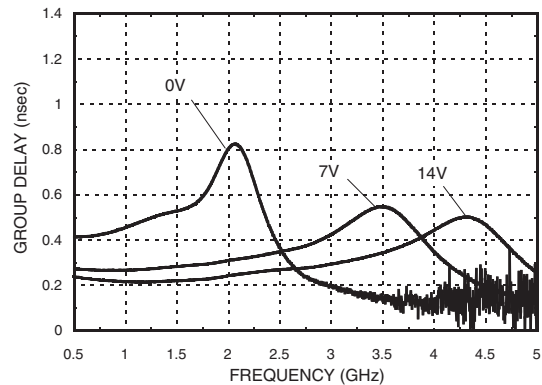

[1] Rejection ratio is defined as the ratio of the frequency at which the relative insertion loss is 20 dB, to  $f_{cutoff}$



## FILTER - TUNABLE, LOW PASS SMT 2.2 - 4.0 GHz

### Absolute Maximum Ratings

|                                   |                |
|-----------------------------------|----------------|
| Frequency Control Voltage (Vfctl) | -0.5 to +15V   |
| RF Power Input                    | 26.5 dBm       |
| Storage Temperature               | -65 to +150 °C |
| ESD Rating (HBM)                  | Class 1B       |


### Reliability Information

|  |               |
|--|---------------|
| Junction Temperature to Maintain 1 Million Hour MTTF     | 150 °C        |
| Nominal Junction Temperature (T= 85 °C and Pin = 10 dBm) | 90 °C         |
| Operating Temperature                                    | -40 to +85 °C |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Outline Drawing

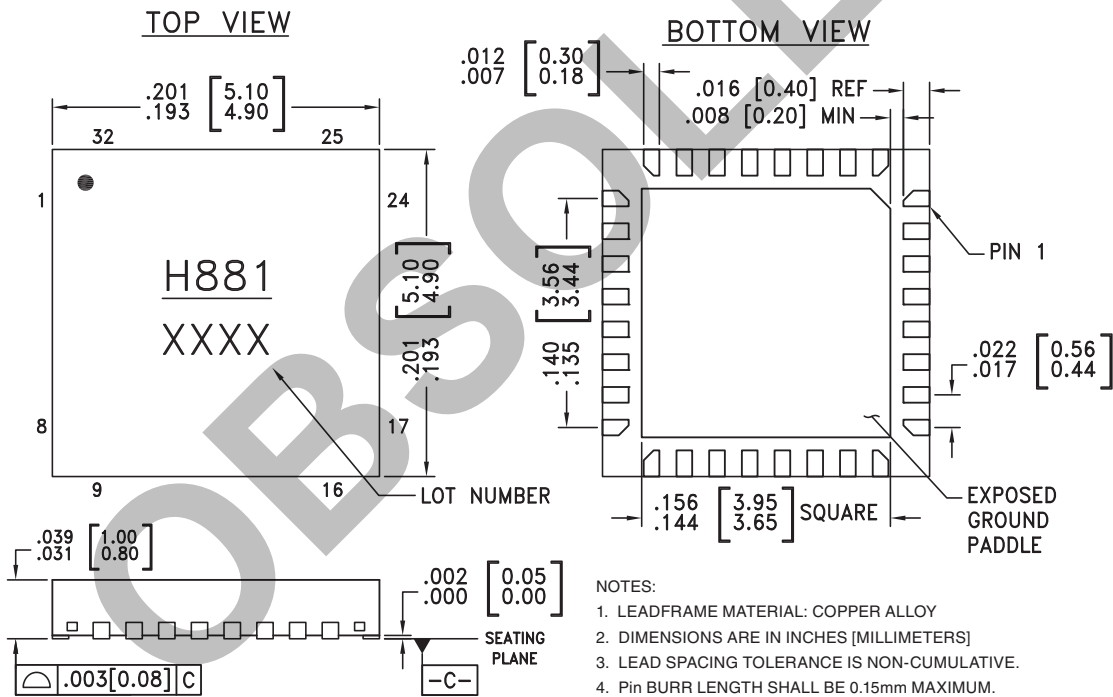

NOTES:

- LEADFRAME MATERIAL: COPPER ALLOY
- DIMENSIONS ARE IN INCHES [MILLIMETERS]
- LEAD SPACING TOLERANCE IS NON-CUMULATIVE.
- PIN BURR LENGTH SHALL BE 0.15mm MAXIMUM.  
PIN BURR HEIGHT SHALL BE 0.05mm MAXIMUM.
- PACKAGE WARP SHALL NOT EXCEED 0.05mm.
- ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.
- REFER TO HITTITE APPLICATION NOTE FOR SUGGESTED LAND PATTERN.

### Package Information

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[1]</sup> |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC881LP5E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H881<br>XXXX                   |

[1] 4-Digit lot number XXXX

[2] Max peak reflow temperature of 260 °C



**FILTER - TUNABLE, LOW PASS SMT**  
**2.2 - 4.0 GHz**


3

FILTERS - TUNABLE - SMT

**Pin Descriptions**

| Pin Number                      | Function | Description  | Interface Schematic |
|---------------------------------|----------|--|---------------------|
| 1 - 4, 7 - 13, 15 - 18, 21 - 32 | N/C      | The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally. |                     |
| 5, 20                           | GND      | These pins and exposed paddle must be connected to RF/DC ground.   |                     |
| 6                               | RFIN     | This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin.   |                     |
| 14                              | Vfctl    | Cutoff frequency control voltage.  |                     |
| 19                              | RFOUT    | This pin is DC coupled and matched to 50 Ohms. External voltage must not be applied to this pin.   |                     |

**Application Circuit**

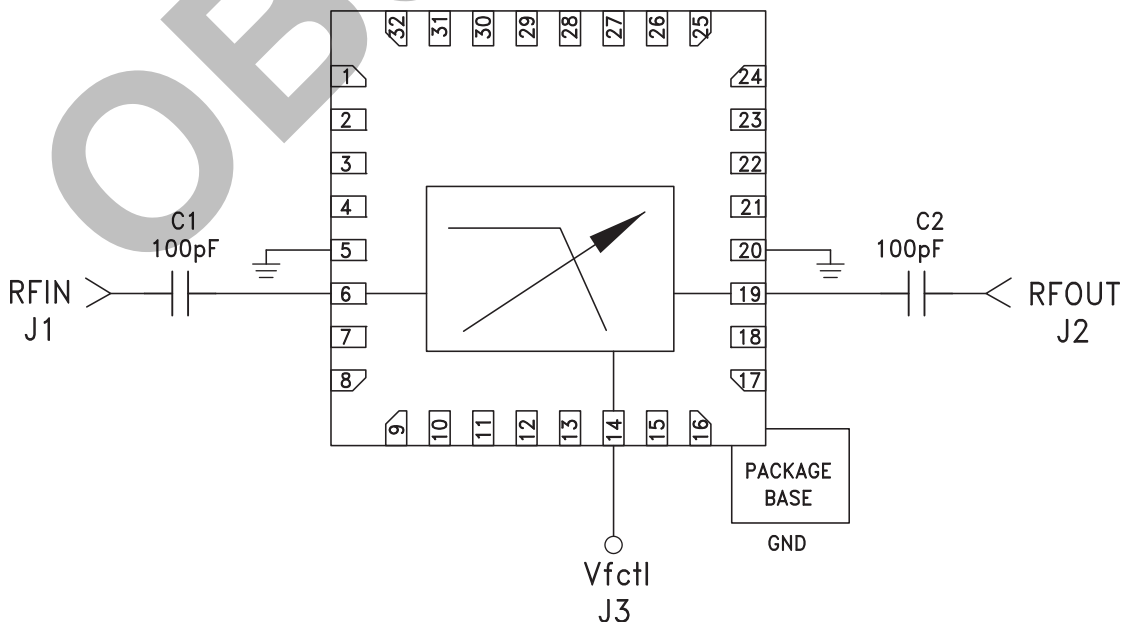


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com) Application Support: Phone: 1-800-ANALOG-D



**Evaluation PCB**

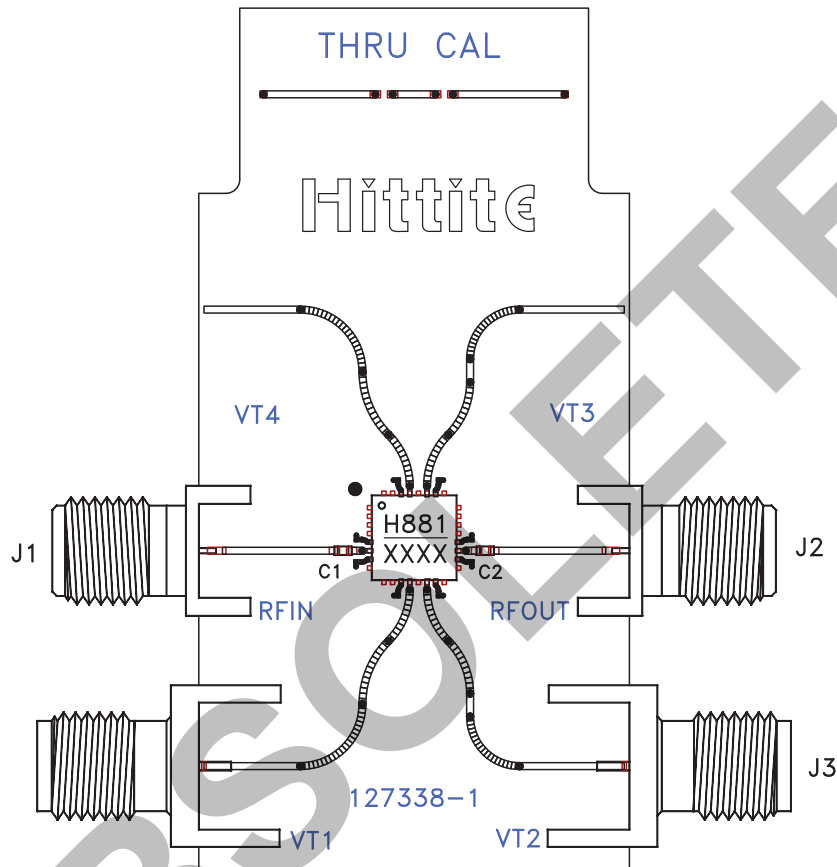

**List of Materials for Evaluation PCB 128531 [1]**

| Item    | Description                 |
|---------|-----------------------------|
| J1 - J3 | SMA - SRI                   |
| C1, C2  | 100 pF Capacitor, 0402 Pkg. |
| U1      | HMC881LP5E Filter           |
| PCB [2] | 127338 Evaluation PCB       |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Arlon 25FR or Rogers 25FR

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohms impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Active Filter](#) category:*

*Click to view products by [Analog Devices](#) manufacturer:*

Other Similar products are found below :

[1D38810GQ2](#) [1D73312GQ22](#) [1D38830GQ3](#) [D51510GQ1](#) [D45015GQ42](#) [HMC894LP5ETR](#) [HMC896LP4ETR](#) [HMC891LP5ETR](#)  
[MAX7491CEE+](#) [MAX7415CUA+](#) [MAX7413CPA+](#) [MAX7411CPA+](#) [MAX7410CPA+](#) [MAX7405EPA+](#) [MAX7413CUA+](#) [MAX7411CUA+](#)  
[MAX7408CPA+](#) [MAX7405CPA+](#) [MAX7401EPA+](#) [MAX293CWE+](#) [MAX281AEWE+](#) [MAX275ACPP+](#) [MAX264BEPI+](#) [MAX263BEPI+](#)  
[MAX293ESA+](#) [MAX280EPA+](#) [MAX275AEPP+](#) [MAX268BCWG+](#) [MAX263AEPI+](#) [MAX7423EUA+T](#) [LT1568CGN#PBF](#)  
[LTC1062CSW#PBF](#) [LTC1562CG-2#PBF](#) [HMC881LP5ETR](#) [HMC882LP5ETR](#) [HMC1000LP5ETR](#) [LTC1569CS8-6#PBF](#) [LTC1563-](#)  
[2IGN#PBF](#) [MAX7426EPA+](#) [MAX7426CPA+](#) [MAX7410EPA+](#) [MAX7407EPA+](#) [MAX7407CPA+](#) [MAX7427CPA+](#) [MAX7412CPA+](#)  
[MAX7404EPA+](#) [MAX7404CPA+](#) [MAX7400EPA+](#) [MAX7400CPA+](#) [MAX296EPA+](#)