

DATA LOGGERS

Simple Logger® II TRMS Current

Dual Channel MiniFlex® Model ML912

Two channel AC recording logger incorporates two selectable measurement ranges



► SPECIFICATIONS

MODEL	ML912	
ELECTRICAL		
Channels	Two	
Input	Captive MiniFlex® AC Current Flexible Sensors	
Range	0.5 to 100Aac	5 to 1000Aac
Accuracy (50/60Hz)	0 to 1A unspecified 1 to 100A: ±(1% of Reading + 0.5A)	0 to 5A unspecified 5 to 1000A: ±(1% of Reading + 1A)
Resolution	0.1A	
Sample Rate	64 samples/cycle	
Storage Rate	Programmable from 8 every second to 1 every day	
Storage Modes	Start/Stop, FIFO, Extended Recording Mode (XRM™) and Alarm	
Recording Length	15 minutes to 8 weeks, programmable using DataView®	
Memory	240,000 measurement (512KB) The recorded data is stored in non-volatile memory and will be retained even if the battery is low or removed.	
Communication	USB 2.0 optically isolated	
Power Source	2 x 1.5V AA-cell Alkaline batteries (included)	
Battery Life	100 hrs to >45 days (dependent on storage rate/recording length)	
MECHANICAL		
Dimensions	4.95 x 2.75 x 1.28" (136 x 70 x 32mm) w/o Sensor	
Max Conductor Size	Sensor: 6" (152mm)/Cable: 6 ft (2m)	
Weight (with battery)	8.67 oz (245g)	
Case	UL94-V0	
Vibration	IEC 68-2-6 (1.5mm, 10 to 55Hz)	
Shock	IEC 68-2-27 (30G)	
Drop	IEC 68-2-32 (1m)	



► FEATURES

- Includes two integral MiniFlex® flexible current probes that will measure from 0.5A to 1000A TRMS with 0.1A resolution
- Dual range 100/1000A user selectable per channel in software
- 64 samples per cycle
- Programmable storage rates from 8 every second to 1 every day
- 4 user selectable storage modes
- Stores up to 240,000 measurements in non-volatile memory
- Powered by standard Alkaline batteries
- Lightweight, compact, fits anywhere
- 5 LED indicators quickly and clearly display logger status
- Includes FREE DataView® software for data storage, real-time display, analysis and report generation
- Optically isolated USB 2.0 communication cable included
- EN 61010-1; 600V CAT IV, 1000V CAT III

► APPLICATIONS

- Single and Split phase load monitoring
- Neutral and ground current monitoring
- Intermittent problem detection
- Harmonic current monitoring using DataView® software
- Machine load monitoring
- Fault current detection
- Load profiling

CATALOG NO.	DESCRIPTION
2126.37	Simple Logger® II Model ML912 (2-Channel, TRMS, MiniFlex®, 100/1000Aac, DataView® software)

DataView®


Data Analysis and Reporting Software for Data Loggers




Typical DataView® Functional Displays



Quick and simple configuration of all functions and settings from one dialog box.

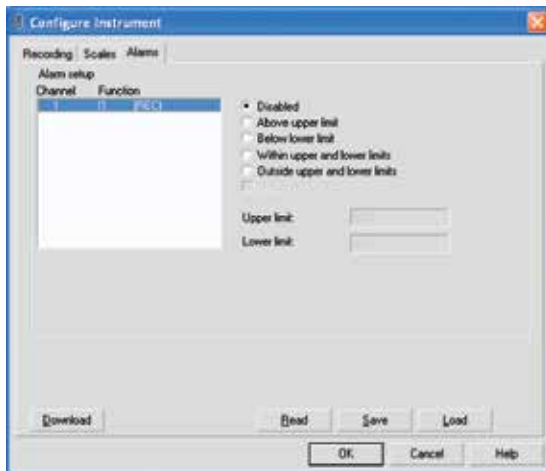



Configure all alarm functions with straightforward selections.

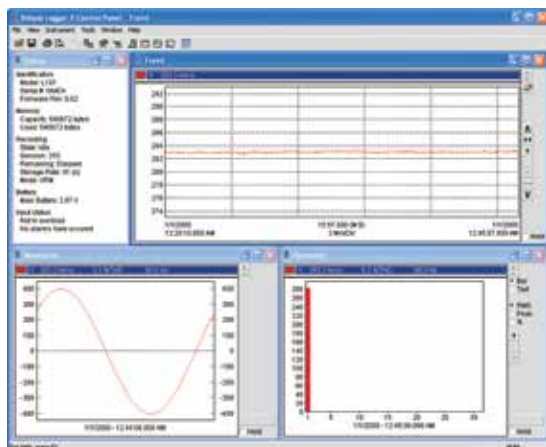

Real-time view of trend, waveform and status screens.

Configure all data logger functions of the Simple Logger® II Models

- Display and analyze real-time data on your PC
- Configure all data logger functions and parameters from your PC including sample rate, recording length, channel configuration and more
- Create and store a complete library of configurations that can be uploaded to the logger as needed
- Zoom in and out and pan through sections of the graph to analyze the data
- Download, display and analyze recorded data
- Display waveforms, trend graphs, harmonics (AC models) and text summaries
- Create custom views and reports
- Print reports using standard or custom templates you design
- Free software upgrades are available on our website www.aemc.com

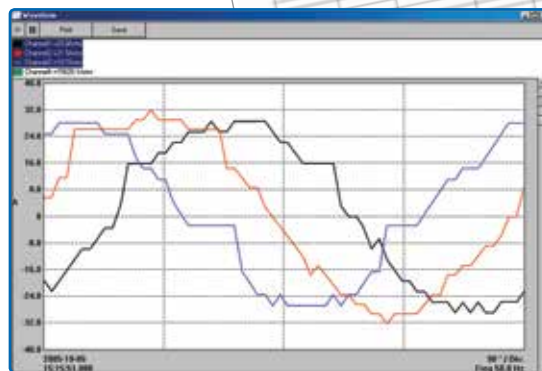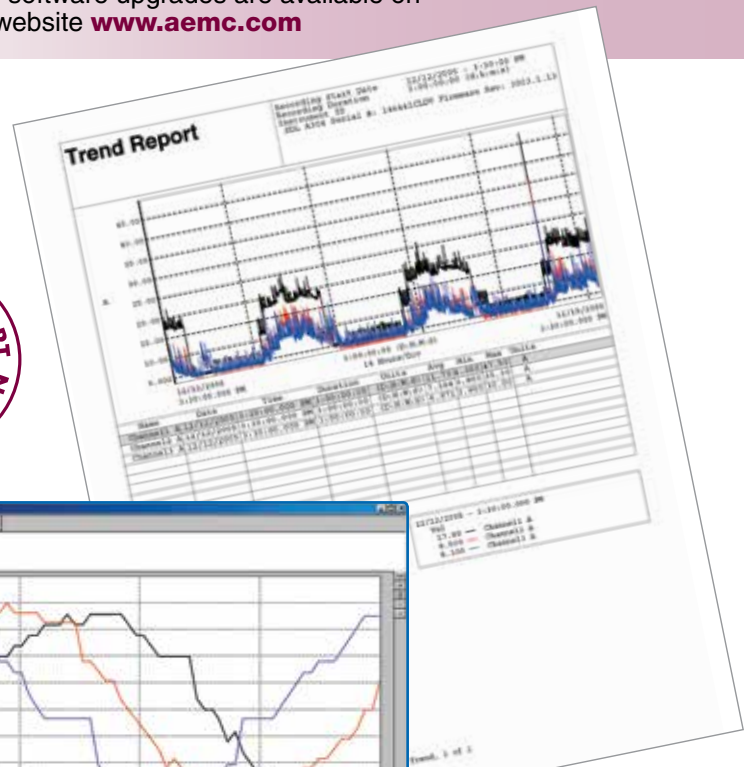

Real-time display of all active inputs on computer through DataView® software.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [aemc manufacturer](#):

Other Similar products are found below :

[2118.79](#) [2118.82](#) [6417](#) [MN261](#) [MN106](#) [1017.84](#) [2119.02](#) [MD301](#) [K110](#) [SR601](#) [MN103](#) [6610](#) [SR752](#) [MS3474W10-6P](#) [MS3456L16-10SY-LC](#) [SL261](#) [BR07](#) [2118.73](#) [MS3475W14-4S-LC](#) [MS3456L20-14SX-LC](#) [MS3450W22-2SY-LC](#) [MS3475W14-4SW](#) [D38999/26WD5PN](#)