

## Single Output 115VAC Input Industrial Power Supplies

### Features

- ◆ 3 Year Warranty
- ◆ Small size
- ◆ Approved to UL & CSA (cUL)
- ◆ 85 - 132VAC Input, 47-440Hz
- ◆ ±10% output adjustment
- ◆ Adjustment potentiometer
- ◆ Low profile

### Key Market Segments & Applications



Specifications							
Model		HK10A	HK15A	HK25A	HK50A	HK100A	HK150A
Input Voltage range	-	85 - 132VAC (47 - 440Hz) or 110 - 175VDC*					
Inrush Current (100VAC)	A	20	30	15	30	15	15
Temperature Coefficient (Typ)	-	1% (over operating temperature range)					
Overcurrent Protection	-	>105%					
Overvoltage Protection	%	>115% (Zener clamp)			115 to 135%		
Hold Up Time (Typ at 100VAC)	ms	20					
Remote Sense	-	No				Yes	
LED Indicator	-	Green LED = On					
Operating Temp (no cover) (1)	-	0°C to +60°C, derate linearly to 50% load from 50°C to 60°C					
Operating Temp (w/ cover) (1)	-	0°C to +50°C, derate linearly to 50% load from 40°C to 50°C					
Storage Temperature	-	-30 to +85°C					
Operating Humidity	-	30 - 90% RH (non condensing)					
Storage Humidity	-	10 - 95% RH (non condensing)					
Cooling	-	Convection cooled					
Withstand Voltage	-	I/P to Grnd, I/P to O/P 2kVAC (20mA), O/P to Grnd 500VAC (100mA) for 1 min.					
Isolation Resistance	-	>100M at 25C & 70%RH, Output to Ground 500VDC					
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 19.6m/s <sup>2</sup> constant X, Y, Z 1 hour					
Shock	-	< 196.1 m/s <sup>2</sup>					
Safety Agency Approvals	-	UL60950-1, CSA C22.2 No. 60950-1 (cUL)					
Conducted & Radiated EMI	-	FCC Class B, VCCI-B					
Recommended EMI Filter	-	RSEL-20R5W	RSEL-2001W		RSEL-2002W	RSEN-2006	
Weight (Typ)	g	150	170	230	280	540	650
Size (WxHxD)	in	2.83x2.83x1.02	2.83x3.31x1.08	2.83x3.9x1.26	2.83x4.69x1.38	3.66x5.91x1.52	3.66x6.69x1.85
Warranty	-	Three Years					

(1) Vertical mount as photo, HK100A & HK150A models operate to -10°C

\*Safety certified for AC only


See installation manual for full details, test methods of parameters and application notes

Not Recommended For New Designs

## Model Selector


Model	Adjust Voltage	Max Range	Load Curr. Reg	Line mV Reg	Ripple Noise	Eff. (typ)%	
HK10A-5/A	5	4.5 - 5.5	2.0	40	20	120	71
HK15A-5/A	5	4.5 - 5.5	3.0	40	20	120	69
HK25A-5/A	5	4.5 - 5.5	5.0	40	20	120	72
HK50A-5/A	5	4.5 - 5.5	10.0	40	20	120	79
HK100A-5/A	5	4.5 - 5.5	20.0	40	20	120	80
HK150A-5/A	5	4.5 - 5.5	30.0	40	20	120	80
HK10A-12/A	12	10.8 - 13.2	0.9	96	48	150	73
HK15A-12/A	12	10.8 - 13.2	1.3	96	48	150	74
HK25A-12/A	12	10.8 - 13.2	2.1	96	48	150	76
HK50A-12/A	12	10.8 - 13.2	4.2	96	48	150	81
HK100A-12/A	12	10.8 - 13.2	8.5	96	48	150	81
HK150A-12/A	12	10.8 - 13.2	12.5	96	48	150	81
HK10A-15/A	15	13.5 - 16.5	0.7	120	60	150	74
HK15A-15/A	15	13.5 - 16.5	1.0	120	60	150	75
HK25A-15/A	15	13.5 - 16.5	1.7	120	60	150	77
HK50A-15/A	15	13.5 - 16.5	3.4	120	60	150	82
HK100A-15/A	15	13.5 - 16.5	7.0	120	60	150	81
HK150A-15/A	15	13.5 - 16.5	10.0	120	60	150	81
HK10A-24/A	24	21.6 - 26.4	0.5	150	96	150	78
HK15A-24/A	24	21.6 - 26.4	0.7	150	96	150	77
HK25A-24/A	24	21.6 - 26.4	1.1	150	96	150	80
HK50A-24/A	24	21.6 - 26.4	2.2	150	96	150	84
HK100A-24/A	24	21.6 - 26.4	4.5	150	96	150	82
HK150A-24/A	24	21.6 - 26.4	6.5	150	96	150	82

## HK-10A Outline Drawing

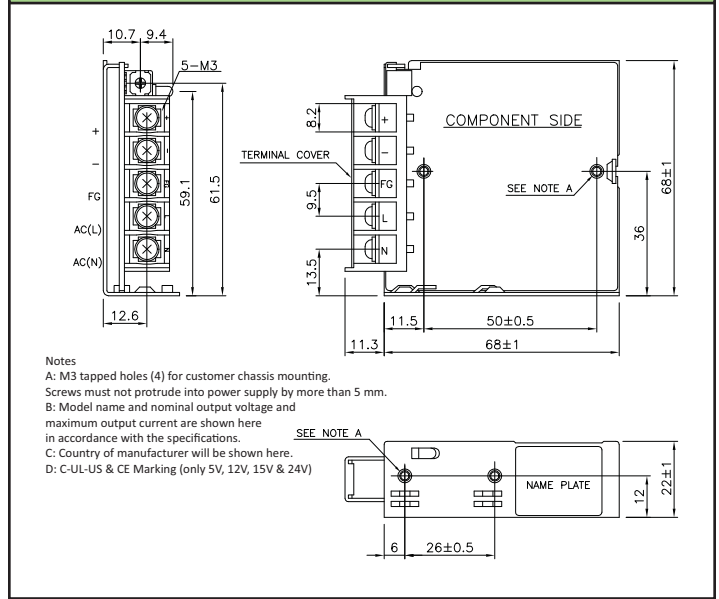

Derate to 80% load from 0 to -10°C

## HK-150A Outline Drawing

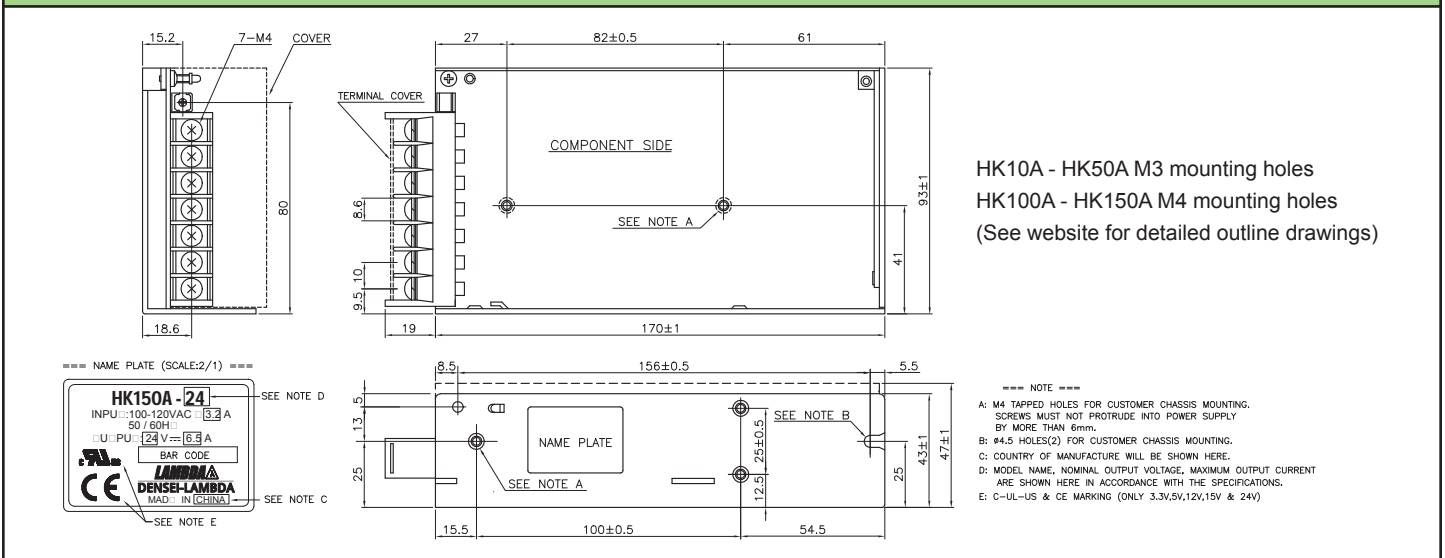

## Sample Configurations

Suffix	Description
Blank	No cover (Special order)
/A	With cover (Standard US stock)
LDIN30	DIN Rail Mounting Bracket (Sold Separately)

## Other Industrial Products

HWS	15W to 1500W Single output 85-265VAC
DLP/DPP/DSP	10W to 480W DIN rail mount 85-265VAC
ZWS	5W to 150W pcb style single output 85-265VAC
VS/VSVC	10W to 150W pcb style single output 85-132VAC

For Additional Information, please visit [us.tdk-lambda.com/lp/products/hka-series.htm](http://us.tdk-lambda.com/lp/products/hka-series.htm)



Not Recommended For New Designs

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [tdk-lambda](#) manufacturer:*

Other Similar products are found below :

[CSS500-57/S](#) [CUS200M18](#) [FPST1U](#) [PH150S110-15](#) [PH300S280-3.3](#) [PH50A280-48](#) [PH75A280-5](#) [PV1R5-12-5](#) [PV1R5-5-12](#) [PXA15-24WS3P3NT](#) [PXB15-24D05/N](#) [PXB15-48S12/NT](#) [PXB15-48WD15/N](#) [PXCM1048WD15A](#) [PXD1024WS15](#) [PXD1524D12](#) [PXD1524D15](#) [PXD1524S05](#) [PXD1524S12](#) [PXD1548D12](#) [PXD2024S3P3](#) [PXE2024WS12](#) [PXF4012D12](#) [PXF4024WD12](#) [PXF4048S05](#) [PXF4048T0515](#) [PXF4048WS15](#) [PXF6048S05](#) [GWS500-48](#) [HFE2500-S1U-TB](#) [DRJ30-12-1](#) [DRJ50-12-1](#) [DT100PW120C](#) [DT150PW480C](#) [DTM165PW150C](#) [1500-FAN-01](#) [MWS6515](#) [NL200](#) [HWS1000-12](#) [HWS1000-24](#) [HWS1000-48](#) [HWS1000-60](#) [HWS100A-24/A](#) [HWS100A3HD](#) [HWS100A48HD](#) [HWS100A-5](#) [HWS150036ME](#) [HWS150-12/ME](#) [HWS150A48HD](#) [HWS15A-3/A](#)