

Voltage transducer DVL 50

$V_{PN} = 50\text{ V}$

For the electronic measurement of voltage: DC, AC, pulsed..., with galvanic separation between the primary and the secondary circuit.



Features

- Bipolar and insulated measurement up to 75 V
- Current output
- Input and output connections with M5 studs
- Compatible with AV 100 family.

Advantages

- Low consumption and low losses
- Compact design
- Good behavior under common mode variations
- Excellent accuracy (offset, sensitivity, linearity)
- Good response time
- Low temperature drift
- High immunity to external interferences.

Applications

- Single or three phase inverters
- Propulsion and braking choppers
- Propulsion converters
- Auxiliary converters
- High power drives
- Substations.

Standards

- EN 50155: 2007
- EN 50178: 1997
- EN 50124-1: 2001
- EN 50121-3-2: 2006
- UL 508: 2013
- IEC 61010-1: 2010.

Application Domains

- Traction (fixed and onboard)
- Industrial.

Absolute maximum ratings

| Parameter | Symbol | Unit | Value |
|-------------------------------------------------------|-----------|------|--------------------------------|
| Maximum supply voltage ($V_P = 0 \text{ V}$, 0.1 s) | $\pm U_C$ | V | ± 34 |
| Maximum supply voltage (working) (-40 ... 85 °C) | $\pm U_C$ | V | ± 26.4 |
| Maximum input voltage (-40 ... 85 °C) | V_P | V | 75 |
| Maximum steady state input voltage (-40 ... 85 °C) | V_{PN} | V | 50 see derating on figure 2 |

Absolute maximum ratings apply at 25 °C unless otherwise noted. Stresses above these ratings may cause permanent damage. Exposure to absolute maximum ratings for extended periods may degrade reliability.

UL 508: Ratings and assumptions of certification

File # E189713 Volume: 2 Section: 7

Standards

- USR indicated investigation to the Standard for Industrial Control Equipment UL 508.
- CNR Indicated investigation to the Canadian standard for Industrial Control Equipment CSA C22.2 No. 14-13

Conditions of acceptability

When installed in the end-use equipment, consideration shall be given to the following:

- 1 - *These devices must be mounted in a suitable end-use enclosure.*
- 2 - *The terminal have not been evaluated for field wiring.*
- 3 - *Low voltage circuits are intended to be powered by a circuit derived from an isolating source (such as transformer, optical isolator, limiting impedance or electro-mechanical relay) and having no direct connection back to the primary circuit (other than through the grounding means).*

Marking

Only those products bearing the UL or UR Mark should be considered to be Listed or Recognized and covered under UL's Follow-Up Service. Always look for the Mark on the product.

Insulation coordination

| Parameter | Symbol | Unit | Value | Comment |
|--------------------------------------------------|--------------------------------------------------|------------|----------------------------------|---------------------------------|
| Rms voltage for AC insulation test, 50 Hz, 1 min | U_d | kV | 8.5 | 100 % tested in production |
| Impulse withstand voltage 1.2/50 μ s | \hat{U}_W | kV | 16 | |
| Partial discharge extinction rms voltage @ 10 pC | U_e | V | 2700 | |
| Insulation resistance | R_{IS} | M Ω | 200 | measured at 500 V DC |
| Clearance (pri. - sec.) | d_{Cl} | mm | See dimensions drawing on page 9 | Shortest distance through air |
| Creepage distance (pri. - sec.) | d_{Cp} | mm | | Shortest path along device body |
| Case material | - | - | V0 according to UL 94 | |
| Comparative tracking index | CTI | | 600 | |
| Maximum DC common mode voltage | $V_{HV+} + V_{HV-}$ and $ V_{HV+} - V_{HV-} $ | kV | ≤ 4.2 $\leq V_{PM}$ | |

Environmental and mechanical characteristics

| Parameter | Symbol | Unit | Min | Typ | Max |
|-------------------------------|--------|--------------|-----|-----|-----|
| Ambient operating temperature | T_A | $^{\circ}$ C | -40 | | 85 |
| Ambient storage temperature | T_S | $^{\circ}$ C | -50 | | 90 |
| Mass | m | g | | 300 | |

Electrical data

At $T_A = 25\text{ °C}$, $\pm U_C = \pm 24\text{ V}$, $R_M = 100\ \Omega$, unless otherwise noted.

Lines with a * in the conditions column apply over the $-40 \dots 85\text{ °C}$ ambient temperature range.

| Parameter | Symbol | Unit | Min | Typ | Max | Conditions |
|-----------------------------------------------|-----------------|-----------------|--------------|--------------|------------|-------------------------------------------------------------------------------------------------------|
| Primary nominal rms voltage | V_{PN} | V | | 50 | | * |
| Primary voltage, measuring range | V_{PM} | V | -75 | | 75 | * |
| Measuring resistance | R_M | Ω | 0 | | 133 | * See derating on figure 2. For $ V_{PM} < 75\text{ V}$, max value of R_M is given on figure 1 |
| Secondary nominal rms current | I_{SN} | mA | | 50 | | * |
| Secondary current | I_S | mA | -75 | | 75 | * |
| Supply voltage | $\pm U_C$ | V | ± 13.5 | ± 24 | ± 26.4 | * |
| Rise time of U_C (10-90 %) | t_{rise} | ms | | | 100 | |
| Current consumption @ $U_C = \pm 24\text{ V}$ | I_C | mA | | $20 + I_S$ | $25 + I_S$ | |
| Offset current | I_O | μA | -50 | 0 | 50 | 100 % tested in production |
| Temperature variation of I_O | I_{OT} | μA | -120 -150 | | 120 150 | -25 ... 85 °C -40 ... 85 °C |
| Sensitivity | G | $\mu\text{A/V}$ | | 1000 | | 50 mA for primary 50 V |
| Sensitivity error | ϵ_G | % | -0.2 | 0 | 0.2 | |
| Thermal drift of sensitivity | ϵ_{GT} | % | -0.5 | | 0.5 | * |
| Linearity error | ϵ_L | % of V_{PM} | -0.5 | | 0.5 | * $\pm 75\text{ V}$ range |
| Overall accuracy | X_G | % of V_{PN} | -0.5 -1 | | 0.5 1 | * 25 °C; 100 % tested in production -40 ... 85 °C |
| Output rms noise current | I_{no} | μA | | 47 | | 1 Hz to 100 kHz |
| Reaction time @ 10 % of V_{PN} | t_{ra} | μs | | 30 | | |
| Response time @ 90 % of V_{PN} | t_r | μs | | 50 | 60 | 0 to 50 V step, 6 kV/ μs |
| Frequency bandwidth | BW | kHz | | 14 8 2 | | -3 dB -1 dB -0.1 dB |
| Start-up time | t_{start} | ms | | 190 | 250 | * |
| Primary resistance | R_1 | M Ω | | 2.7 | | * |
| Total primary power loss @ V_{PN} | P_P | mW | | 0.9 | | * |

Definition of typical, minimum and maximum values

Minimum and maximum values for specified limiting and safety conditions have to be understood as such as well as values shown in "typical" graphs.

On the other hand, measured values are part of a statistical distribution that can be specified by an interval with upper and lower limits and a probability for measured values to lie within this interval.

Unless otherwise stated (e.g. "100 % tested"), the LEM definition for such intervals designated with "min" and "max" is that the probability for values of samples to lie in this interval is 99.73 %.

For a normal (Gaussian) distribution, this corresponds to an interval between -3 sigma and +3 sigma. If "typical" values are not obviously mean or average values, those values are defined to delimit intervals with a probability of 68.27 %, corresponding to an interval between -sigma and +sigma for a normal distribution.

Typical, minimum and maximum values are determined during the initial characterization of the product.

Typical performance characteristics

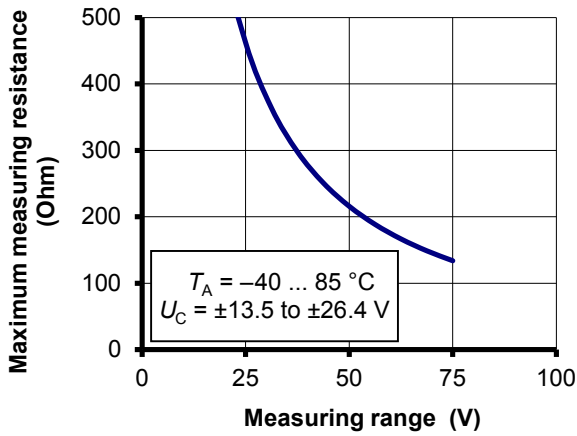


Figure 1: Maximum measuring resistance

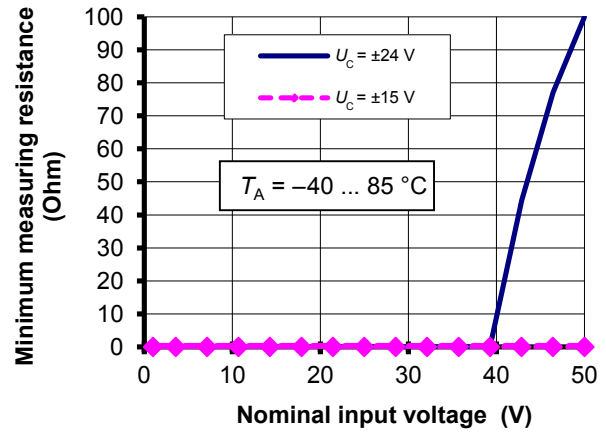


Figure 2: Minimum measuring resistance.
For T_A under 80 °C, the minimum measuring resistance is 0 Ω whatever U_C

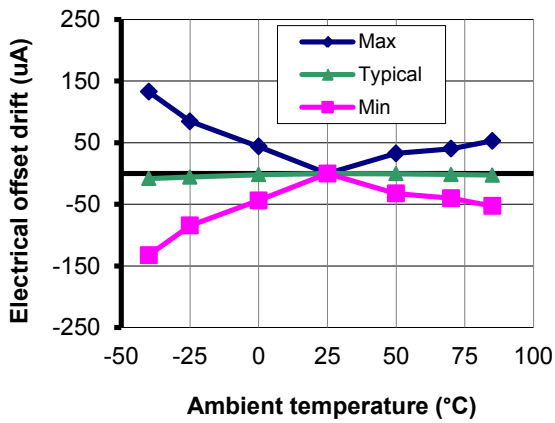


Figure 3: Electrical offset thermal drift

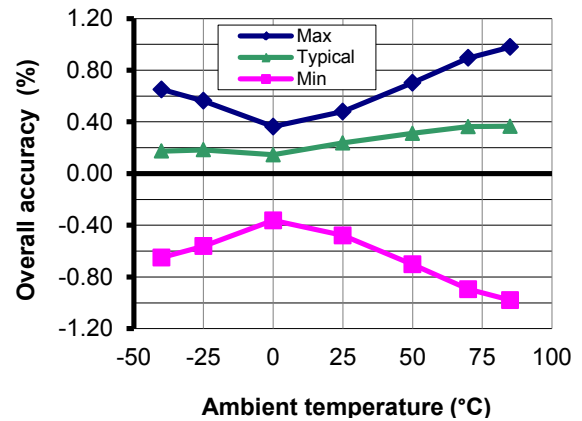


Figure 4: Overall accuracy in temperature

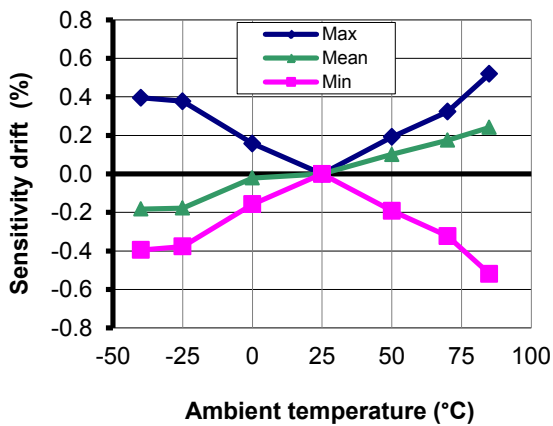


Figure 5: Sensitivity thermal drift

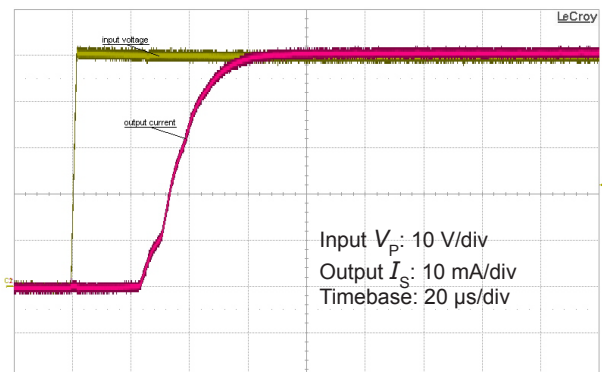


Figure 6: Typical step response (0 to 50 V)

Typical performance characteristics

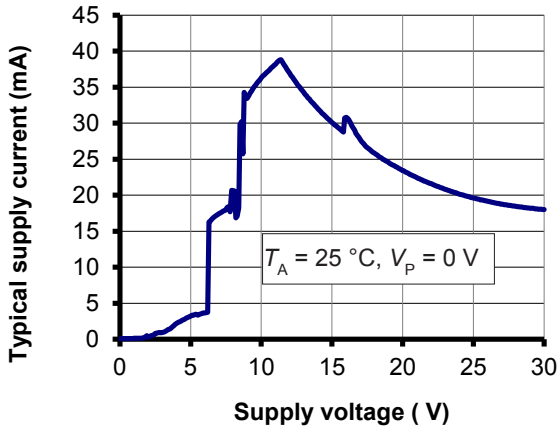


Figure 7: Supply current function of supply voltage

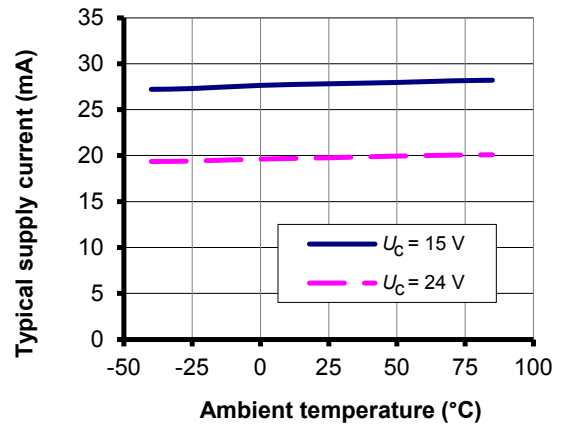


Figure 8: Supply current function of temperature

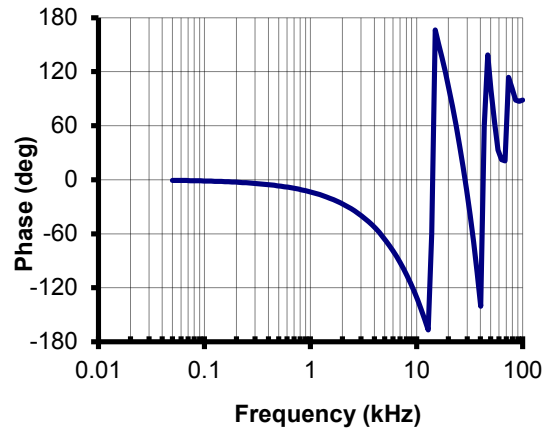
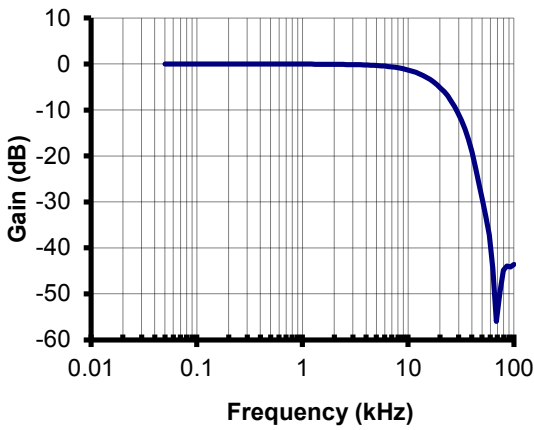


Figure 9: Typical frequency and phase response

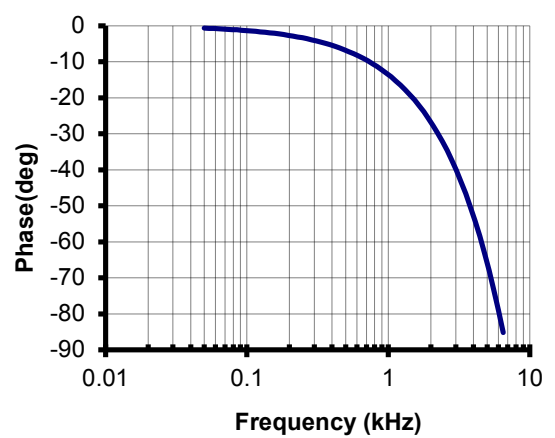
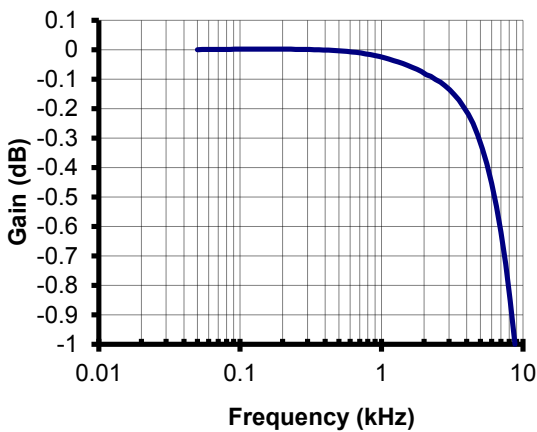


Figure 10: Typical frequency and phase response (detail)

Typical performance characteristics

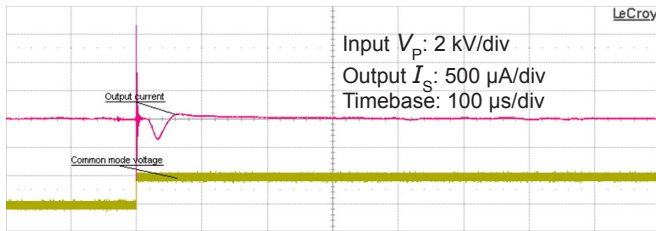


Figure 11: Typical common mode perturbation (2000 V step with 6 kV/µs $R_M = 100 \Omega$)

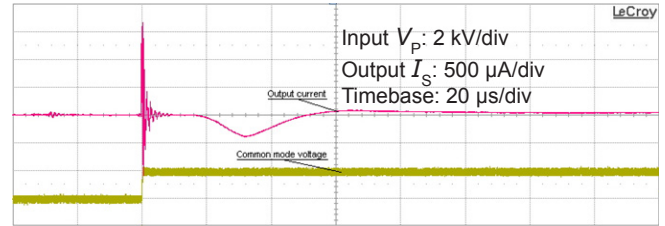


Figure 12: Detail of typical common mode perturbation (2000 V step with 6 kV/µs, $R_M = 100 \Omega$)

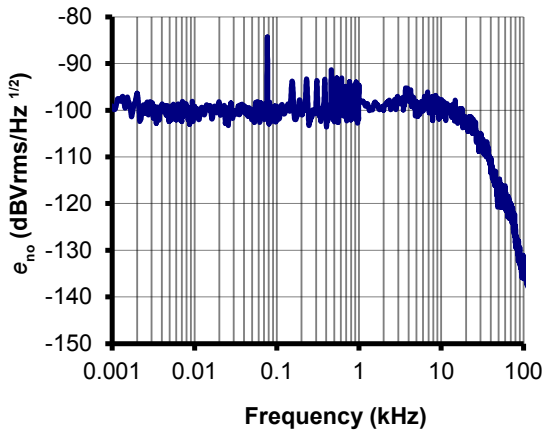


Figure 13: Typical noise voltage density of e_{no} with $R_M = 50 \Omega$

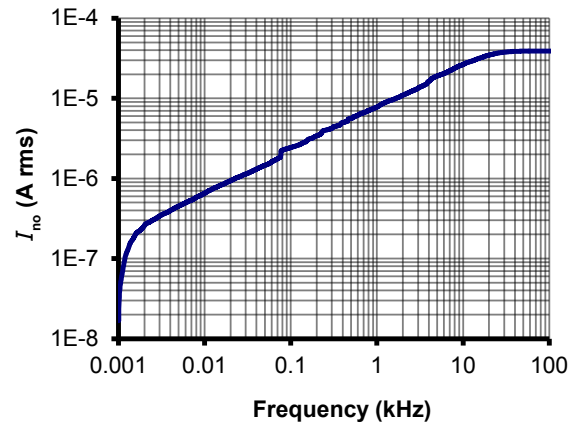


Figure 14: Typical total output rms noise current with $R_M = 50 \Omega$ (fc is upper cut-off frequency of bandpass, low cut off frequency is 1 Hz)

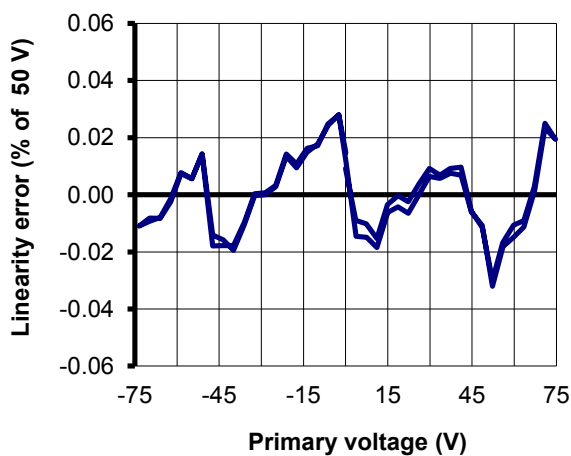


Figure 15: Typical linearity error at 25 °C

Figure 13 (noise voltage density) shows that there are no significant discrete frequencies in the output. Figure 14 confirms the absence of steps in the total output current noise that would indicate discrete frequencies. To calculate the noise in a frequency band $f1$ to $f2$, the formula is:

$$I_{no}(f1\text{ to }f2) = \sqrt{I_{no}(f2)^2 - I_{no}(f1)^2}$$

with $I_{no}(f)$ read from figure 14 (typical, rms value).

Example:

What is the noise from 10 to 100 Hz?

Figure 14 gives $I_{no}(10 \text{ Hz}) = 0.6 \mu\text{A}$ and $I_{no}(100 \text{ Hz}) = 2.4 \mu\text{A}$. The output rms current noise is therefore:

$$\sqrt{(2.4 \times 10^{-6})^2 - (0.6 \times 10^{-6})^2} = 2.32 \mu\text{A}$$

Performance parameters definition

The schematic used to measure all electrical parameters are:

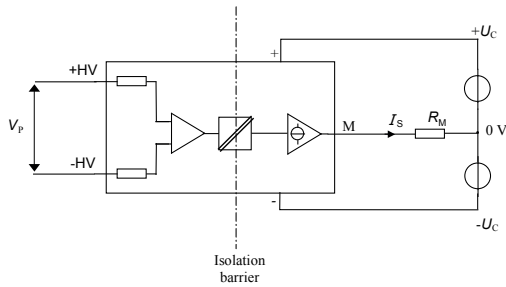


Figure 16: Standard characterization schematics for current output transducers ($R_M = 50 \Omega$ unless otherwise noted)

Transducer simplified model

The static model of the transducer at temperature T_A is:

$$I_s = G \cdot V_p + \varepsilon$$

In which

$$\varepsilon = I_{OE} + I_{OT}(T_A) + \varepsilon_G \cdot G \cdot V_p + \varepsilon_{GT}(T_A) \cdot G \cdot V_p + \varepsilon_L \cdot G \cdot V_{PM}$$

- I_s : secondary current (A)
- G : sensitivity of the transducer (A/V)
- V_p : primary voltage (V)
- V_{PM} : primary voltage, measuring range (V)
- T_A : ambient operating temperature ($^{\circ}C$)
- I_{OE} : electrical offset current (A)
- $I_{OT}(T_A)$: temperature variation of I_O at temperature T_A (A)
- ε_G : sensitivity error at $25^{\circ}C$
- $\varepsilon_{GT}(T_A)$: thermal drift of sensitivity at temperature T_A
- ε_L : linearity error

This is the absolute maximum error. As all errors are independent, a more realistic way to calculate the error would be to use the following formula:

$$\varepsilon = \sqrt{\sum_{i=1}^N \varepsilon_i^2}$$

Sensitivity and linearity

To measure sensitivity and linearity, the primary voltage (DC) is cycled from 0 to V_{PM} , then to $-V_{PM}$ and back to 0 (equally spaced $V_{PM}/10$ steps).

The sensitivity G is defined as the slope of the linear regression line for a cycle between $\pm V_{PM}$.

The linearity error ε_L is the maximum positive or negative difference between the measured points and the linear regression line, expressed in % of the maximum measured value.

Electrical offset

The electrical offset current I_{OE} is the residual output current when the input voltage is zero.

The temperature variation I_{OT} of the electrical offset current I_{OE} is the variation of the electrical offset from $25^{\circ}C$ to the considered temperature.

Overall accuracy

The overall accuracy X_G is the error at $\pm V_{PN}$, relative to the rated value V_{PN} . It includes all errors mentioned above.

Response and reaction times

The response time t_r and the reaction time t_{ra} are shown in the next figure.

Both depend on the primary voltage dv/dt . They are measured at nominal voltage.

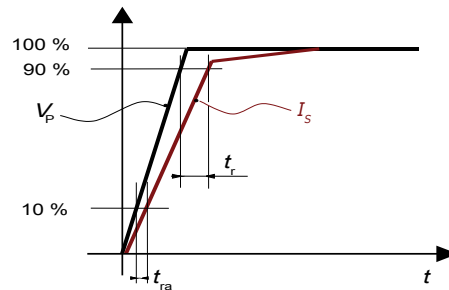
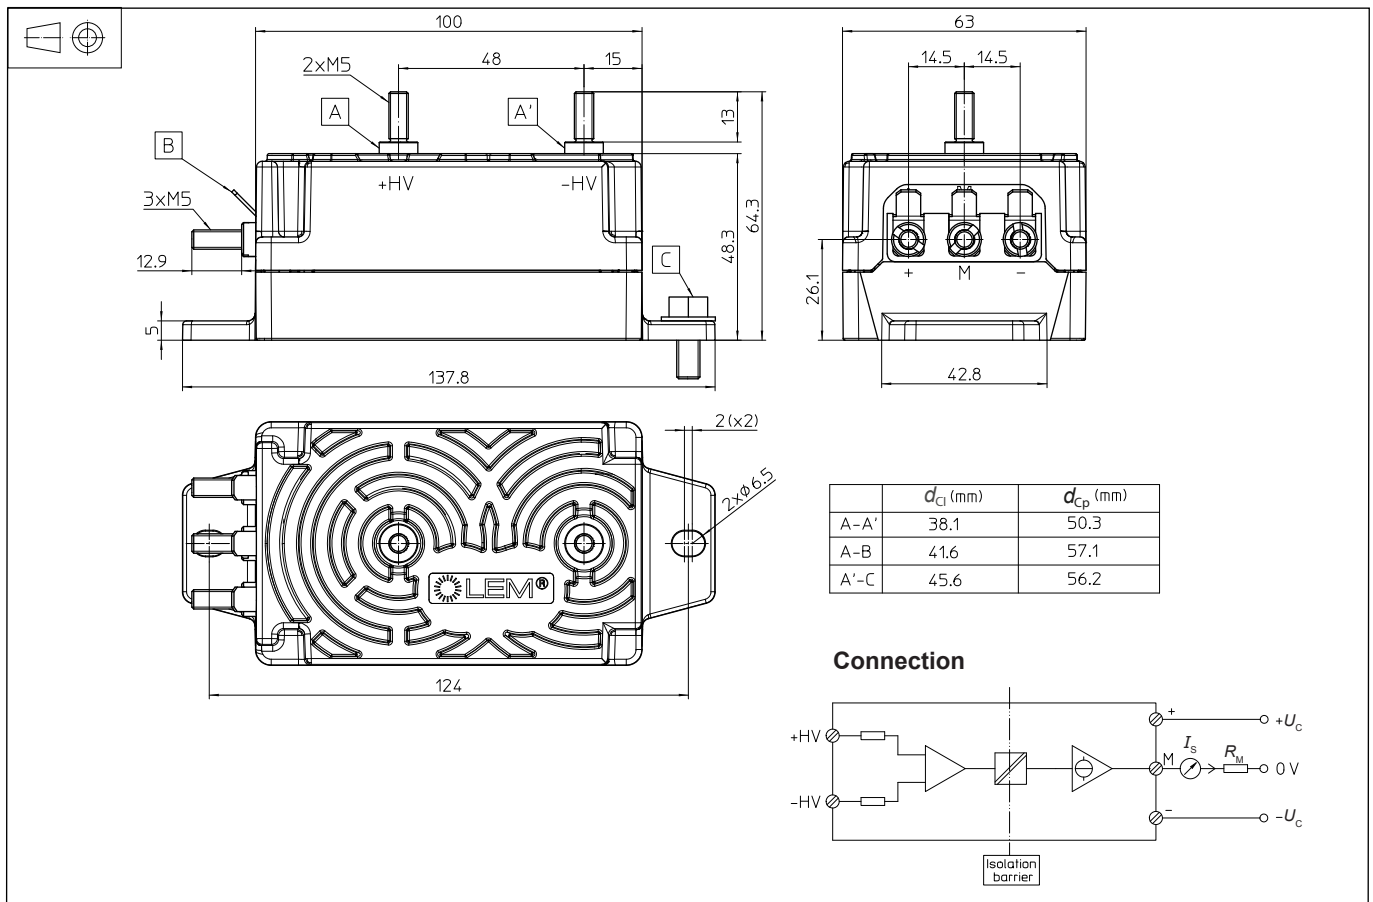


Figure 17: Response time t_r and reaction time t_{ra}

Dimensions (in mm)

Mechanical characteristics

- General tolerance ± 1 mm
- Transducer fastening
 - 2 holes $\varnothing 6.5$ mm
 - 2 M6 steel screws
- Recommended fastening torque 4 N·m
- Connection of primary
 - 2 M5 threaded studs
 - Recommended fastening torque 2.2 N·m
- Connection of secondary
 - 3 M5 threaded studs
 - Recommended fastening torque 2.2 N·m

Remarks

- I_S is positive when a positive voltage is applied on +HV.
- The transducer is directly connected to the primary voltage.
- The primary cables have to be routed together all the way.
- The secondary cables also have to be routed together all the way.
- Installation of the transducer is to be done without primary or secondary voltage present.
- Installation of the transducer must be done unless otherwise specified on the datasheet, according to LEM Transducer Generic Mounting Rules. Please refer to LEM document N°ANE120504 available on our Web site: [Products/Product Documentation](#).
- This is a standard model. For different versions (supply voltages, turns ratios, unidirectional measurements...), please contact us.

Safety

This transducer must be used in limited-energy secondary circuits according to IEC 61010-1.



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary connection, power supply).

Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a build-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [lem manufacturer](#):

Other Similar products are found below :

[FHS 40-P KIT 4-1P](#) [FHS 40-P KIT 9-1P](#) [ATO-60-B225-D10](#) [DVL 750-UI](#) [IT 205-S](#) [ULTRASTAB](#) [LA125-P](#) [HAS50-S/SP50](#) [AT10B420L](#)
[APR 50 B10](#) [DHR 100 C420](#) [DIN RAIL ADAPTER ATO-D10](#) [DIN RAIL ADAPTER ATO-D16](#) [DHAB S/118](#) [LF 305-S](#) [HY 20-P](#) [HO 250-](#)
[/SP30](#) [AP 50 B10](#) [DHR 1000 C420](#) [LAH100-P](#) [HO 60-NP](#) [DHR 100 C10](#) [AT100B10](#) [AT 10 B10](#) [LF205-S](#) [LTSR 25-NP](#) [RT 2000](#) [HLSR](#)
[40-P/SP33](#) [HX 05-NP](#) [HLSR 16-SM](#) [HO 50-S/SP33-1106](#) [hat800-s](#) [HAT400-S](#) [HTFS 200-P/SP2](#) [ART-B22-D070](#) [DVL 2000](#) [HTFS 400-P](#)
[LV25-P](#) [HAIS 50-TP](#) [HTB 50-TP](#) [LAS 50-TP/SP1](#) [HX 05-P/SP2](#) [HO 60-NP-0100](#) [HAIS 200-P](#) [CAS25-NP](#) [HAL 600-S](#) [HAS 200-S](#) [HLSR](#)
[10-P](#) [HLSR 10-P/SP1](#) [has100-s/sp50](#) [HO 240-P](#)