

711 Series Single Way

DB-1a

Data Bus Interconnection System




Data Bus Interconnection System designed for data transmission as defined by MIL-STD-1553B, STANAG 3838 and DEF STAN 00-18 (Part 2). This system is also ideal for video transmission systems and the termination of screened twisted pairs.

BS 9522 F0043 approved and qualified to PAN 6484/6499. 711 series connectors incorporate an anti-vibration locking mechanism. The triaxial, all crimp contact used in the 711 series single way connectors is common to the multi-way connector housing allowing up rating of equipment at any time.


Amphenol

Plugs

Plug - 711-5000/C2832-

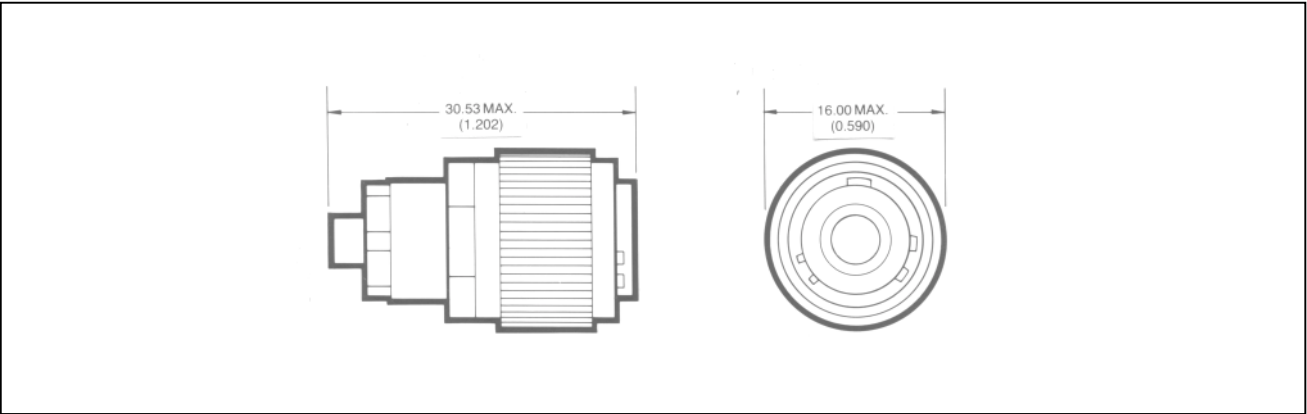


Plug-711-5011/C2831-/PAN 6484 F

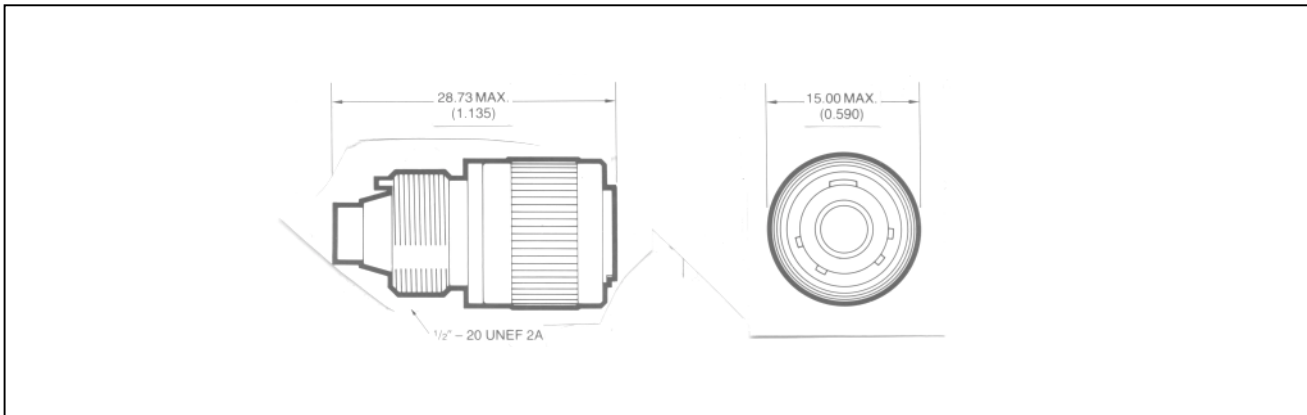


Receptacles

Single Hole Mtg. Receptacle - 711-5001/C2834-

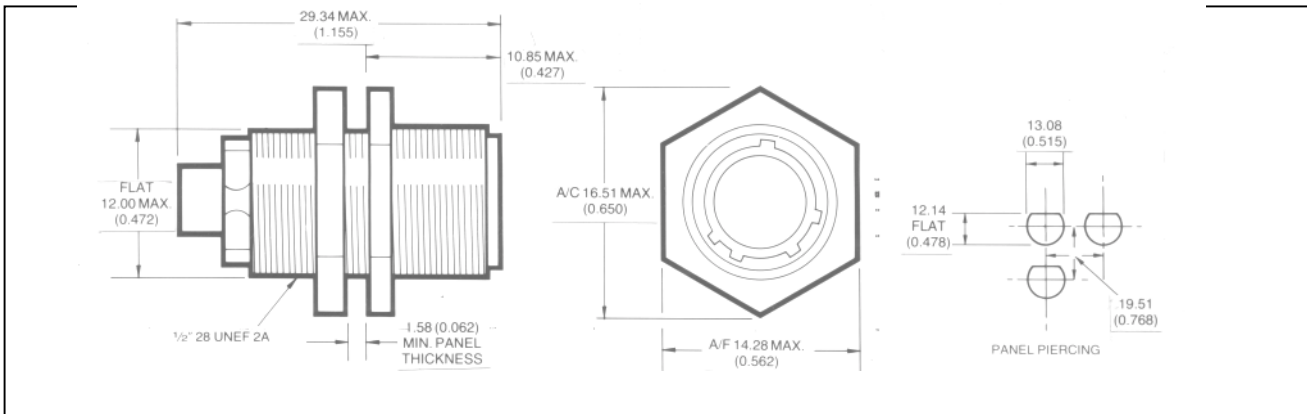

Sq. Flange Mtg. Receptacle - 711-5002/C2835-/PAN 6484 B

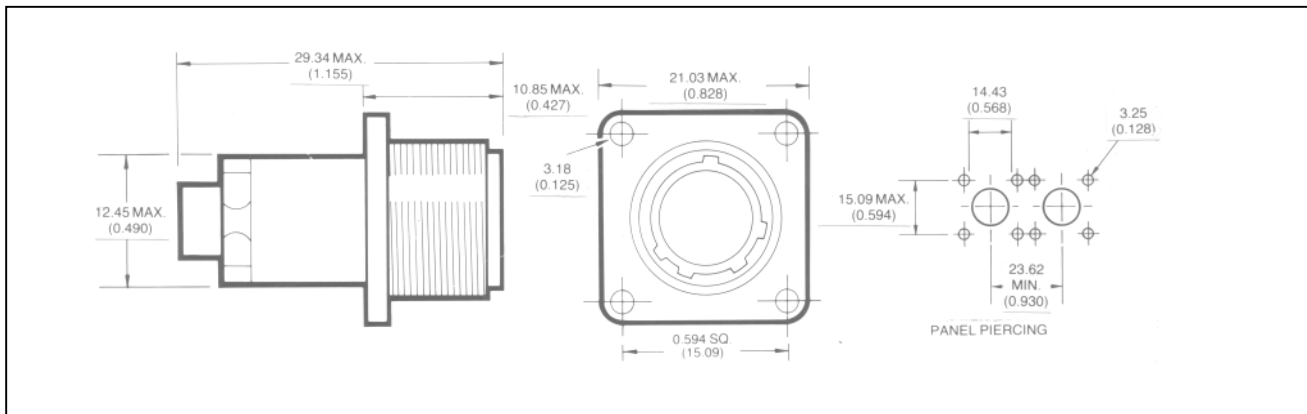


Single Hole Mtg. Receptacle - 711-5008/C2844-



PANEL PIERCING AS FOR 5001

NOTE: This connector is only for use with discrete wiring and is not suitable for use with Data Bus cable.


Sq. Flange Mtg. Receptacle - 711-5009/C2838-(M3 Clinch nuts fitted)

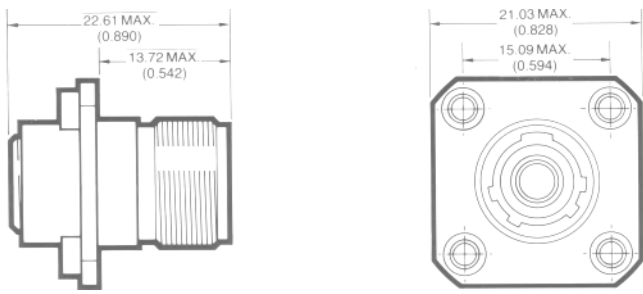

PANEL PIERCING AS FOR-5002


NOTE: This connector is only for use with discrete wiring and is not suitable for use with Data Bus cable.

Sq. Flange Mtg. Receptacle - 711-5010/C2837-/PAN 6484C (M3 Clinch nuts fitted)

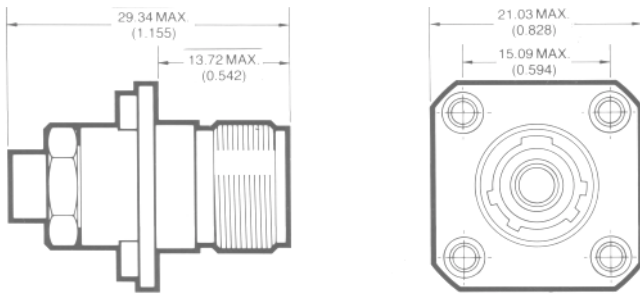


PANEL PIERCING AS FOR - 5002

Sq. Flange Mtg. Receptacle with P.C. Termination Contacts - 711-5015/C2839 (clinch nuts fitted)

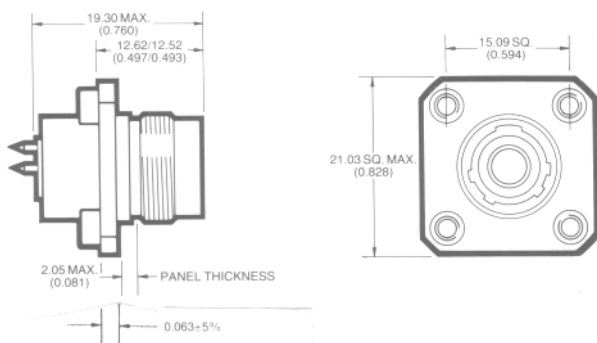


PANEL PIERCING AS FOR-5002


Single Hole Mtg. Receptacle with bulkhead seal - 711-5016/C2833-/PAN 6484A

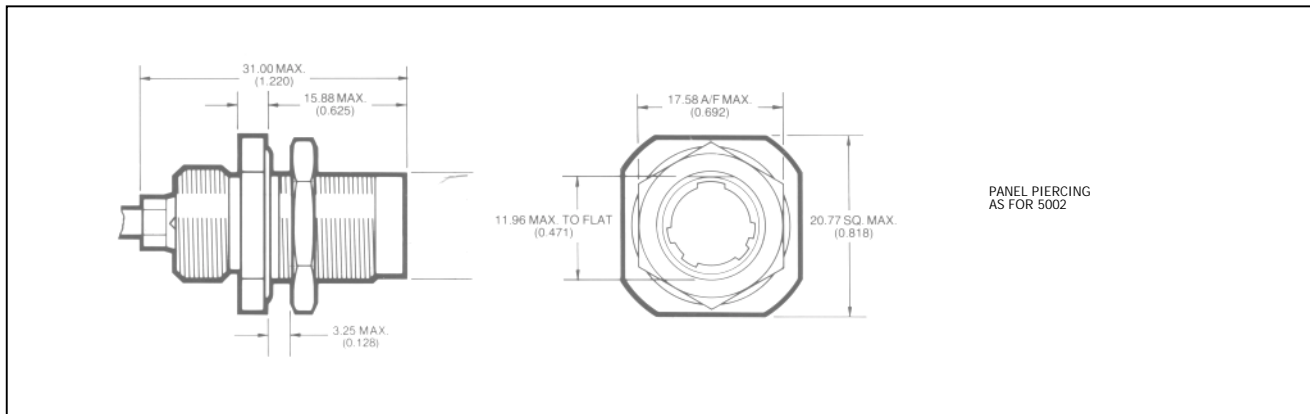

Sq. Flange Mtg. Receptacle - 711-5024/C2836-

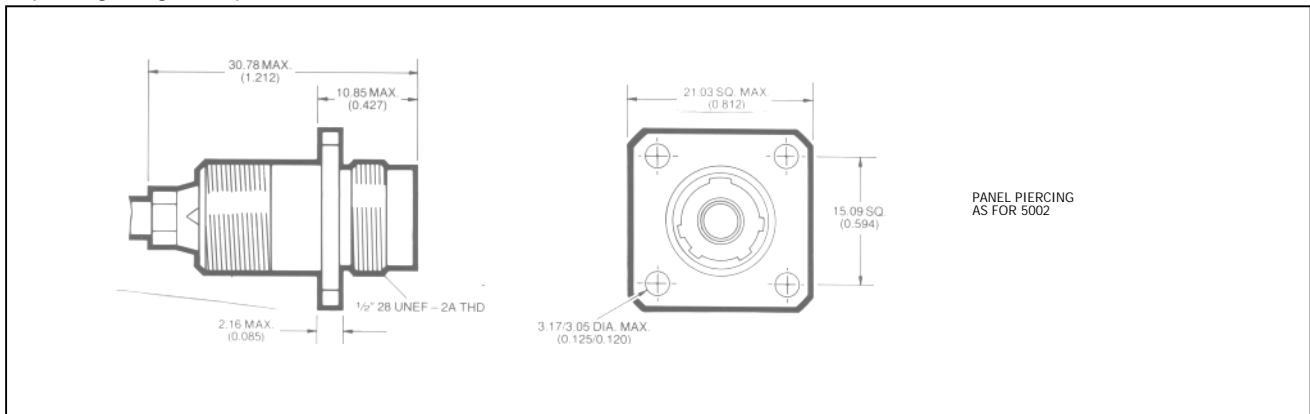


Single Hole Mtg. Receptacle with bulkhead seal and P.C. Termination Contacts-711-5038-

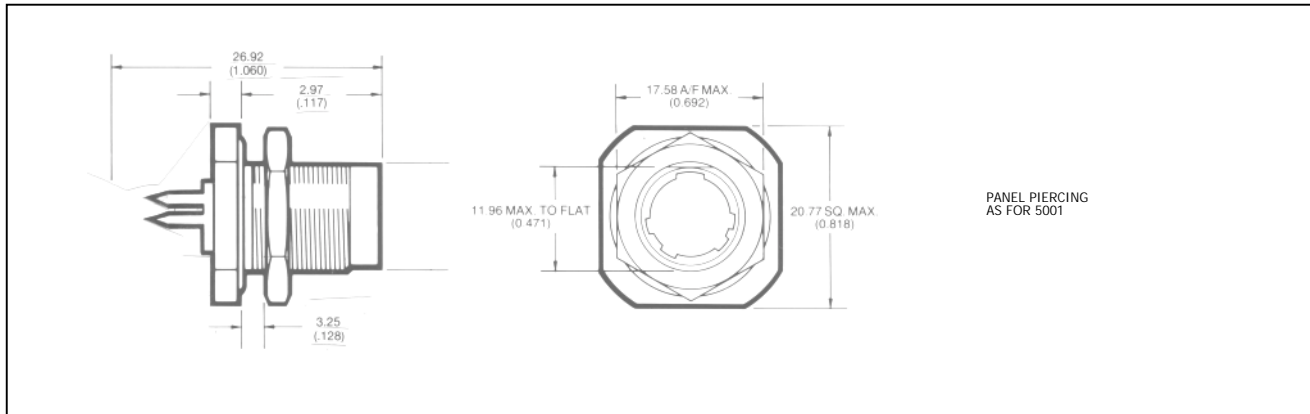


Terminators

Plug Terminator $77\Omega \pm 1$ - 5013-XX/C2843-/PAN 6484 L

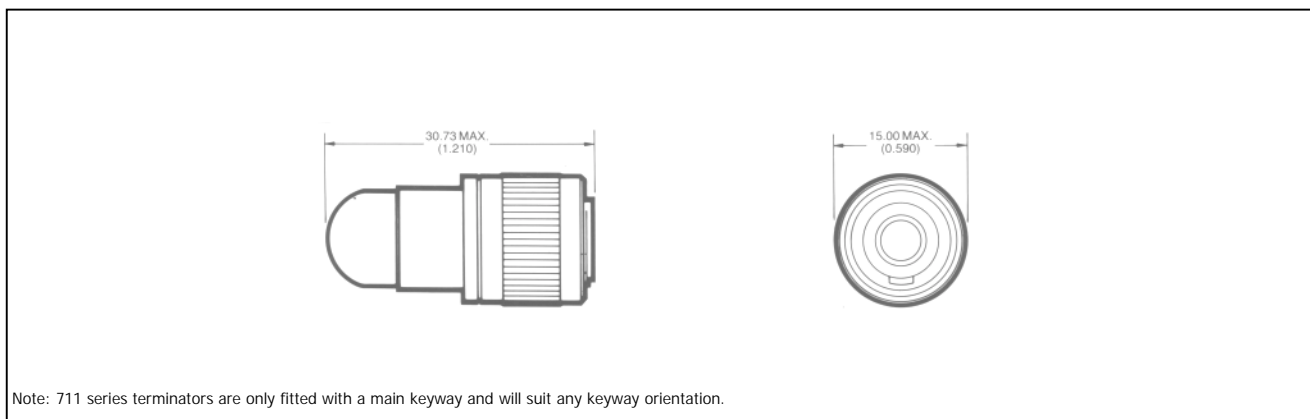


Note: 711 series terminators are only fitted with a main keyway and will suit any keyway orientation.

Sq. Flange Mtg. Receptacle Terminator ($3K\Omega \pm 5\%$) - 5017 - XX/C2845-/PAN 6484 M

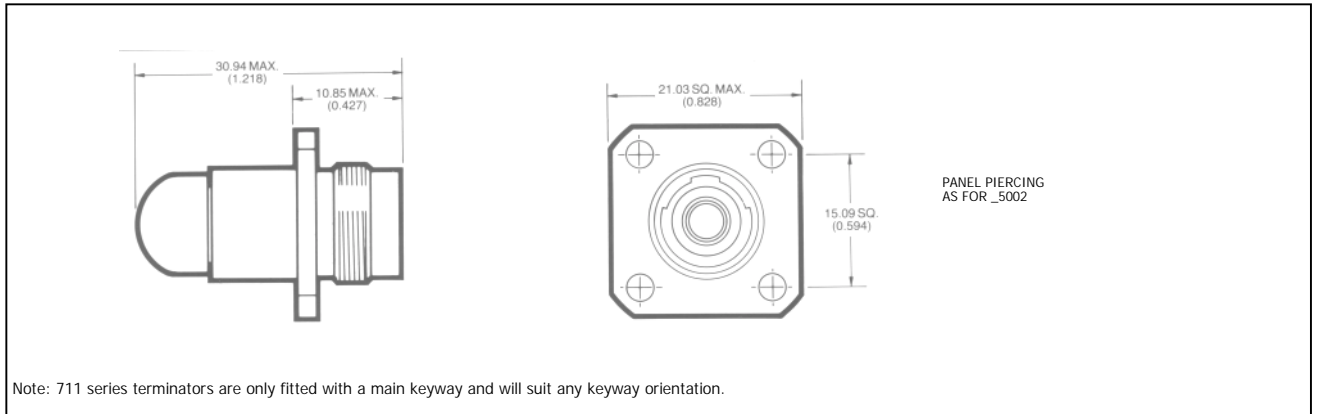

In Line Receptacle Terminator ($3K\Omega \pm 5\%$) - 5028 - XX/C2846-/

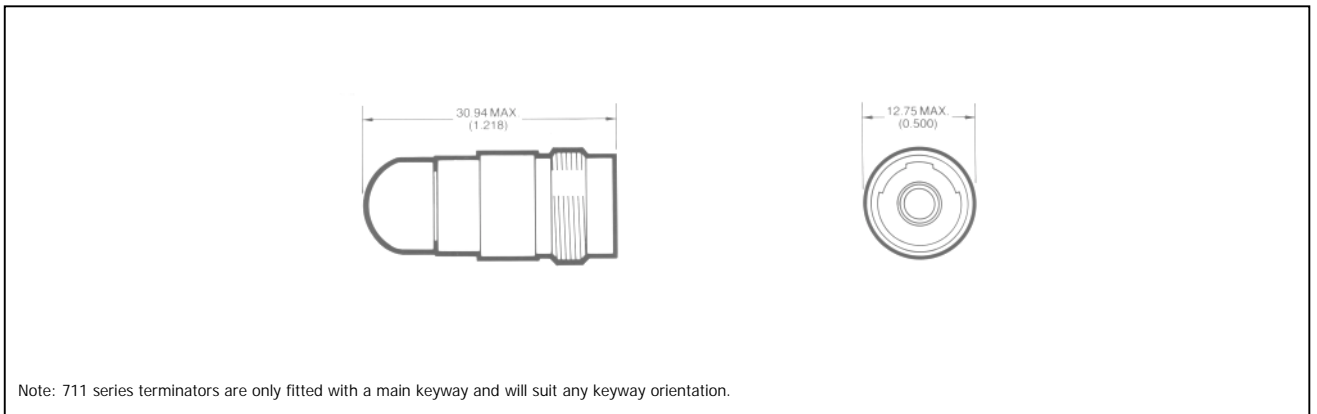


XX Refers to the terminator impedance value. This value can be selected according to the characteristic impedance of the data bus transmission line or to simulate the RT internal impedance. Amphenol standard terminators come fitted with two impedance values.

BUS terminators = 77 ohm STUB terminators = 3K ohm
e.g. Order 711-5017-77, 711-5028-3K etc.

For special requirements contact Amphenol Technical Support and Product Management team.

Loads

Sq. Flange Mounting $10K\Omega \pm 5\%$ in line load - 5020 /PAN 6484 N

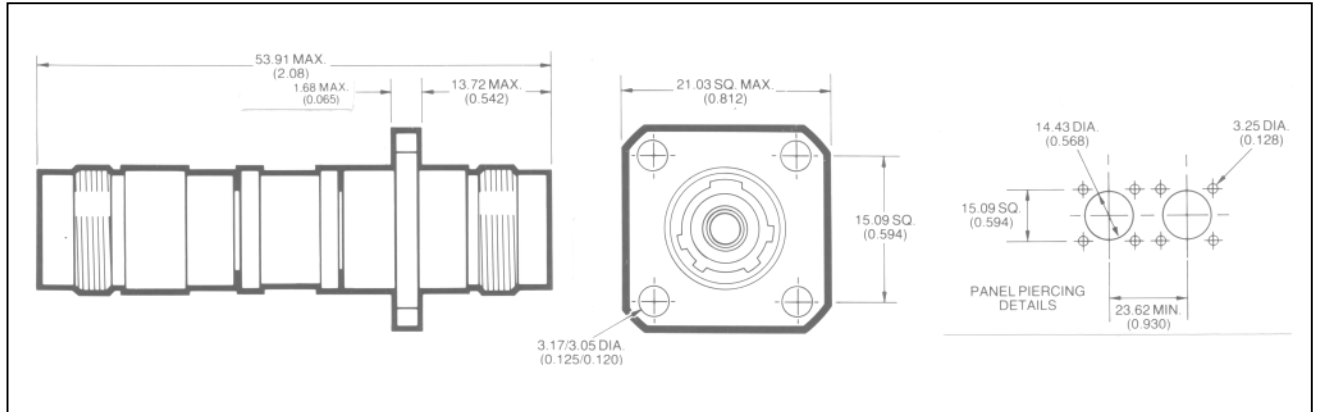

Ordering

Ordering by Amphenol

Part Numbers

711 -

5000 - 1 (XXX)

Series designation 711

Shell Style

- 5000- Plug, with socket contact.
- 5001- Receptacle, sealed. Single hole mounting.
- 5002- Receptacle, square flange.
- 5008- Single hole mounting receptacle for discrete wiring.
- 5009- Receptacle, square flange. Low profile, clinch nuts fitted for discrete wiring.
- 5010- Receptacle, square flange. Clinch nuts fitted.
- 5011- Plug to take cable accessories.
- 5013- Plug terminator 750.
- 5015- Receptacle, square flange. P.C. termination contacts. Clinch nuts fitted.
- 5016- Receptacle, single hole mount with bulkhead seal, to take cable accessories.
- 5017- Receptacle terminator 3Kfl. Square flange mounting.
- 5020- In line load 1 OKSZ square flange mounting.
- 5024- Receptacle, square flange mount, to take cable accessories.
- 5028- In line receptacle terminator 3Kfl.
- 5038- Receptacle, single hole mounting with bulkhead seal, P.C. termination.


Deviation Code

- (462) Cadmium Olive drab plating
- (473) Less clinch nuts


Orientation (1 for normal orientation)

Keys/Keyways 1,2,3,4 and 5)

Ordering by B.S. Part Numbers

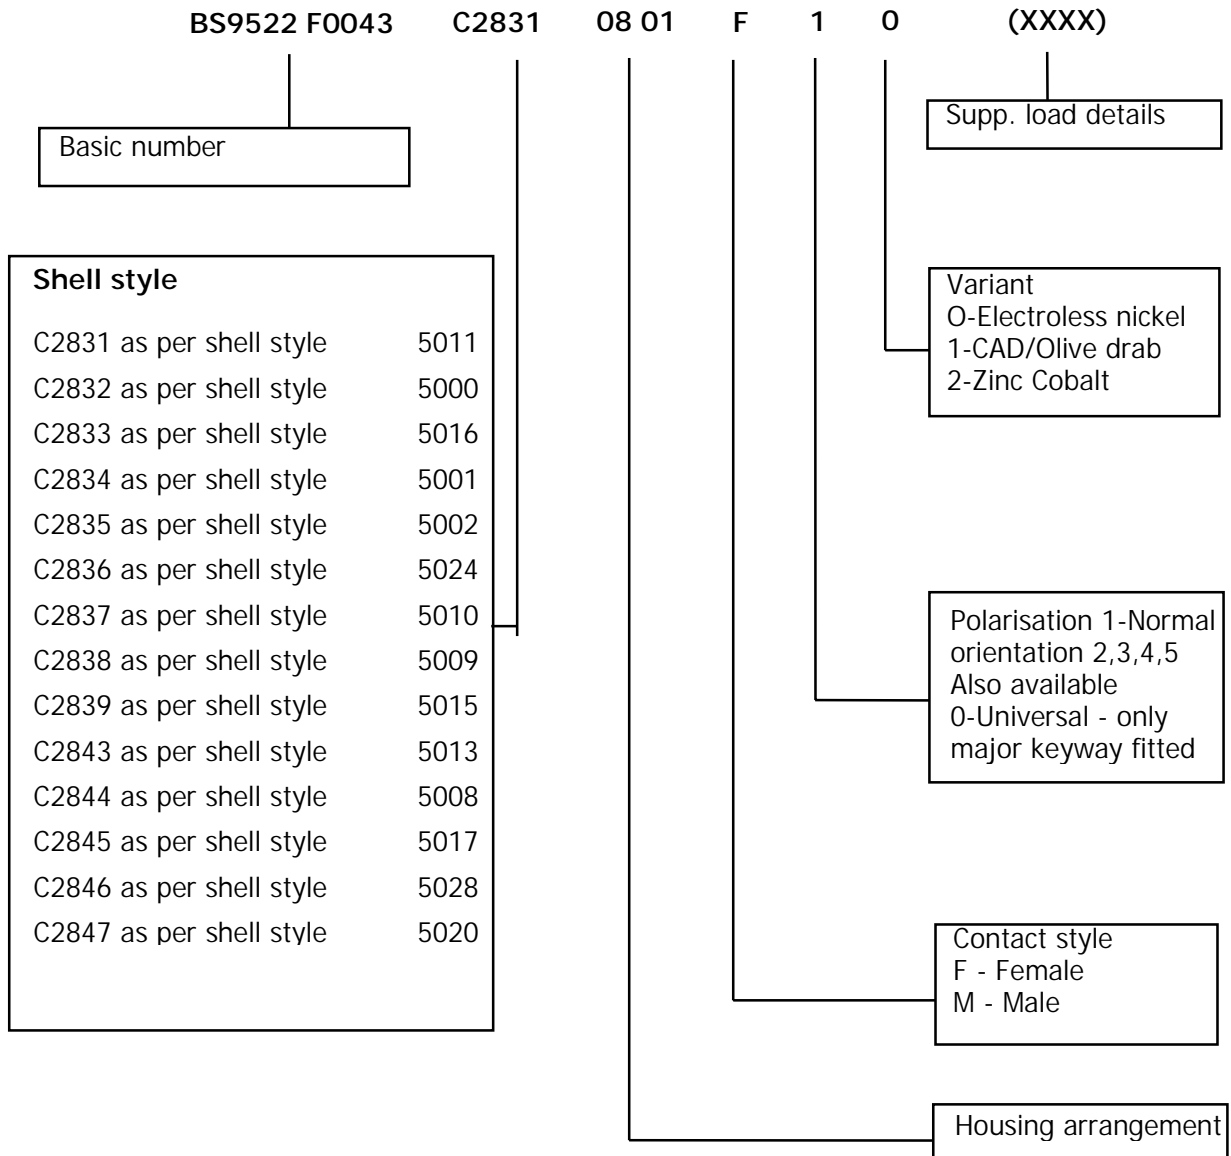

Ordering by Pan Number

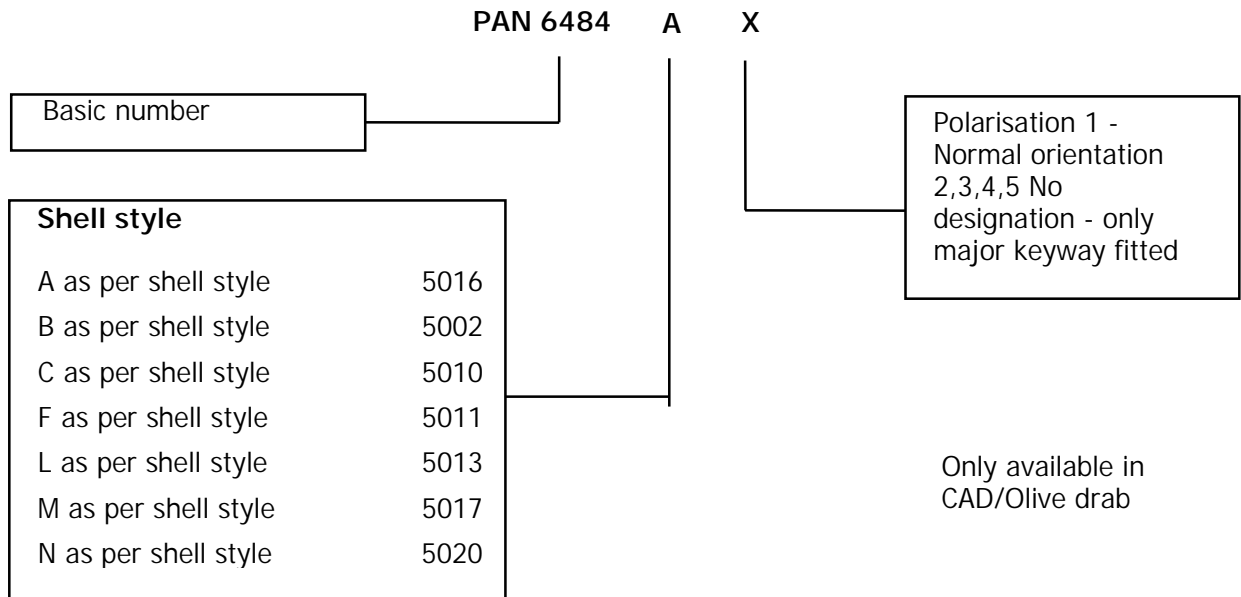

Protective Caps

Caps and Cords

711-0100-XX For use with all single way receptacles.

711-0112-XX For use with all single way plugs.

XX denotes the length of cord or chain required.

01 = 3"

02 = 3.5"

03=4"


Caps and Chains

711-0121-XX For use with all single way receptacles.


711-0122-XX For use with all single way plugs.

Use deviation (462) for Cadmium Olive drab finish.

Caps and Cords

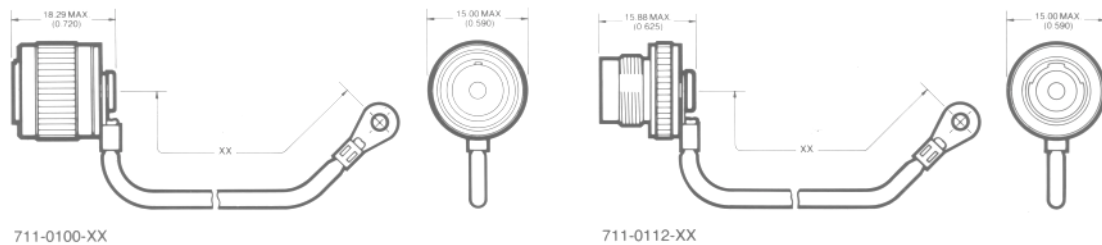

Caps and Chains

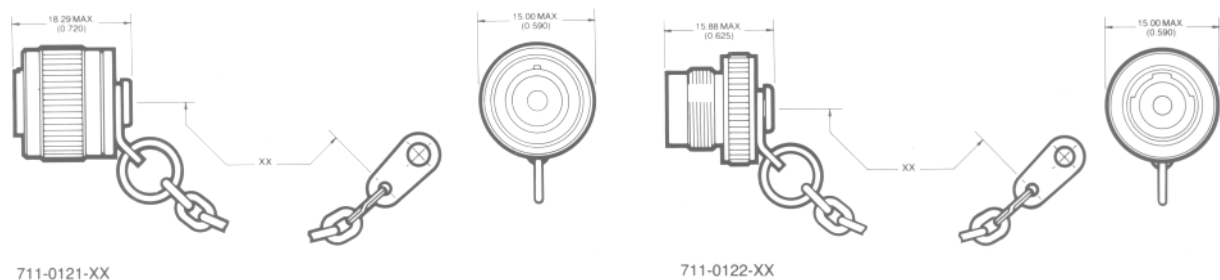

Contacts

Contacts may be ordered separately under the following Part No.'s:

711-0013-1 - Pin contact. 711-0014-1 - Socket contact.

711-0037 -Pin contact for use with discrete wire.

Crimp Tools for 711 Series Connectors



Centre contact crimp - Crimp tool M22520/2-01.

Positioner 294GB-5027-1.

Intermediate/Outer crimp - Crimp tool 227-944 (M22520/5-01).

Die Set 294GB-5026-1.

Key/Keyway Orientations

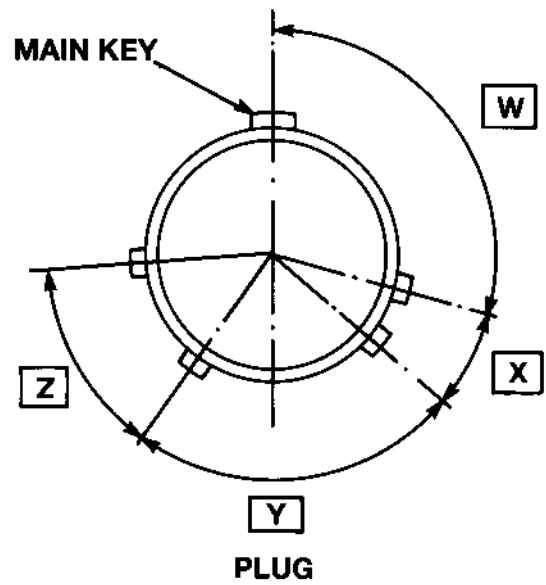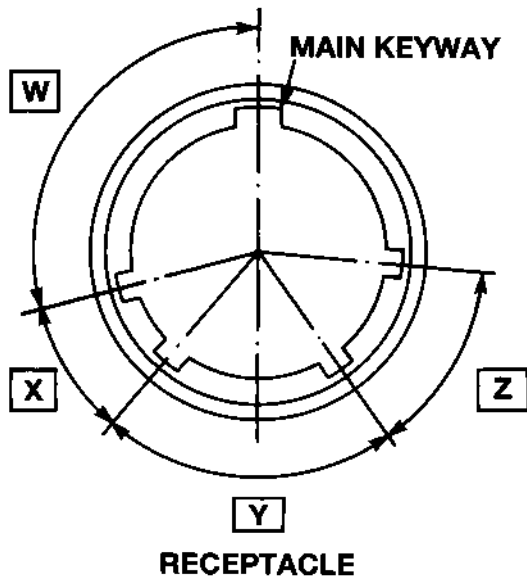


| POS | ANGLES | | | |
|-----|--------|----|-----|----|
| | W | X | Y | Z |
| 1 | 105 | 35 | 75 | 50 |
| 2 | 118 | 30 | 100 | 30 |
| 3 | 82 | 50 | 75 | 45 |
| 4 | 92 | 35 | 75 | 50 |
| 5 | 118 | 35 | 75 | 50 |
| 0* | | | | |


Datum is always taken from major key or keyway. In receptacles the major keyway always remains fixed in relation to the mounting flange.

*0 is a universal keyway. Only the major keyway is fitted.


Size #10 Data Bus Contact Assembly Instructions

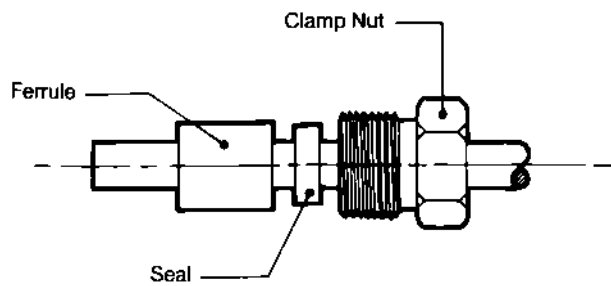


Slide clamp nut, seal and ferrule over cable. (Nut & seal only applicable on single way connector).

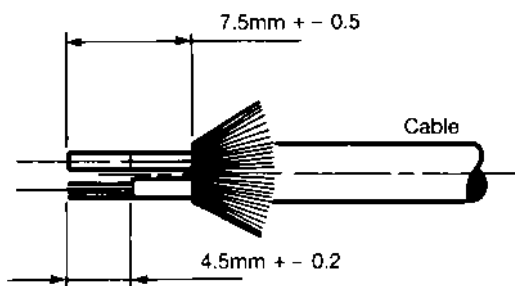


Remove outer sheath of cable to 7.5mm comb out all braids evenly and fold back. Remove cable fillers from stripped length. Strip the centre contact conductor to 4.5mm. Note: It is recommended that both intermediate and centre contact conductors are scored at the correct stripping length. The intermediate conductor insulation should not be removed until the centre contact has been crimped.

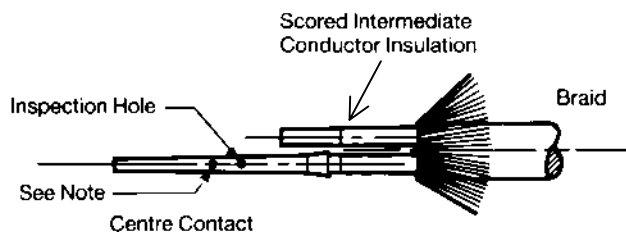


Crimp centre contact (Pin or Socket) on to the stripped wire using tool M22520/2-01 and crimp positioner 294GB-5027-1 (setting No. 4 for 24AWG) butting rear end of contact to wire insulation. The conductor end should be visible in the inspection hole. Note: A second hole is permissible in the socket contact for manufacturing purposes. It is not required to be on the same centre line as the inspection hole.

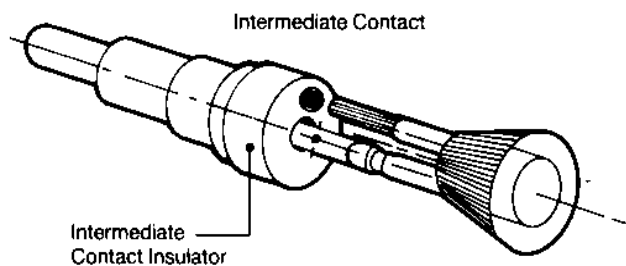


Strip intermediate contact conductor to 4.5mm. Insert centre contact into centre hole of intermediate contact conductor into the outer hole of the intermediate contact assembly. Push firmly home until the centre contact is felt to snap into place and ensure that the insulation of each conductor is fully inserted into the intermediate contact insulator. The intermediate conductor should be visible in the inspection hole in the intermediate contact. There should be no loose cable strands visible. Crimp the intermediate contact assembly using the appropriate cavity of crimp jaw 294GB-5026-1 fitted into M22520/5-01 tool.

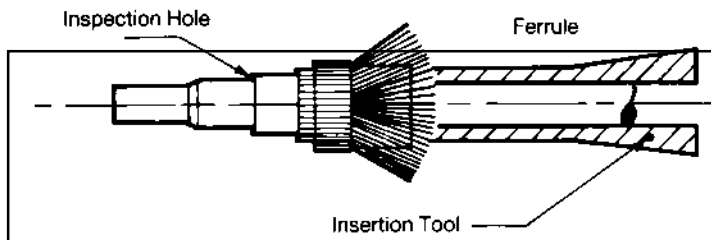


Slide the ferrule forward under the braid to trap the braid against the rear of the intermediate contact insulator, for all succeeding operations keep the ferrule firmly against the rear of the insulator using insertion tool (294GB-5028).

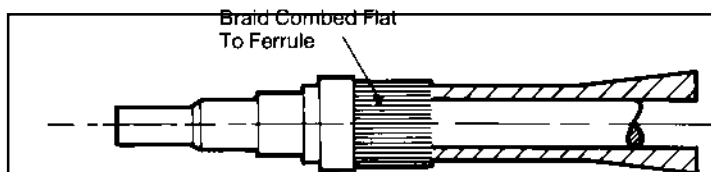

Comb the braid back evenly and flatten it onto the ferrule.

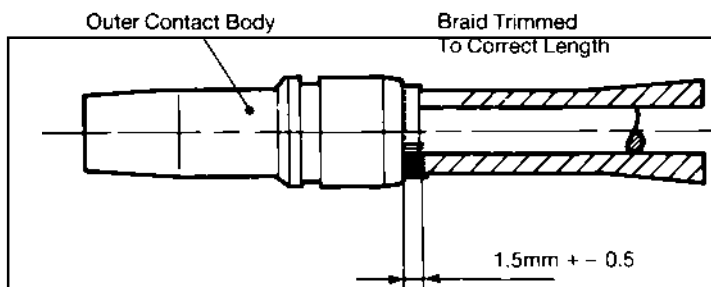

Slide the outer contact body over the intermediate contact assembly and ferrule until approximately 1.5 mm of the ferrule is visible. Trim off the excess braid using the rear of the outer contact body as a guide. Ensure that there are no loose braid clippings at the rear of the ferrule.

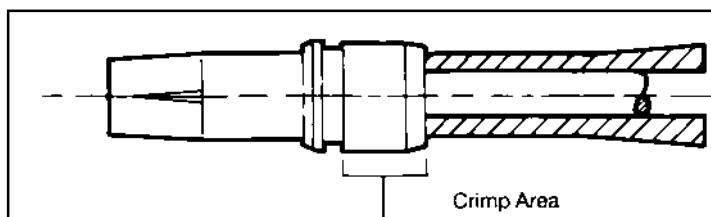

Place the outer contact body into the hexagonal cavity of the crimp jaws (294GB-5026-1). Slide the intermediate contact assembly and ferrule fully into the outer body using the insertion tool. The rear of the ferrule should be -0.5 or ± 0.5 mm to the rear of the outer contact body when fully inserted. Complete the hexagonal crimp.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [amphenol manufacturer](#):

Other Similar products are found below :

[CTV06RGQF-17-52P](#) [CTVPS00RGF-23-6P-LC](#) [JTPQ00RT-16-35P\(453\)](#) [GC835TY2S](#) [CF-509621-29P](#) [BF8-1218-31SV-Y70](#) [TVP00RGW-23-6SA\(LC\)](#) [RNJ27CI1535P014](#) [10-553998-139](#) [21-033388-031](#) [10-507142-843](#) [GTS02R20-15P-025-116](#) [GTS06G-32-7S](#) [GTC06-36-78PX-023](#) [ACC02E28-51S-003-B30-LC](#) [TV06RL-13-35SD-LC](#) [TV06RL-13-35SD](#) [TV06RL-13-98SD-LC](#) [TV06RL-13-98SD](#) [GTC08AF32-15SX-B30-LC](#) [GTC06G32-76PZ](#) [TVP00RW-23-53AD](#) [100-007-213-002-001](#) [5M30-61](#) [JT07RT-22-14PB-453](#) [FSPP-103-00-004](#) [360031](#) [10-037090-161](#) [10-541504-001](#) [10-580902-409](#) [TV97RW-9-9S\(S15\)](#) [TVPS00RGF-9-5P-LC](#) [TVPS00RGF-9-5PA-LC](#) [TVP00RGQW-21-75P-LC](#) [TV06RW-25-90AE](#) [97-3108B16S-5PW-417](#) [PT06J20-24SW](#) [97-3108B16S-4PY-417](#) [97-3108B16S-4PX-417](#) [97-3108B16S-5PY-417](#) [97-3108B16S-4PW-417](#) [CS-DSDMDB37MF-025](#) [97-3108B16S-5PZ-417](#) [TV06RW-25-46AE](#) [TVS07RF-21-16AA](#) [TVS07RF-21-39BA](#) [60261626SNCOND1](#) [SE00TVW09](#) [CF-5A9013-04N](#) [CF-6A4615-06N](#)