

Features

- High Efficiency (Up to 90%)
- Full Power at 70-100% Max Current (Constant Power)
- Thermal Sensing and Protection for LED Panel/Strings
- DALI Dimmable and Dim off
- Low Dimming Level to 1% with Good Accuracy
- Standby Power ≤ 0.5 W
- Output Lumen Compensation
- All-Around Protection: OVP, SCP, OTP
- Class II, SELV and Class 2
- Complies with DALI protocol IEC62386-101,102 and part of 207



Description

The LUD-060SxxxBSF series is a 60W, constant-current, programmable indoor LED driver that operates from 90-305 Vac input with excellent power factor. Created for dimmable panel lights and linear lights, it provides good dimming accuracy down to 1% output, plus a dim-off mode with low standby power. The high efficiency of these drivers and slim metal case enables them to run cooler, significantly improving reliability and extending product life. To ensure trouble-free operation, protection is provided against over voltage, short circuit, and over temperature of both the driver and the external LED array.

Models


Output Current Range	Full-Power Current Range (1)	Default Output Current	Input Voltage Range(2)	Output Voltage Range	Max. Output Power	Typical Efficiency (3)	Power Factor		Model Number
							120Vac	220Vac	
3.85-550mA	385-550 mA	530mA	90 ~ 305 Vac 127~300 Vdc	31~156 Vdc	60 W	90%	0.99	0.96	LUD-060S055BSF
5.46-780mA	546-780 mA	700mA	90 ~ 305 Vac 127~300 Vdc	22~110 Vdc	60 W	90%	0.99	0.96	LUD-060S078BSF (SELV)
7.7-1100mA	770-1100 mA	1050mA	90 ~ 305 Vac 127~300 Vdc	16 ~78 Vdc	60 W	90%	0.99	0.96	LUD-060S110BSF (SELV)
10.5-1500mA	1050-1500mA	1400mA	90 ~ 305 Vac 127~300 Vdc	12 ~57 Vdc	60 W	90%	0.99	0.96	LUD-060S150BSF (Class2 & SELV)
14.7-2100mA	1470-2100mA	2100mA	90 ~ 305 Vac 127~300 Vdc	8 ~40 Vdc	60 W	89%	0.99	0.96	LUD-060S210BSF (Class2 & SELV)

Notes: (1) Output current range with constant power at 60W

(2) UL, FCC certified input voltage range: 100-277Vac or 127-300Vdc; other certified input voltage range except UL & FCC: 100-240Vac /127-250Vdc

(3) Measured at a 220Vac input with 70% maximum output current and 100% maximum output voltage.

I-V Operating Curve

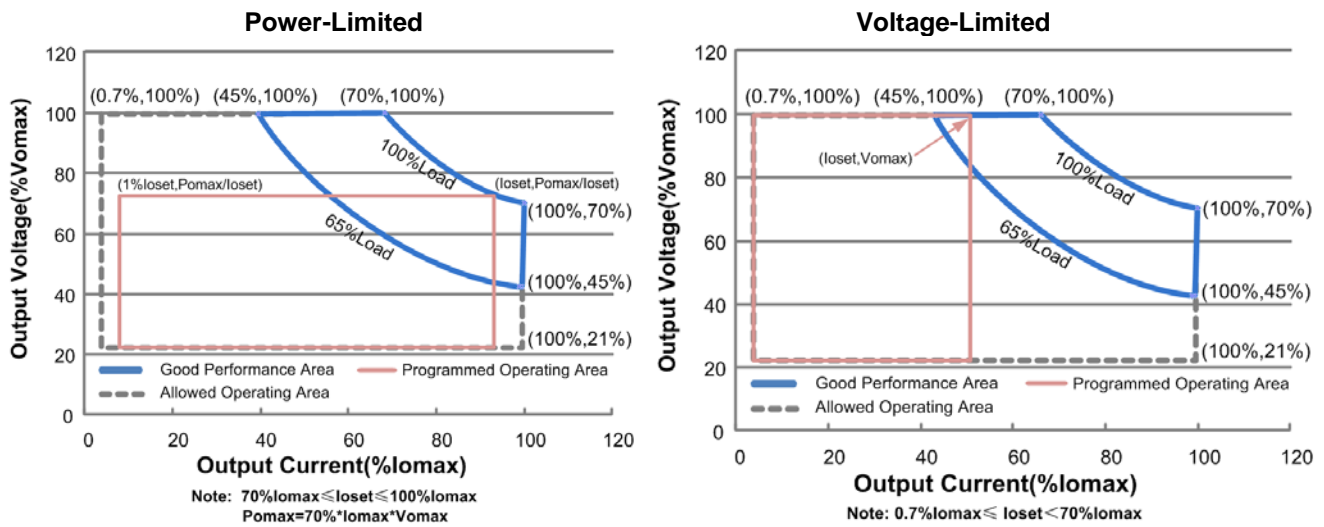

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 V	-	305 V	127~300 Vdc
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 mA	At 277Vac 60Hz input
Input AC Current	-	-	0.8 A	Measured at full load and 100 Vac input.
	-	-	0.36 A	Measured at full load and 220 Vac input.
Inrush Current(I^2t)	-	-	2 A ² s	At 220Vac input, 25°C Cold Start, Duration =0.44 mS, 10%lpk-10%lpk. See Inrush Current Waveform for the details.
PF	0.90	-	-	At 100-277Vac, 65%-100% load(39-60W)
THD	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%I _{oset}	-	5%I _{oset}	At full load condition
Output Current Setting(I _{oset}) Range	0.7%I _{omax}	-	100%I _{omax}	
Output Current Setting Range with Constant Power	70%I _{omax}	-	100%I _{omax}	
Output Current Ripple(pk-pk)	-	5%I _{omax}	10%I _{omax}	At full load condition
Startup Overshoot Current	-	-	10%I _{omax}	At full load condition

Output Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
No Load Output Voltage				
LUD-060S055BSF	-	-	180 V	
LUD-060S078BSF	-	-	120 V	
LUD-060S110BSF	-	-	90 V	
LUD-060S150BSF	-	-	59.5 V	
LUD-060S210BSF	-	-	50 V	
Line Regulation	-	-	±0.5%	Measured at full load
Load Regulation	-	-	±1.5%	
Turn-on Delay Time	-	0.8 s	1.2 s	Measured at 120Vac input.
	-	0.6 s	1.0 s	Measured at 220Vac input.
Temperature Coefficient of I _o set	-	-	0.02%/°C	Case temperature = 0°C ~T _c max
12V Auxiliary Output Voltage	10.8 V	12 V	13.2 V	
12V Auxiliary Output Source Current	0 mA	-	200 mA	Return terminal is "Return"

Note: All specifications are typical at 25°C unless otherwise stated.

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 120 Vac input:				
LUD-060S055BSF				
I _o =385 mA	86.0%	88.0%	-	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
I _o =550 mA	85.0%	87.0%	-	
LUD-060S078BSF				
I _o =546 mA	86.0%	88.0%	-	
I _o =780 mA	85.0%	87.0%	-	
LUD-060S110BSF				
I _o =770 mA	86.0%	88.0%	-	
I _o =1100 mA	84.0%	86.0%	-	
LUD-060S150BSF				
I _o =1050 mA	86.0%	88.0%	-	
I _o =1500 mA	84.0%	86.0%	-	
LUD-060S210BSF				
I _o =1470 mA	85.0%	87.0%	-	
I _o =2100 mA	83.0%	85.0%	-	
Efficiency at 220 Vac input:				
LUD-060S055BSF				
I _o =385 mA	88.0%	90.0%	-	Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
I _o =550 mA	86.5%	88.5%	-	
LUD-060S078BSF				
I _o =546 mA	88.0%	90.0%	-	
I _o =780 mA	87.0%	89.0%	-	
LUD-060S110BSF				
I _o =770 mA	88.0%	90.0%	-	
I _o =1100 mA	86.0%	88.0%	-	
LUD-060S150BSF				
I _o =1050 mA	88.0%	90.0%	-	
I _o =1500 mA	87.0%	89.0%	-	
LUD-060S210BSF				
I _o =1470 mA	87.0%	89.0%	-	
I _o =2100 mA	85.0%	87.0%	-	

General Specifications (Continued)

Parameter	Min.	Typ.	Max.	Notes
Efficiency at 277 Vac input: LUD-060S055BSF				Measured at full load and steady-state temperature in 25°C ambient; (Efficiency will be about 2.0% lower if measured immediately after startup.)
I _o =385 mA	88.0%	90.0%	-	
I _o =550 mA	86.5%	88.5%	-	
LUD-060S078BSF				
I _o =546 mA	88.0%	90.0%	-	
I _o =780 mA	87.0%	89.0%	-	
LUD-060S110BSF				
I _o =770 mA	88.0%	90.0%	-	
I _o =1100 mA	86.0%	88.0%	-	
LUD-060S150BSF				
I _o =1050 mA	88.0%	90.0%	-	
I _o =1500 mA	87.0%	89.0%	-	
LUD-060S210BSF				
I _o =1470 mA	87.0%	89.0%	-	
I _o =2100 mA	85.0%	87.0%	-	
Standby Power	-	-	0.5 W	Measured at 230Vac/50Hz; Dimming off
MTBF	-	204,000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F)
Lifetime	-	120,000 Hours	-	Measured at 120Vac input, 80%Load and 60°C case temperature; See lifetime vs. T _c curve for the details
Case Temperature	-	-	90°C	
Dimensions Inches (L × W × H) Millimeters (L × W × H)	16.46 × 1.18 × 0.83 418 × 30 × 21			
Net Weight	-	380 g	-	

Note: All specifications are typical at 25°C unless otherwise stated.

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
DA1,DA2 High Level	9.5V	16V	22.5V	
DA1,DA2 Low Level	-6.5V	0V	6.5V	
DA1,DA2 Current	0mA	-	2mA	
Dimming Output Range	1%I _o set	-	I _o set	70%I _o max ≤ I _o set ≤ 100%I _o max
	0.7%I _o max	-	I _o set	0.7%I _o max ≤ I _o set < 70%I _o max

Note: All specifications are typical at 25 °C unless stated otherwise.


Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes
Operating Ambient Temperature	-30°C	-	+70°C	Humidity: 10% RH to 90% RH; No Condensation See Derating Curve for more details
Storage Temperature	-40°C	-	+85°C	Humidity: 5% RH to 90% RH


Safety & EMC Compliance

Safety Category	Standard
UL/CUL	UL 8750, UL1310, CAN/CSA-C22.2 No. 250.13-12, CAN/CSA-C22.2 No. 223-M9
CE	EN61347-1, EN61347-2-13
EMI Standards	Notes
EN 55015	Conducted emission Test & Radiated emission Test
EN 61000-3-2	Harmonic current emissions Class C
EN 61000-3-3	Voltage Fluctuations & Flicker
FCC Part 15	ANSI C63.4:2009 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge(ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient/Burst-EFT
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 1 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies to Lighting Equipment


Derating

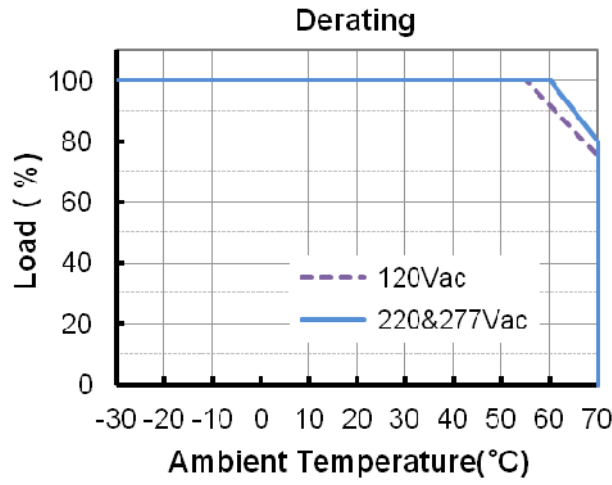

Lifetime vs. Case Temperature

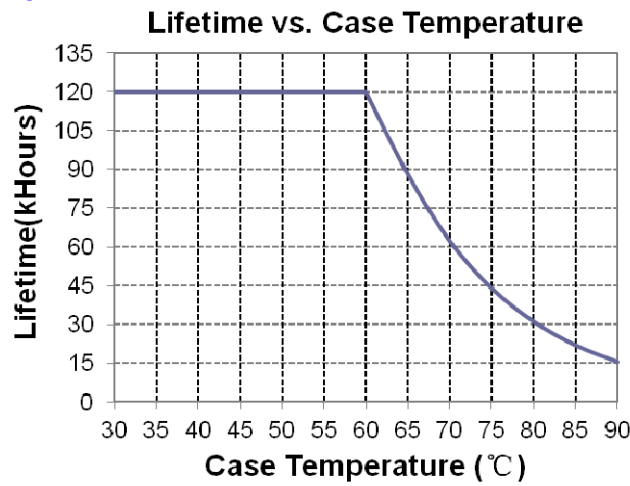


Inrush Current Waveform

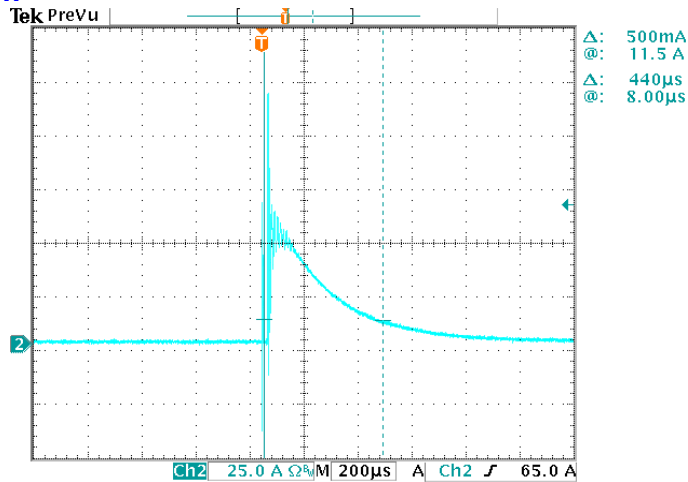

Efficiency vs. Load


LUD-060S055BSF($I_o=385mA$)

Efficiency vs. Output Voltage

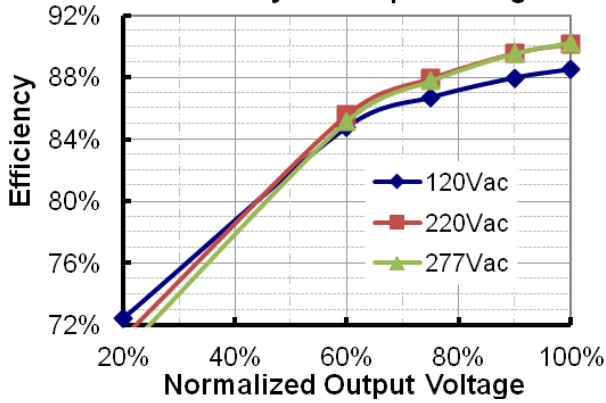


LUD-060S055BSF($I_o=550mA$)

Efficiency vs. Output Voltage

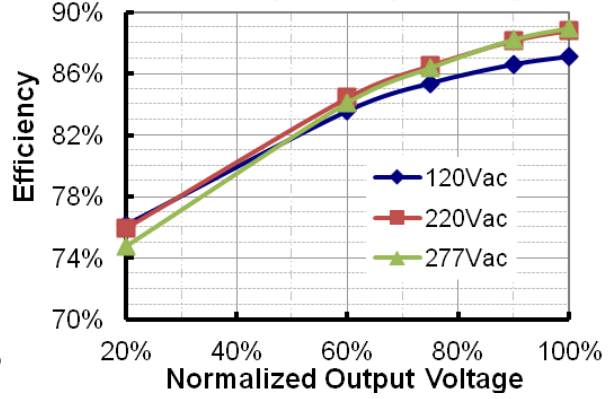


LUD-060S078BSF($I_o=545mA$)

Efficiency vs. Output Voltage

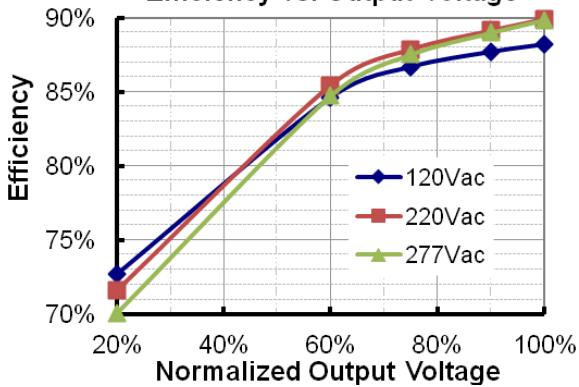


LUD-060S078BSF($I_o=780mA$)

Efficiency vs. Output Voltage

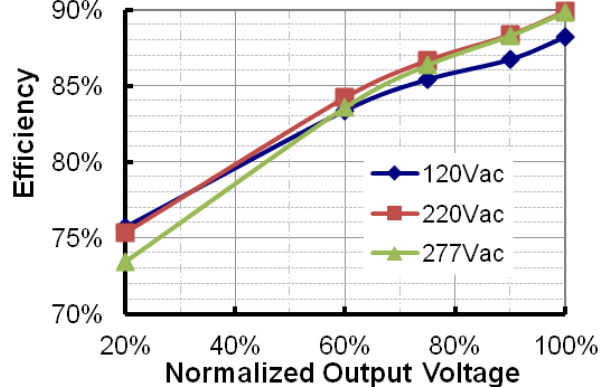


LUD-060S110BSF($I_o=770mA$)





Efficiency vs. Output Voltage

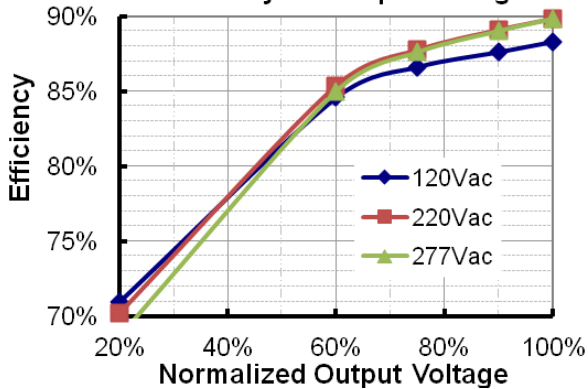


LUD-060S110BSF($I_o=1100mA$)

Efficiency vs. Output Voltage

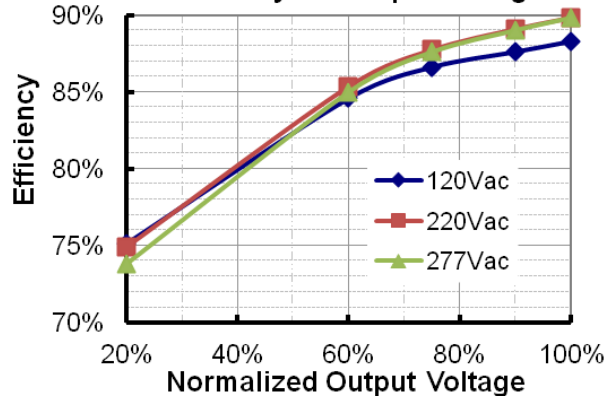


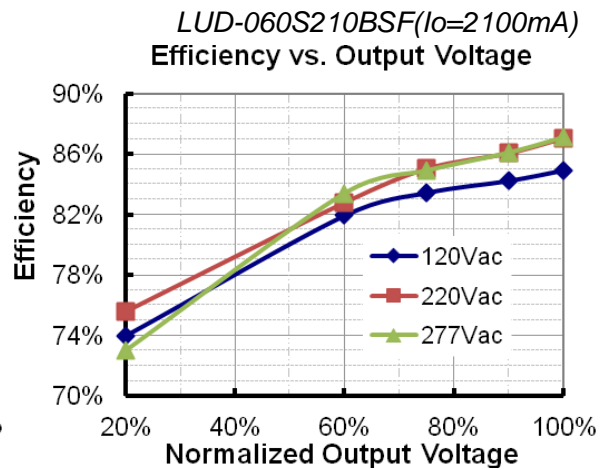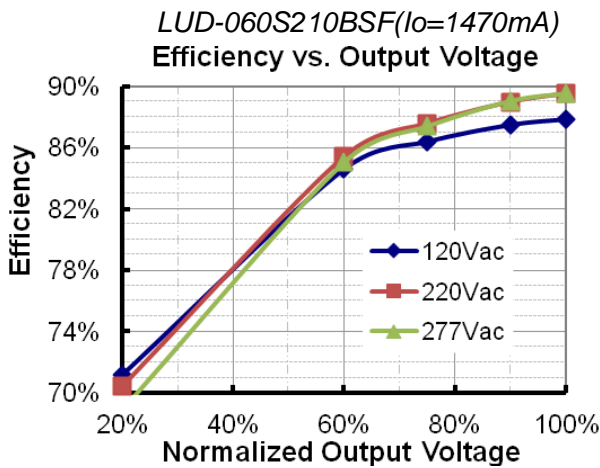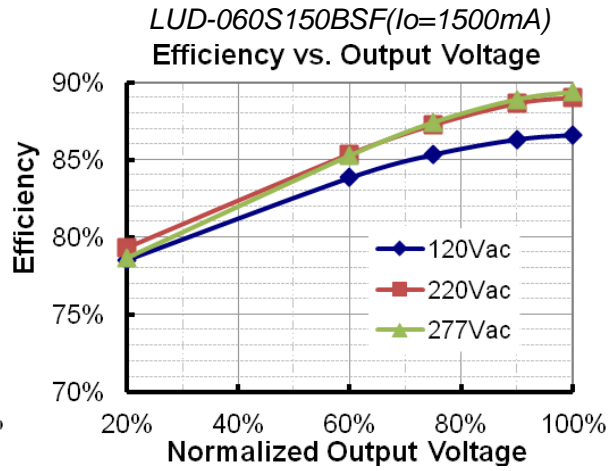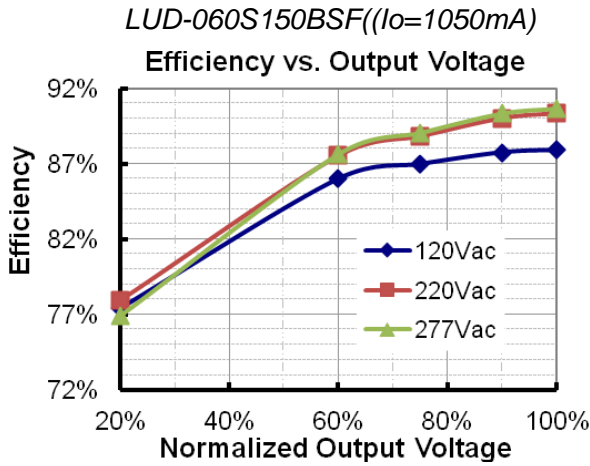

Power Factor

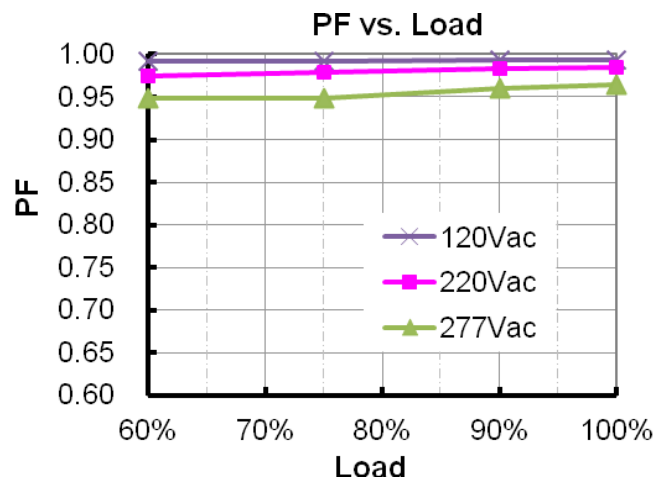

Total Harmonic Distortion

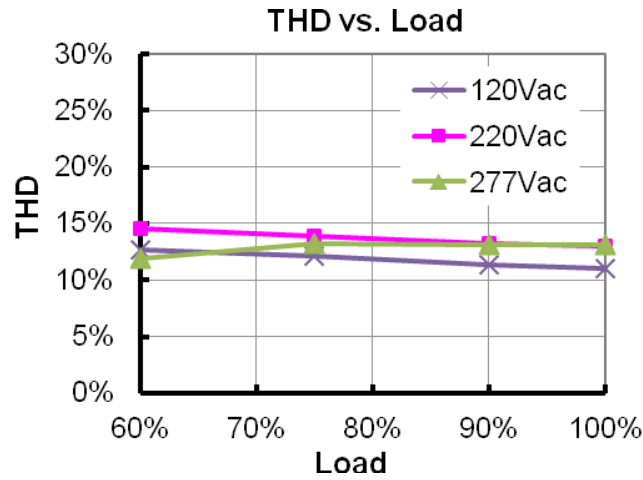


Protection Functions


Parameter	Min.	Typ.	Max.	Notes
Over Temperature Protection	Decreases output current, returning to normal after over temperature is removed.			
External Thermal Protection NTC	-	4.26 kOhm	-	The default of NTC is 4.26 kOhm. When NTC is lower than 4.26 kOhm, External Thermal Protection will be triggered.
Short Circuit Protection	Auto Recovery. No damage will occur when any output is short circuited. The output shall return to normal when the fault condition is removed.			
Over Voltage Protection	Limits output voltage at no load and in case the normal voltage limit fails.			

Dimming

● DALI Dimming

The recommended implementation of the dimming control is provided below.

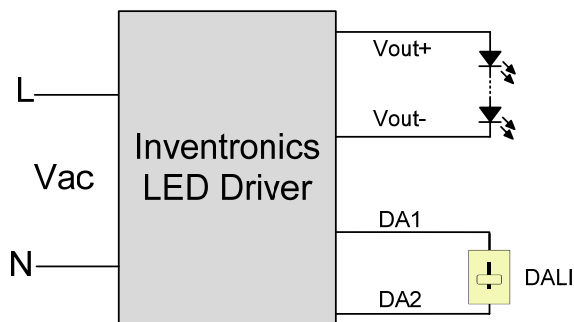


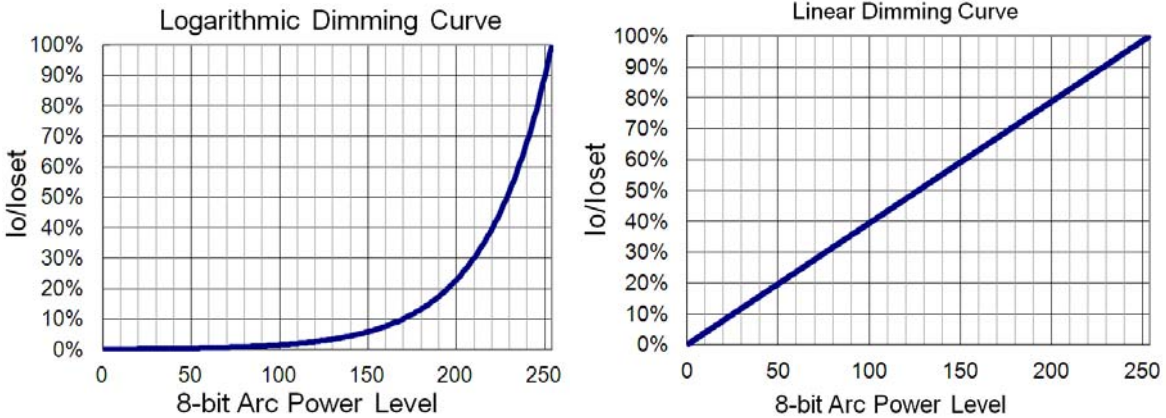


Implementation: DALI Dimming

● **Output Lumen Compensation**


Output Lumen Compensation (OLC) may be used to maintain constant light output over the life of the LEDs by driving them at a reduced current when new, then gradually increasing the drive current over time to counteract LED lumen degradation.

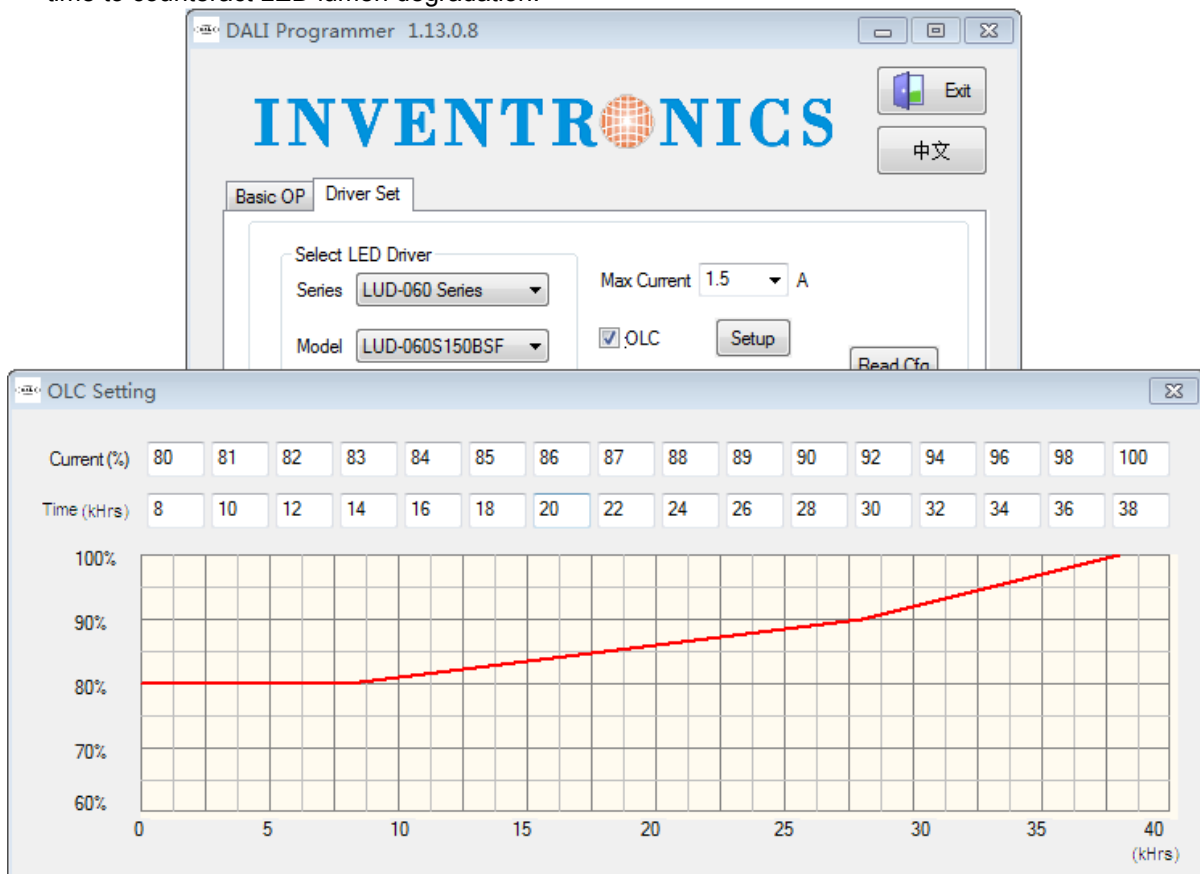

Wire Connection Diagram

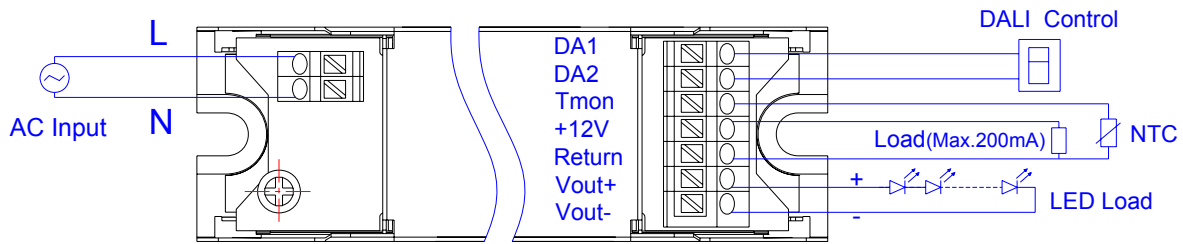

Programming Connection Diagram

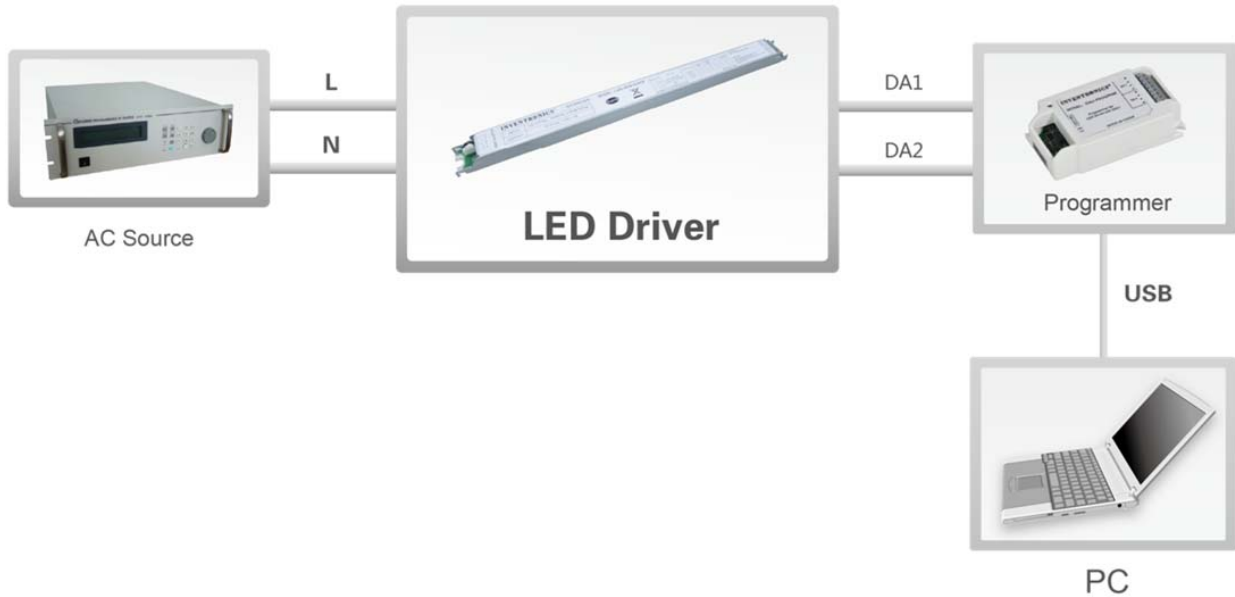


Note: The driver needs to be powered on during the programming process.

- Please refer to DALI-PROGRAM (Programmer) datasheet for details.

http://www.inventronics-co.com/cp_det.aspx?c_kind=2&c_kind2=177&c_kind3=179&id=232&productName=DALI-PROGRAM

Mechanical Outline

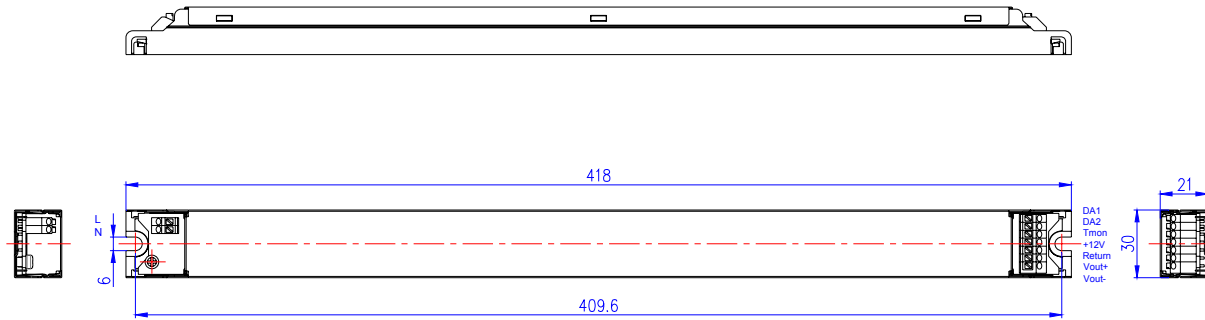

Unspecified tolerance: ± 1

RoHS Compliance

Our products comply with the European Directive 2011/65/EC, calling for the elimination of lead and other hazardous substances from electronic products.

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2014-10-10	A	Datasheets Release	/	/

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [LED Power Supplies](#) category:

Click to view products by [Inventronics](#) manufacturer:

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LCA 75W 350-1050MA ONE4ALL LP PRE](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#) [LCA 75W 900-1800MA ONE4ALL LP PRE](#) [LCA 100W 250-700MA ONE4ALL LP PRE](#)