



- Jumper selected input and output signal.
- Input 4...20 mA with current loop supply.
- Galvanic separation input/output/supply.
- Signal conversion between input and output.
- High reliability and accuracy.
- Detachable, fast and reliable wire connectors.
- Slim, rail and fast click mounted housing.
- Special versions on request.



3 years warranty

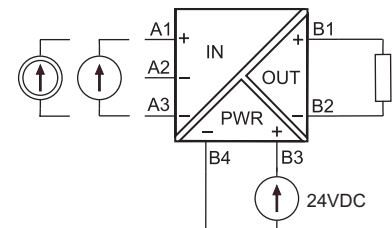

The LXA-U1U universal analog isolator is dedicated for separation the analog input signal from the output line. A device assures full 3 ways galvanic separation between input, output and supply lines. Front jumpers allow for easy and comfortable setting the input and output signal. User may to choose one of the current signal (0...5 mA, 0...20 mA, 4...20 mA) or voltage (0...10V). For 4...20 mA input it is possible to supply the input current loop. Front jumpers are covered by transparent protection cover. There is possibility to deliver device for non-standard signals on demand.

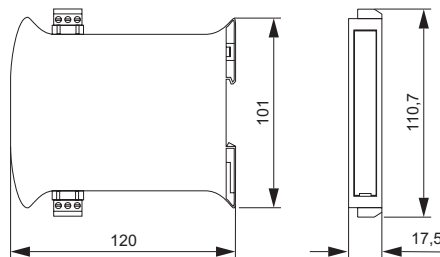

Input and output are programmable via DIP switches located on the front panel.

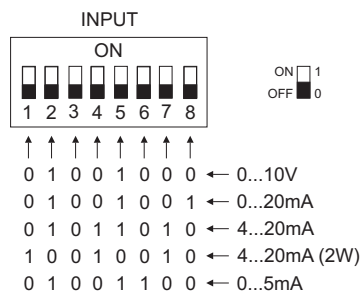

It is recommended to set input and output before installation.

Order LXA-U1U using the following code:

LXA - U1U

Input

- input span (jumper selected) 0...5mA, 0...20mA, 4...20mA, 0...10V, 4...20mA with current loop supply
- input resistance
 - current input $\leq 100\Omega$
 - voltage input $\geq 500k\Omega$
- input current loop supply 18...22V DC / 20...0mA
- overload $\leq 200\%$ input span

Output

- output signal (jumper selected) 0...20mA, 4...20mA, 0...10V
- load resistance
 - current output $\leq 500\Omega$
 - voltage output $\geq 1k\Omega$
- load variation influence $\leq 0.05\%$

Dane ogólne

- basic accuracy $\leq 0.2\%$
- response time (10..90%) $\leq 0.2s$
- galvanic separation (test) 1.5kV AC, 50Hz, 1min
- warm up time 15min

Power supply

- supply voltage
 - nominal 24V DC
 - supply voltage range 20...30V DC
- supply current $\leq 90mA$
- supply voltage variation influence $\leq 0.05\%$

Temperature

- operating temperature 0...70°C
- temperature influence $\leq 0.01\%/^{\circ}C$

Environment conditions

- storage temperature -20...85°C
- humidity (non-condensing) $\leq 90\%$
- working position vertical

Housing

- material molded PC/ABS
- protection housing/terminals IP20/IP20
- wire connections plugs with screw terminals 1.5 mm²
- dimensions see drawings on the first page
- weight ~ 110g

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Measuring Tools](#) category:

Click to view products by [SSA](#) manufacturer:

Other Similar products are found below :

[G336](#) [M225203-01](#) [G426](#) [G1333](#) [G1327](#) [G1154](#) [G1150](#) [G1152](#) [G1157](#) [G1153](#) [G1155](#) [G1009](#) [1051-03](#) [121010D](#) [121050D](#) [25541](#) [8255](#)
[NF-221200130](#) [20323](#) [20329](#) [20363](#) [20365](#) [20515](#) [20516](#) [G800](#) [G1229](#) [5205000](#) [5206000](#) [5223000](#) [6921000](#) [YT-30061](#) [W002900](#)
[W061008](#) [W061009](#) [W061010](#) [W062004](#) [W066005](#) [W066006](#) [15225](#) [16135](#) [16456](#) [17215](#) [17218](#) [17221](#) [17670](#) [17672](#) [17677](#) [17953](#)
[18115](#) [18879](#)