

## Dual Channel ESD Protection Device

### UM1002 SOT23-6

#### General Description

The UM1002 is a low pass filter array with integrated TVS diodes for ESD protection. It is designed to provide bidirectional filtering of EMI/ RFI signals and electrostatic discharge (ESD) protection in portable electronic equipment. This state-of-the art device utilizes solid-state silicon-avalanche technology for superior clamping performance and DC electrical characteristics. They have been optimized for use on a USB port in cellular phone and other portable electronics.

The UM1002 effectively replaces 10 discrete components in a small SOT23-6 package to provide ESD protection and EMI filtering. This small package will protect and filter up to two lines. This small outline makes the device especially well suited for portable applications.

The TVS diodes are bi-directional for supporting bipolar signals without distortion. The TVS diodes provide effective suppression of ESD voltages in excess of 15kV (air discharge) and 8kV (contact discharge) per IEC61000-4-2, level 4. The device has very low insertion loss in the pass band (to approximately 10MHz) and high attenuation at frequencies ranging from 800MHz to 3GHz. Each line features two stages of TVS diode protection. They feature large cross-sectional area junctions for conducting high transient currents. They offer desirable characteristics for board level protection including fast response time, low operating and clamping voltage, and no device degradation.


#### Applications

Web-pads & Handhelds  
 Notebook  
 Portable Instrumentation  
 Industrial Interface  
 Treadmill


#### Features

Transient protection for data lines to  
 IEC 61000-4-2 (ESD)  $\pm 15$  kV (air),  $\pm 8$  kV (contact)  
 Bidirectional EMI/RFI filter with integrated ESD protection  
 Protects two I/O lines  
 Working voltage: 5 V  
 Low leakage current  
 Low operating and clamping voltages  
 Solid-state silicon-avalanche technology

#### Pin Configurations

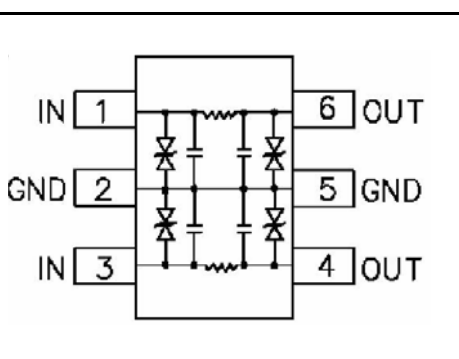

#### Top View

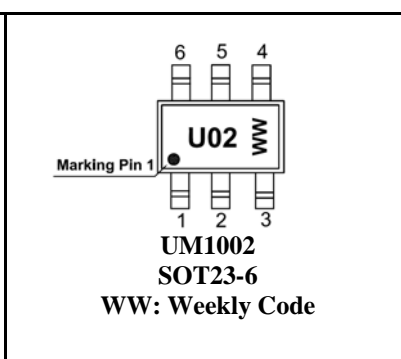

## Ordering Information

Part Number	Working Voltage	Packaging Type	Channel	Marking Code	Shipping Qty
UM1002	5.0V	SOT23-6	6	U02	3000/7 Inch Reel

## Absolute Maximum Ratings


RATING	SYMBOL	VALUE	UNITS
Steady-State Power	$P_{SS}$	100	mW
Operating Temperature	$T_J$	-55 to +125	°C
Storage Temperature	$T_{STG}$	-55 to +125	°C

## Electrical Characteristics (T=25°C)


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Reverse Stand-Off Voltage	$V_{RWM}$				5	V
Reverse Breakdown Voltage	$V_{BR}$	$I_t = 1mA$	6			V
Reverse Leakage Current	$I_R$	$V_{RWM} = 5V, T=25°C$			5	μA
Series Resistance	R	Each line	0.8	1	1.5	Ohms
Total Capacitance	$C_{TOT}$	Any I/O to GND $V_R=0V, f=1MHz$			20	PF

## Typical Operating Characteristics


### Typical Insertion Loss

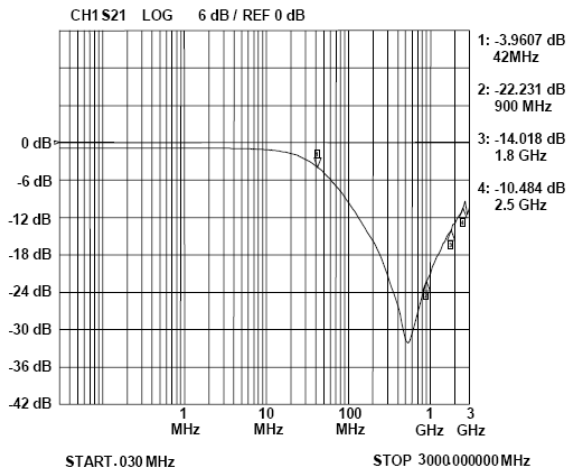


### Analog Crosstalk

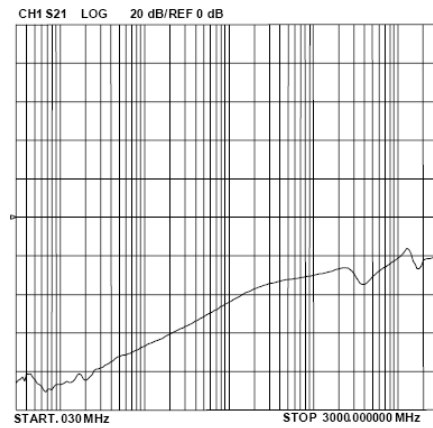


### Forward Voltage vs. Peaking Pulse Current

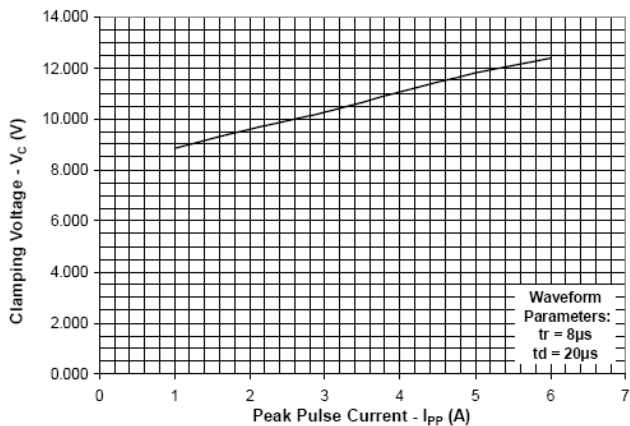


### Junction Capacitance vs. Reverse Voltage

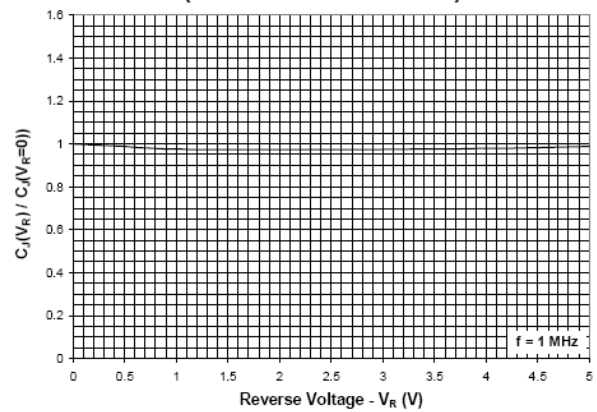

### ESD Clamping (8KV Contact)

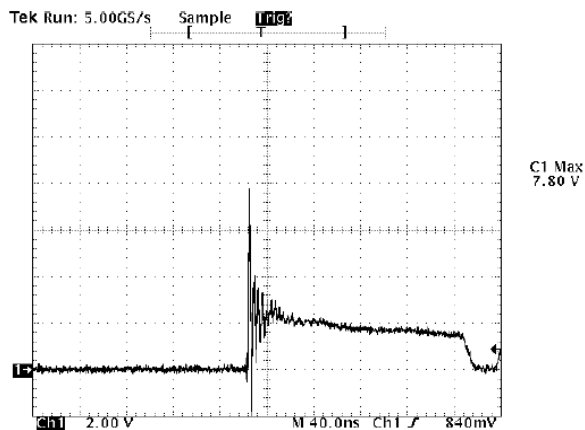

### ESD Clamping (15KV Air)

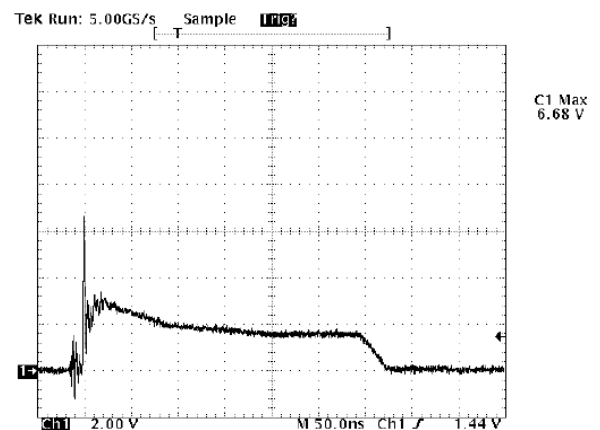

## Applications Information

### Device Connection for Protection of Quad Data Lines


The UM1002 provides EMI filtering and ESD protection in a small SOT23-6 package for dual line data port applications. The layout of the device is designed such that the data lines can be routed through the device. The first line pair enters at pin 1 and exits at pin 6. The second line pair enters at pin 3 and exits at pin 4. The device is symmetrical so the above connections may be reversed.

### Circuit Board Layout Recommendations for Suppression of ESD


Good circuit board layout is critical for the suppression of ESD induced transients. The following guidelines are recommended:

- Place the TVS near the input terminals or connectors to restrict transient coupling.
- Minimize the path length between the TVS and the protected line.
- Minimize all conductive loops including power and ground loops.
- The ESD transient return path to ground should be kept as short as possible.
- Never run critical signals near board edges.
- Use ground planes whenever possible.

### Layout Example

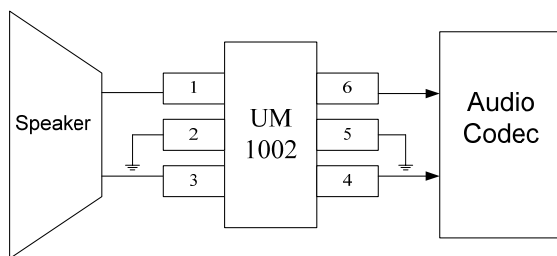

Pin	Identification
1	Line 1 In (From Speaker)
6	Line 1 Out (To Audio Circuit)
3	Line 2 In (From Speaker)
4	Line 2 Out (To Audio Circuit)
2, 5	Ground

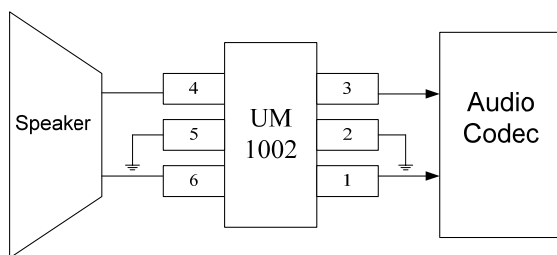


Pin	Identification
6	Line 1 In (From Speaker)
1	Line 1 Out (To Audio Circuit)
4	Line 2 In (From Speaker)
3	Line 2 Out (To Audio Circuit)
2, 5	Ground


## Package Information

### UM1002 SOT23-6


#### Outline Drawing

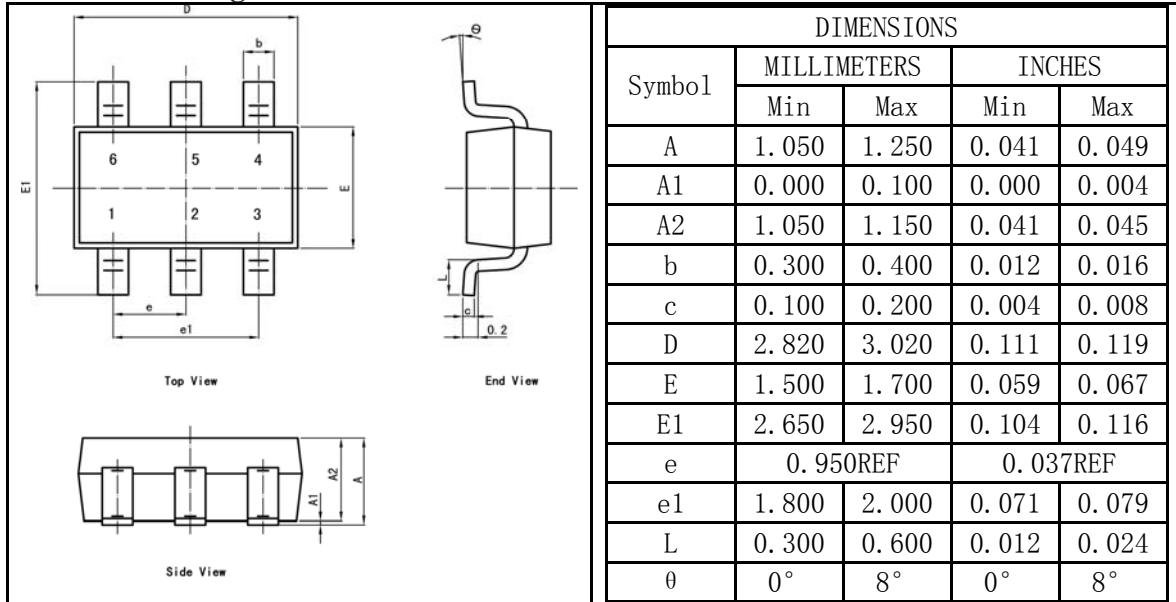

#### Land Pattern

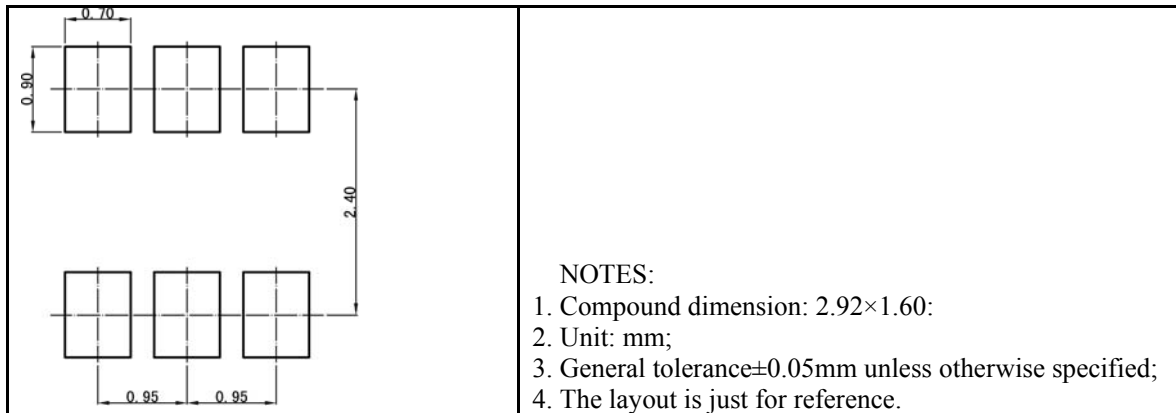

#### Tape and Reel Orientation

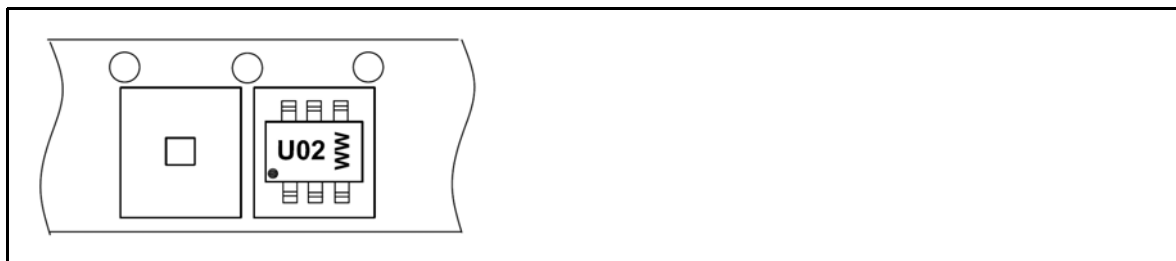

---

**IMPORTANT NOTICE**

The information in this document has been carefully reviewed and is believed to be accurate. Nonetheless, this document is subject to change without notice. Union assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the contained information, or to notify a person or organization of any update. Union reserves the right to make changes, at any time, in order to improve reliability, function or design and to attempt to supply the best product possible.

Union Semiconductor, Inc  
Add: 7F, No. 5, Bibo Road, Shanghai 201203  
Tel: 021-51097928  
Fax: 021-51026018  
Website: [www.union-ic.com](http://www.union-ic.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [EMI Network Filter](#) category:*

*Click to view products by [Union](#) manufacturer:*

Other Similar products are found below :

[NFL18ST507H1A3D](#) [SBSGC0500224MXB](#) [SBSPP0250104MXT](#) [SBSPP0250154MXT](#) [SBSPP0500473MXT](#) [SBSPP1000102MXT](#)  
[SBSPP1000153MXB](#) [SBSPP1000153MXT](#) [SBSPP1000220MCT](#) [SBSPP1000222MXT](#) [SBSPP1000332MXT](#) [SBSPP1000470MCT](#)  
[SBSPP1000471MCT](#) [SBSPP1000472MXT](#) [SNZF220DFT1G](#) [SBSPP0250154MXB](#) [SBSPP0500473MXB](#) [SBSPP0500683MXT](#)  
[SBSPP1000101MCT](#) [SBSPP1000103MXT](#) [SBSPP1000220MCB](#) [SBSPP1000221MCT](#) [PSM1402Z10T0](#) [SBSMP0500474MXT](#)  
[SBSMP5000473MXB](#) [SSM1-402Z-10B](#) [CM6400A](#) [74273002](#) [BNX026H01L](#) [BNX029-01L](#) [NFE31PT220R1E9L](#) [NFE61HT681D2A9L](#)  
[NFE61PT681B1H9L](#) [NFL18SP207X1A3D](#) [NFL18SP507X1A3D](#) [NFL18ST506H1A3D](#) [NFL21SP307X1C3D](#) [NFL21SP506X1C3D](#)  
[NFL21SP706X1C3D](#) [NFW31SP207X1E4L](#) [BNX027H01L](#) [BNX028-01L](#) [NFE61HT101Z2A9L](#) [NFE61HT181C2A9L](#) [NFE61HT361C2A9L](#)  
[NFL18ST307X1C3D](#) [NFL18ST706H1A3D](#) [NFL21SP107X1C3D](#) [NFL21SP507X1C3D](#) [4420P-601-270/500L](#)