



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089

NTE56070 & NTE56071 TRIAC, 25A, High Commutation

Description:

The NTE56070 and NTE56071 are glass passivated, high commutation TRIACs in a TO220 type package designed for use in circuits where high static and dynamic dV/dt and high dI/dt can occur. These devices will commute the full rated RMS current at the maximum rated junction temperature, without the aid of a snubber.

Absolute Maximum Ratings:


Repetitive Peak Off-State Voltage (Note 1), V_{DRM}	
NTE56070	600V
NTE56071	800V
RMS On-State Current (Full Sine Wave, $T_{MB} \leq 91^{\circ}C$), $I_T(RMS)$	25A
Non-Repetitive Peak On-State Current, I_{TSM}	
(Full Sine Wave, $T_J = +25^{\circ}C$ prior to Surge)	
t = 20ms	190A
t = 16.7ms	209A
I^2t for Fusing (t = 10ms), I^2t	180A ² sec
Repetitive Rate-of-Rise of On-State Current after Triggering, dI_T/dt	
($I_{TM} = 30A$, $I_G = 0.2A$, $dI_G/dt = 0.2A/\mu s$)	100A/ μs
Peak Gate Current, I_{GM}	2A
Peak Gate Voltage, V_{GM}	5V
Peak Gate Power, P_{GM}	5W
Average Gate Power (Over Any 20ms Period), $P_{G(AV)}$	500mW
Operating Junction Temperature, T_J	+125°C
Storage Temperature Range, T_{stg}	-40° to +150°C
Thermal Resistance, Junction-to-Mounting Base, R_{thJMB}	
Full Cycle	1.0K/W
Half Cycle	1.4K/W
Typical Thermal Resistance, Junction-to-Ambient, R_{thJA}	60K/W

Note 1. Although not recommended, off-state voltages up to 800V may be applied without damage, but the TRIAC may switch to the on-state. The rate-of-rise of current should not exceed 15A/ μs .

Electrical Characteristics: ($T_J = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Static Characteristics						
Gate Trigger Current MT ₂ (+), G (+)	I _{GT}	V _D = 12V, I _T = 0.1A, Note 2	2	18	50	mA
MT ₂ (+), G (-)			2	21	50	mA
MT ₂ (-), G (-)			2	34	50	mA
Latching Current MT ₂ (+), G (+)	I _L	V _D = 12V, I _T = 0.1A	-	31	60	mA
MT ₂ (+), G (-)			-	34	90	mA
MT ₂ (-), G (-)			-	30	60	mA
Holding Current	I _H	V _D = 12V, I _T = 0.1A	-	31	60	mA
On-State Voltage	V _T	I _T = 30A	-	1.3	1.55	V
Gate Trigger Voltage	V _{GT}	V _D = 12V, I _T = 0.1A	-	0.7	1.5	V
		V _D = 400V, I _T = 0.1A, T _J = +125°C	0.25	0.4	-	V
Off-State Leakage Current	I _D	V _D = V _{DRMmax} , T _J = +125°C	-	0.1	0.5	mA
Dynamic Characteristics						
Critical Rate-of-Rise of Off-State Voltage	dV _D /dt	V _{DM} = 67% V _{DRMmax} , T _J = +125°C, Exponential Waveform, Gate Open	1000	4000	-	V/μs
Critical Rate-of-Change of Commutating Current	di _{com} /dt	V _{DM} = 400V, T _J = +125°C, I _T RMS = 25A, without Snubber, Gate Open	-	44	-	A/ms
Gate Controlled Turn-On Time	t _{gt}	I _{TM} = 12A, V _D = V _{DRMmax} , I _G = 0.1A, di _G /dt = 5A/μs	-	2	-	μs

Note 2. Device does not trigger in the MT₂ (-), G (+) quadrant.

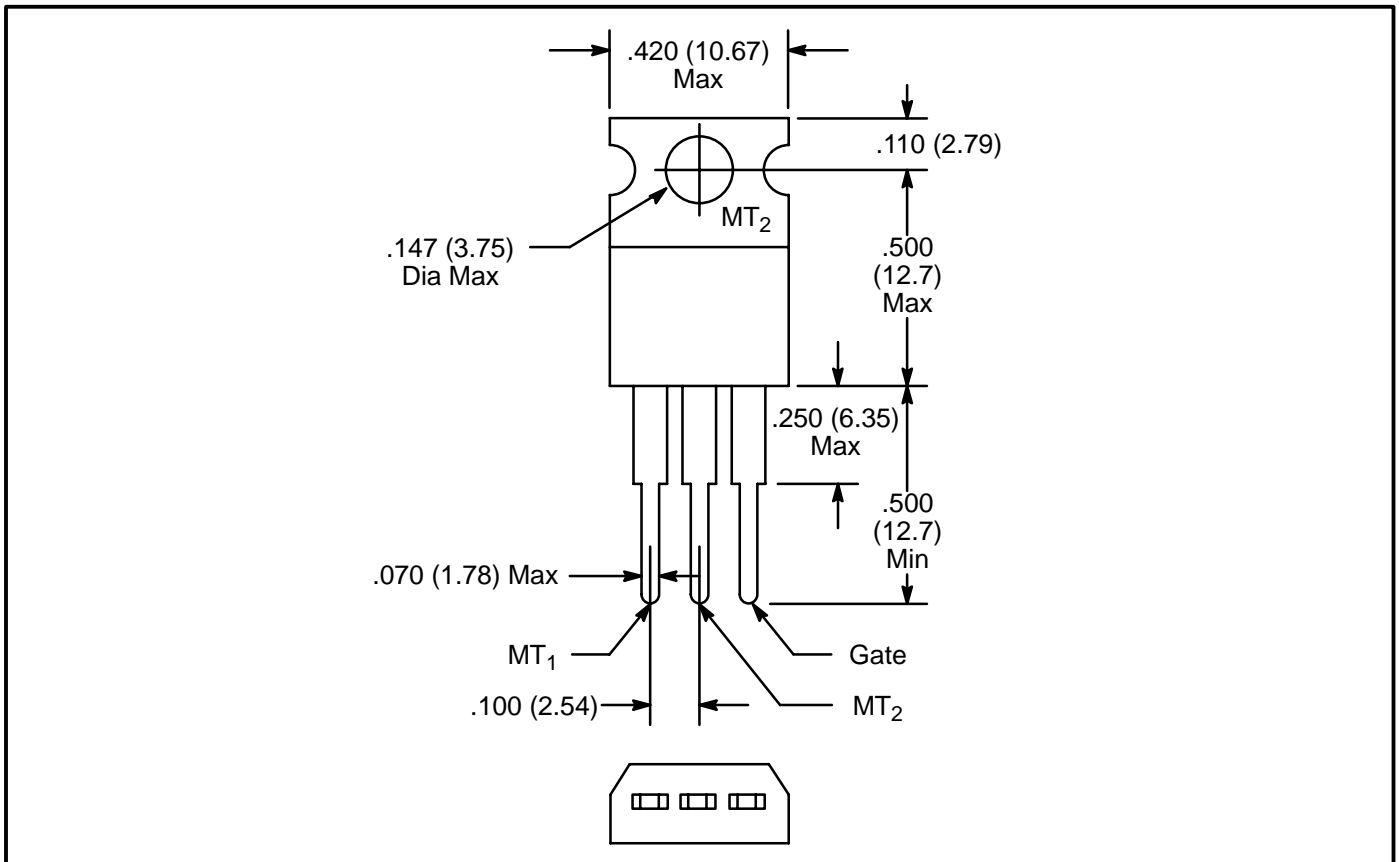

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Triacs](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[ACST435-8B](#) [LIC01-215B-TR](#) [T2035H-6G](#) [BT137-600-0Q](#) [Z0410NF 1AA2](#) [098128C](#) [620675E](#) [T1610-600G-TR](#) [Z0409MF0AA2](#)
[Z0109NA 2AL2](#) [ACS108-8SA-AP](#) [ACS108-8SN-TR](#) [ACST1635T-8FP](#) [BCR16PM-12LG#B00](#) [BCR20RM-30LA#B00](#) [T1205-600G-TR](#)
[CMA60MT1600NHR](#) [NTE5611](#) [NTE5612](#) [NTE5613](#) [NTE5621](#) [NTE5623](#) [NTE5629](#) [NTE5638-08](#) [NTE5688](#) [NTE5689](#) [NTE5690](#) [T1235T-](#)
[8I](#) [BTA312-600CT.127](#) [T1210T-8G-TR](#) [T1210T-8G](#) [BT136S-600E,118](#) [RS40Z06-BW](#) [BT137B-800G,118](#) [Z0109NN0,135](#) [BTA212-](#)
[600D,127](#) [BTA24-600CW](#) [BTA16](#) [BTA20](#) [BT137](#) [BTA04-600CW](#) [BTA04-800CW](#) [BTA20-800CW](#) [MAC4DLM-1G](#) [BT137-600E,127](#)
[BT137X-600D](#) [BT148W-600R,115](#) [BT258-500R,127](#) [BTA08-800BW3G](#) [BTA140-800,127](#)