




Low profile transformer FLN 40/9

| Type | | FLN 40/9 |
|----------------------------|---------------------------------|-------------|
| Electrical data | Input | |
| | Rated input Voltage | 2 x 115 Vac |
| | Rated frequency | 50 - 60 Hz |
| | Output | |
| | Rated output voltage | 2 x 9 Vac |
| | Rated Power | 40.0 VA |
| | No-load voltage (app. x factor) | 1.20 |
| | No-load loss (typ.) | 2.30 W |
| | Efficiency | 82 % |
| | Standards | |
| Classification | Safety isolating transformer | |
| Approvals | | |
| Approvals | cURus, ENEC 10 (VDE) | |
| Environment | | |
| Ambient temperature max. | 70 °C | |
| Safety and protection | | |
| Type | encapsulated | |
| Class of Insulation System | B | |
| Protection index | IP 00 | |
| Safety class (prepared) | II | |
| Short circuit strength | non-short-circuit proof | |
| Order numbers | | |
| Order Number | FLN 40/9 | |

| Type | | FLN 40/9 |
|-----------------|-----------------------|---------------------------------|
| Mechanical data | Terminal and mounting | |
| | Terminals | Pins for printed circuit boards |
| 30 | Measures and weights | |
| | Core type | UI 48/17 |
| | Weight | 0.76 kg |

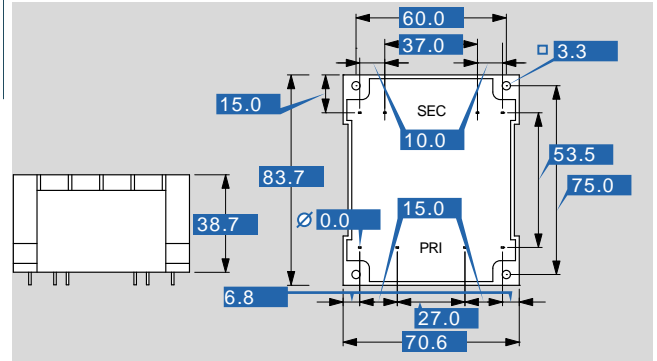

Subjects to change.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [block manufacturer](#):

Other Similar products are found below :

[PVSB 400/24-20](#) [RKD 120/2X24](#) [AIM5.0/2.5](#) [VB1.5/2/24](#) [STEU160/48](#) [TIM300](#) [AVB1.0/2/12](#) [FL4/18](#) [AVB2.3/2/12](#) [FL6/24](#) [FL24/6](#)
[STEU250/48](#) [STEU160/23](#) [LR3 48-3/80](#) [PC-0148-100-0](#) [PM-0112-040-0](#) [PM-0748-400-0](#) [PT 7.5/2/9](#) [USTE100/2X12](#) [STEU250/23](#) [FL14/6](#)
[FL52/12](#) [GNC24-2.5](#) [DCT24-1.5](#) [VB2.3/2/9](#) [VB 1.5/2/8](#) [RKD 100/2X15](#) [LR3 48-5/80](#) [LR3 48-5/90](#) [PM-0112-070-0](#) [PM-0148-020-0](#) [EB-](#)
[1824-010-0](#) [USTE1000/2X115](#) [AIM3.2/1.6](#) [AVB3.2/2/12](#) [FL10/12](#) [FL14/18](#) [VB 0.35/1/15](#) [PC-0324-400-0](#) [FL14/15](#) [FL8/6](#) [FL8/9](#) [SIM100](#)
[LR3 48-3/90](#) [PC-0112-150-0](#) [EB-2724-100-0](#) [PVAF 24/3,2AH](#) [PT 4.5/2/12](#) [VB0.35/2/6](#) [PM-0124-038-0](#)