

Dipole Antenna

- RFDPA151310NNAB3G1 for Single Band 2.4 GHz Application

ELECTRICAL CHARACTERISTICS

Item	Specification
Working Frequency Range	2.4 ~ 2.5 GHz (Note-1)
Gain	3 dBi
Return Loss	-10dB(Max)
VSWR	2 max.
Polarization	Linear
Radiation Pattern	Omni-directional
Impedance	50Ω

*Note 1. Central Frequency should be defined after customers' application approval.

MATERIAL TABLE

Items	Description
Cable	φ 1.13 CABLE(Black)
Antenna Cover	TPEE
Antenna Base	PC/PBT
Color	Black
Brass Tube	Brass
Spring	Phosphor Bronze
Tube	CB-HFT

ORDERING RULE


RF	DPA	1513	10	N	N	A	B	3	G1
Type Code	Product Code	Dipole Dimension (Unit: mm)	Cable Length (unit: cm)	Connector Brand	Type of Connector	Application	Project status	Wire Diameter	Project
Walsin RF Device	DPA: Dipole Antenna	Per 2 digits of length, width e.g.: 1513 Length 157.5mm, Width 13mm	2 digits for cable length e.g.: 10 Cable Length:10cm	A: N C:MCX D:IPEX III E: IPEX IV F: IPEX A13 H: Hirose I: IPEX M: MMCX S: SMA T: TNC U:MURATA N: None	A: Reverse Female B: Reverse Male F: Female M: Male N: None	0: 0GHz 3: 3GHz 5: 5 GHz 6: 6GHz A: 2.4GHz ISM band B: GSM 900/1800 dual band G: GPS band L: 2.4/5.2/5.8 GHz tri-band N: NFC T:LTE band W: WCDMA band	B: MP T:During Test X: Pile Run	0:None 1:φ0.81 3:φ1.13 6:RG316 7:φ1.37 8:RG178	01~99 series number

DIMENSIONS

ELECTRICAL

Frequency: 2.4 GHZ
Peak Gain: 3dBi

No.	DESCRIPTION	MAT'L	Color	Q'TY
A	Antenna Down Base	PC+PBT	Black	1
B	Antenna Up Base	PC	Black	1
C	Rivet	POM	Black	2
D	Antenna Cover	TPEE	Black	1
E	Up Brass Tube	Brass	---	1
F	Down Brass Tube	Brass	---	1
G	Spring	Phosphor Bronze	---	1
H	Coaxial Cable $\phi 1.13$	---	Black	1
I	TUBE	CB-HFT	Black	1

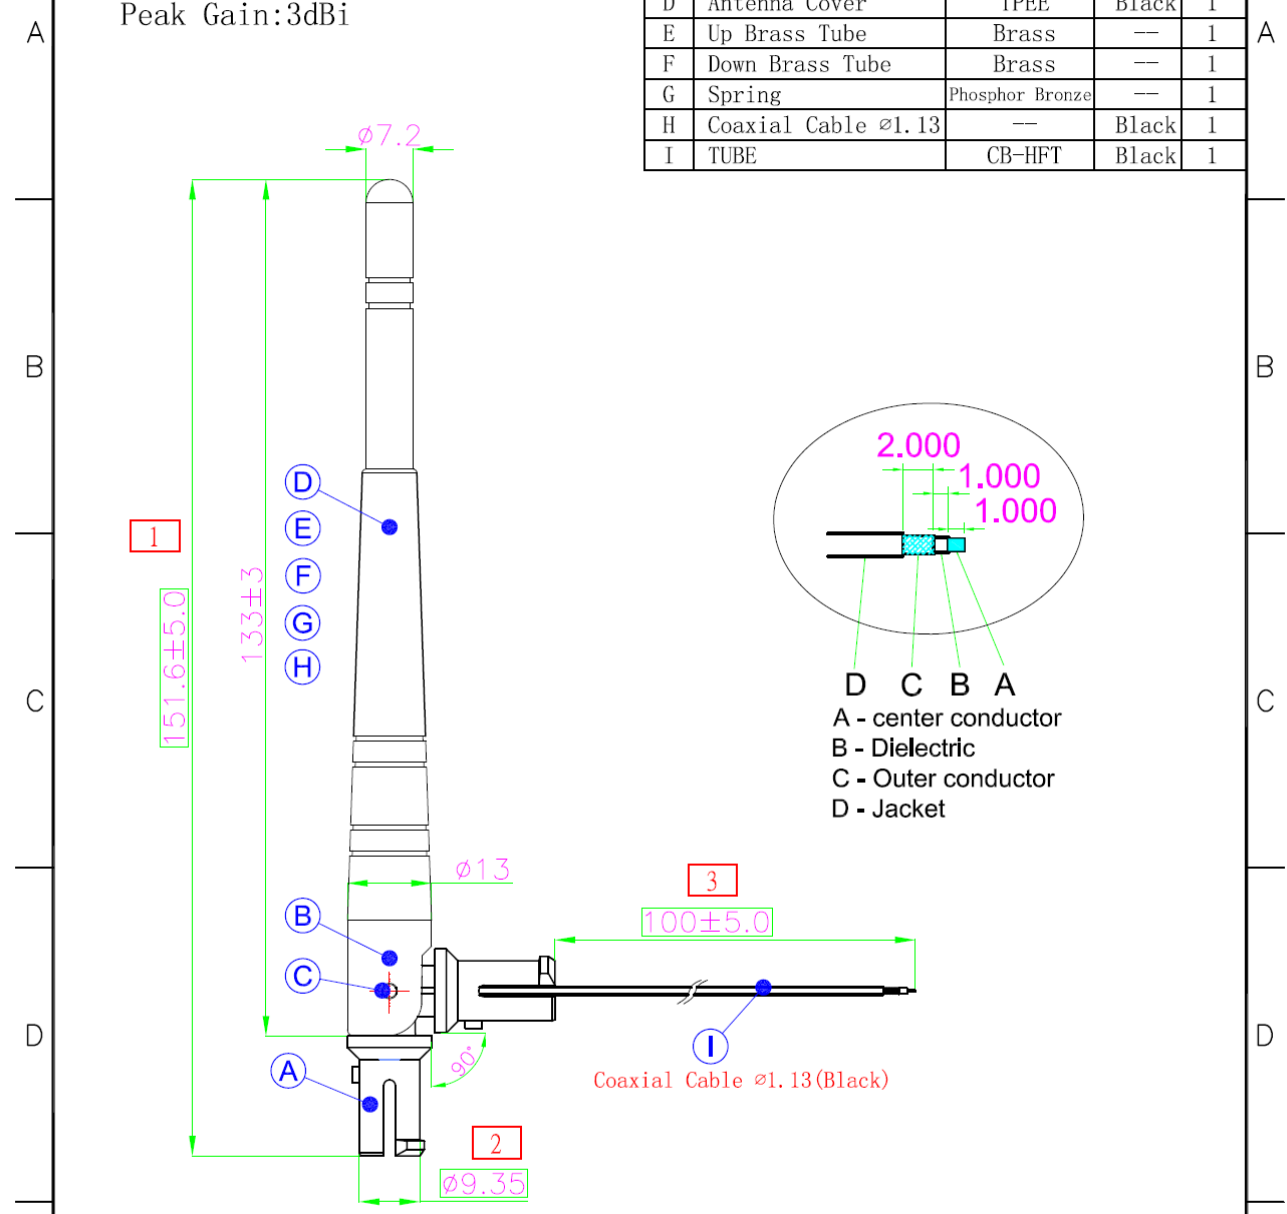

2.00
1.00
1.00

D C B A
A - center conductor
B - Dielectric
C - Outer conductor
D - Jacket

Coaxial Cable $\phi 1.13$ (Black)


※標記□記號者, 為重點檢驗尺寸

設計 DR. HWCHAN 2014.01.08		品名		版本 REV. A
核准 APP. _____		ARTICLE		
容許公差 TOLERANCE		RFDPA151310NNAB3G1		
.XXX	±0.20	單位 UNIT	比例 SCALE	張數 SHEET
.XX	±0.35	mm	****	1
.X	±0.50			
X	±1.00			
ANG	±5			

Test Report

ELECTRICAL CHARACTERISTICS

Return Loss

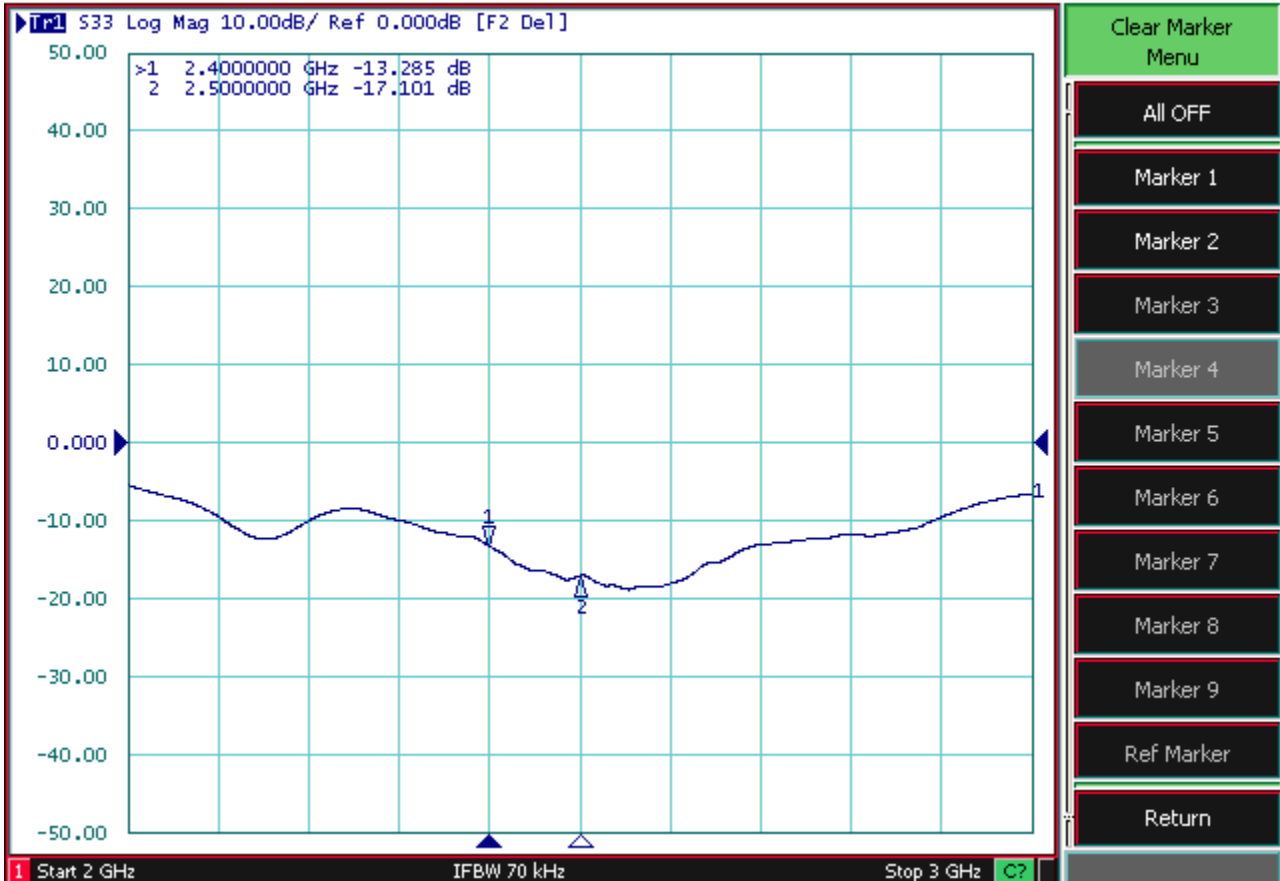


RADIATION PATTERN

2400~2500 MHz

X-Z Plane

Phi=0.00deg

Gain . dB

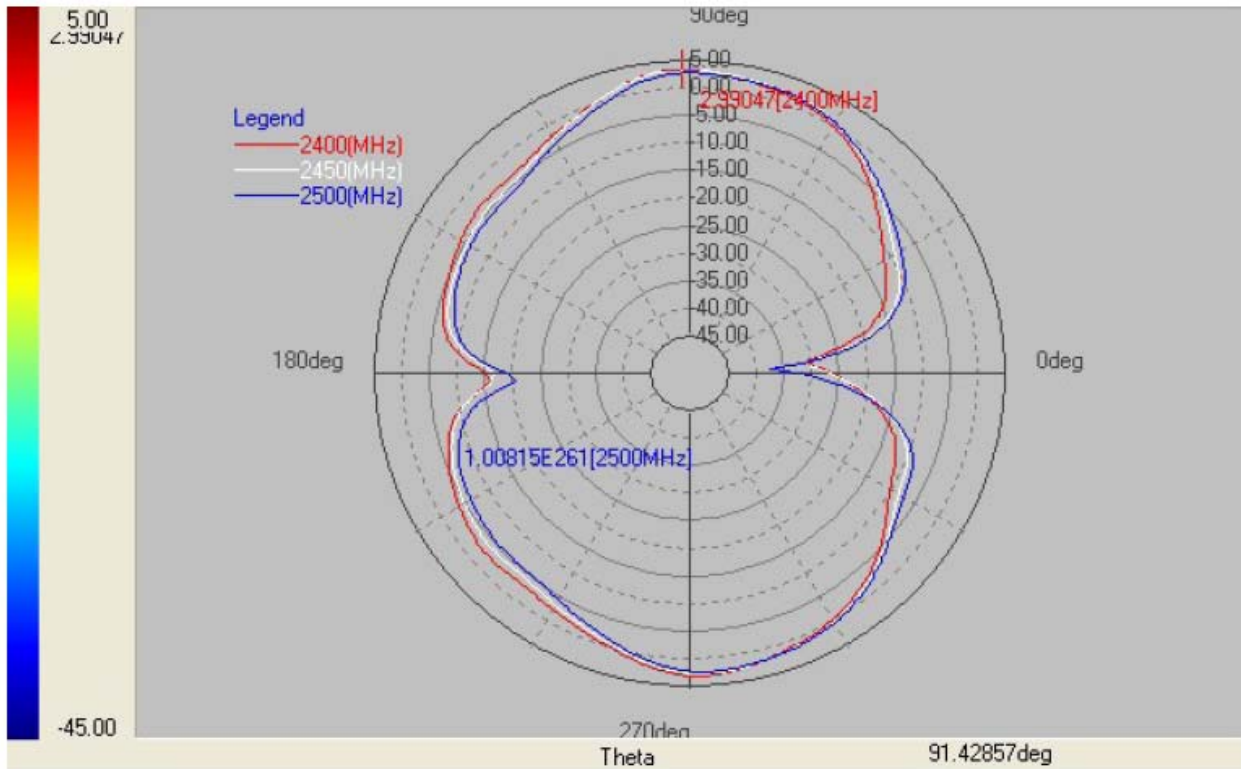


Layer	Max value	Average
2400(MHz)	2.99	-2.07
2450(MHz)	2.93	-2.15
2500(MHz)	2.30	-2.51

2400~2500 MHz

Y-Z Plane

Phi=90.00deg

Gain . dB

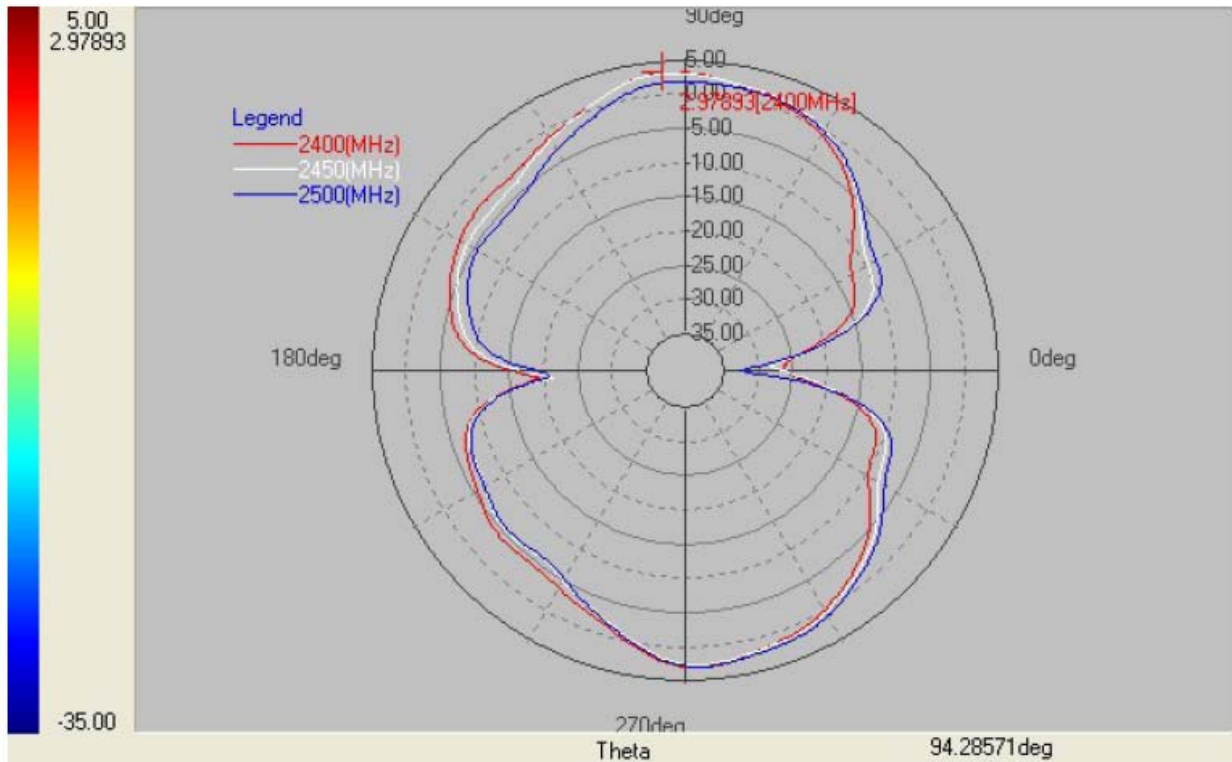


Layer	Max value	Average
2400(MHz)	2.98	-2.08
2450(MHz)	2.86	-2.19
2500(MHz)	2.77	-2.50

2400~2500 MHz

X-Y Plane

Theta=90.00deg

Gain . dB

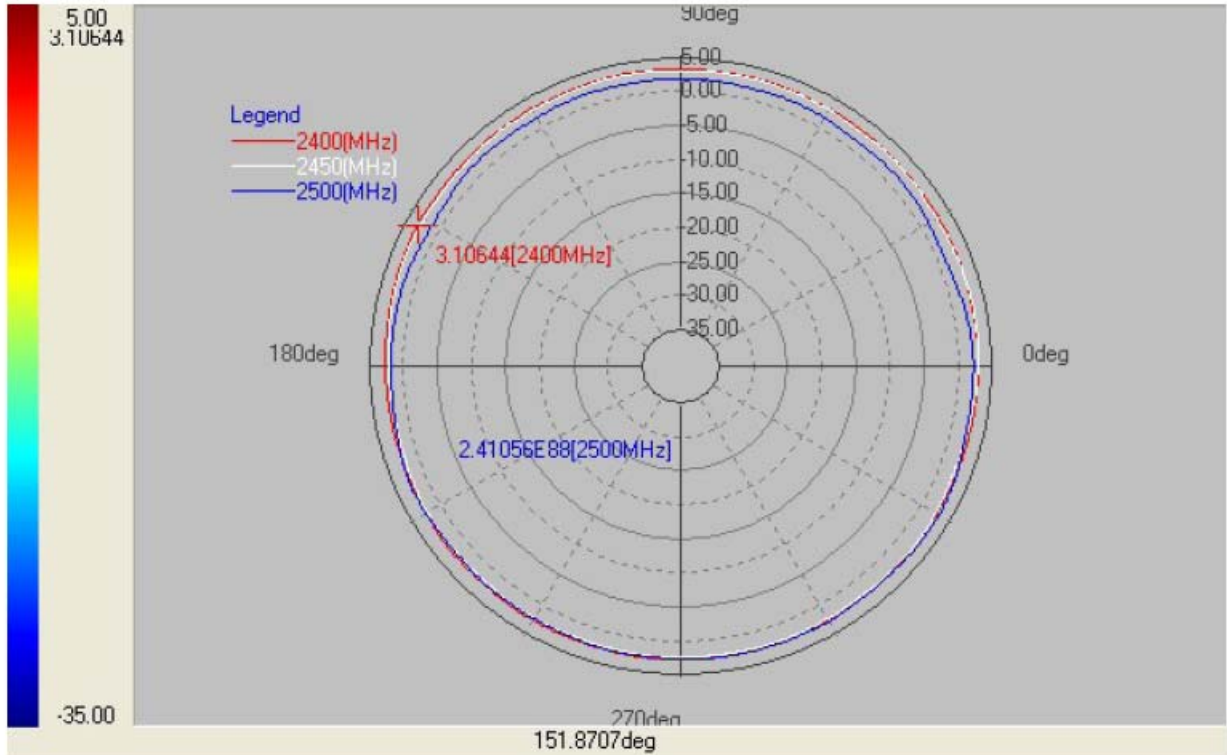

Layer	Max value	Average
2400(MHz)	3.11	2.79
2450(MHz)	3.15	2.54
2500(MHz)	3.17	2.06

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Antennas](#) category:

Click to view products by [Walsin](#) manufacturer:

Other Similar products are found below :

[CCT FM1](#) [ABFT](#) [AD-NM-SMAF 001-0021](#) [CTC110](#) [MAF94149](#) [EXE902SF](#) [MMCX-SMA-100](#) [PDQ24496-91NF](#) [GAN30084EU](#) [930-033-R](#) [A08-HABUF-P5I](#) [AAF95035](#) [DG-ANT-20DP-BG-B](#) [APAMPGJ-141](#) [1513563-1](#) [OF86315-FNF](#) [OP24516DS-91NM](#) [A09-HASM-7](#) [EXE902MD](#) [EXE902SM](#) [SPDA17806/2170LAR](#) [APAMPG-117](#) [GPS1575SP26-004](#) [GPS15MGSMA](#) [CMD69273P-30NF](#) [CMQ69273-30NF](#) [RD2458-5-OTDR-NM](#) [RD2458-5-RSMA](#) [TRAB24/49003](#) [W4120ER5000](#) [W6102B0100](#) [YE572113-30RSMM](#) [108-00014-50](#) [SPDA17RP918](#) [OP24516SX-91NM](#) [OP24516SX-91RSMM](#) [CMQ69273P-30NF](#) [CMS69273-30NF](#) [CMS69273P-30NF](#) [TRAB24003N](#) [TRAB24003NP](#) [TRAB8213NP](#) [TRAB8903](#) [A09-Y8NF](#) [A09-Y11NF](#) [A09-HSM-7](#) [A09-F8NF-M](#) [A09-F5NF-M](#)