




**1mm APERTURE OPTO-ELECTRONIC SINGLE CHANNEL SLOTTED INTERRUPTER SWITCHES WITH TRANSISTOR SENSORS**

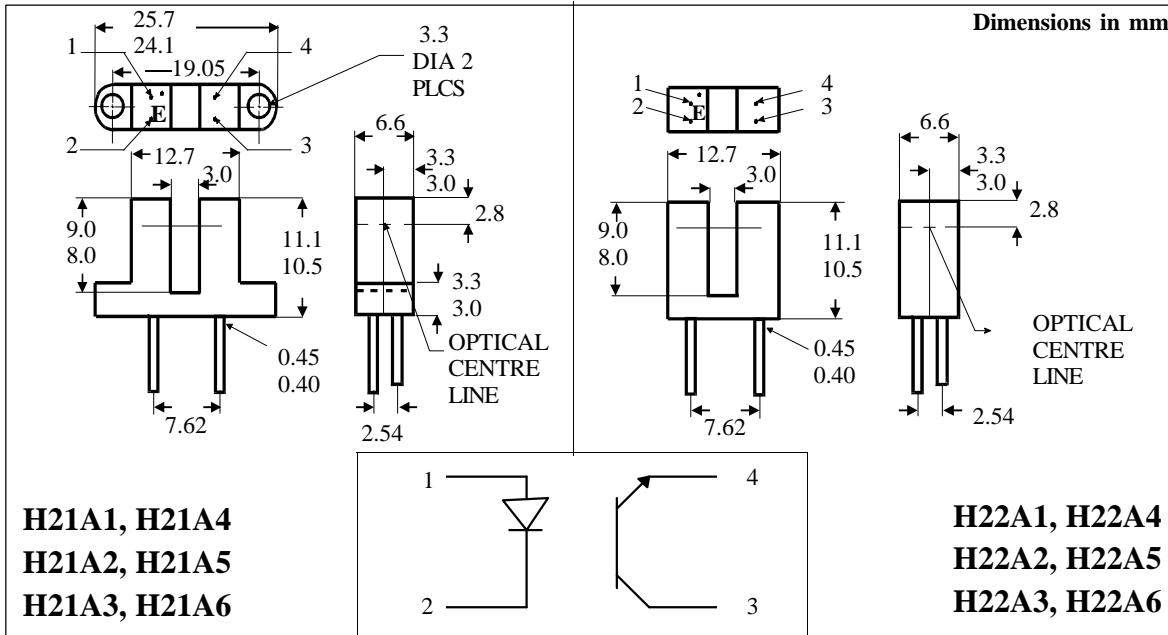

#### DESCRIPTION

The H21A\_ and H22A\_ series of opaque photointerrupters are single channel switches consisting of a Gallium Arsenide infrared emitting diode and a NPN silicon photo transistor mounted in a polycarbonate housing. The package is designed to optimise the mechanical resolution, coupling efficiency, ambient light rejection, cost and reliability. Operating on the principle that objects opaque to infrared will interrupt the transmission of light between an infrared emitting diode and a photo sensor switching the output from an "ON" state to an "OFF" state.

#### FEATURES

- High Gain
- 3mm Gap between LED and Detector
- Polycarbonate case protected against ambient light

#### APPLICATIONS

- Copiers, Printers, Facsimiles, Record Players, Cassette Decks, Optoelectronic Switches

#### ABSOLUTE MAXIMUM RATINGS (25°C unless otherwise specified)

Storage Temperature	-40°C to + 85°C
Operating Temperature	-25°C to + 85°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

#### INPUT DIODE

Forward Current	50mA
Reverse Voltage	5V
Power Dissipation	75mW

#### OUTPUT TRANSISTOR

Collector-emitter Voltage BV <sub>CEO</sub>	
H21A4, 5, 6, H22A4, 5, 6	55V
H21A1, 2, 3, H22A1, 2, 3	30V
Emitter-collector Voltage BV <sub>ECO</sub>	5V
Collector Current I <sub>C</sub>	20mA
Power Dissipation	75mW

**ISOCOM COMPONENTS LTD**

Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, Cleveland, TS25 1YD  
Tel: (01429) 863609 Fax : (01429) 863581

**ISOCOM INC**


720 E., Park Boulevard, Suite 104,  
Plano, TX 75074 USA  
Tel: (972) 423-5521  
Fax: (972) 422-4549

**ELECTRICAL CHARACTERISTICS (  $T_A = 25^\circ\text{C}$  Unless otherwise noted )**


PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage ( $V_F$ ) Reverse Voltage ( $V_R$ ) Reverse Current ( $I_R$ )	5	1.2	1.7 100	V V $\mu\text{A}$	$I_F = 50\text{mA}$ $I_R = 100\mu\text{A}$ $V_R = 5\text{V}$
Output	Collector-emitter Breakdown ( $BV_{CEO}$ ) ( Note 1 ) H21A4, 5, 6, H22A4, 5, 6 H21A1, 2, 3, H22A1, 2, 3 Emitter-collector Breakdown ( $BV_{ECO}$ ) Collector-emitter Dark Current ( $I_{CEO}$ )	55 30 5			V V nA	$I_C = 1\text{mA}$ $I_C = 1\text{mA}$ $I_E = 100\mu\text{A}$ $V_{CE} = 10\text{V}$
Coupled	On-State Collector Current $I_C(ON)$ ( Note 1 ) H21A1, 4, H22A1, 4 H21A2, 5, H22A2, 5 H21A3, 6, H22A3, 6 Collector-emitter Saturation Voltage $V_{CE(SAT)}$ H21A2, 3, 5, 6, H22A2, 3, 5, 6 H21A1, 4, H22A1, 4 Turn-on Time $t_{on}$ Turn-off Time $t_{off}$	0.15 1.0 1.9 0.3 2.0 3.0 0.6 4.0 5.5			mA mA mA mA mA mA mA mA mA	5mA $I_F$ , 5V $V_{CE}$ 20mA $I_F$ , 5V $V_{CE}$ 30mA $I_F$ , 5V $V_{CE}$ 5mA $I_F$ , 5V $V_{CE}$ 20mA $I_F$ , 5V $V_{CE}$ 30mA $I_F$ , 5V $V_{CE}$ 5mA $I_F$ , 5V $V_{CE}$ 20mA $I_F$ , 5V $V_{CE}$ 30mA $I_F$ , 5V $V_{CE}$ 20mA $I_F$ , 1.8mA $I_C$ 30mA $I_F$ , 1.8mA $I_C$ $V_{CC} = 5\text{V}$ , $I_F = 30\text{mA}, R_L = 2.5\text{k}\Omega$

Note 1      Special Selections are available on request. Please consult the factory.


**Collector Power Dissipation vs. Ambient Temperature**

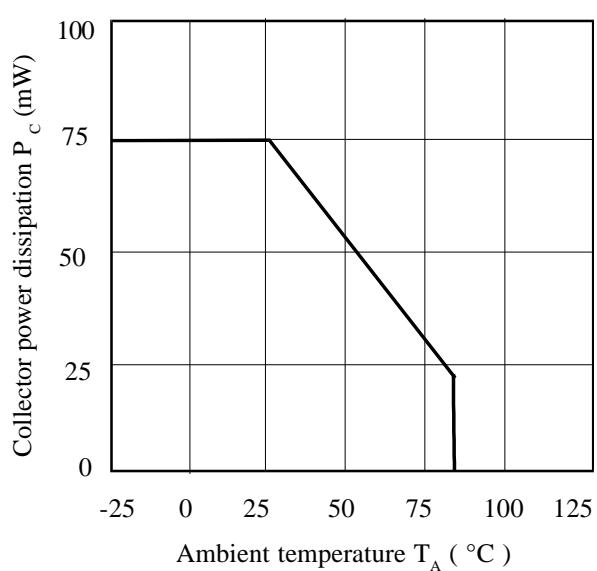


**Normalized Output Current vs. Collector-emitter Voltage**

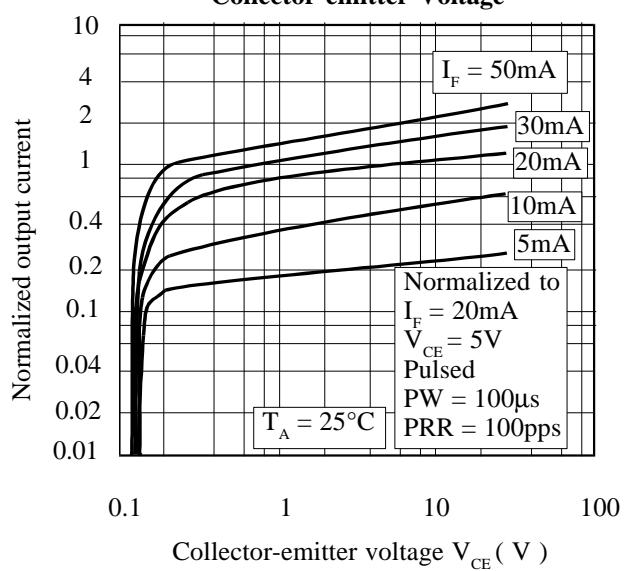


**Forward Current vs. Ambient Temperature**

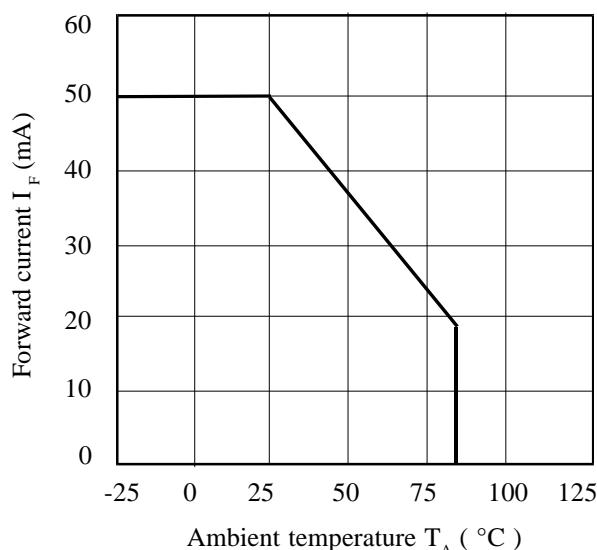


**Normalized Output Current vs. Forward Current**

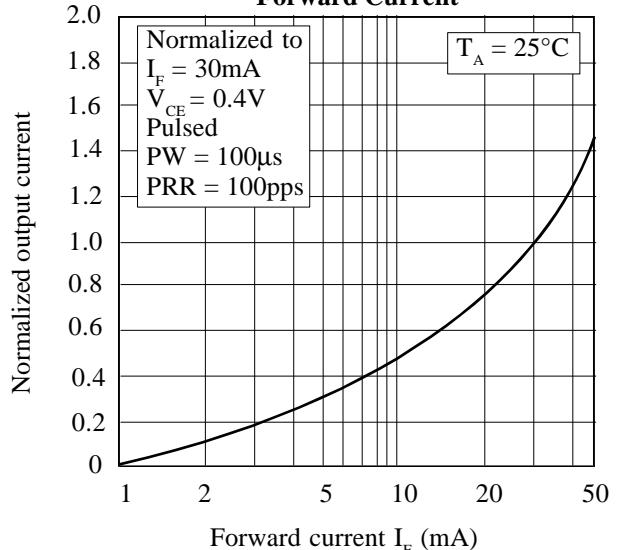

**Normalized Output Current vs. Ambient Temperature**

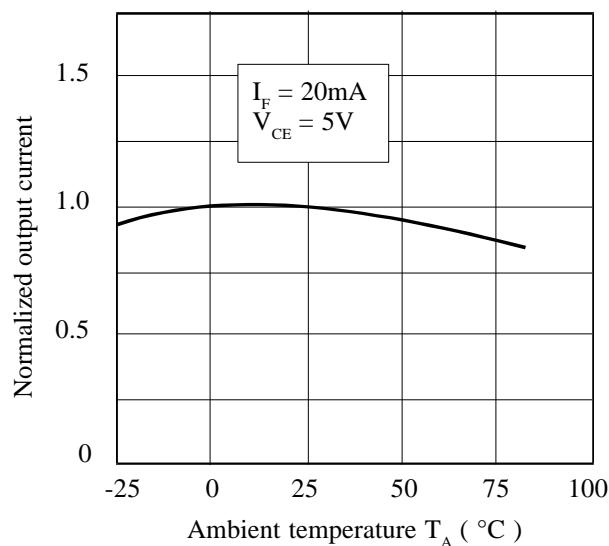

**Collector-emitter Saturation Voltage vs. Ambient Temperature**

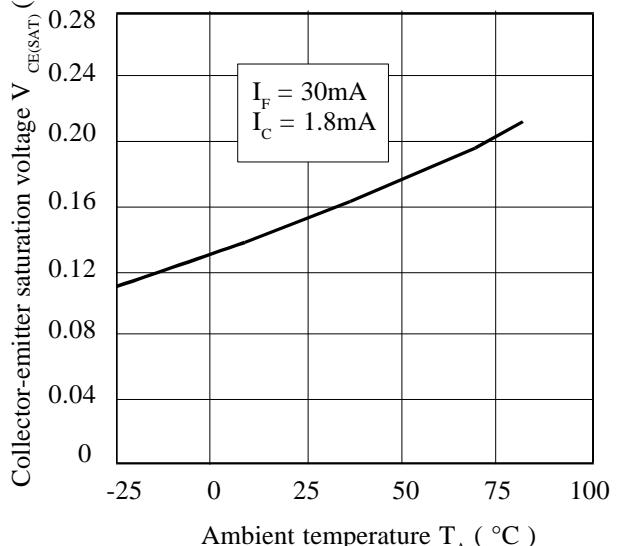

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for Photoelectric Sensors category:*

*Click to view products by Isocom manufacturer:*

Other Similar products are found below :

[E3JM-DS70R4T-US](#) [E3L2DC4](#) [E3RA-DN12 2M](#) [E3RA-DP12 2M](#) [E3S5LE4S](#) [E3S-AD38](#) [E3S-CR11 5M](#) [E3SCT11D5M](#) [E3SCT11M1J03M](#) [E3T-CT22S](#) [E3T-FD12R](#) [E3T-SL14R](#) [E3T-SL24 5M](#) [E3T-ST12R](#) [E3T-ST24 2M](#) [E3X-CN02](#) [E3X-CN11 5M](#) [E3X-CN21 10M](#) [E3ZM-B66](#) [E3ZM-CL81H 2M](#) [E3Z-T62 2M](#) [NJL5303R-TE1](#) [PB10CNT15PO](#) [PD60CNX20BP](#) [FZS](#) [CX-491-P-J](#) [CX-491-Z](#) [XUM2BKCNL2T](#) [XUM2BKCNL2T](#) [XUM2BNANL2R](#) [Y92E-ES30M](#) [Y92E-GS08SS](#) [ZXTDS04T](#) [ZX-XC4A 4M](#) [E3E23Y2US](#) [E3JM-DS70S4-US](#) [E3RA-RN11 2M](#) [E3S5LE42M](#) [E3S-LS20XB4 5M](#) [E3S-LS3PW 2M](#) [E3TFD14N](#) [E3T-FD14R](#) [E3T-SL21 5M](#) [E3T-SL21M](#) [E3T-ST11R](#) [E3T-ST12 5M](#) [E3X-DA41-S-M1J 0.3M](#) [E3X-DAB6](#) [E3X-DAG8](#) [E3ZM-B86](#)