


DTMSS-27 SENDUST POWER INDUCTORS

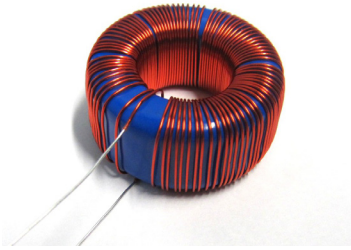

APPLICATIONS:


- interference suppressing chokes (DC - 300kHz)
- energy storage inductors (DC - 300kHz)
- DC/DC converters
- SMPS
- EMI filters (DC - 1 MHz)
- acoustic filters

ORDERING CODE:

DTMSS- 27 / 2,2 / 0,3 -V

mounting: V - vertical, H - horizontal, BV - base vertical,
 CV - case vertical, CH - case horizontal, KM-5 - case KM-5 type
 rated current in Amps
 inductance in mH@I_{DC} = 0A
 sendust core outer diameter
 product symbol

DIMENSIONS:

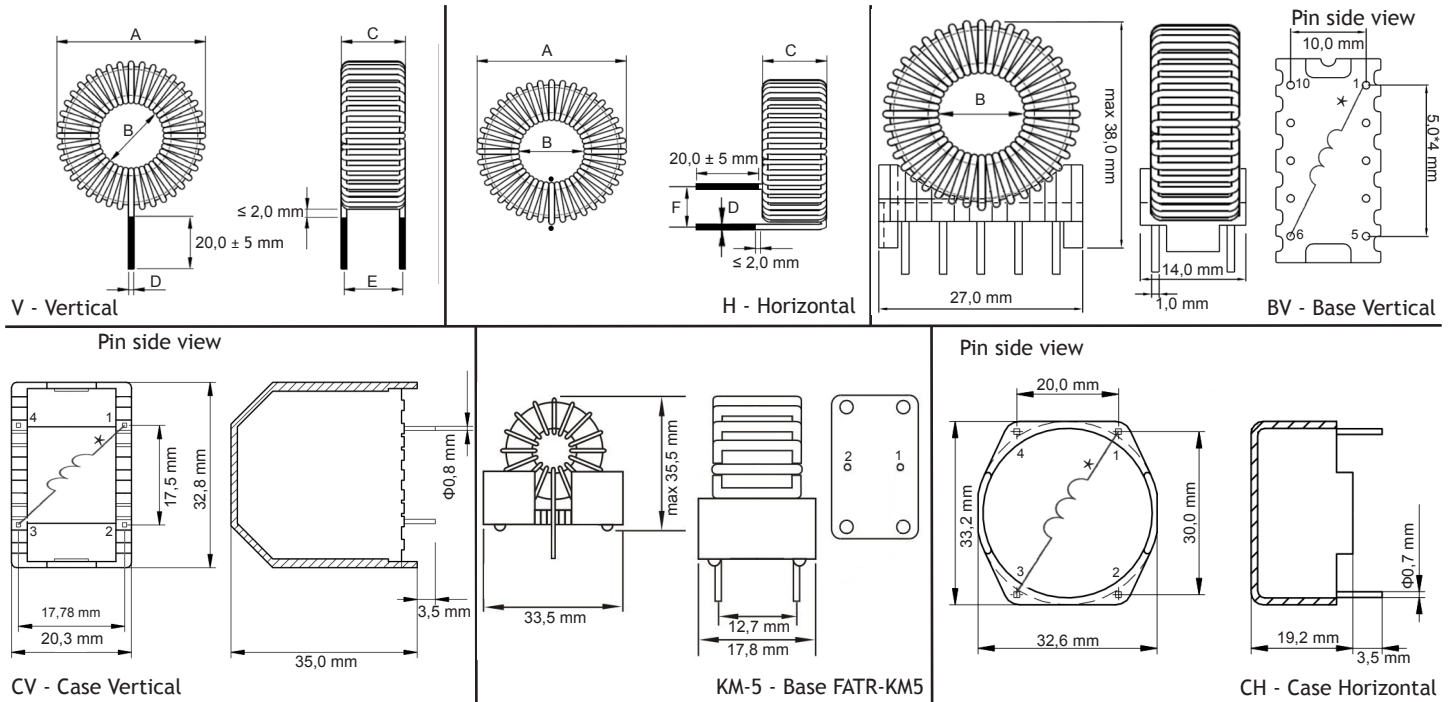


Part number	Type - core dimension (± 10%)						Mounting version					
	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	V	H	BV	CV	CH	KM-5
DTMSS-27/2,2/0,3	28,5	13,5	12,5	0,20	12,5	7,5	✓	✓	✓	✓	✓	—
DTMSS-27/1,5/0,4	28,5	13,5	12,5	0,23	12,5	7,5	✓	✓	✓	✓	✓	—
DTMSS-27/1,0/0,7	29,0	13,0	13,0	0,30	12,5	7,5	✓	✓	✓	✓	✓	—
DTMSS-27/0,68/1,0	29,0	12,5	13,0	0,36	13,0	7,5	✓	✓	✓	✓	✓	—
DTMSS-27/0,47/1,6	29,0	11,5	13,5	0,45	13,0	8,5	✓	✓	✓	✓	✓	—
DTMSS-27/0,33/2,0	29,0	11,0	13,5	0,50	14,0	8,5	✓	✓	✓	✓	✓	—
DTMSS-27/0,22/4,0	30,5	10,0	14,5	0,95	14,5	10,0	✓	✓	✓	✓	✓	✓
DTMSS-27/0,15/6,0	31,5	8,5	15,5	1,15	15,5	10,0	✓	✓	✓	✓	✓	✓
DTMSS-27/0,10/8,0	31,5	7,5	16,0	1,40	15,5	10,0	✓	✓	✓	—	✓	✓
DTMSS-27/0,068/10	32,0	7,5	16,0	1,50	17,5	10,0	✓	✓	—	—	—	✓
DTMSS-27/0,047/15	32,5	5,0	16,0	1,90	17,5	11,5	✓	✓	—	—	—	✓
DTMSS-27/0,033/20	33,5	4,5	17,0	2,45	17,5	13,0	✓	✓	—	—	—	✓
DTMSS-27/0,022/30	33,5	3,0	17,0	2,80	16,5	13,0	✓	✓	—	—	—	✓

ELECTRICAL PROPERTIES:


Part number	Lmax [μH]	Imax [A]	L@Imax [μH]	RDC [Ω]	Δt [°C]
DTMSS-27/2,2/0,3	2200	0,30	2160	3,0100	7,4
DTMSS-27/1,5/0,4	1500	0,40	1460	2,2100	10,1
DTMSS-27/1,0/0,7	1000	0,70	954	1,1100	12,1
DTMSS-27/0,68/1,0	680	1,00	640	0,5750	15,2
DTMSS-27/0,47/1,6	470	1,60	429	0,2940	15,9
DTMSS-27/0,33/2,0	330	2,00	294	0,2090	19,8
DTMSS-27/0,22/4,0	220	4,00	170	0,1070	35,6
DTMSS-27/0,15/6,0	150	6,00	106	0,0541	32,9
DTMSS-27/0,10/8,0	100	8,00	68,5	0,0387	45,3
DTMSS-27/0,068/10	68	10,0	45,2	0,0197	30,3
DTMSS-27/0,047/15	47	15,0	26,1	0,0100	33,3
DTMSS-27/0,033/20	33	20,0	17,3	0,0072	38,8
DTMSS-27/0,022/30	22	30,0	9,12	0,0037	43,7

CHARACTERISTICS:

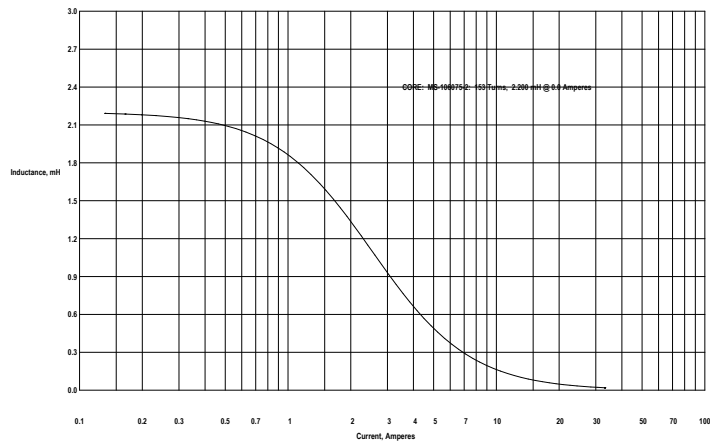


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 10:51:25 2011

DTMSS-27/2,2/0,3

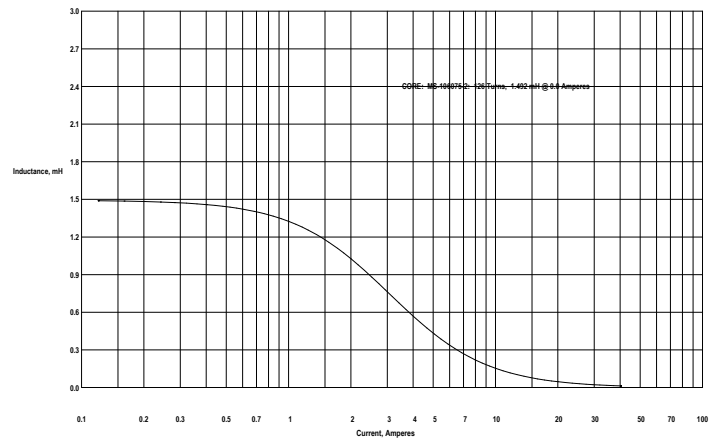


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:03:36 2011

DTMSS-27/1,5/0,4

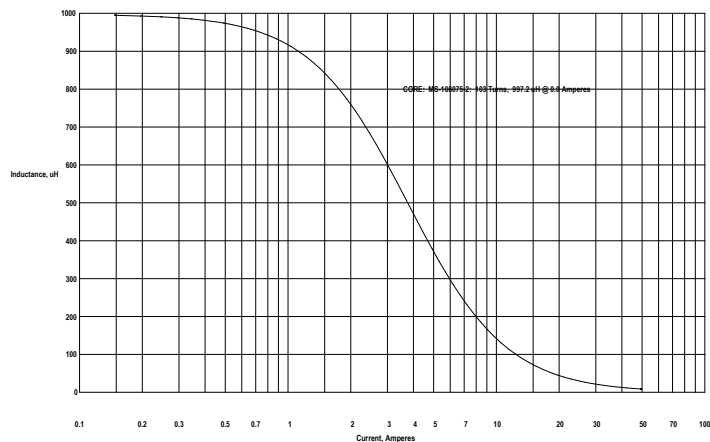

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:07:32 2011


DTMSS-27/1,0/0,7

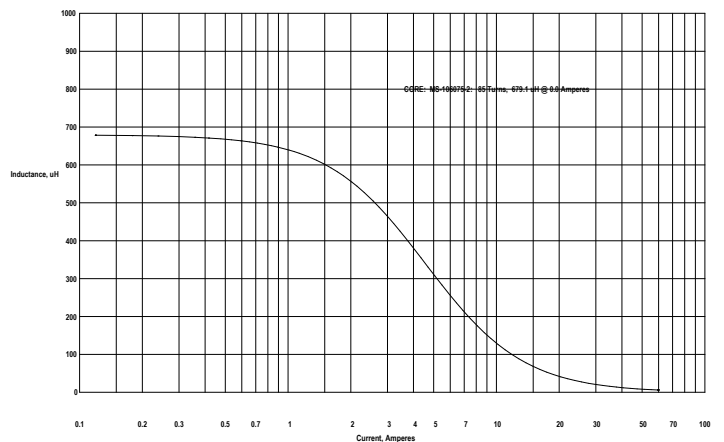

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:09:09 2011


DTMSS-27/0,68/1,0

CHARACTERISTICS:

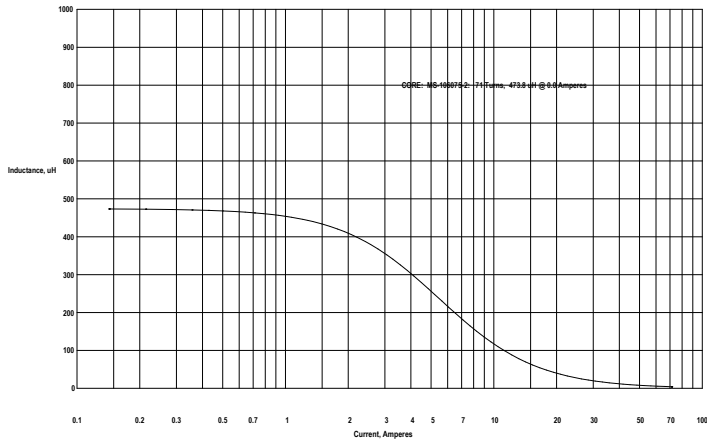


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:10:35 2011

DTMSS-27/0,47/1,6

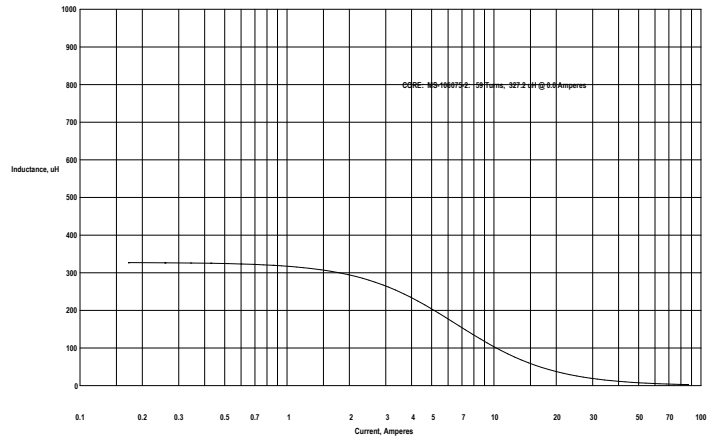


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:12:18 2011

DTMSS-27/0,33/2,0

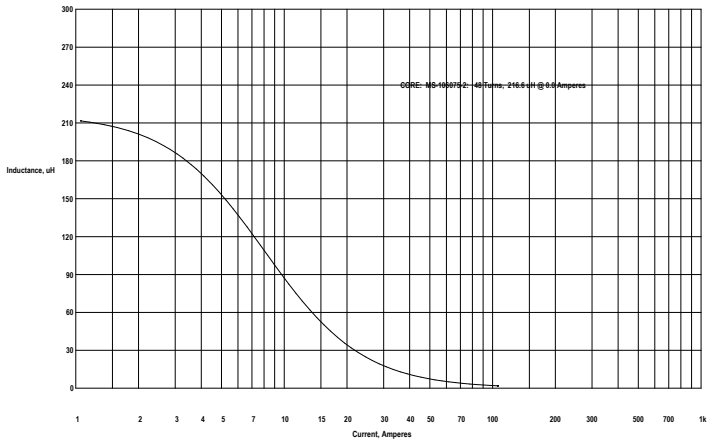


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:14:30 2011

DTMSS-27/0,22/4,0

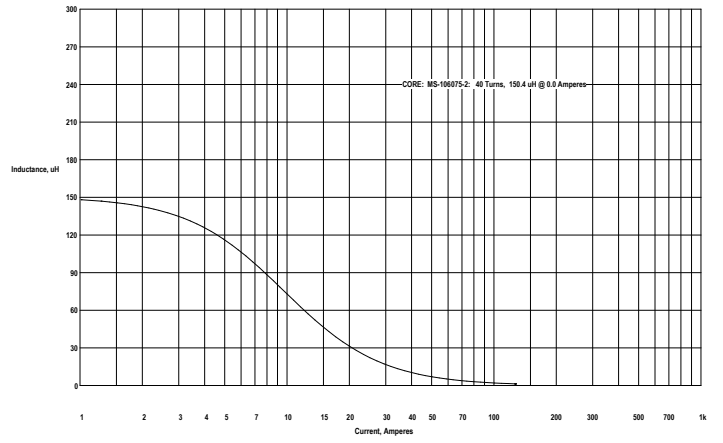


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:15:51 2011

DTMSS-27/0,15/6,0

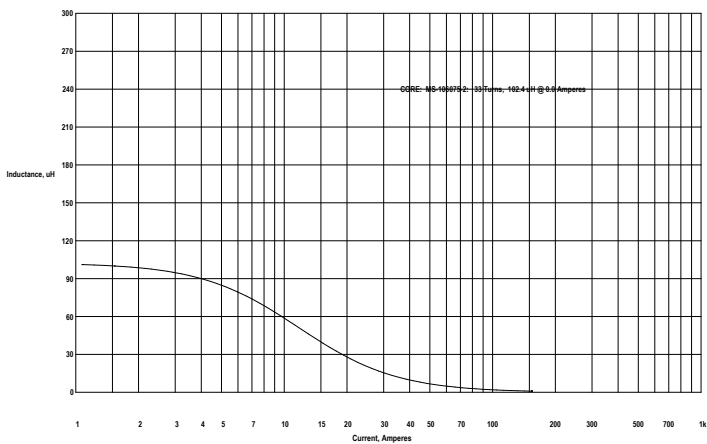

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:18:16 2011


DTMSS-27/0,1/8,0

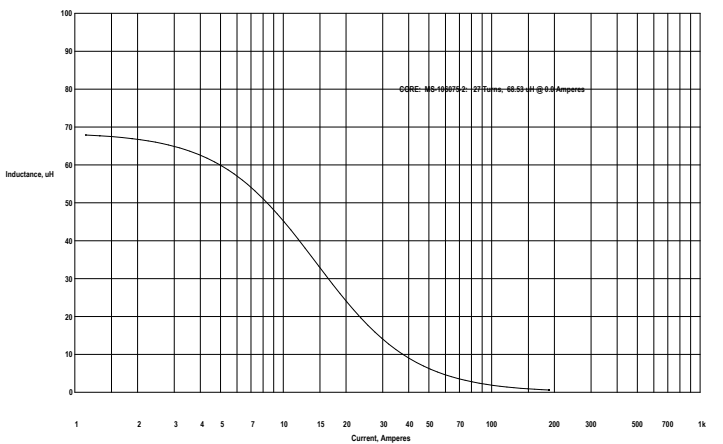

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:22:21 2011


DTMSS-27/0,068/10

CHARACTERISTICS:

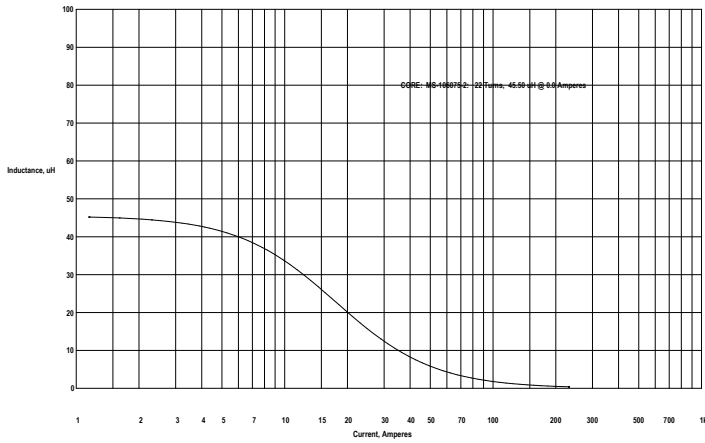


CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:23:56 2011

DTMS-27/0,047/15

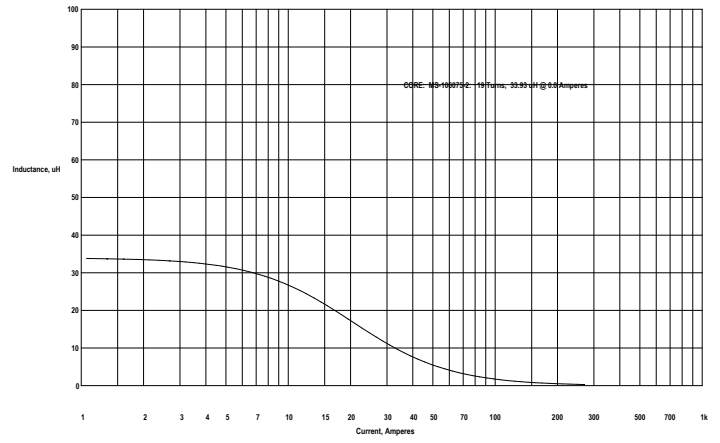

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:26:27 2011

DTMS-27/0,033/20

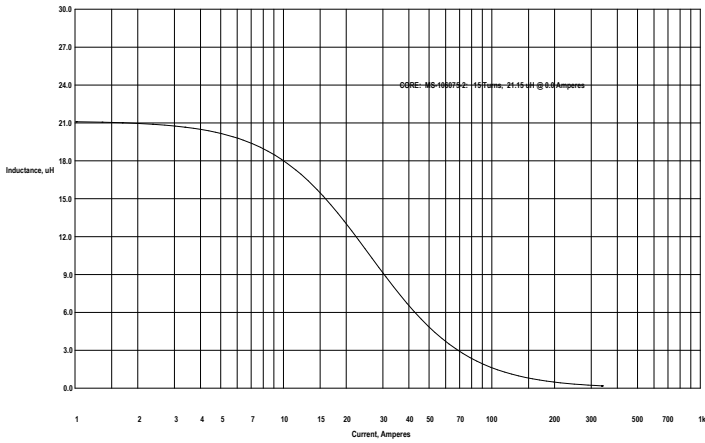

CREATED IN MICROMETALS ARNOLD POWDER CORES - DESIGN OF INDUCTORS FOR POWER FILTER APPLICATIONS Fri Nov 25 11:31:25 2011

DTMS-27/0,022/30

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Feryster](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)