


# Precision Hygro-Thermometer

**Highest 2% RH accuracy**

With Grains per Pound (GPP) and Grams per Kilogram (g/kg) measurement

## Features:

- Less than 30 second RH response time
- Water vapor in GPP (g/kg)
- Dual backlit display
- Simultaneous display of:
  - Humidity or GPP (g/kg) plus Temperature
  - Humidity or GPP (g/kg) plus Dew Point
  - Humidity or GPP (g/kg) plus Wet Bulb
- Slim design with rubberized sides for better grip and for one hand operation
- Data Hold and Min/Max functions
- Auto power off with disable and low battery indicator
- Complete with carrying case and 9V battery

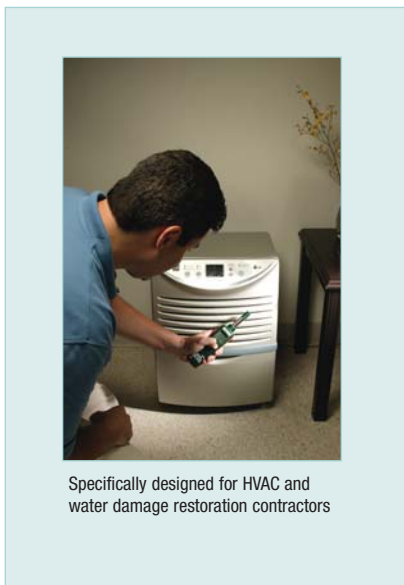

Specifically designed for HVAC and water damage restoration contractors

Specifications	
Humidity	0 to 100%RH
Temperature (Internal)	-22 to 199°F (-30 to 100°C)
Basic Accuracy	±2%RH, ±1.8°F/1°C
Max. Resolution	0.1%RH, 0.1°F/°C
Dewpoint	-22 to 199°F (-30 to 100°C)
Wet Bulb	32 to 176 °F (0 to 80°C)
Absolute Humidity	0 to 1120GPP (0 to 160g/kg)
Dimensions	7.8x1.7x1.3" (200x45x33mm)
Weight	7oz (200g)

## Ordering Information:

RH490 .....Precision Hygro-Thermometer  
RH490-NIST ....Precision Hygro-Thermometer w/NIST



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [extech](#) manufacturer:*

Other Similar products are found below :

[PT400](#) [EX365](#) [MO260](#) [MO280](#) [PH113](#) [HD700](#) [HD755](#) [140000](#) [AN300](#) [149116](#) [149118](#) [DV40](#) [EA11A](#) [EMF450](#) [BT100](#) [SDL600](#) [EX363](#)  
[SW810A](#) [AN200](#) [AN320](#) [PH110](#) [PH220](#) [PRC15](#) [PRC20](#) [PT-30](#) [HD500](#) [HDV540](#) [RH490](#) [RH522](#) [380405](#) [380941](#) [380975](#) [MA145](#)  
[MA1500](#) [MA3010](#) [407736](#) [412300](#) [412355A](#) [42275](#) [42540](#) [TL726](#) [TL807C](#) [45118](#) [461895](#) [380260](#) [380363](#) [380462](#) [380926](#) [381676A](#)  
[382202](#)