



## ■ Features

- Metal housing design with functional Ground
- Class II design
- Constant Current mode output
- Built-in active PFC function
- No load / Standby power consumption <0.5W
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
- 3 in 1 dimming (dim-to-off); Smart timer dimming; DALI;
- Typical lifetime>50000 hours
- 5 years warranty


## ■ Applications

- LED street lighting
- LED harbor lighting
- LED bay lighting
- LED greenhouse lighting
- LED flood lighting
- Comply with class II application

## ■ Description

ELGT-150-C series is a 105~150W LED AC/DC classII driver featuring the constant current mode and high voltage output. ELGT-150-C operates from 100~305VAC and offers models with different rated current ranging between 700mA and 1400mA. Thanks to the high efficiency up to 92%, with the fanless design, the entire series is able to operate for -40°C ~+90°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. ELGT-150-C is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

## ■ Model Encoding

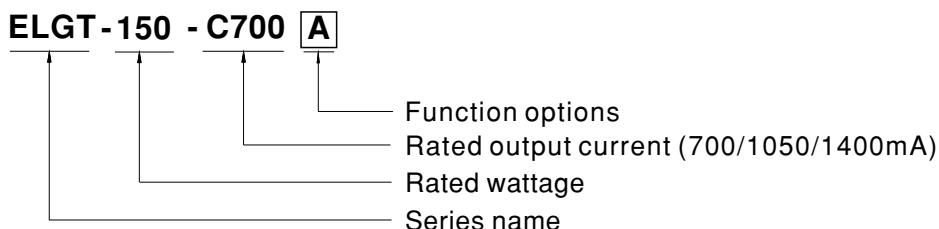

Function options  
Rated output current (700/1050/1400mA)  
Rated wattage  
Series name

Type	IP Level	Function	Note
Blank	IP67	I <sub>o</sub> fixed.	In Stock
A	IP65	I <sub>o</sub> adjustable through built-in potentiometer.	In Stock
B	IP67	3 in 1 dimming function (0~10Vdc, 10V PWM signal and resistance)	In Stock
DA	IP67	DALI control technology.	In Stock
D2	IP67	Built-in Smart timer dimming and programmable function.	In Stock




105~150W Class II Constant Current Mode LED Driver

**ELGT-150-C series****SPECIFICATION**


MODEL	ELGT-150-C700 <input type="checkbox"/>	ELGT-150-C1050 <input type="checkbox"/>	ELGT-150-C1400 <input type="checkbox"/>
OUTPUT	<b>RATED CURRENT</b>	700mA 200VAC ~ 305VAC	1050mA 1400mA
	<b>RATED POWER</b>	149.8W 100VAC ~ 180VAC	150.15W 149.8W
	<b>CONSTANT CURRENT REGION</b> Note.2	105W 107 ~ 214V	105W 72 ~ 143V
	<b>OPEN CIRCUIT VOLTAGE(max.)</b>	225V	151V 54 ~ 107V
	<b>CURRENT ADJ. RANGE</b>	Adjustable for A-Type only (via built-in potentiometer)	
		350 ~ 700mA	525 ~ 1050mA
	<b>CURRENT RIPPLE</b>	5.0% max. @rated current	
	<b>CURRENT TOLERANCE</b>	±5.0%	
	<b>SET UP TIME</b> Note.4	1600ms/115VAC	500ms/230VAC
	<b>VOLTAGE RANGE</b> Note.3	100 ~ 305VAC      142 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)	
INPUT	<b>FREQUENCY RANGE</b>	47 ~ 63Hz	
	<b>POWER FACTOR (Typ.)</b>	PF ≥ 0.97/115VAC, PF ≥ 0.95/230VAC, PF ≥ 0.92/277VAC@full load (Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)	
	<b>TOTAL HARMONIC DISTORTION</b>	THD < 20%(@load ≥ 50%/115VC; @load ≥ 60%/230VAC; @load ≥ 75%/277VAC) (Please refer to "TOTAL HARMONIC DISTORTION(THD)" section)	
	<b>EFFICIENCY (Typ.)</b>	92%	92% 91%
	<b>AC CURRENT (Typ.)</b>	1.7A / 115VAC	0.9A / 230VAC
	<b>INRUSH CURRENT(Typ.)</b>	COLD START 65A(twidth=485μs measured at 50% Ipeak)/230VAC; Per NEMA 410	
	<b>MAX. No. of PSUs on 16A CIRCUIT BREAKER</b>	3 units (circuit breaker of type B) / 6 units (circuit breaker of type C) at 230VAC	
	<b>LEAKAGE CURRENT</b>	<0.7mA / 240VAC	
	<b>NO LOAD / STANDBY POWER CONSUMPTION</b>	No load power consumption <0.5W for Blank / A / D2-Type Standby power consumption <0.5W for B / DA-Type	
	<b>SHORT CIRCUIT</b>	Hiccup mode, recovers automatically after fault condition is removed	
PROTECTION	<b>OVER VOLTAGE</b>	230 ~ 265V	155 ~ 180V
		Shut down o/p voltage, re-power on to recover	
	<b>OVER TEMPERATURE</b>	Shut down o/p voltage, re-power on to recover	
ENVIRONMENT	<b>WORKING TEMP.</b>	Tcase=-40 ~ +90°C (Please refer to " OUTPUT LOAD vs TEMPERATURE" section)	
	<b>MAX. CASE TEMP.</b>	Tcase=+90°C	
	<b>WORKING HUMIDITY</b>	20 ~ 95% RH non-condensing	
	<b>STORAGE TEMP., HUMIDITY</b>	-40 ~ +80°C, 10 ~ 95% RH	
	<b>TEMP. COEFFICIENT</b>	±0.03%/°C (0 ~ 60°C)	
	<b>VIBRATION</b>	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes	
SAFETY & EMC	<b>SAFETY STANDARDS</b>	ENEC EN61347-1, EN61347-2-13 independent, EN62384; GB19510.1, GB19510.14; IP65 or IP67 approved	
	<b>DALI STANDARDS</b>	Compliance to IEC62386-101, 102, 207 for DA-Type only	
	<b>WITHSTAND VOLTAGE</b>	I/P-O/P:3.75KVAC	I/P-CASE:3.75KVAC
	<b>ISOLATION RESISTANCE</b>	O/P-CASE:1.5KVAC	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH
	<b>EMC EMISSION</b>	Compliance to EN55015,EN61000-3-2 Class C (@load ≥ 60%) ; EN61000-3-3; GB/T17743, GB17625.1	
	<b>EMC IMMUNITY</b>	Compliance to EN61000-4-2,3,4,5,6,8,11; EN61547, light industry level (surge immunity Line-Earth 6KV, Line-Line 4KV)	
OTHERS	<b>MTBF</b>	1098.95K hrs min. Telcordia SR-332 (Bellcore)	308.5Khrs min. MIL-HDBK-217F (25°C)
	<b>DIMENSION</b>	219*63*35.5 mm (L*W*H)	
	<b>PACKING</b>	0.95Kg; 16pcs / 16.0kg / 0.77CUFT	
<b>NOTE</b>	1. All parameters NOT specially mentioned are measured at 230VAC input, rated current and 25°C of ambient temperature. 2. Please refer to "DRIVING METHODS OF LED MODULE". For DA-Type, Constant Current region is 60%~100% of maximum voltage under rated power delivery. 3. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details. 4. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time. 5. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 6. This series meets the typical life expectancy of >50,000 hours of operation when Tcase, particularly (t <sub>c</sub> ) point (or TMP, per DLC), is about 75°C or less. 7. Please refer to the warranty statement on MEAN WELL's website at <a href="http://www.meanwell.com">http://www.meanwell.com</a>		

### ■ BLOCK DIAGRAM

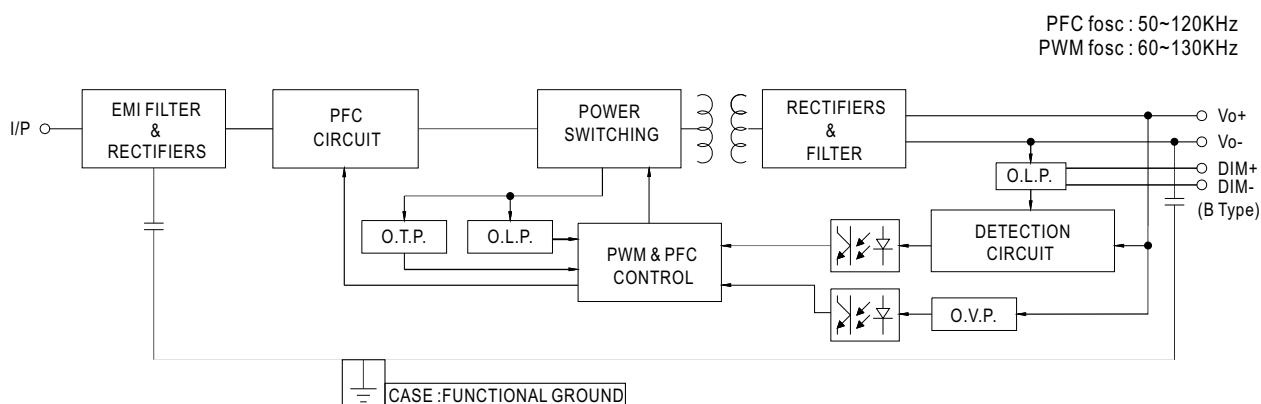

### ■ DRIVING METHODS OF LED MODULE

※ This series works in constant current mode to directly drive the LEDs.

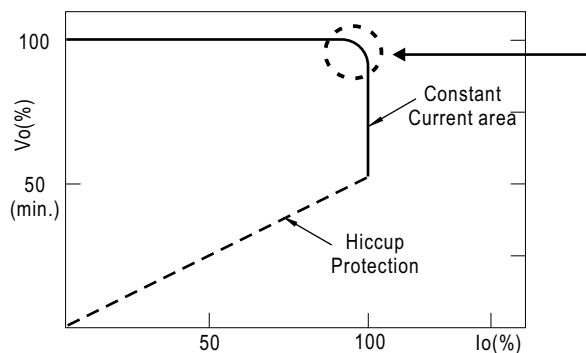


Typical output current normalized by rated current (%)

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.  
Should there be any compatibility issues, please contact MEAN WELL.

◎ This characteristic applies to Blank/A/B/D2-Type,  
For DA-Type, the Constant Current area is 60%~100% Vo.

## ■ DIMMING OPERATION

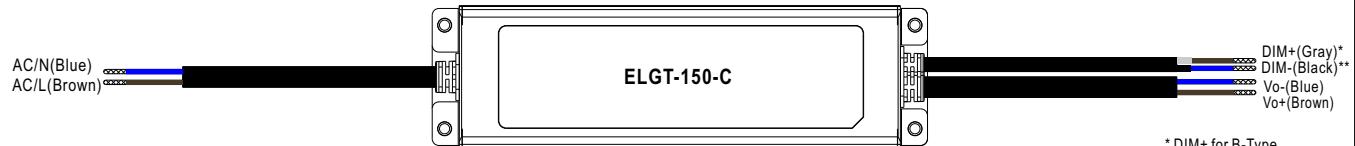



### ※ 3 in 1 dimming function (for B-Type)

Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:  
 0 ~ 10VDC, or 10V PWM signal or resistance.



Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.

Dimming source current from power supply: 100 $\mu$ A (typ.)



#### ◎ Applying additive 0 ~ 10VDC

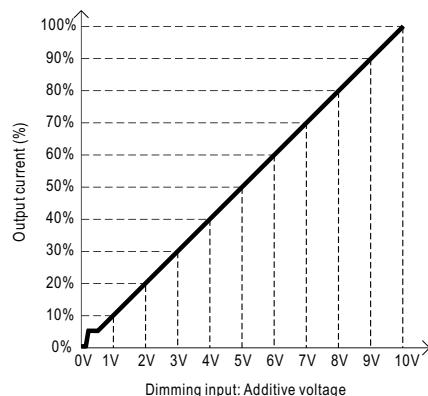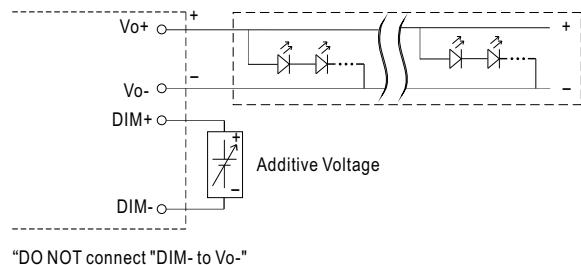

#### ◎ Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

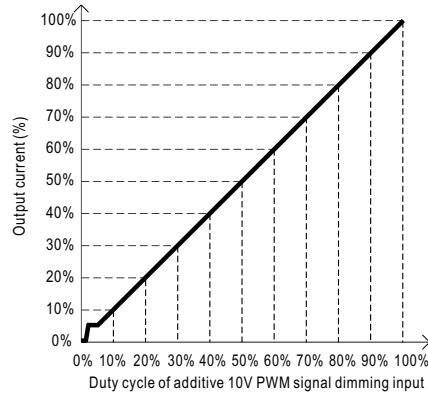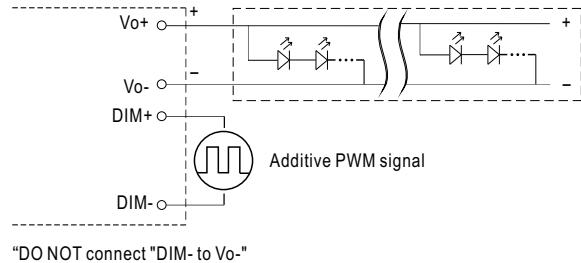

#### ◎ Applying additive resistance:

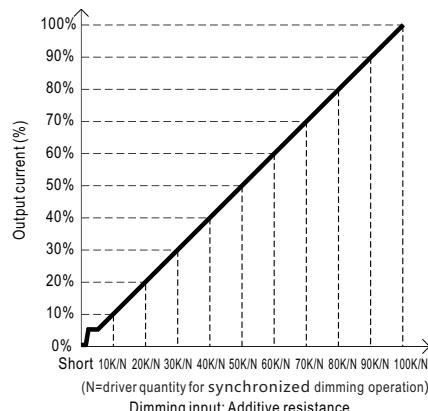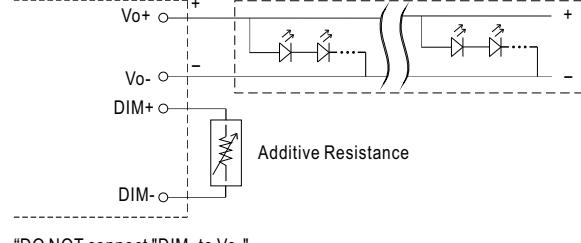

Note : 1. Min. dimming level is about 8% and the output current is not defined when 0% < Iout < 8%.

2. The output current could drop down to 0% when dimming input is about 0k $\Omega$  or 0Vdc, or 10V PWM signal with 0% duty cycle.

**※ DALI Interface (primary side; for DA-Type)**

- Apply DALI signal between DA+ and DA-.


- DALI protocol comprises 16 groups and 64 addresses.

- First step is fixed at 8% of output.

**※ Smart timer dimming function (for D2-Type by User definition)**

MEAN WELL Smart timer dimming primarily provides the adaptive proportion dimming profile for the output constant current level to perform up to 14 consecutive hours. 3 dimming profiles hereunder are defined accounting for the most frequently seen applications. If other options may be needed, please contact MEAN WELL for details.

Ex : ◎ D01-Type: the profile recommended for residential lighting

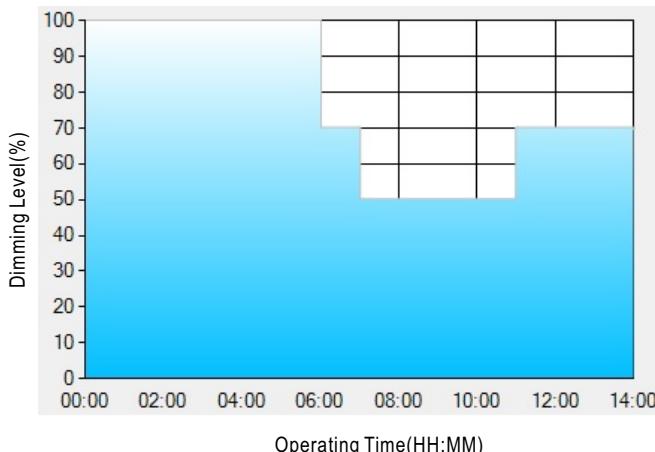

Set up for D01-Type in Smart timer dimming software program:

	T1	T2	T3	T4
TIME**	06:00	07:00	11:00	---
LEVEL**	100%	70%	50%	70%


\*\*: TIME matches Operating Time in the diagram whereas LEVEL matches Dimming Level.

Example: If a residential lighting application adopts D01-Type, when turning on the power supply at 6:00pm, for instance:

- [1] The power supply will switch to the constant current level at 100% starting from 6:00pm.
- [2] The power supply will switch to the constant current level at 70% in turn, starting from 0:00am, which is 06:00 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 50% in turn, starting from 1:00am, which is 07:00 after the power supply turns on.
- [4] The power supply will switch to the constant current level at 70% in turn, starting from 5:00am, which is 11:00 after the power supply turns on.

The constant current level remains till 8:00am, which is 14:00 after the power supply turns on.

Ex: ◎ D02-Type: the profile recommended for street lighting

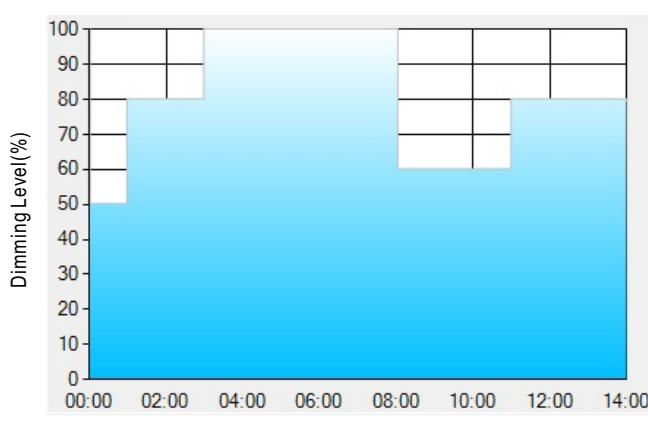

Set up for D02-Type in Smart timer dimming software program:


	T1	T2	T3	T4	T5
TIME**	01:00	03:00	8:00	11:00	---
LEVEL**	50%	80%	100%	60%	80%

\*\*: TIME matches Operating Time in the diagram whereas LEVEL matches Dimming Level.

Example: If a street lighting application adopts D02-Type, when turning on the power supply at 5:00pm, for instance:

- [1] The power supply will switch to the constant current level at 50% starting from 5:00pm.
- [2] The power supply will switch to the constant current level at 80% in turn, starting from 6:00pm, which is 01:00 after the power supply turns on.
- [3] The power supply will switch to the constant current level at 100% in turn, starting from 8:00pm, which is 03:00 after the power supply turns on.
- [4] The power supply will switch to the constant current level at 60% in turn, starting from 1:00am, which is 08:00 after the power supply turns on.
- [5] The power supply will switch to the constant current level at 80% in turn, starting from 4:00am, which is 11:00 after the power supply turns on. The constant current level remains till 6:30am, which is 14:00 after the power supply turns on.

Ex: © D03-Type: the profile recommended for tunnel lighting

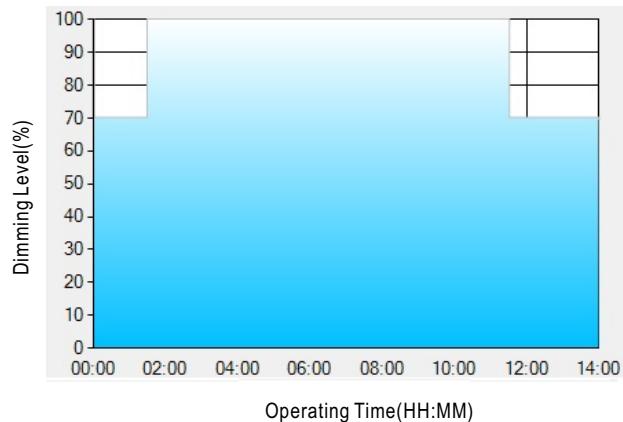

Set up for D03-Type in Smart timer dimming software program:

	T1	T2	T3
TIME**	01:30	11:00	---
LEVEL**	70%	100%	70%

\*\*: TIME matches Operating Time in the diagram whereas LEVEL matches Dimming Level.




Example: If a tunnel lighting application adopts D03-Type, when turning on the power supply at 4:30pm, for instance:

[1] The power supply will switch to the constant current level at 70% starting from 4:30pm.


[2] The power supply will switch to the constant current level at 100% in turn, starting from 6:00pm, which is 01:30 after the power supply turns on.

[3] The power supply will switch to the constant current level at 70% in turn, starting from 5:00am, which is 11:00 after the power supply turns on.


The constant current level remains till 6:30am, which is 14:00 after the power supply turns on.

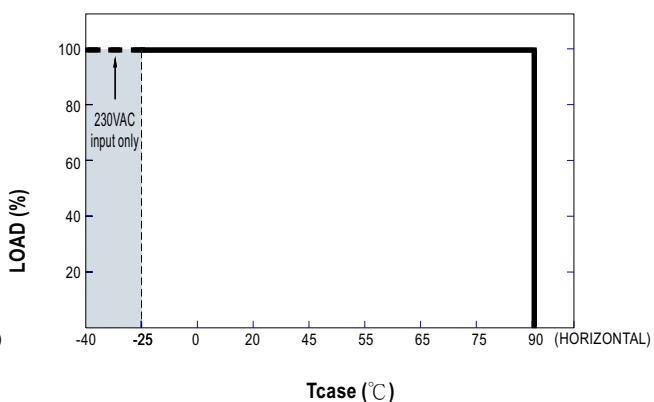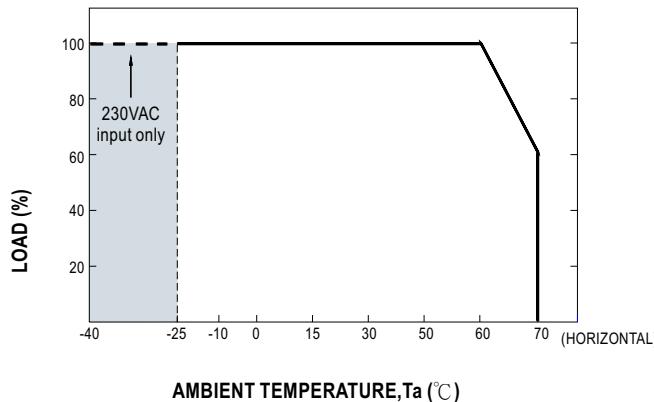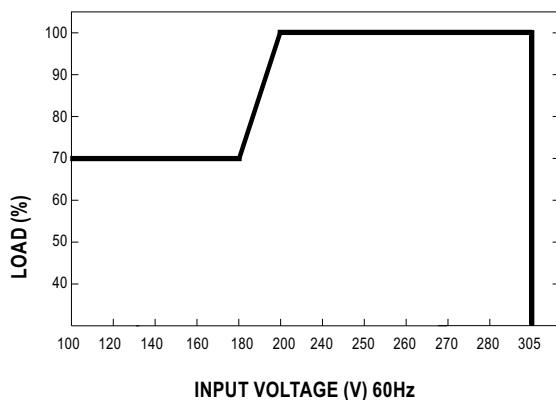**■ OUTPUT LOAD vs TEMPERATURE**

**■ STATIC CHARACTERISTIC**

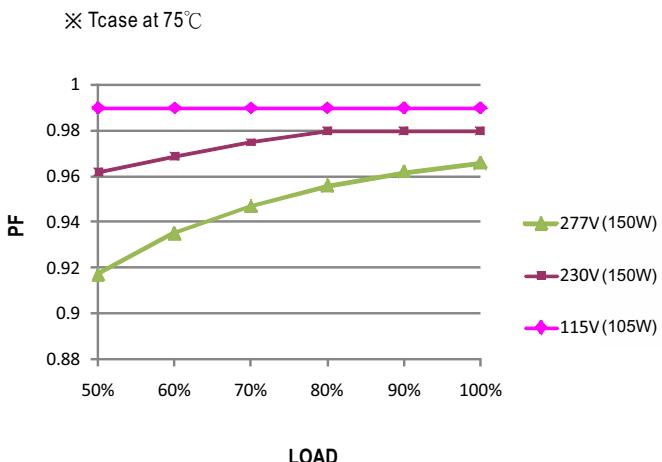
※ De-rating is needed under low input voltage.


**■ POWER FACTOR (PF) CHARACTERISTIC**

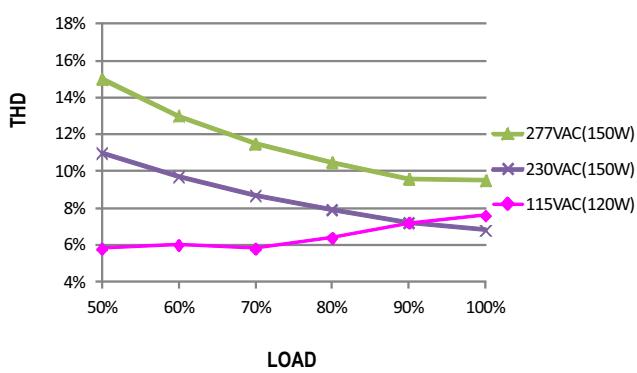**■ TOTAL HARMONIC DISTORTION (THD)**


※ 700mA Model,  $T_{case}$  at  $75^{\circ}$ C


**■ EFFICIENCY vs LOAD**

ELGT-150-C series possess superior working efficiency that up to 92% can be reached in field applications.

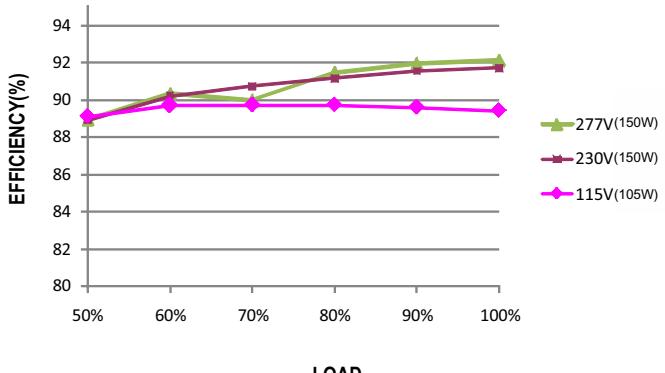※ 700mA Model,  $T_{case}$  at  $75^{\circ}$ C

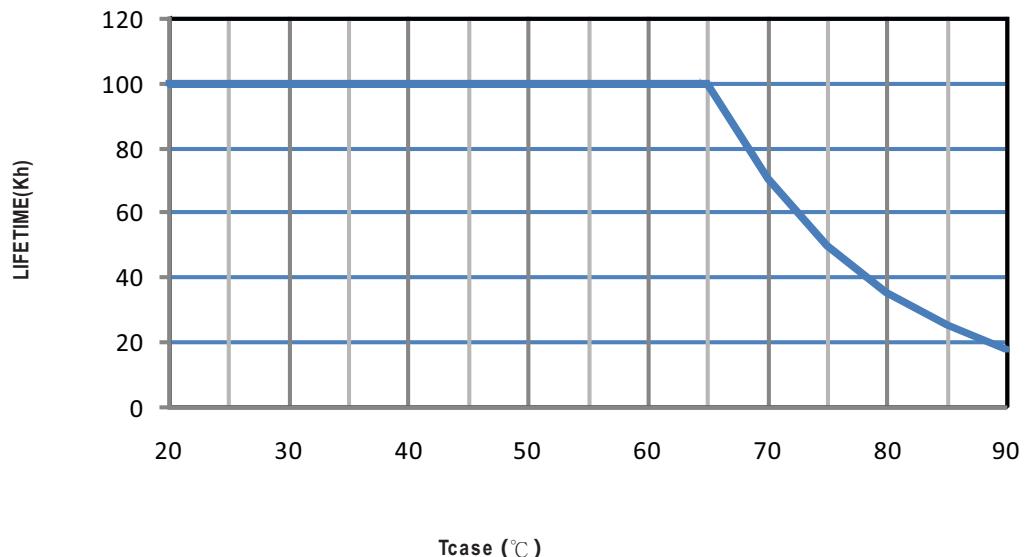


**LIFE TIME**


### ■ MECHANICAL SPECIFICATION

※ Blank-Type

CASE NO.: 237A Unit:mm

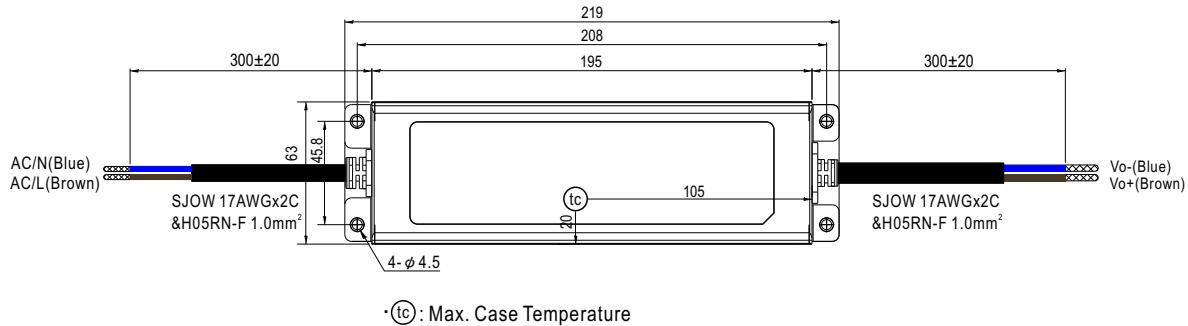

※ B/DA/D2-Type

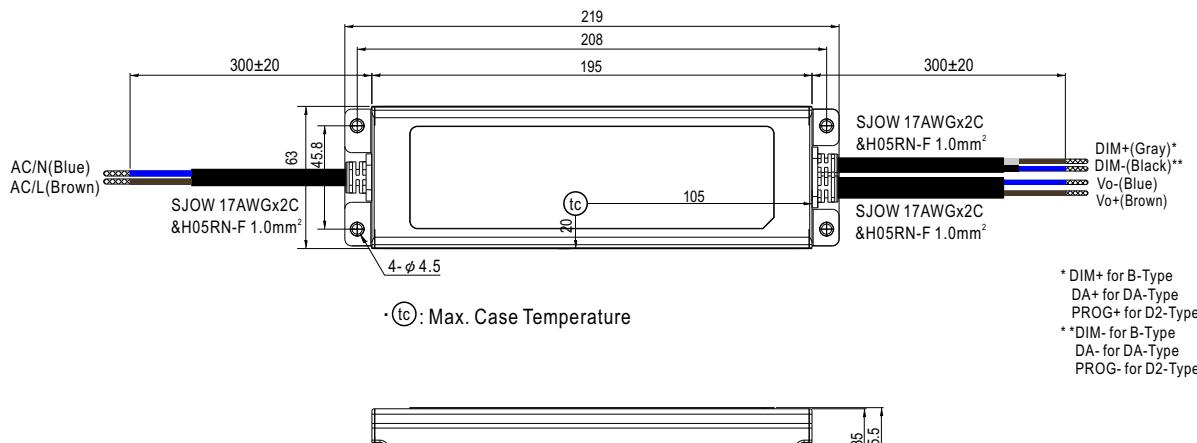






105~150W Class II Constant Current Mode LED Driver

**ELGT-150-C series**

※ A-Type

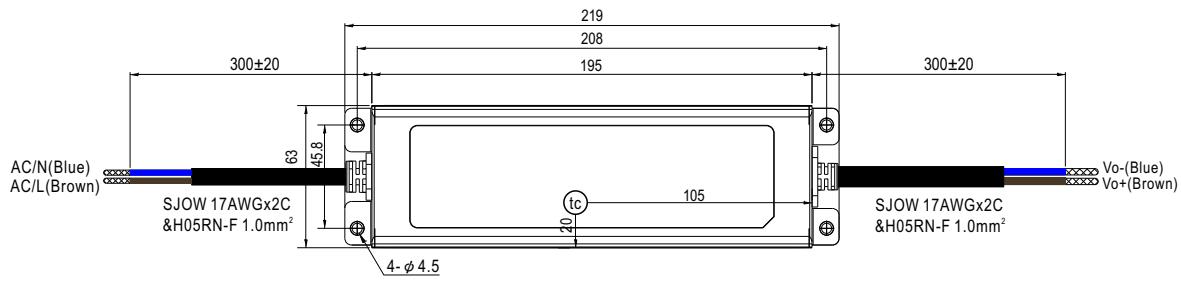

•(tc) : Max. Case Temperature

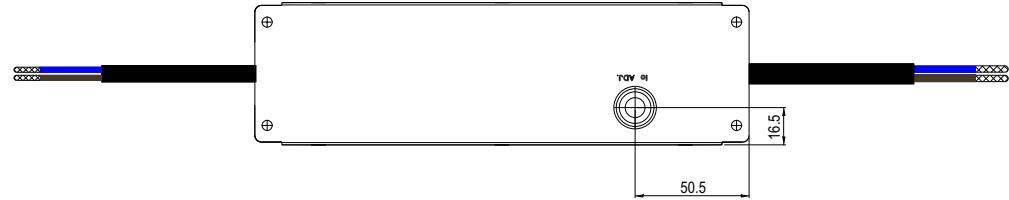

## ■ MANUAL INSTALLATION

Please refer to : <http://www.meanwell.com/manual.html>

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for LED Power Supplies category:***

***Click to view products by Mean Well manufacturer:***

Other Similar products are found below :

[ESS015W-1000-12](#) [EUC-075S105DT](#) [PDA-WIFI](#) [PIFC-K250F](#) [PITB-K222A](#) [ALD-514012PJ134](#) [LB240S24KH](#) [LMH020-SPLC-0000-0000001](#) [79534](#) [79535](#) [EUG-200S210DT](#) [ESS030W-1050-21](#) [ESS030W-0900-32](#) [BPOXL 4-12-035](#) [SLM160W-3.9-40-ZA](#) [ESS010W-0180-42](#) [ESS010W-0350-24](#) [ESS010W-0200-42](#) [PDA080B-1A0G](#) [ESS010W-0500-12](#) [PDA150B-S1A5G](#) [ZPS-20](#) [SLM140W-1.05-130-ZA](#) [ESS040W-1400-27](#) [ESS015W-0700-18](#) [ESS010E-0250-42](#) [EVM120W-2700-42-ECN2](#) [EDC-100S105SV-0007](#) [79278](#) [EUD-150S350DVA](#) [LWA320-C420-ARK-B](#) [50304](#) [HVG-320-36AB](#) [HVG-320-54AB](#) [OT FIT 50/220-240/300 D L](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 65/220-240/350 D CS L](#) [ELEMENT 30/220-240/700 S](#) [LC 75W 100-400MA 1-10V LP EXC](#) [LCA 35W 150-700MA ONE4ALL LP PRE](#) [LCA 50W 100-400MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA ONE4ALL LP PRE](#) [LCA 50W 350-1050MA 2XCH LP PRE](#) [LCI 150/325-1050/300 O4A SL PRE](#) [LCA 75W 100-400MA ONE4ALL LP PRE](#) [LCA 45W 500-1400MA ONE4ALL SC PRE](#) [LC 50W 100-400MA FLEXC LP EXC](#) [LCA 75W 350-1050MA ONE4ALL LP PRE](#) [LC 50W 350-1050MA FLEXC LP EXC](#) [LC 75W 350-1050MA FLEXC LP EXC](#)