


## AEDR-871x

### 3-Channel High Resolution Reflective Incremental Encoder (Digital Outputs)



## Data Sheet



### Description

The AEDR-871x encoder is the smallest 3-channel optical encoder with digital outputs that employs Reflective Technology for motion control.

The encoder is designed to operate over the  $-20\text{ }^{\circ}\text{C}$  to  $85\text{ }^{\circ}\text{C}$  temperature range and so is suitable for both commercial and industrial applications.

AEDR-871x offers high resolution (318 LPI) with built-in interpolation, enabling great flexibility and versatility in resolution range.

The compact dimensions of  $3.95\text{ mm (L)} \times 3.4\text{ mm (W)} \times 0.9562\text{ mm (H)}$  coupled with the low operating  $3.3\text{ V}$  option allows it to be used in a wide range of miniature commercial applications and portable devices in which space and power consumption is a primary concern.

AEDR-871x encoder offers two-channel (AB) quadrature digital outputs and a third channel, index digital outputs. Being TTL compatible, the outputs of the AEDR-871x encoder can be interfaced directly with most of the signal processing circuitries. Therefore, the encoder provides great design-in flexibility and easy integration into existing systems.

### Features



- World's smallest 3-channel reflective technology encoder
- Digital Output option - 3 channels TTL compatible; 2 channel quadrature (AB) digital outputs for direction sensing and a third channel, Index digital output. Built-in interpolator for  $4\times$ ,  $8\times$  and  $16\times$  interpolation.
- Surface mount leadless package  $3.95\text{ mm (L)} \times 3.4\text{ mm (W)} \times 0.9562\text{ mm (H)}$
- Operating voltage of  $3.3\text{ V}$  or  $5\text{ V}$  supply
- Built-in LED current regulation, removing need for external biasing resistor
- $-20\text{ }^{\circ}\text{C}$  to  $85\text{ }^{\circ}\text{C}$  absolute operating temperature
- Encoding resolution: 318 (lines/inch, LPI)

### Applications

Ideal for high volume applications:

- Miniature motors
- Printers and copiers
- Card readers
- Miniature camera module
- Portable measurement devices
- Healthcare, lab diagnostic equipment and portable devices
- Optometric equipment
- Consumer and industrial product applications

## Output Waveform

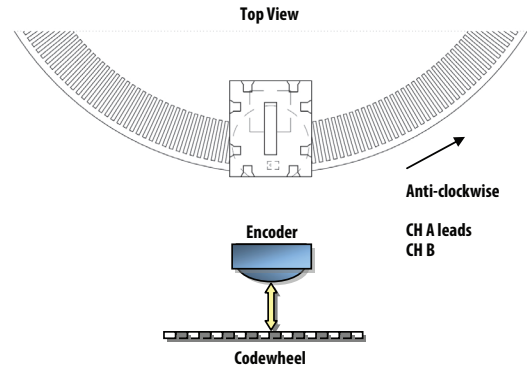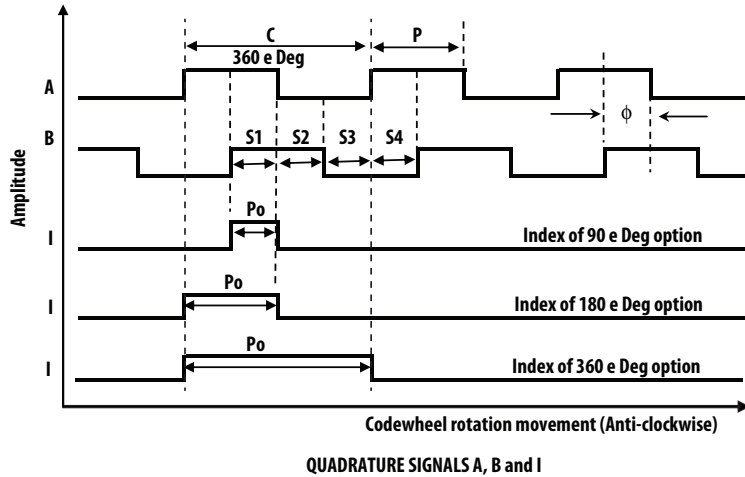

Note: Drawing not to scale

## Test Parameter Definitions

Parameter	Symbol	Description
Count	N	The number of bar and window pairs, or counts per revolution (CPR), of the codewheel.
One Cycle	C	360 electrical degrees ( $^{\circ}$ e), 1 bar and window pair.
One Shaft Rotation		360 mechanical degrees, N cycles.
Cycle Error	$\Delta C$	An indication of cycle uniformity. The difference between an observed shaft angle that gives rise to one electrical cycle, and the nominal angular increment of $1/N$ of a revolution.
Pulse Width (Duty)	P	The number of electrical degrees that an output is high during 1 cycle. This value is nominally $180^{\circ}$ e or $1/2$ cycle.
Pulse Width (Duty) Error	$\Delta P$	The deviation, in electrical degrees, of the pulse width from its ideal value of $180^{\circ}$ e.
State	S	The number of electrical degrees between a transition in the output of channel A and the neighboring transition in the output of channel B. There are 4 states per cycle, each nominally $90^{\circ}$ e.
State Error	$\Delta S$	The deviation, in electrical degrees, of each state width from its ideal value of $90^{\circ}$ e.
Phase	$\phi$	The number of electrical degrees between the center of the high state of channel A and the center of the high state of channel B. This value is nominally $90^{\circ}$ e for quadrature output.
Phase Error	$\Delta \phi$	The deviation of the phase from its ideal value of $90^{\circ}$ e.
Optical Radius	$R_{OP}$	The distance from the codewheel's center of rotation to the optical center (O.C.) of the encoder module.
Index Pulse Width	$P_O$	The number of electrical degrees that an index is high during one full shaft rotation.

## Absolute Maximum Ratings

Parameter	Value
Storage Temperature, $T_S$	-20 °C to 85 °C
Operating Temperature, $T_A$	-20 °C to 85 °C
Supply Voltage, $V_{CC}$	7 V

Notes:

1. Exposure to extreme light intensity (such as from flashbulbs or spotlights) may cause permanent damage to the device.
2. CAUTION: To avoid damage or degradation induced by ESD, take normal static precautions when handling the encoder.
3. Proper operation of the encoder cannot be guaranteed if the maximum ratings are exceeded.

## Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Units	Notes
Operating Temperature	$T_A$	-20	25	85	°C	
Supply Voltage	$V_{CC}$	3.0 4.5	3.3 5	3.6 5.5	V	Ripple < 100 mV <sub>p-p</sub>
Current	$I_{CC}$	-	27	60	mA	
Output Frequency	F	-	-	240	kHz	4× Interpolation
	F	-	-	480	kHz	8× Interpolation
	F	-	-	960	kHz	16× Interpolation
Radial Misalignment	$E_R$	-	-	± 0.2	mm	
Tangential Misalignment	$E_T$	-	-	± 0.2	mm	
Codewheel Gap	G	0.5	0.75	1.0	mm	


## Recommended Codewheel Characteristics

Parameter	Symbol	Min.	Max.	Unit	Notes
Window/Bar Ratio	$W_W/W_B$	0.9	1.1		
Window/Bar Length	$L_W$	1.80 (0.071)	-	mm (inches)	
Specular Reflectance	Rf	60	-		Reflective area <sup>[1]</sup>
		-	10		Non-reflective area
Line Density	LPmm	12.52		lines/mm	
	LPI	318		lines/inch	

Notes:

1. Measurements from TMA  $\mu$ Scan meter
2.  $LPmm = CPR/[2\pi \cdot R_{op}(mm)]$

## Encoder Pinouts

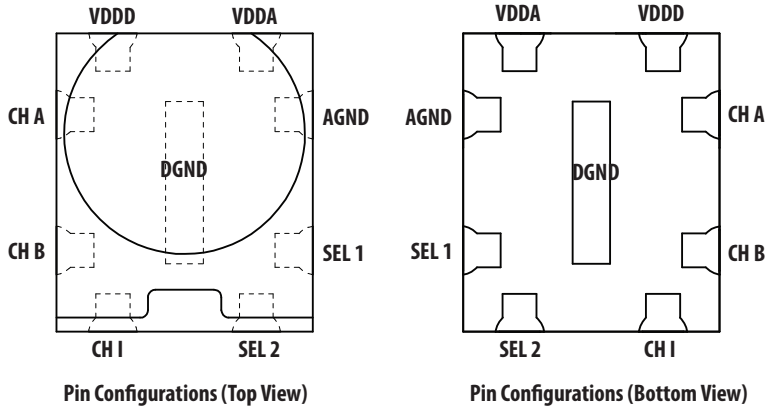

## Digital Option - Encoder's Built-in Interpolation

Pin (Interpolation)		Interpolation Factor	Max. output frequency	Example of CPR @ R <sub>OP</sub> = 11 mm	H = HIGH Logic Level L = LOW Logic Level
SEL 1	SEL 2				
H	H	4×	240 kHz	3460	
L	L	8×	480 kHz	6920	
H	L	16×	960 kHz	13840	

This interpolation factor may be used in conjunction with the following formula to cater to the need for various rotation speeds (RPM) and counts.

$$\text{RPM} = (\text{Count Frequency} \times 60) / \text{CPR}$$


The CPR (@1× interpolation) is based on the following formula, which is directly dependent on R<sub>OP</sub>:

$$\text{CPR} = \text{LPI} \times 2\pi \times \text{R}_{\text{OP}} \text{ (inch)} \text{ or } \text{CPR} = \text{LPmm} \times 2\pi \times \text{R}_{\text{OP}} \text{ (mm)}$$

Note: LPmm (lines per mm) = LPI/25.4

## Recommended Setup For the Power Supply Pins

Connect both V<sub>DDD</sub>, V<sub>DDA</sub> and their corresponding grounds (AGND and DGND) appropriately as follows. It is recommended that you use 22 μF and 0.1 μF for bypass capacitor on V<sub>DDD</sub> and V<sub>DDA</sub> and place them in parallel as close as possible to the power and the ground pins.

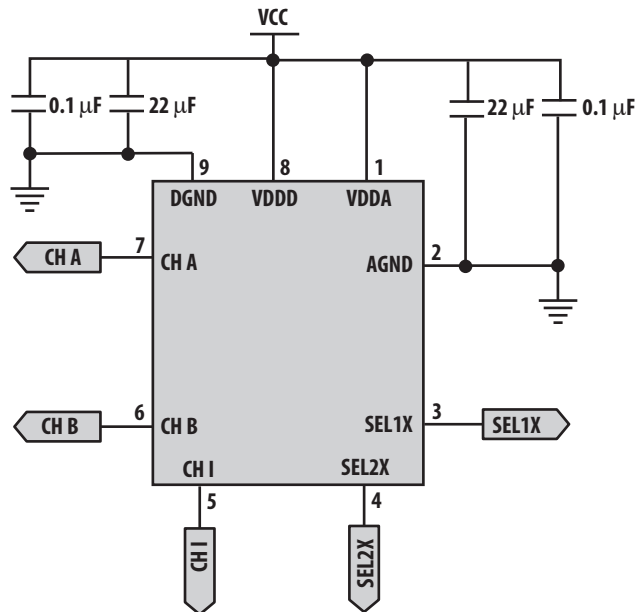

Notes:

1. DGND (Pin 9) is the center pad of the package.
2. For SEL1X and SEL2X configuration, see the Digital Option - Encoder's Built-in Interpolation table.

## Encoding Characteristics (Code wheel of R<sub>0p</sub> @ 11 mm)

Parameter	Symbol	Dynamic Performance			Unit
		Typical			
<b>Interpolation Factor</b>		<b>4×</b>	<b>8×</b>	<b>16×</b>	
Cycle Error	$\Delta C$	±17	±28	±35	°e
Pulse Width (Duty) Error	$\Delta P$	±14	±18	±22	°e
Phase Error	$\Delta \emptyset$	±5	±8	±9	°e
State Error	$\Delta S$	±8	±10	±13	°e
Index Pulse Width (Gated 90°)	P <sub>o</sub>	90	90	90	°e
Index Pulse Width (Gated 180°)	P <sub>o</sub>	180	180	180	°e
Index Pulse Width (Gated 360°)	P <sub>o</sub>	360	360	360	°e

Notes:

1. Typical values represent the average values of encoder performance in our factory-based setup conditions.
2. The optimal performance of encoder depends on the motor/system setup condition of the individual customer.


## Electrical Characteristics

Characteristics over recommended operating conditions at 25 °C.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
High Level Output Voltage	V <sub>OH</sub>	2.4	-	-	V	I <sub>OH</sub> = -4mA
Low Level Output Voltage	V <sub>OL</sub>	-	-	0.4	V	I <sub>OH</sub> = +4mA
Output current per channel, I <sub>out</sub>	I <sub>o</sub>	-	-	4	mA	
Rise Time	t <sub>r</sub>	-	< 100	-	ns	C <sub>L</sub> ≤ 50 pF
Fall Time	t <sub>f</sub>	-	< 100	-	ns	


## Codewheel Design Guideline

The index bar (I-) track is opaque and the width is  $3 \times W_B^\circ$ . The Index (I) track is reflective and the width is  $3 \times W_W^\circ$ . The dimension  $L_W$  should be at least 1.8 mm. (Note: If  $L_W$  shorter than 1.8 mm is required, please consult factory) There are 6 pairs of incremental track (1 pair=  $1 W_B^\circ$  and  $1 W_W^\circ$ ) between opaque and reflective index tracks.

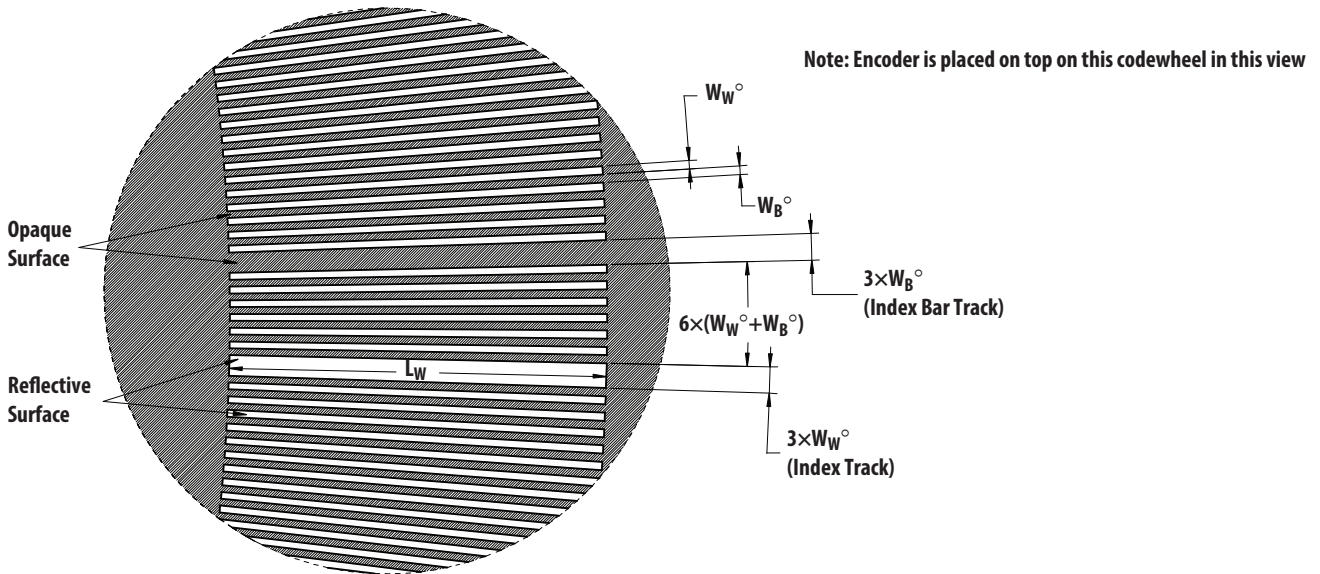


Codewheel design example

The following demonstrates a codewheel design for  $R_{op}$  of 11 mm @ 865 CPR for a 2-channel and a 3-channel encoder.

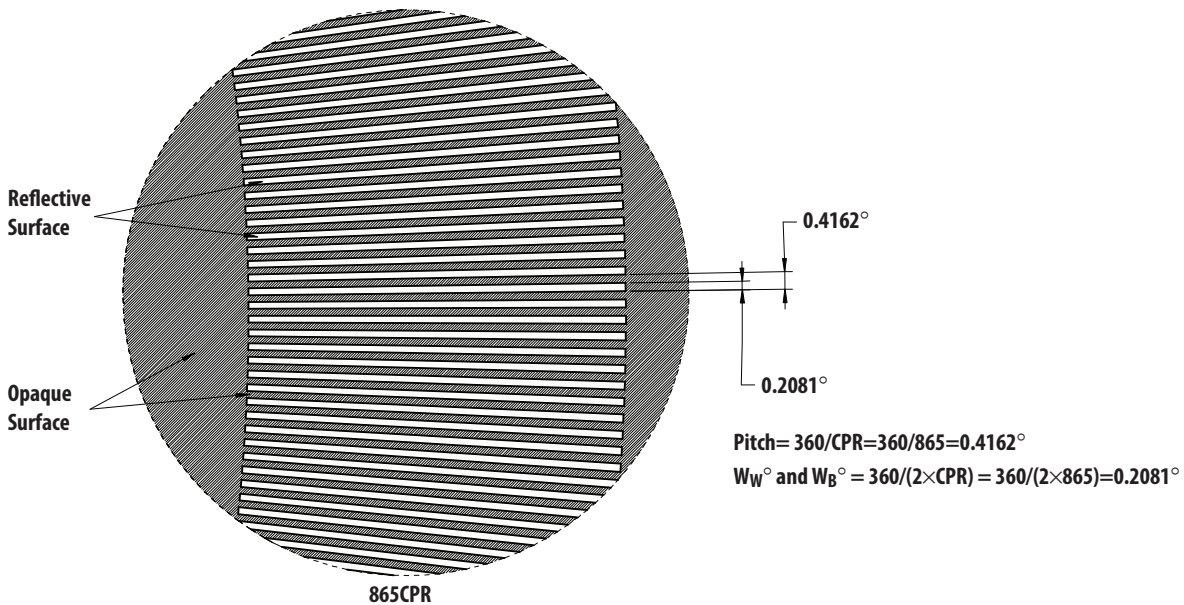


Codewheel pattern for a 2-channel encoder

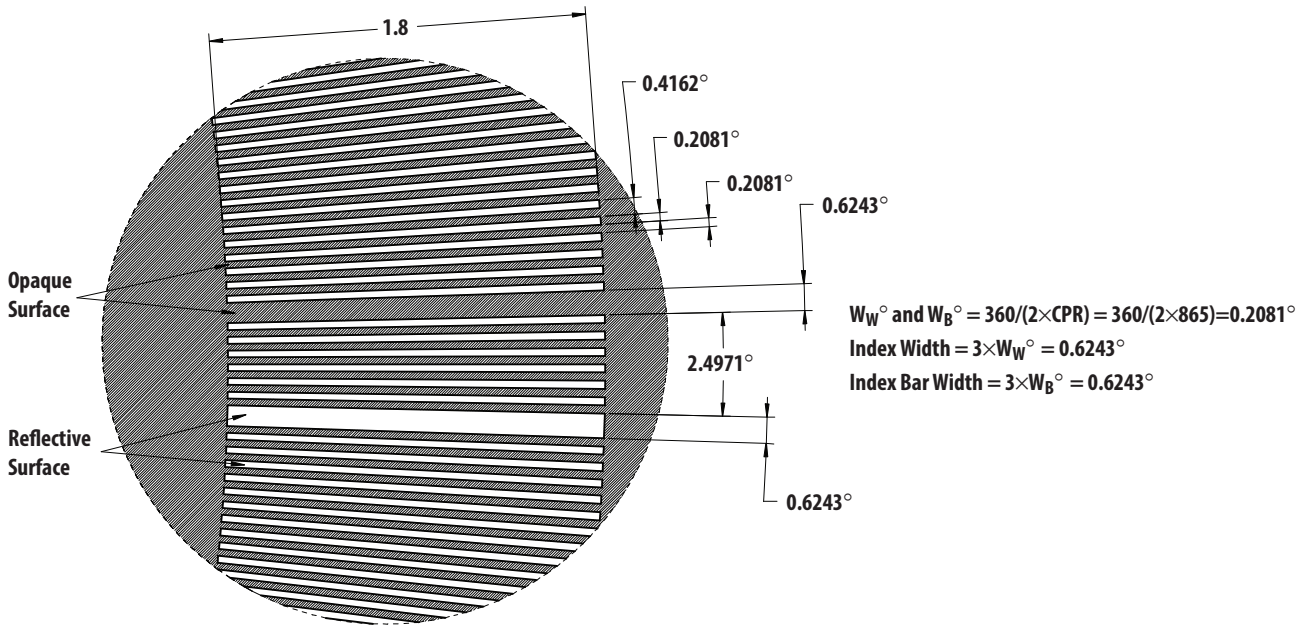


**Codewheel pattern for a 3-channel encoder**

Note: The overall physical track count is reduced but not the counts per revolution (CPR). The CPR *remains the same* because the count during this index transition is generated by an intelligent signal processing circuit.

**Package Outline Drawing**


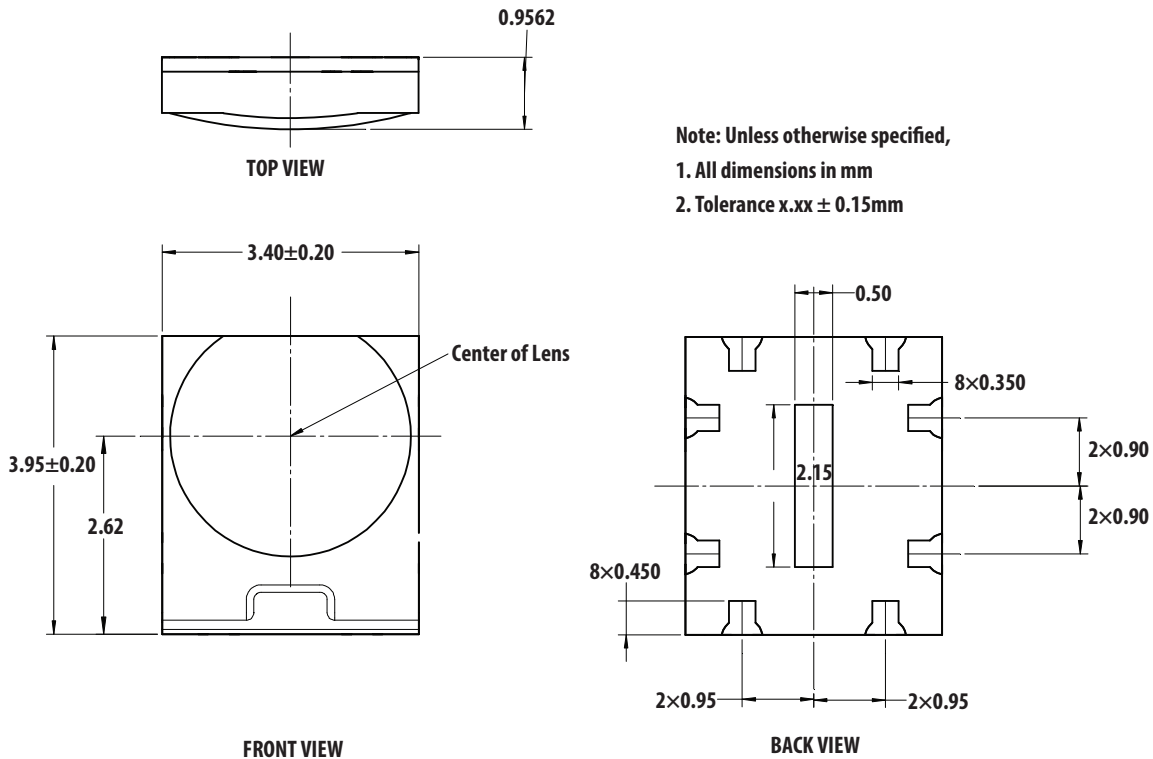


## Recommended Land Pattern

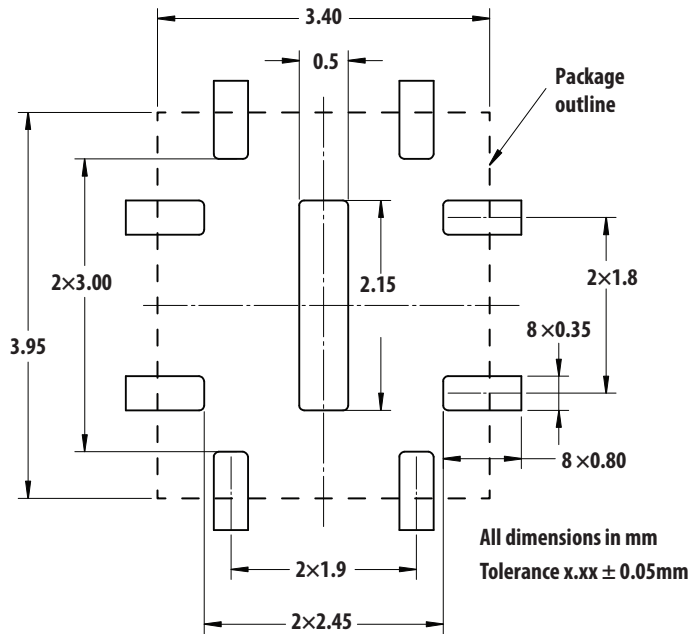

## Encoder Placement Orientation and Positioning

The AEDR-871x is designed such that both the emitter and the detector ICs are placed parallel to the window/bar orientation, *with the encoder mounted on top of the codewheel* (see below right). When properly oriented, the detector side will be closer to the center of codewheel than the emitter. More importantly, *the center of the lens* of the encoder unit must be aligned with the codewheel ( $R_{OP}$ ), or more specifically tangential to the center point of  $L_W$  (1/2 of the length of window).

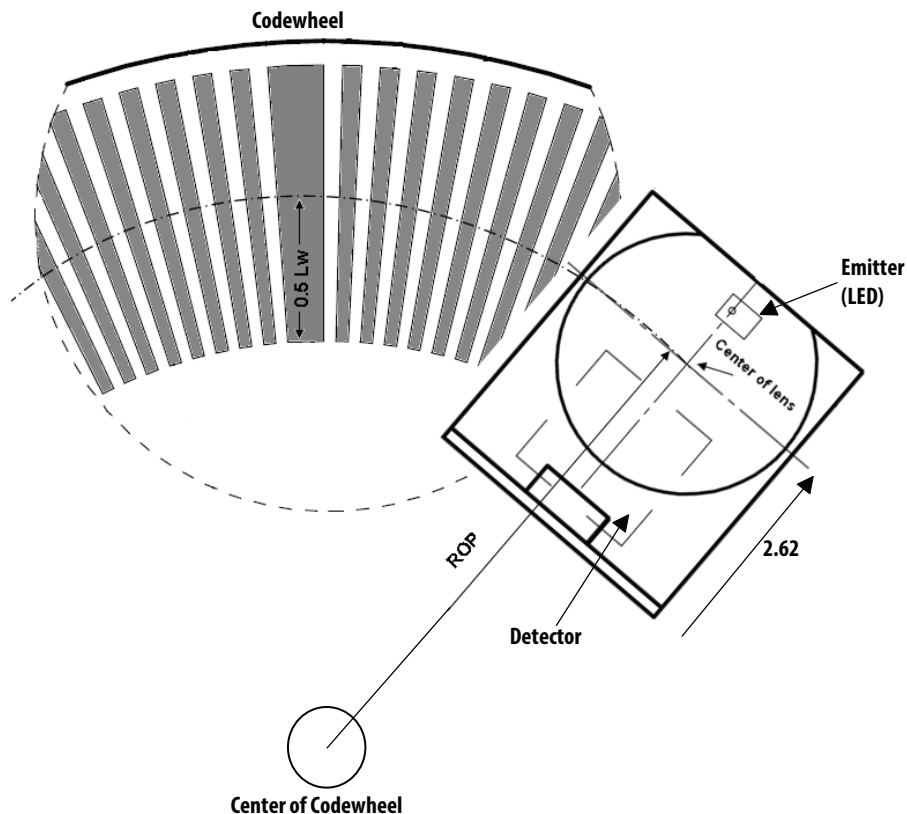


Center of the lens should be aligned with the  $R_{OP}$  of the codewheel



## Direction of Movement

With the detector side of the encoder placed closer to the codewheel (see picture on the previous page), Channel A leads Channel B when the codewheel rotates anti-clockwise and vice versa (*with the encoder mounted on top of the code-wheel*). The optimal gap setting recommended is between 0.5 to 1.0 mm (see the side view below).

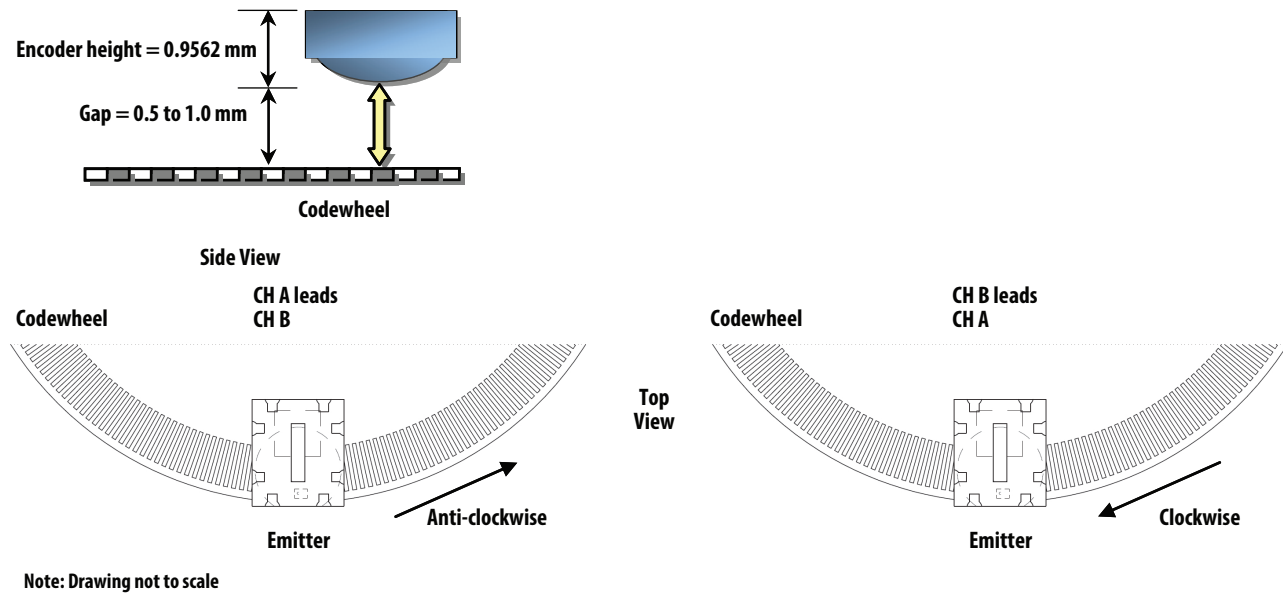

## Moisture Sensitivity Level

The AEDR-871x is specified to Moisture Sensitive Level (MSL) 3. Precaution is required to handle this moisture-sensitive-product to ensure the reliability of the product.

### Storage before use

- An unopened Moisture Barrier Bag (MBB) can be stored at  $< 40\text{ }^{\circ}\text{C}/90\% \text{ RH}$  for 12 months.
- It is not recommended that the MBB is opened before assembly.

### Control after the MBB is opened

- Encoder that will be subjected to reflow solder must be mounted within 168 hours of factory condition  $<30\text{ }^{\circ}\text{C}/60\% \text{ RH}$


### Control for unfinished reel

- Stored and sealed MBB with desiccant or desiccators at  $< 5\% \text{ RH}$ .

### Baking is required if:

- Humidity Indicator Card (HIC) is  $> 10\%$  when read at  $23 \pm 5\text{ }^{\circ}\text{C}$
- The encoder floor life exceeded 168 hours.
- Recommended baking condition:  $60 \pm 5\text{ }^{\circ}\text{C}$  for 20 hours (tape and reel),  $125 \pm 5\text{ }^{\circ}\text{C}$  for 5 hours (loose unit)


## Recommended Lead-free Reflow Soldering Temperature Profile

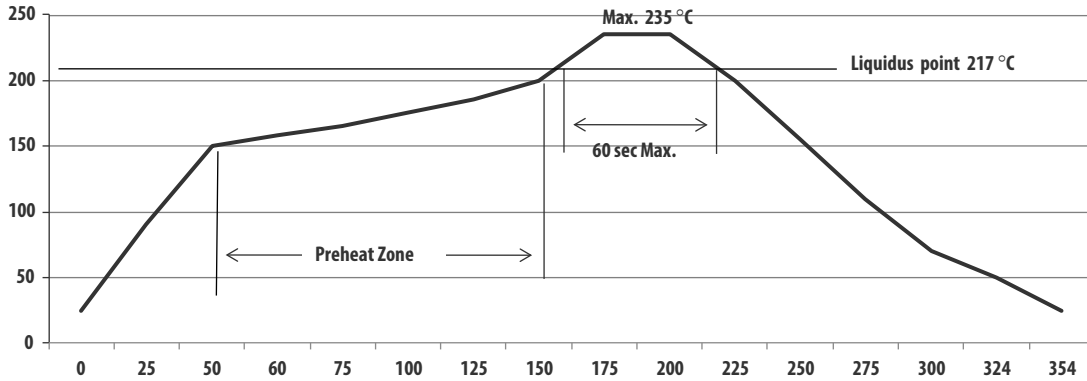


Average ramp up rate	= 3 °C/sec
Average ramp down rate	= 6 °C/sec
Preheat temperature	= 150 °C to 200 °C
Preheat time	= 60 to 100 sec
Time maintain above 217 °C	= 40 to 60 sec
Peak Temperature	= 235 °C
Time within 5 °C of peak temperature	= 20 to 30 sec

**Notes:**

1. Reflow with peak temperature > 235 °C may damage the component.
2. Due to treatment of high temperature, this clear compound may turn yellow after IR reflow.
3. Profile shown here is the actual readings from the thermocouple (attached to AEDR-871x as shown to the right) on the reflow board PCB.

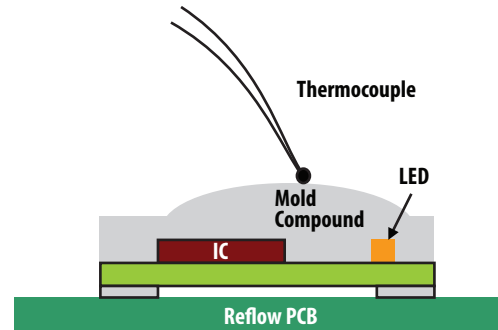


## Tape and Reel Information

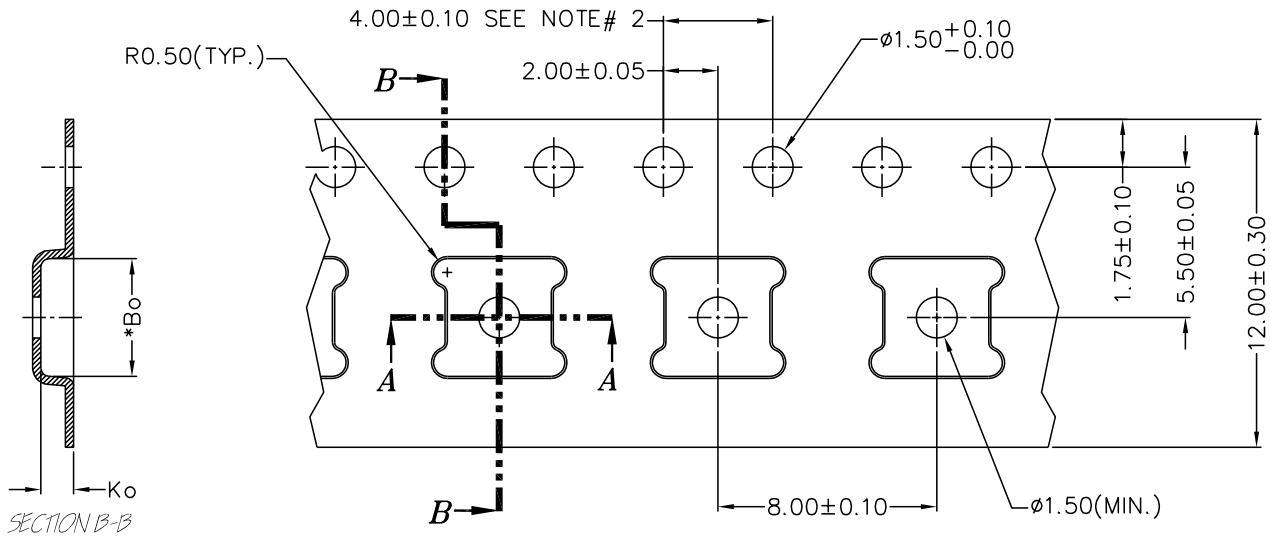


**NOTES: -**

1. \* Ao & Bo measured at 0.3mm above base of pocket.
2. 10 pitches cumulative tol. ±0.2mm.
3. ( ) Reference dimensions only.



Ao:	3.80
Bo:	4.30
Ko:	1.20
Pitch:	8.00
Width:	12.00

## Order Information

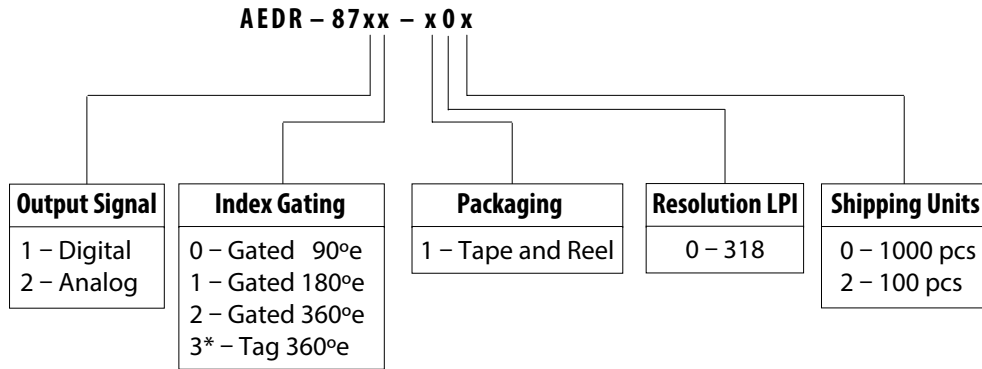

### Notes:

**Digital 3.3 V and 5 V operating mode**

**Analog: 5 V operating mode only**

**Index Gating: 3\* applicable only for analog output**

**DISCLAIMER:** Avago's products and software are not specifically designed, manufactured or authorized for sale as parts, components or assemblies for the planning, construction, maintenance or direct operation of a nuclear facility or for use in medical devices or applications. Customer is solely responsible, and waives all rights to make claims against Avago or its suppliers, for all loss, damage, expense or liability in connection with such use.

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries.

Data subject to change. Copyright © 2005-2014 Avago Technologies. All rights reserved.

AV02-4517EN - June 6, 2014

**AVAGO**  
TECHNOLOGIES

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Optical Switches, Reflective, Photo IC Output](#) category:*

*Click to view products by [Broadcom](#) manufacturer:*

Other Similar products are found below :

[GP2A230LRSF](#) [GP2A240LCS0F](#) [EE-SPY801](#) [EE-SPY802](#) [AEDR-8100-1P2](#) [AEDR-8710-102](#) [AEDR-8711-102](#) [AEDR-8712-102](#) [AEDR-83001K2](#) [AEDR-8300-1Q2](#) [ECS-22RP1R-1000](#) [ECS-22RP2R-1010](#) [ECS-22RP3R-1000](#) [ECS-22RP1Y-1000](#) [ECS-22RP2Y-1010](#) [ECS-22RP3Y-1000](#) [ECS-22RP1G-1000](#) [ECS-22RP2G-1010](#) [ECS-22RP3G-1000](#) [ECS-22RP1G-1020-L24G](#) [ECS-22RP2R-1030-L24R](#) [ECS-22RL1G-0020-L24G](#) [ECS-22RL1R-0020-L24R](#) [ML6-H4KA2VA](#) [K6-8859D-04](#) [C3012A-TW-R-V](#) [C3012-TW-B-V](#) [ML6-H4K12PGVA](#) [ECS-22RP2G-1030-L24G](#) [ECC128973EU](#) [ECC128974EU](#) [ECC128975EU](#) [K6-1212A-04](#) [K6-6133D-L1-02](#) [K6-6136D-L1-04](#) [K6-6140D-03](#) [K6-6270S-02](#) [K6-6271D-02](#) [K6-6272S-02](#) [ML6-H4K12GVA](#) [EE-SPY415](#) [EE-SY310](#) [EE-SY410](#) [EE-SY413](#) [GP2A200LCSCF](#) [GP2A25J0000F](#) [TLLAG-72APG-R1KH1-V-A](#) [TLLAG-72BB-R1KH2-V-A](#) [TLLAG-72BG-R1KH1-V-A](#) [TLLAG-72BPG-R1SH1-V-A](#)