


### FEATURES

- 40V complementary device
- High  $h_{FE}$
- Mounting cost and area can be cut in half




### MARKING

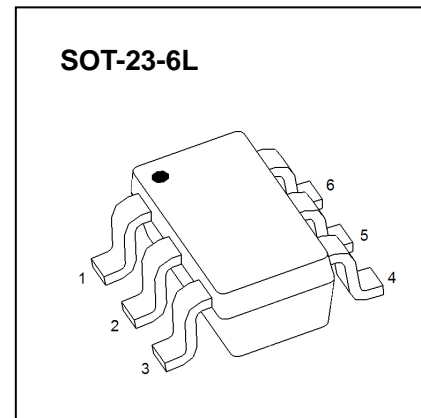

PIN1

### EQUIVALENT CIRCUIT



### Tr1 NPN and Tr2 PNP Absolute Maximum Ratings ( $T_a=25^\circ\text{C}$ )

Symbol	Parameter	Value		Unit
		NPN	PNP	
$V_{CB0}$	Collector-Base Voltage	40	-40	V
$V_{CEX}$	Collector-Emitter Voltage	40	-40	V
$V_{CE0}$	Collector-Emitter Voltage	30	-30	V
$V_{EB0}$	Emitter-Base Voltage	7	-7	V
$I_C$	Collector Current- Continuous	1.5	-1.5	A
$I_{CM}$	Collector Current- Peak	5	-5	A
$P_C$	Collector Power Dissipation	350	350	mW
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	357	357	$^\circ\text{C}/\text{W}$
$T_J$	Junction Temperature	150		$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-55~+150		$^\circ\text{C}$

### ELECTRICAL CHARACTERISTICS

Tr1 NPN ( $T_a=25^\circ\text{C}$  unless otherwise specified)









Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu\text{A}$ , $I_E=0$	40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C=10\text{mA}$ , $I_B=0$	30			V
Collector-emitter breakdown voltage	$V_{(BR)CEX}$	$I_C=1\mu\text{A}$ , $V_{BE(off)}=-0.5\text{V}$	40			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu\text{A}$ , $I_C=0$	7			V
Collector cut-off current	$I_{CBO}$	$V_{CB}=32\text{V}$ , $I_E=0$			20	nA
Collector cut-off current	$I_{CER}$	$V_{CE}=16\text{V}$ , $R_s\leq 1\text{k}\Omega$			20	nA
Emitter cut-off current	$I_{EBO}$	$V_{EB}=6\text{V}$ , $I_C=0$			20	nA
DC current gain	$h_{FE}^*$	$V_{CE}=2\text{V}$ , $I_C=100\text{mA}$	180		500	
Collector-emitter saturation voltage	$V_{CE(sat)}^*$	$I_C=750\text{mA}$ , $I_B=15\text{mA}$			0.375	V
Base-emitter saturation voltage	$V_{BE(sat)}^*$				1.2	V

Tr2 PNP ( $T_a=25^\circ\text{C}$  unless otherwise specified)









Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-100\mu\text{A}$ , $I_E=0$	-40			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C=-10\text{mA}$ , $I_B=0$	-30			V
Collector-emitter breakdown voltage	$V_{(BR)CEX}$	$I_C=-1\mu\text{A}$ , $V_{BE(off)}=0.5\text{V}$	-40			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-100\mu\text{A}$ , $I_C=0$	-7			V
Collector cut-off current	$I_{CBO}$	$V_{CB}=-32\text{V}$ , $I_E=0$			-20	nA
Collector cut-off current	$I_{CER}$	$V_{CE}=-16\text{V}$ , $R_s\leq 1\text{k}\Omega$			-20	nA
Emitter cut-off current	$I_{EBO}$	$V_{EB}=-6\text{V}$ , $I_C=0$			-20	nA
DC current gain	$h_{FE}^*$	$V_{CE}=-2\text{V}$ , $I_C=-100\text{mA}$	180		500	
Collector-emitter saturation voltage	$V_{CE(sat)}^*$	$I_C=-750\text{mA}$ , $I_B=-15\text{mA}$			-0.375	V
Base-emitter saturation voltage	$V_{BE(sat)}^*$				-1.2	V

\*Pulse Test : Pulse Width $\leq 300\mu\text{s}$ , Duty Cycles $\leq 2\%$ .


# Typical Characteristics

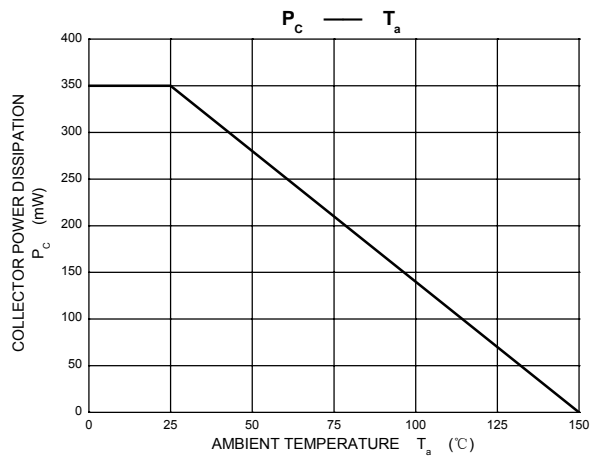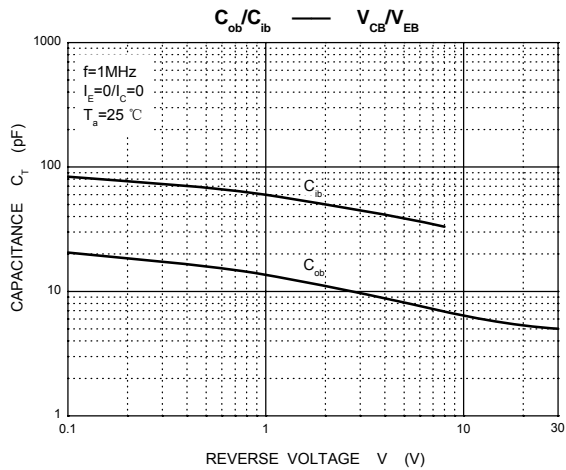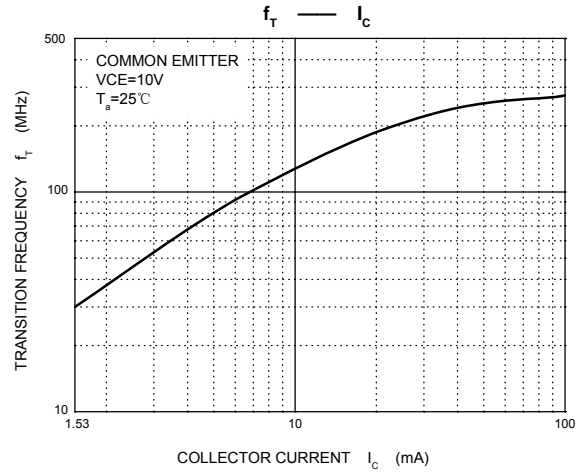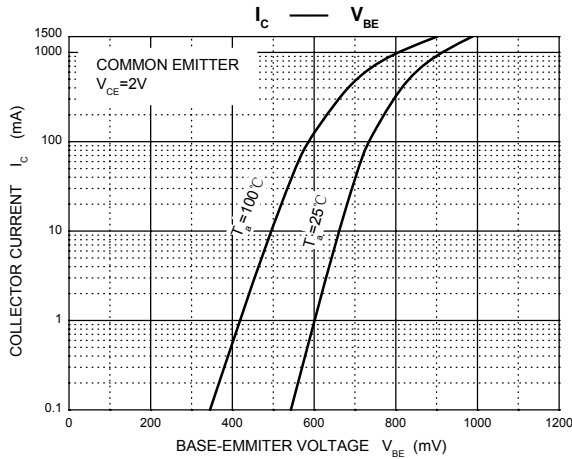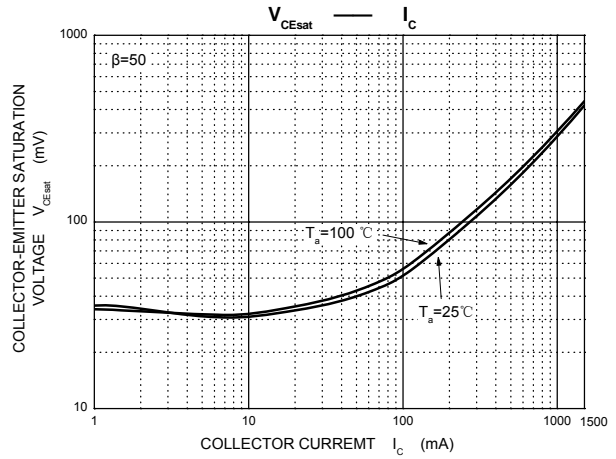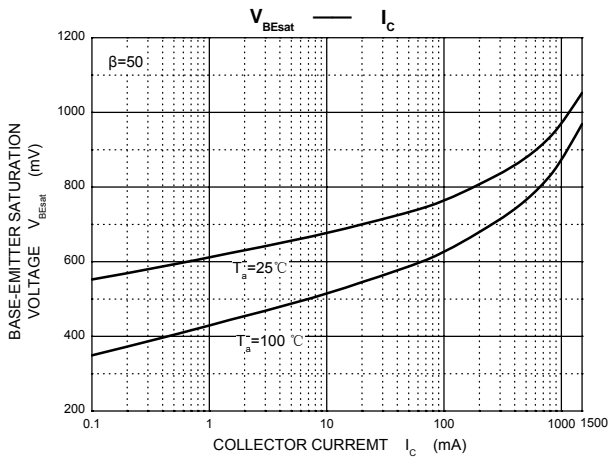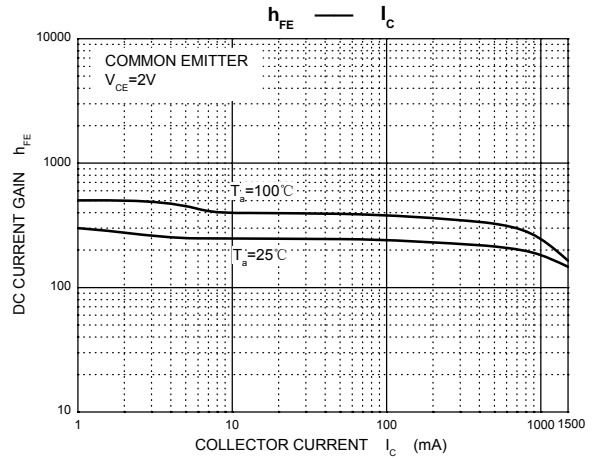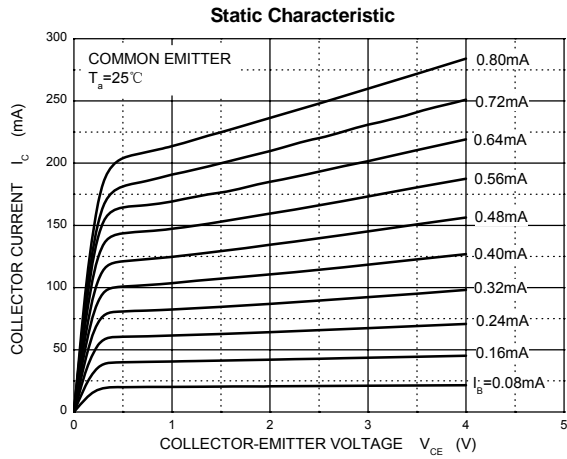

# Typical Characteristics

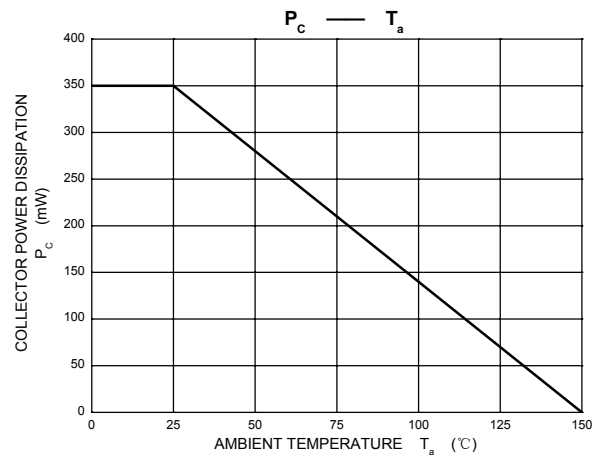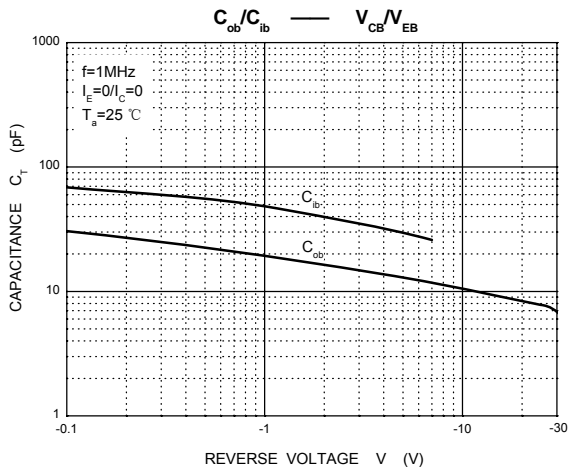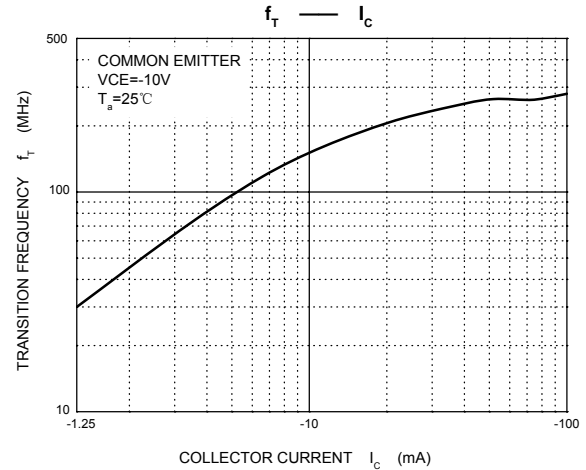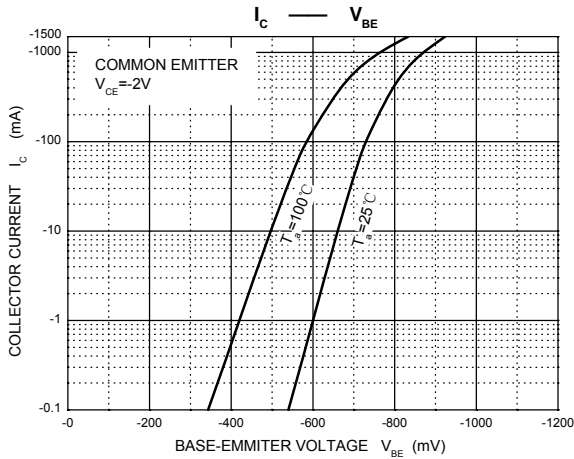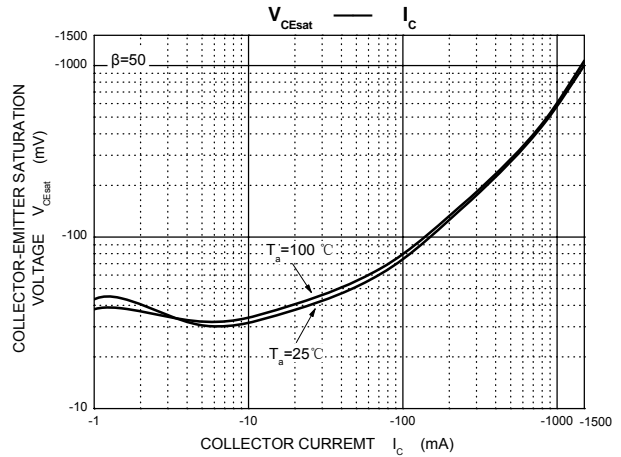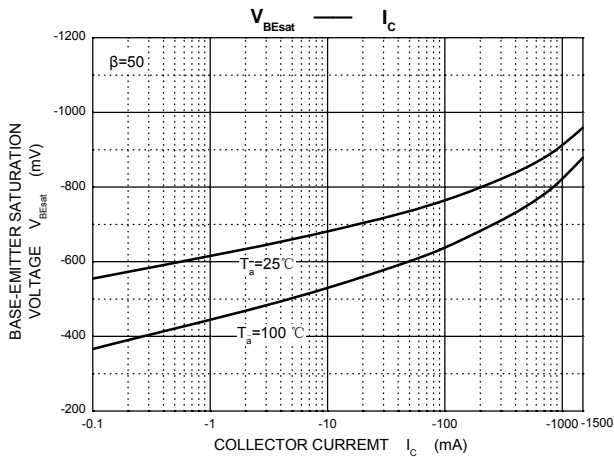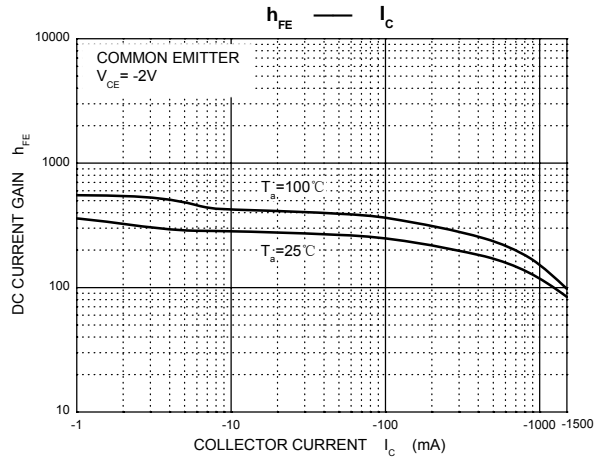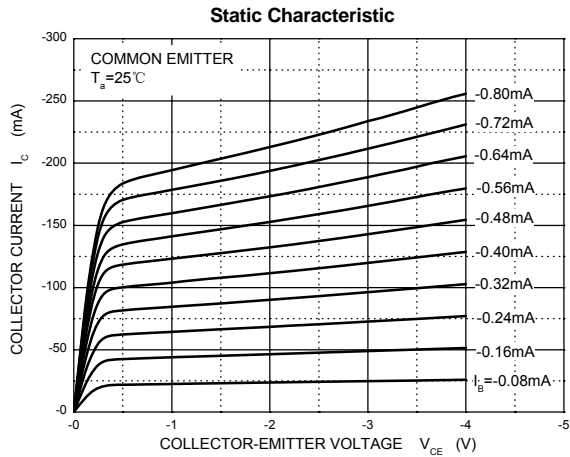


### SOT-23-6L Package Outline Dimensions

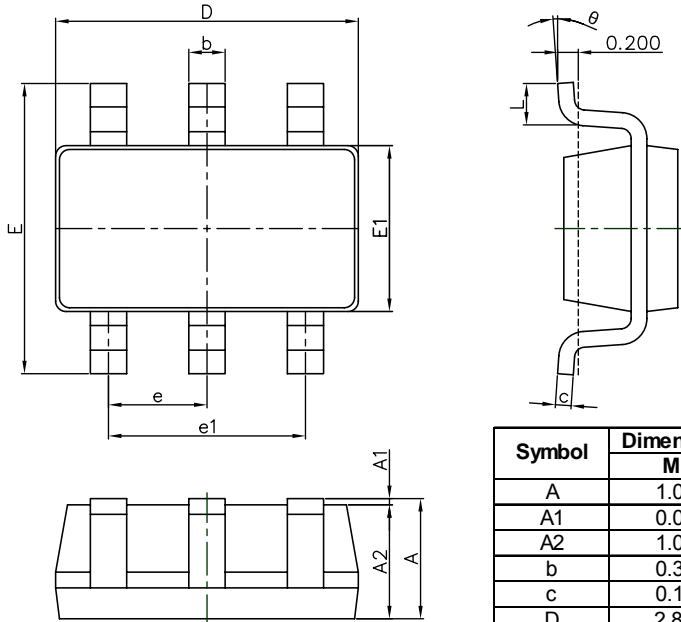

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

### SOT-23-6L Suggested Pad Layout

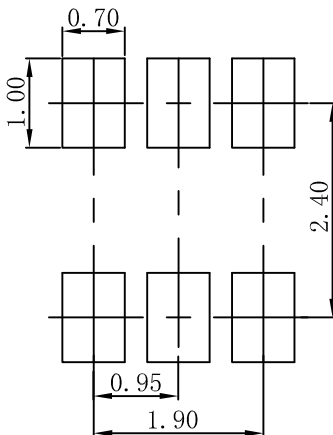

Note:  
 1. Controlling dimension: in millimeters.  
 2. General tolerance: ± 0.05mm.  
 3. The pad layout is for reference purposes only.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Bipolar Transistors - BJT category](#):*

*Click to view products by [AnBon manufacturer](#):*

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T](#)  
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)  
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-](#)  
[TL-H](#) [2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)  
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)  
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)