
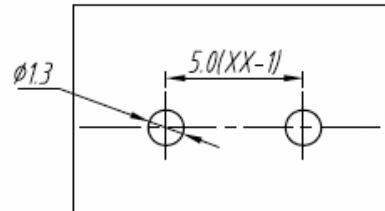


SECTION A-A

P.C.B.LAYOUT

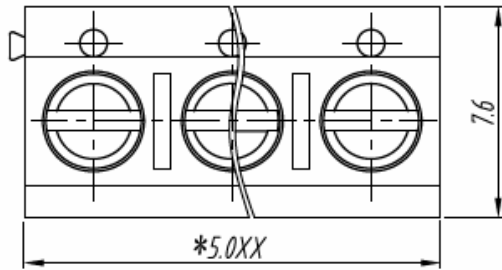

## Electrical

Standard	UL	IEC
Rated voltage	250V	250V
Rated current	16A	24A
Contact resistance	20mΩ	
Insulation resistance	5000MΩ/DC1000V	
Wire range	22-14 AWG 2.5mm <sup>2</sup>	
Withstanding voltage	AC 2000V/1 Min	

## Mechanical

Temp. Range	-30°C ~ +120°C
MAX Soldering	+250°C for 5 Sec
Torque	0.4Nm(3.6lb .in)
Strip length	4.5-5mm

## Material

Housing	PBT,UL94V-0
Screws	M2.5 steel Zinc plated
Pin housing	Brass, Tin plated
Wire guard	Phosphor bronze, Ni plated

<b>NINIGI</b>			
APPD. Helen		TOLERANCE .9 ±0.4 .40 ±0.25 ANG. ±	PART NAME 品名
DWG. abby	SCALE 参考	UNIT M M	<b>TB-5.08-P-3P/BL</b>
DATE 2011/12/07	PAGE 1 OF 1	REV. A 4 B	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Pluggable Terminal Blocks](#) category:*

*Click to view products by [Ninigi](#) manufacturer:*

Other Similar products are found below :

[57.404.7553](#) [57.504.0053.7](#) [57.510.0053](#) [57.910.6153](#) [01.112.1453](#) [CTB932VE/6](#) [MC 1.5/ 6-ST-3.5 GY AU](#) [ET02015000J0G](#) [734-104](#) [734-302](#) [734-304](#) [8-141-P](#) [FKCT 2.5/ 3-ST KMGY](#) [860505](#) [860508](#) [860516](#) [860810](#) [861908](#) [GBPACX-12](#) [93.731.4953.0](#) [PV05-5,08-K](#) [PVP02-5,00](#) [PVP04-3,50](#) [PVS02-5,00](#) [1-1986160-3](#) [H-10](#) [1546228-5](#) [ELFH09150](#) [ELFH16150](#) [ELFP03110](#) [ELFT06250](#) [ELFT07250](#) [ELVF09400](#) [ELVP03100](#) [ELXH03100](#) [ELXH071G0E](#) [ELXP041G0](#) [ELXT046G0](#) [1700101](#) [1700410](#) [1700425](#) [1703176](#) [1705229](#) [1710175](#) [1714537](#) [1717806](#) [1719600](#) [1729386](#) [1734692](#) [1734795](#)