



PSB-1000 Series

Programmable Multi-Range D.C. Power Supply

FEATURES

- LCD Display and User-Friendly Menu-Typed Functional Interface
- Voltage Rating : 40V/160V, Output Power Rating : 400W/800W
- Constant Power Output for Multi-Range(V & I)Operation
- The I/V Control Functions(Adjustable Slew Rate) are Suitable for Diode Characteristic Load & Surge Reducing; C.V/C.C Priority; Sequence Function for Sequential D.C Waveform Output
- Auto Run for Output or Sequence Function
- Master-Slave Operation : 2 Units in Series/4 Units in Parallel
- Synchronized Operation(Voltage Trigger, Trigger In/Trigger Out Signal)
- Standard Interface : USB Host, LAN; Option : GPIB
- Internal Sense Control(Disable/Front Panel/Rear Panel)Function
- LabVIEW Driver

GWINSTEK
Simply Reliable

PSB-1000 is a series of Multi-Range DC Power Supply, whose maximum voltage output of 320V can be realized by placing 2 sets of 160V units in series connection. By connecting 4 sets of PSB-1800L units in parallel, the maximum current output of 320A can be achieved. The PSB-1000 series is a bench-top power supply featuring user friendly interface, which can clearly display setting conditions and measurement results via LCD display and menu-typed functionality selection without referring to the user manual. All settings can be done by functionality keys, numerical keys, and speed dial keys. The 30A output capability from the front output terminal of the PSB-1000 series can better meet the requirements of laboratories and scientific R&D departments.

The PSB-1000 series features user friendly menu-typed functionality interface and its built-in functionalities can better meet industry's application requirements. Both front panel and rear panel output terminals of the PSB-1000 series facilitate researchers to access power output conveniently. The display panel adopts menu-typed functionality selection to help users quickly familiarize with settings and operation that is extremely suitable for on-site engineers and R&D engineers who deal with complicated functional setting requirements.


Power On Configuration allows users to select previously set SEQ to carry out automatic execution as soon as power is turned on. For production lines demanding sequential power supply output application requirements, tremendous time can be saved by this function, which exempts users from resetting sequential power supply when power is turned on every single time.

Voltage Trigger allows users to set pulse signals for leading edge threshold and trailing edge threshold. VOLT TRIG can be applied to Automatic test system by providing output time for working voltage via BNC adapter. The Output Delay function facilitates users to respectively set action time for power output on and power output off for multiple sets of PSB-1000 so as to realize sequential power output applications.

The PSB-1000 series is equipped with multi range power output capability providing fourfold rated power output to meet customers' flexible application requirements. The models and operating area of the entire series are as the following chart :

Model Name	Output Voltage	Output Current	Output Power
PSB-1400L	40V	40A	400W
PSB-1400M	160V	10A	400W
PSB-1800L	40V	80A	800W
PSB-1800M	160V	20A	800W

Operating Area: PSB-1000 Series Output Operating Area

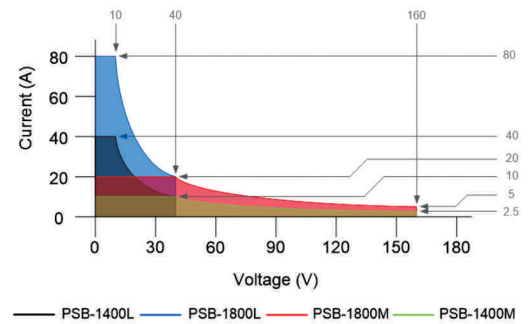

PANEL INTRODUCTION

CE GPIB USB LabVIEW Driver Analog Control LAN Front/Rear Output

1. Power Switch
2. LCD Display
3. Function Keys
4. Front Panel Output Terminals
5. Scroll Wheels
6. Output Key
7. Line Input
8. Rear Panel Output Terminals
9. USB
10. Analog Control Interface
11. GPIB Interface (Optional)
12. LAN
13. TRIG IN
14. TRIG OUT
15. VOLT TRIG


A. Parallel/Series Operation

Parallel Connection	1 UNIT	2 UNITS	3 UNITS	4 UNITS
PSB-1400L	40V/40A	40V/80A	40V/120A	40V/160A
PSB-1400M	160V/10A	160V/20A	160V/30A	160V/40A
PSB-1800L	40V/80A	40V/160A	40V/240A	40V/320A
PSB-1800M	160V/20A	160V/40A	160V/60A	160V/80A

Series Connection	1 UNIT	2 UNITS
PSB-1400L	40V/40A	80V/40A
PSB-1400M	160V/10A	320V/10A
PSB-1800L	40V/80A	80V/80A
PSB-1800M	160V/20A	320V/20A

To augment output power so as to meet customers' large voltage and large current requirements, the PSB-1000 series, via placing two same model units in series connection, will be able to produce twofold rated voltage output, and through connecting four same model units in parallel, the PSB-1000 series can produce fourfold rated current output. The maximum voltage output of 320V can be achieved via placing the PSB-1000 series in series connection, and the maximum current of 320A and the maximum power of 3200W can be obtained through parallel connection.


C. OCP Control Function

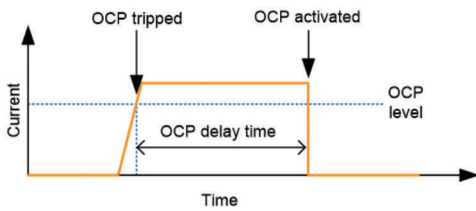

Enable OCP Control

The On/Off of the OCP protection function can be selected from the master display screen and the OCP activation time can delay 0.1~2.0 seconds. This function can protect customers' DUTs from over current to avoid unexpected operations which lead to DUT damage caused by over current.

E. Output Delay Function

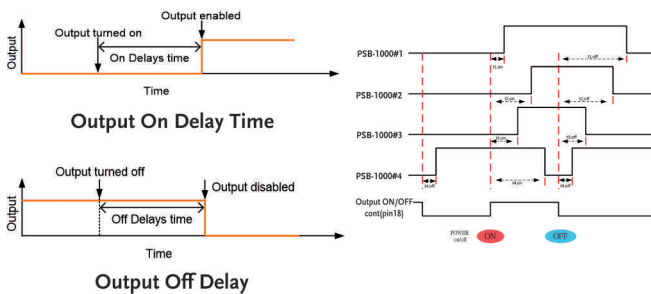

Power output and on/off facilitate flexible planning and setting with respect to time.

- * Set output on delays time to delay 0.00 ~ 100.00 seconds
- * Set output off delays time to delay 0.00 ~ 100.00 seconds

Multiple power outputs by different time sequence can be realized via synchronizing multiple PSB-1000 series.


B. Power On Configuration



Power On Configuration Setting Screen

The PSB-1000 series provides different Power On Configurations for different users. Users can also set automatic execution procedures to be carried out as soon as power is turned on. After presetting Power On Configuration, each rebooting will have a short activation display to show present settings of Power On Configuration of the PSB-1000 series. The execution will be conducted by the power on mode.

D. Voltage Trigger

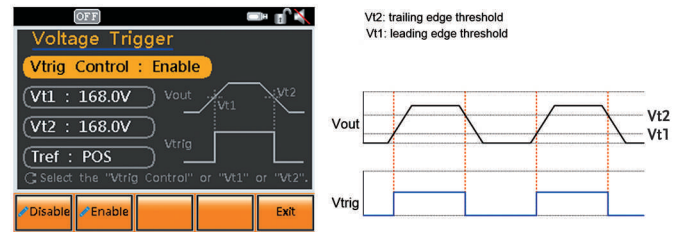

Voltage Trigger Setting

Vtrig Timing Chart

Voltage Trigger allows users to set pulse signals for leading edge threshold Vt1 and trailing edge threshold Vt2. VOLT TRIG can be applied to provide output time for working voltage via BNC adapter. Users can determine positive or negative voltage trigger signals by Tref.

F. I/V Control (Adjustable Slew Rate)



Current Mode I/V Mode Settings

Min/Max Slew Rate

Slew Rate Settings

Selected Setting

CV and CC priority can be set based upon customers' application requirements. The speed of voltage rise (V/s) or voltage fall (V/s), and the speed of current rise (A/s) or current fall (A/s) can be set respectively.

The PSB-1000 series provides customers with the following four modes to meet their requirements.

- CVHS - Voltage with maximum speed Slew Rate
- CCHS - Current with maximum speed Slew Rate
- CVLS - Users set voltage Slew Rate
- CCLS - Users set current Slew Rate

SPECIFICATIONS					
Model Name		PSB-1400L	PSB-1400M	PSB-1800L	PSB-1800M
OUTPUT RATING					
Output voltage(V)		0~40	0~160	0~40	0~160
Output current(A)		0~40	0~10	0~80	0~20
Output power(W)		400W	400W	800W	800W
REGULATION (CV)					
Load regulation (mV)		25	85	25	85
Line regulation (mV)		23	83	23	83
REGULATION (CC)					
Load regulation (mA)		45	15	85	25
Line regulation (mA)		45	15	85	25
RIPPLE & NOISE (Noise Bandwidth 20MHz ; Ripple Bandwidth = 1MHz)					
CV p-p		60	60	80	80
CV rms		7	12	11	15
CC rms		80	20	160	40
PROGRAMMING ACCURACY					
Voltage (mV)	0.1% +	10	50	10	50
Current (mA)	0.1% +	20	10	40	20
MEASUREMENT ACCURACY					
Voltage (mV)	0.1% +	10	50	10	50
Current (mA)	0.1% +	20	10	40	20
RESPONSE TIME					
Raise Time (ms)		50	100	50	100
Fall Time(Full load) (ms)		50	150	50	150
Fall Time(No load) (ms)		500	1200	500	1200
Load Transient Recover Time(ms) (Load change from 50 to 100%)		1	1	1	1
PROGRAMMING RESOLUTION (By PC Remote Control Mode)					
Voltage (mV)		1	3	1	3
Current (mA)		1	1	2	1
MEASUREMENT RESOLUTION (By PC Remote Control Mode)					
Voltage (mV)		1	3	1	3
Current (mA)		1	1	2	1
SERIES AND PARALLEL CAPABILITY					
Parallel Operation		Up to 4 units including the master unit			
Series Operation		Up to 2 units including the master unit			
PROTECTION FUNCTION					
OVP (V)		4-44	5-176	4-44	5-176
OCP (A)		4-44	1-11	5-88	2-22
OHP		Turn the output off.	Turn the output off.	Turn the output off.	Turn the output off.
FRONT PANEL DISPLAY ACCURACY (4 Digits)					
Voltage (mV)	0.1% +	20	100	20	100
Current (mA)	0.1% +	20	10	40	20
ENVIRONMENT CONDITION					
Operation Temp		0°C to 40°C			
Storage Temp		-25°C to 70°C			
Operating Humidity		20% to 85% RH; No condensation			
Storage Humidity		90% RH or less; No condensation			
OTHER					
Analog Control Interface		Yes USB/LAN/GPIB(Optional)			
Power Source		100Vac to 240Vac, 50Hz to 60Hz, single phase			
Dimension		214(W)×124(H)×350(D) mm			
Weight		Approx. 5.2kg	Approx. 5.2kg	Approx. 6.8kg	Approx. 6.8kg

Specifications subject to change without notice. SB-1000GD1BH

ORDERING INFORMATION	
PSB-1400L	40V/40A/400W Programmable Multi-Range D.C. Power Supply
PSB-1400M	160V/10A/400W Programmable Multi-Range D.C. Power Supply
PSB-1800L	40V/80A/800W Programmable Multi-Range D.C. Power Supply
PSB-1800M	160V/20A/800W Programmable Multi-Range D.C. Power Supply
ACCESSORIES	
CD ROM (User Manual, Programming Manual) x 1, Power cord for UL/CSA or PSE(Region dependent), Output terminal cover, Type A-B USB cable, PSB-106 Basic accessory kit : M4 terminal screws and washers x 2, M8 terminal bolts, nuts and washers x 2, analog control protection dummy x 1, analog control lock level x 2, short bar x 1	

OPTIONAL ASSESSORIES	
PSW-001	Analog remote control connector kit
PSW-002	Simple IDC tool
PSW-003	Contact removal tool
PSB-101	Cable for 2 units of PSB-1000 units in parallel mode connection
PSB-102	Cable for 3 units of PSB-1000 units in parallel mode connection
PSB-103	Cable for 4 units of PSB-1000 units in parallel mode connection
PSB-104	Cable for 2 units of PSB-1000 units in series mode connection
PSB-105	GPIB card
PSB-106	basic accessory kit: M4 terminal screws and washers x 2, M8 terminal bolts, nuts and washers x 2, analog control protection dummy x 1, analog control lock level x 2, short bar x 1

Global Headquarters
GOOD WILL INSTRUMENT CO., LTD.
 T +886-2-2268-0389 F +886-2-2268-0639

China Subsidiary
GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.
 T +86-512-6661-7177 F +86-512-6661-7277

Malaysia Subsidiary
GOOD WILL INSTRUMENT (M) SDN. BHD.
 T +604-6309988 F +604-6309989

Europe Subsidiary
GOOD WILL INSTRUMENT EURO B.V.
 T +31(0)40-2557790 F +31(0)40-2541194

U.S.A. Subsidiary
INSTEK AMERICA CORP.
 T +1-909-399-3535 F +1-909-399-0819

Japan Subsidiary
TEXIO TECHNOLOGY CORPORATION.
 T +81-45-620-2305 F +81-45-534-7181

Korea Subsidiary
GOOD WILL INSTRUMENT KOREA CO., LTD.
 T +82-2-3439-2205 F +82-2-3439-2207

GW INSTEK

Simply Reliable



www.gwinstek.com www.facebook.com/GWInstek

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bench Top Power Supplies](#) category:

Click to view products by [GW Connect](#) manufacturer:

Other Similar products are found below :

[NL200](#) [PR20](#) [ZUPNC403](#) [Z60-7-L-U](#) [ZUPNC402](#) [GDM-8342](#) [GPIB](#) [PSW 250-4.5](#) [CPX200DP](#) [AX-8450A](#) [TPM-3003](#) [HMP2020](#)
[HMP2030](#) [HMP4040](#) [1320](#) [1350](#) [UT804](#) [1405](#) [1410](#) [1513](#) [1514](#) [1513](#) [1550](#) [1651A](#) [1665](#) [1666](#) [1667](#) [SDP-2405-000G](#) [1673](#) [1693](#) [1694](#)
[MX100TP](#) [1737](#) [1739](#) [1762](#) [1788](#) [TPM-3005](#) [1900](#) [1902B](#) [9174B](#) [GDM-8245](#) [GDM-8255A](#) [GDM-8341](#) [PSW 160-7.2](#) [PSW 30-36](#) [PSW](#)
[80-13.5](#) [Z10-20-LAN-U](#) [PSW 30-72](#) [QL355P SII](#) [Z36-6-LAN-U](#) [HCS-3400-USB](#)