


# R&S®HM8118

## LCR-Bridge

### Technical Data

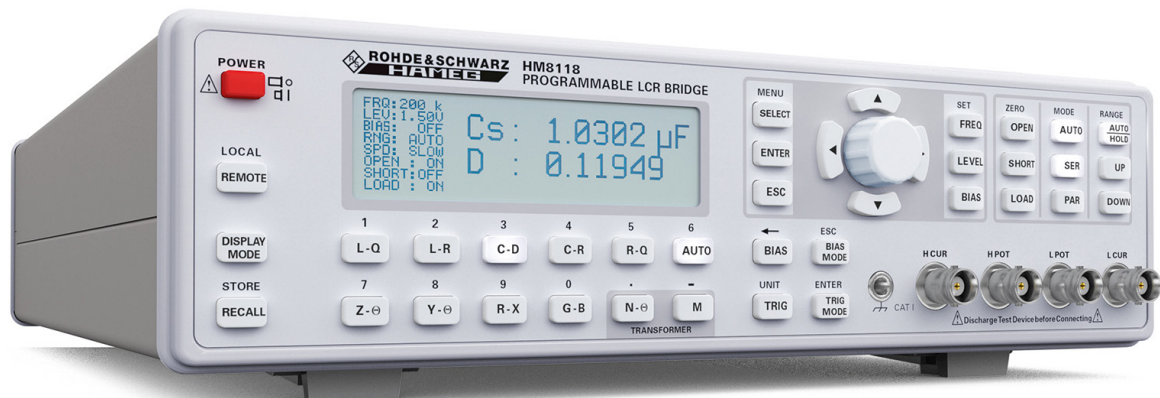

#### Key facts

- Basic Accuracy 0.05 %
- Measurement Functions L, C, R, |Z|, X, |Y|, G, B, D, Q,  $\Theta$ ,  $\Delta$ , M, N
- Test Frequencies 20 Hz...200 kHz
- Up to 12 Measurements per Second
- Parallel and Serial Mode
- Binning Interface HO118 (optional) for automatic Sorting of Components
- Internal programmable Voltage and Current Bias
- Transformer Parameter Measurement
- External Capacitor Bias up to 40 V
- Kelvin Cable and 4-Terminal SMD Test Adapter included
- Galvanically isolated USB/RS-232 Dual-Interface, optional IEEE-488 (GPIB)

# Technical Data

## 200 kHz LCR-Bridge R&S®HM8118

All data valid at 23°C after 30 minutes warm-up.

### Conditions

Test signal voltage	1 V
Open and short corrections performed	
Measurement time	SLOW

### Display

Measurement modes	Auto, L-Q, L-R, C-D, C-R, R-Q, Z- $\theta$ , Y- $\theta$ , R-X, G-B, N- $\theta$ , M
Equivalent circuits	auto, series or parallel
Parameters displayed	Value, deviation or % deviation
Averaging	2 to 99 measurements

### Accuracy

Primary parameters Basic accuracy (Test voltage: 1.0V, measurement SLOW/MEDIUM, autoranging mode, constant voltage OFF, bias off). For FAST mode double the basic accuracy values

Impedance	20 Hz	1 kHz	10 kHz	100 kHz
100 M $\Omega$	0.2% +  Z /1.5 G $\Omega$		0.5% +  Z /100 M $\Omega$	
4 M $\Omega$	0.05% +  Z /2 G $\Omega$		0.2% +  Z /100 M $\Omega$	
1 M $\Omega$	0.1% +  Z /1.5 G $\Omega$		0.5% + 5 m $\Omega$ /  Z  +  Z /10 M $\Omega$	
25 k $\Omega$	0.1% + 1 m $\Omega$ /  Z		0.2% + 2 m $\Omega$ /  Z	
100 $\Omega$	0.3% + 1 m $\Omega$ /  Z		0.5% + 2 m $\Omega$ /  Z	
2.5 $\Omega$				
0,01 m $\Omega$				

### Secondary parameters

Basic accuracy D, Q	$\pm 0,0001$ if f = 1 kHz
Phase angle	$\pm 0,005^\circ$ if f = 1 kHz

### Ranges

Z , R, X	0,01 m $\Omega$ to 100 M $\Omega$
Y , G, B	10 nS to 1.000 S
C	0,01 pF to 100 mF
L	10 nH to 100 kH
D	0,0001 to 9,9999
Q	0,1 to 9.999,9
$\theta$	-180° to +180°
$\Delta$	-999,99 to 999,99%
M	1 $\mu$ H to 100 H
N	0,95 to 500

### Measurement conditions and functions

Test frequency	20 Hz to 200 kHz (69 steps)
Frequency accuracy	$\pm 100$ ppm
AC test signal level	50 mV <sub>rms</sub> to 1.5 V <sub>rms</sub>
Resolution	10 mV <sub>rms</sub>

Drive level accuracy	$\pm(5\% + 5\text{ mV})$
Internal bias voltage	0 V <sub>DC</sub> to +5,00 V <sub>DC</sub>
Resolution	10 mV
External bias voltage	0 V <sub>DC</sub> to +40 V <sub>DC</sub> (fused 0.5 A)
Internal bias current	0 mA to +200 mA
Resolution	1 mA
Range selection	Auto and Hold
Trigger	Continuous, manual or external via interface, binning interface or trigger input
Trigger delay time	0 ms to 999 ms in 1 ms steps
Measurement time (f $\geq$ 1 kHz)	
FAST	70 ms
MEDIUM	125 ms
SLOW	0.7 s

### Miscellaneous

Test signal level monitor	Voltage, current
Error correction	Open, short, load
Save/Recall	9 instrument settings
Front-end protection	$V_{\text{max}} < \sqrt{2/C}$ @ $V_{\text{max}} < 200\text{ V}$ , C in Farads (1 Joule of stored energy)
Low potential and low current guarding	Ground, driven guard or auto (fused)
Constant voltage mode (25 $\Omega$ source)	
Temperature effects R, L or C	$\pm 5$ ppm/ $^\circ\text{C}$
Interface	Dual interface USB/RS-232 (R&S®HO820), optional R&S®HO880 IEEE-488 (GPIB)
Safety	Safety class I (EN61010-1)
Power supply	110 V to 230 V $\pm 10\%$ , 50 to 60 Hz, CAT II
Power consumption	approx. 20 W
Operating temperature	+5 $^\circ\text{C}$ to +40 $^\circ\text{C}$
Storage temperature	-20 $^\circ\text{C}$ to +70 $^\circ\text{C}$
Rel. humidity	5% to 80% (non condensing)
Dimensions (W x H x D)	285 x 75 x 365 mm
Weight	approx. 4 kg

**Accessories supplied:** Line cord, operating manual, R&S®HZ184 4-terminal kelvin test cable, R&S®HZ188 4-terminal SMD component test fixture

### Recommended accessories:

R&S®HO118	Binning interface
R&S®HO880	Interface IEEE-488 (GPIB), galvanically isolated
R&S®HZ42	19" rackmount kit 2RU
R&S®HZ72	GPIB-cable 2 m
R&S®HZ181	4-terminal test fixture including shorting plate
R&S®HZ186	4-terminal transformer test cable

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for Rohde & Schwarz manufacturer:*

Other Similar products are found below :

[HMC8042](#) [HZ10R](#) [HMP2020](#) [HMP2030](#) [HMP4040](#) [RT-ZP03](#) [HV512](#) [R&S HMF2525](#) [RTB2K-102](#) [RTC1K-102](#) [RTC1K-202](#)  
[SMC100A/B103/B1](#) [HA-Z211](#) [RTB2002 \(RTB2K-72\)](#) [RTB2004 + RTB-B242 \(RTB2K-204\)](#) [RTB2004 + RTB-B242 + RTB-B1 \(RTB2K-204M\)](#) [RTB2004 + RTB-B243 + RTB-B1 \(RTB2K-304M\)](#) [RTM3004 + RTM-B222 \(RTM3K-24\)](#) [RTM3002 + RTM-B223 \(RTM3K-32\)](#)  
[RTM-B222](#) [RTM-B223](#) [RTM-B225](#) [RTM-B2210](#) [RTM-B243](#) [RTM-B2410](#) [RTM-B1](#) [R&S® FPH-B8](#) [NGE102B](#) [NGE103B](#) [NGL-K103](#)  
[FPC-COM1](#) [RTB2K-202](#) [RTB2K-204](#) [HMC8012](#) [HZ42](#) [R&S HMC8012G](#) [RTB2K-104](#) [SMC100A/B103](#) [HA-Z302](#) [RT-ZA21](#) [RTB2002 +](#)  
[RTB-B221 \(RTB2K-102\)](#) [RTB-PK1](#) [RTC1002 \(RTC1K-52\)](#) [RTC1002 + RTC-B221 \(RTC1K-102\)](#) [RTM-K1](#) [RTM-B242](#) [R&S NRX](#) [R&S](#)  
[RTM-K36](#) [R&S HM7042-5](#) [RTB2K-74](#)