


**Notes**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. "TESTeLINK" & Serial No., Black Text.
3. Mark Shrink Upper Shrink Tube on both connectors ends with "DC-50GHz" & Connector Series
4. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)
5. 100% Tested DC to 50GHz, Plotted Data supplied with assembly.
6. Serial No. to be Marked as Cxxxxx, where xxxxx = sequential no. from log.
7. Caps to be Fitted Prior to Packaging
8. Cables to be Coiled and Placed in Plain Bag with ConductRF Label. (See Separate Label Instructions)

## TESTeLINK Phase Stable/Los Loss RF Test Cable

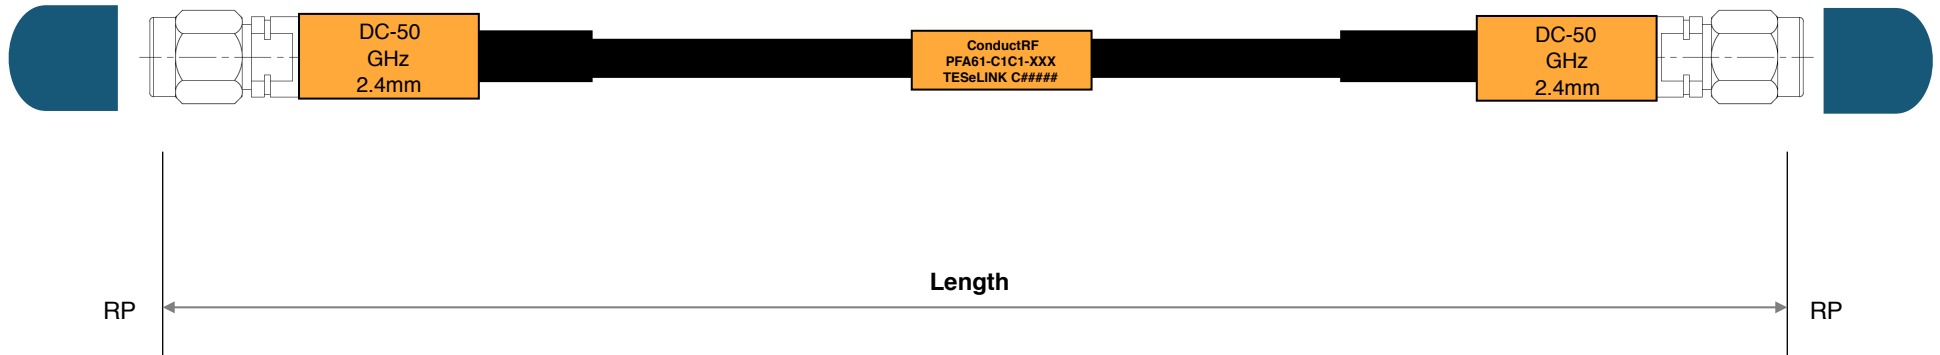

|           |     | Max Insertion Loss(dB) |
|-----------|-----|------------------------|
| Length    | XXX | 50GHz                  |
| 12"       | S12 | 2.349                  |
| 18"       | S18 | 3.263                  |
| 24"       | F02 | 4.178                  |
| 36"       | F03 | 6.007                  |
| 48"       | F04 | 7.836                  |
| 0.5M      | 0M5 | 3.520                  |
| 1.0M      | 1M0 | 6.519                  |
| VSWR(Max) |     | 1.45:1                 |

Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMX = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

| REV.             | DESCRIPTION | ECN | DRAWN | DATE     | Tolerances:<br>Length +/-2% | Checked: JW | Approved: PL   | Rev: 1  | Part No: PFA61-C1C1-XXX    |
|------------------|-------------|-----|-------|----------|-----------------------------|-------------|--|---|----------------------------|
| 1                | Pre-Release |     | DG    | 10/19/16 |                             |             |  |   |                            |
| REVISION HISTORY |             |     |       |          | Customer DWG                |             | Title: <b>TESTeLINK 50GHz Cable - 2.4mm Male to Male</b> |   |                            |
|                  |             |     |       |          | Remarks:                    |             | Originated:<br>10/20/15                                  | Conduct RF<br>sales@ConductRF.com<br>Tel: +1 978 374 6840 | Range: PFA<br>Sheet 1 of 1 |
|                  |             |     |       |          |                             |             | Dwg Ref: PFA61-C1C1                                      |   |                            |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Other Tools](#) category:*

*Click to view products by [CONDUCTRF](#) manufacturer:*

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [5718X-01PD-19RO](#)  
[CRCW04021100FRT7](#) [CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [LTLA506SBLAMNBL](#) [CRCW08052740FRT1](#)  
[LUC-012S070DSM](#) [LUC-018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GD](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#) [LW1L-A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-KT39](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#)