

Shunt release, up to 63 A, 12-110V, 1HP



**Part no.** FAZ-XAA-C-12-110VAC  
**Catalog No.** 278518  
**Eaton Catalog No.** FAZ-XAA-C-12-110VAC  
**EL-Nummer (Norway)** 1695013

## Delivery program

Basic function		Accessories for miniature circuit-breaker
Basic function accessories		Shunt release
Product range		Accessory
Contact sequence		

## Technical data

### Electrical

Voltage range		V AC	12 ... 110 110 ... 415
Rated frequency	f	Hz	50/60

### Mechanical

Standard front dimension		mm	45
Enclosure height		mm	80
Mounting width		mm	17.5 (1 space unit)
Mounting			IEC/EN 60715 top-hat rail
Degree of protection			
Integrated			IP40
Terminal protection			Protection against electric shock to IEC 536
Terminals			Twin-purpose terminals
Terminal capacities		mm <sup>2</sup>	
Solid		mm <sup>2</sup>	1 ... 2.5
flexible		mm <sup>2</sup>	1 ... 2.5
Tightening torque of terminal screws		Nm	2.4

## Design verification as per IEC/EN 61439


Technical data for design verification			
Operating ambient temperature min.		°C	-5
Operating ambient temperature max.		°C	40

## Technical data ETIM 6.0

Devices for distribution board-/surface mounting (EG000062) / Auxiliary contact unit for distribution board (EC001286)			
Electric engineering, automation, process control engineering / Electrical installation, device / Breaker switch component / Auxiliary contact unit for distribution board (ecl@ss8.1-27-14-35-02 [AKE327010])			
Device fitting			Miniature circuit breaker (MCB)
Additional equipment			Shunt release (for power circuit breaker)
Attached at delivery			No
Assembly width (TE)			1
Number of normally open contacts			0
Number of normally closed contacts			0

Number of change-over contacts		0
Number of fault-signal switches		0
Rated switch current	A	0
Nominal rated voltage	V	110
Control voltage type		AC
With autotest for earth leakage function		No
Suitable for max. number of poles main contact unit (total)		1
Suitable for max. current main contact unit	A	0

## Dimensions

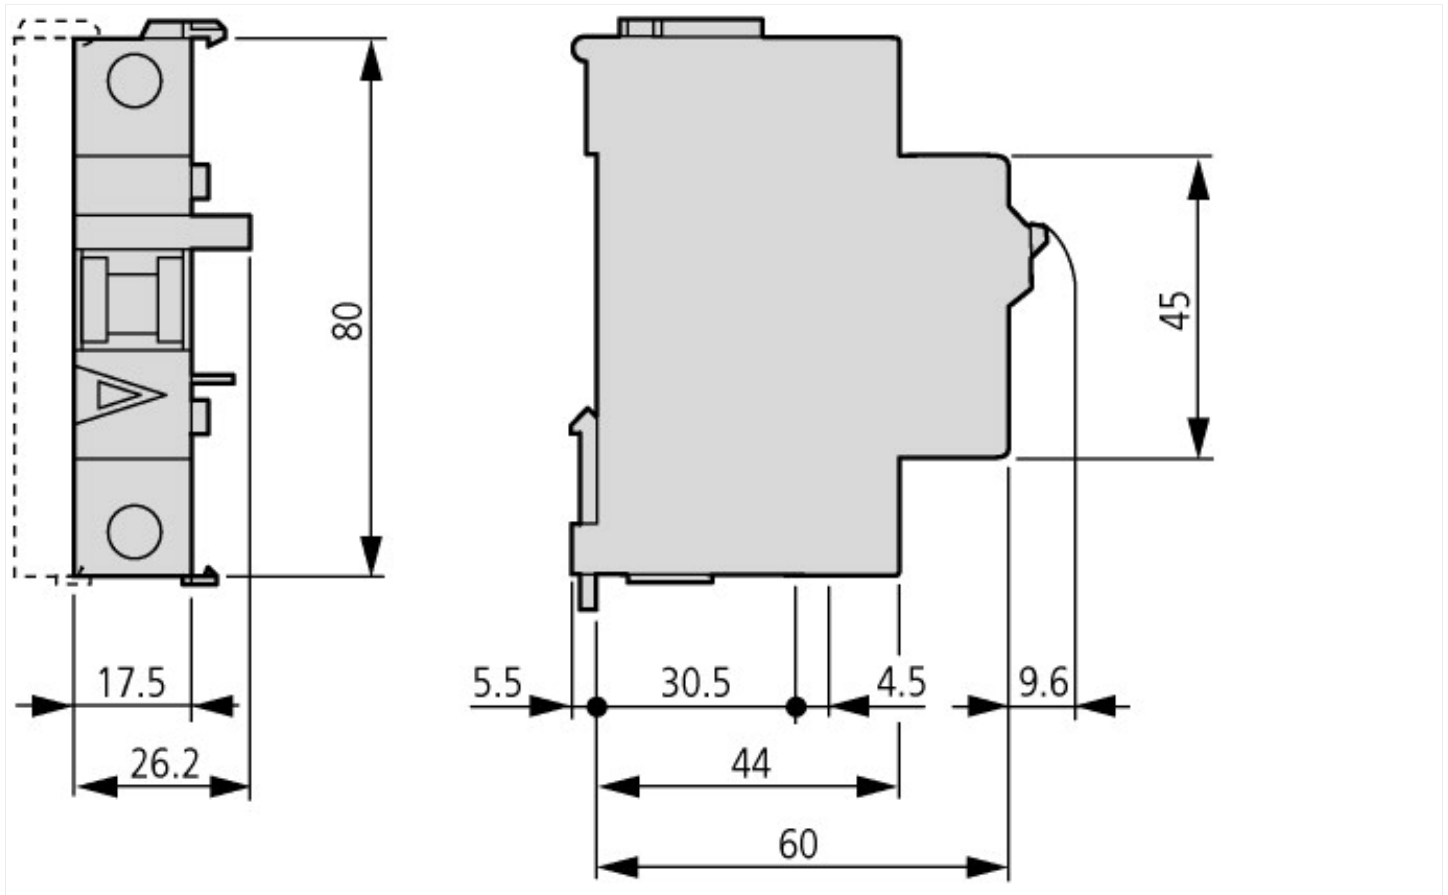

## Additional product information (links)

**AWA1220-1777 Shunt and undervoltage release**

AWA1220-1777 Shunt and undervoltage release [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/17770301.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17770301.pdf)

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Eaton](#) manufacturer:*

Other Similar products are found below :

[BK1-S506-2-R](#) [FHN31G1](#) [CH222B](#) [SAMI-2I](#) [SAMI-6I](#) [LPN-RK-25SP](#) [ZE6](#) [ZE9](#) [LPN-RK-15SP](#) [LPN-RK-3SP](#) [SAMI-1I](#) [2499](#) [GMC-500MA](#) [AT-20](#) [BK/SC-45](#) [AGC-1-2](#) [BK/MDA-15](#) [BK/MDA-1](#) [BK/C519-1A](#) [BK/MDL-3-2/10](#) [89096-015](#) [8943K28](#) [8946K153](#) [8961K155](#) [M22-DH-Y](#) [M22-DLH-Y](#) [M22-D-R-GB0/K11](#) [M22-LCH-R](#) [M22-L-R/R](#) [M22-WLK3-B](#) [63ET](#) [6422](#) [6580](#) [CTX20-16-52LP-R](#) [CWL530FI](#) [CXM/CO/GP/R/BB](#) [6HD36](#) [714125](#) [MBO-2](#) [7314K36](#) [7321K2](#) [ETF-200MA](#) [F02A-1-1/2A](#) [F02A-1-1/2AS](#) [F02A-1AS](#) [F02A-3/4A](#) [F03A250V10A](#) [F03A250V12A](#) [MDA-2-8/10-R](#) [MDA-30A](#)