



5.0 x 3.2 x 1.6 mm

1.8 Vdc • LVHCMOS CERAMIC SURFACE MOUNT CRYSTAL CLOCK OSCILLATORS ASFL3

FEATURES:


- Compact and low in height.(1.6 mm max.)
- Low current consumption.
- Tri state function.
- Suitable for high density SMT., Reflow capable.
- Tight stability option.
- Seam sealed package.

APPLICATIONS:

- CCD clock for VTR camera.
- Equipment connected to PC or PC cards.
- Thin equipment.

STANDARD SPECIFICATIONS

PARAMETERS	SPECIFICATIONS
Frequency Range (F ₀)	30.0MHz to 70.0MHz
Operating Temperature (T _{OPR})	-10°C to +70°C (See Options)
Storage Temperature (T _{STO})	-50°C to +125°C
Frequency Stability (ΔF/F ₀)	±100ppm max. (See Options)
Supply Voltage (V _{dd})	1.8 Vdc ±5%
Input Current (I _{dd})	8mA typ., 12mA max for F=50MHz with 15pF load 9mA typ., 18mA max for F=50MHz with 15pF load
Duty Cycle or Symmetry	40 / 60% max. (See Options)
Rise and Fall Times (T _R / T _F)	3.5ns max.
Output Load	15pF
Output Voltage (V _{OH} / V _{OL})	"1" 0.9 * V _{dd} min. "0" 0.1 * V _{dd} max.
Tri-State Function	"1" or Open: Oscillation ≥1.6V "0": Output disabled (Hi Z) <0.8V
Start-up Time	10ms max.
Aging per Year	±5ppm @ 25°C
Disable current (I _{dis})	15 μA typ.
Jitter one sigma RMS	±25ps max.

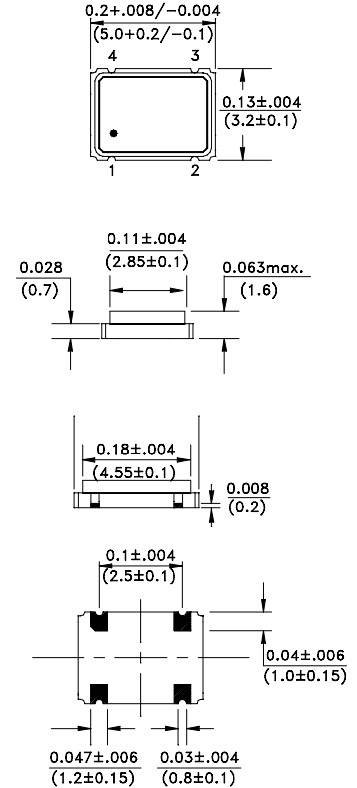

Connect a By-Pass capacitor 0.01 μF between V_{dd} and GND.
Environmental, and mechanical specifications, see appendix C. Group 2.
Marking, see appendix G. Test circuit, waveforms, see appendix B.
Tape and Reel, see appendix H.(1,000 pcs/reel).
Reflow profile, see appendix E.
Application notes, see appendix A.

PIN NO.	FUNCTION
1	Tri State
2	GND / Case
3	Output
4	V _{dd}

ORDERING OPTIONS

ASFL3- Frequency - Temperature - Overall Frequency Stability - Duty Cycle - Packaging


XX.XXXXX MHz

- E for -20°C to +70°C
- F for -30°C to +70°C
- N for -30°C to +85°C
- L for -40°C to +85°C
- J for ± 20ppm max.*
- R for ± 25ppm max.*
- K for ± 30ppm max.*
- H for ± 35ppm max.*
- B for ± 40ppm max.
- C for ± 50ppm max.

-T (Tape & Reel)

-S for 45/55% @ 1/2 V_{dd}

* Vary with frequency and temperature.

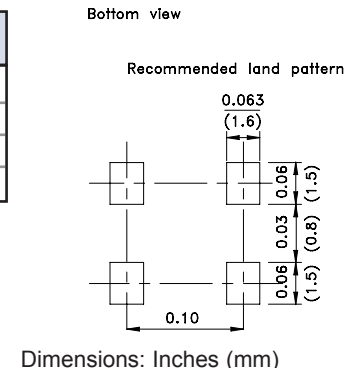

NOTE: Left blank if standard • All specifications and markings subject to change without notice

29 Journey • Aliso Viejo, CA 92656 • USA
(949) 448-7070 • FAX: (949) 448-8484

E-MAIL: abinfo@abracon.com • INTERNET ADDRESS: www.abracon.com

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[EP1400SJTSC-125.000M](#) [601137](#) [601252](#) [CSX750FBC-24.000M-UT](#) [CSX750FBC-33.333M-UT](#) [CSX750FCC-3.6864M-UT](#) [F335-12](#) [F335-25](#) [F535L-50](#) [DSC506-03FM2](#) [ASA-20.000MHZ-L-T](#) [ASA-25.000MHZ-L-T](#) [ASA-27.000MHZ-L-T](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [EL13C7-H2F-125.00M](#) [MXO45HS-2C-66.6666MHZ](#) [NBXDBB017LN1TAG](#) [NBXHBA019LN1TAG](#) [SiT1602BI-22-33E-50.000000E](#) [SIT8003AC-11-33S-2.04800X](#) [SiT8256AC-23-33E-156.250000X](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [SMA4306-TL-H](#) [F335-24](#) [F335-40](#) [F335-50](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX750FBC-20.000M-UT](#) [CSX-750FBC33333000T](#) [CSX750FBC-4.000M-UT](#) [CSX750FBC-7.3728M-UT](#) [CSX750FBC-8.000M-UT](#) [CSX-750FCC14745600T](#) [CSX750FCC-16.000M-UT](#) [CSX-750FCC40000000T](#) [CSX750FCC-4.000M-UT](#) [ASA-22.000MHZ-L-T](#) [ASA2-26.000MHZ-L-T](#) [ASA-40.000MHZ-L-T](#) [ASA-48.000MHZ-L-T](#) [ASA-60.000MHZ-L-T](#) [ASF1-3.686MHZ-N-K-S](#)