


10BASE-T Isolation Modules

16 Pin SOIC Package 10BASE-T Transformers



Product Features:

- Standard series of 16 Pin SOIC Isolation Modules to meet the isolation and impedance matching requirements of IEEE 802.3 for 10BASE-T
- 100% Compliance Testing
- 1500Vrms Hi-Pot
- Patented Open Frame Construction
- UL/EN60950 Recognized

Part Number	Turns Ratio $\pm 3\%$ (1-3:16-14) / (6-8:11-9)	PRI OCL (μH)	PRI/SEC Cw/w (μF max)	PRI LL (μH max)	Schematic	Temp Range	RoHS ¹
TG04-1006N1LF	(1CT:1CT) / (1CT:1CT)	100 Typ	9	0.4	A	0 to +70°C	Pb-Free
TG04-1006N1RL	(1CT:1CT) / (1CT:1CT)	100 Typ	9	0.4	A	0 to +70°C	RoHS (7a)
TG04-2006N1LF	(1CT:1CT) / (1CT:1CT)	200 Typ	15	0.3	A	-40 to +85°C	Pb-Free
TG04-2006N1RL	(1CT:1CT) / (1CT:1CT)	200 Typ	15	0.3	A	-40 to +85°C	RoHS (7a)
TG41-2006NLF	(1CT:1CT) / (1CT:2.5CT)	200/35 Min	15	0.4	B	-40 to +85°C	Pb-Free
TG41-2006NRL	(1CT:1CT) / (1CT:2.5CT)	200/35 Min	15	0.4	B	-40 to +85°C	RoHS (7a)
TG42-1406N1LF	(1CT:1CT) / (1CT:1.41CT)	140 Typ	15	0.4	A	0 to +70°C	Pb-Free
TG42-1406N1RL	(1CT:1CT) / (1CT:1.41CT)	140 Typ	15	0.4	A	0 to +70°C	RoHS (7a)
TG43-1406NLF	(1CT:1CT) / (1CT:1.41CT)	140 Typ	15	0.4	B	0 to +70°C ²	Pb-Free
TG43-1406NRL	(1CT:1CT) / (1CT:1.41CT)	140 Typ	15	0.4	B	0 to +70°C ²	RoHS (7a)
TG62-1006N1LF	(2CT:1CT) / (1CT:1CT)	150 Min	10	0.6	A	0 to +70°C	Pb-Free
TG62-1006N1RL	(2CT:1CT) / (1CT:1CT)	150 Min	10	0.6	A	0 to +70°C	RoHS (7a)
TG66-1006NLF	(2CT:1CT) / (1CT:1CT)	150 Min	10	0.9	B	0 to +70°C	Pb-Free
TG66-1006NRL	(2CT:1CT) / (1CT:1CT)	150 Min	10	0.9	B	0 to +70°C	RoHS (7a)
TG74-1406N1LF	(1CT:1CT) / (1CT:2CT)	140/25 Typ	15	0.4	A	-40 to +85°C	Pb-Free
TG74-1406N1RL	(1CT:1CT) / (1CT:2CT)	140/25 Typ	15	0.4	A	-40 to +85°C	RoHS (7a)
TG75-1406NLF	(1CT:1CT) / (1CT:2CT)	140/25 Typ	15	0.4	B	-40 to +85°C	Pb-Free
TG75-1406NRL	(1CT:1CT) / (1CT:2CT)	140/25 Typ	15	0.4	B	-40 to +85°C	RoHS (7a)
TG81-1006NLF	(1CT:1CT) / (1CT:1CT)	100 Typ	9	0.3	B	0 to +70°C	Pb-Free
TG81-1006NRL	(1CT:1CT) / (1CT:1CT)	100 Typ	9	0.3	B	0 to +70°C	RoHS (7a)
TG84-2006N1LF	(1CT:2CT) / (1CT:1CT)	50/200 Min	11	0.15	A	-40 to +85°C	Pb-Free
TG84-2006N1RL	(1CT:2CT) / (1CT:1CT)	50/200 Min	11	0.15	A	-40 to +85°C	RoHS (7a)
TG86-2006NLF	(1CT:2CT) / (1CT:1CT)	50/200 Min	11	0.3	B	-40 to +85°C	Pb-Free
TG86-2006NRL	(1CT:2CT) / (1CT:1CT)	50/200 Min	11	0.3	B	-40 to +85°C	RoHS (7a)
TG92-2006N1LF	(1CT:1CT) / (1CT:2.5CT)	200/35 Min	15	0.4	A	-40 to +85°C	Pb-Free
TG92-2006N1RL	(1CT:1CT) / (1CT:2.5CT)	200/35 Min	15	0.4	A	-40 to +85°C	RoHS (7a)




Notes:

1. Pb-Free parts are RoHS 6/6 compliant. RoHS (7a) parts contain lead per exemption 7a which is set to expire in July 2016.
2. TG43-1406NRL can be operated in -40 to +85°C environment when using the Cirrus Logic CS8900A-IQ (5V) Transceiver.
3. Parts with RL suffix are not recommended for new designs.
4. Please contact the factory or your local representative for individual datasheets or additional information.


For additional information contact your [local representative](#), or HALO's support staff at (650) 903-3800 or info@haloelectronics.com

10BASE-T Isolation Modules

Package N/N1

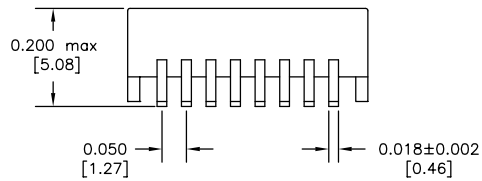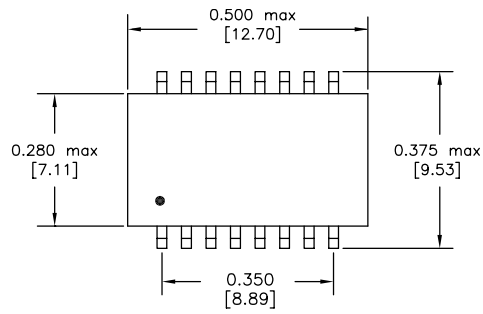


Dimensions: inch [mm]
Co-Planarity: 0.004 [0.10]




Recommended
Solder Pad Layout

Schematic A

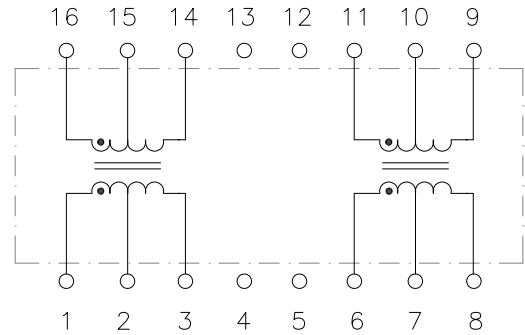

Schematic B

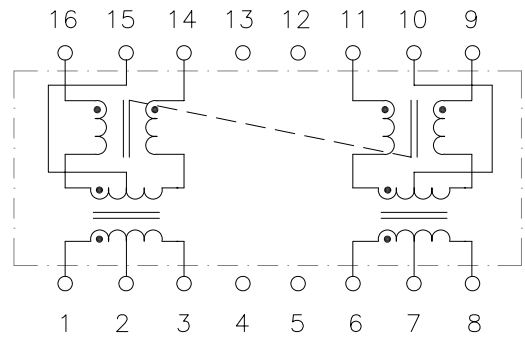

US Patent Numbers

5,656,985 6,297,721 B1
6,297,720 B1 6,320,489 B1
6,344,785 B1 6,662,431 B1

HALO
ELECTRONICS, INC.

2880 Lakeside Drive #116
Santa Clara, CA 95054
(650) 903-3800

www.haloelectronics.com

HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC isolation modules, and integrated Ethernet connectors. HALO's high quality and competitively priced leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Audio Transformers](#) / [Signal Transformers](#) category:

Click to view products by [HALO](#) manufacturer:

Other Similar products are found below :

[749023020](#) [CU4S0506AT-2655-H1](#) [MET-58](#) [PE-64961](#) [H5008FNL](#) [H5020FNLT](#) [H5079NLT](#) [1879479-1](#) [1879564-1](#) [PA1277NLT](#)
[PA1528ANL](#) [PA2007NLT](#) [FL1066](#) [T1137NLT](#) [T3012NL](#) [PE-65812FNL](#) [TTC-100](#) [TTC-143-H](#) [TTC-5032-1](#) [HX1234NLT](#) [HX5008FNLT](#)
[100B-1001XNL](#) [PA1282NLT](#) [HX5084FNL](#) [T1108NLT](#) [2-1879391-5](#) [TTC-266-2](#) [3-1879385-4](#) [PA1032NL](#) [H2009FNLT](#) [PA0801NLT](#)
[TTC-266](#) [X-1619](#) [SM51295PEL](#) [T5008NLT](#) [PE-68517T](#) [HX1294NLT](#) [HX5084FNLT](#) [H5015FNLT](#) [H6080NLT](#) [CX2024NL](#) [HX1294FNLT](#)
[TX1473NLT](#) [PE-69011NLT](#) [CX2047LNLT](#) [CX2043LNLT](#) [DCT20EFD-U32S003](#) [H5120NLT](#) [H7137FNLT](#) [H1259NLT](#)