

STRATUM -III SMD VCTCXO

AST3



RoHS
Compliant



7.0 x 5.0 x 2.0mm

FEATURES:

- High Precision over temperature (± 0.37 ppm over -40°C to $+85^{\circ}\text{C}$)
- Excellent long term stability (± 4.60 ppm Max. over 20-Year life)
- Small Profile (7*5*2 mm)
- Low Power (< 6mA CMOS; < 3.5mA Sinewave)
- Exceptional Close-in Phase Noise (-140 dBc/Hz @ 1kHz typ; 12.80MHz carrier)

APPLICATIONS:

- Wireless & Wireline communications
- Cellular Infrastructure
- Point-to-Point Radios
- Broadband Equipment
- Test & Measurement Equipment
- GPS tracking with precision hold-over accuracy

ELECTRICAL SPECIFICATIONS:

PARAMETERS	
ABRACON P/N	AST3 Series
Frequency	10.000MHz to 26.000MHz
Standard Frequencies	10, 12.8, 19.2, 19.44, 25.6 MHz
Operating temperature	-20°C to $+70^{\circ}\text{C}$ (see option)
Storage temperature	-55°C to $+125^{\circ}\text{C}$
Overall Frequency Stability*	± 4.6 ppm over 20-years Referenced to $+25^{\circ}\text{C}$
Frequency Stability vs Temp range	
- 20°C to $+70^{\circ}\text{C}$	± 0.28 ppm
- 40°C to $+85^{\circ}\text{C}$	± 0.37 ppm
Supply voltage (Vdd)	3.3Vdc $\pm 5\%$ (see option)
Symmetry	45/55 % @ 50% Vdd
Output level	CMOS (see option)
Output load	15pF (CMOS, Clipped Sine wave)
Output Voltage (CMOS)	VOH = 0.9*Vdd min. VOL = 0.1*Vdd max.
Output Voltage (Clipped Sinewave)	0.8 Vp-p min
Tri-state Function	VIH = 80%Vdd min.: Oscillation, VIL = 20%Vdd max.: High Z
Start-up-time	2ms max.
Current consumption	6mA max. (CMOS output) 3.5mA max. (Clipped Sine wave output)
Vc port impedance	100k Ω min.
Control voltage range (Vc)	0 to Vdd (for VCTCXO)
Frequency pull range	± 5.0 ppm min. (see options)
Frequency pull slope	Positive
Spurious response:	-70 dBc max.
Phase Noise (12.8MHz carrier)	
@ 100 Hz offset	-120 dBc/Hz
@ 1000 Hz offset	-140 dBc/Hz
@ 10000 Hz offset	-148 dBc/Hz


* Overall frequency stability includes: as received set-tolerance, stability over temperature, shift through stand reflow, aging over 20-year product life, supply voltage and output load variation.



7.0 x 5.0 x 2.0mm


OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

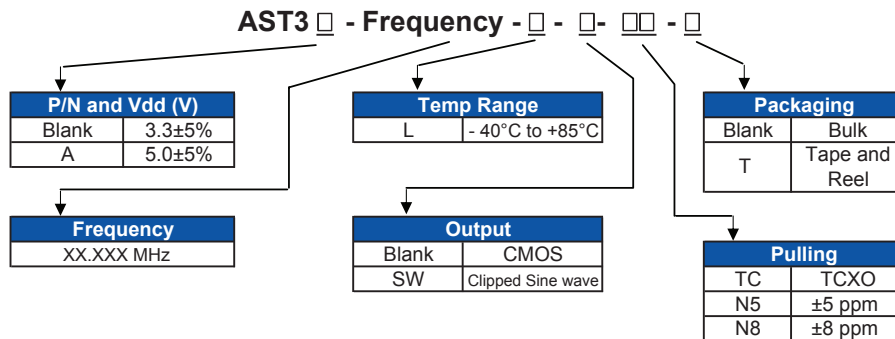

OUTLINE DRAWING:



[TOP VIEW]



[SIDE VIEW]



[BOTTOM VIEW]




Note: Recommend using an approximately 0.01uF bypass capacitor between PIN 5 and 10.

PIN	FUNCTION
1	Control voltage (VC); NC for a TCXO
2	NC
3	NC
4	NC
5	GND
6	RF Output (CMOS or Clipped Sinewave)
7	NC
8	NC
9	Tri-state Control
10	Vdd


Dimensions: mm

TAPE & REEL:

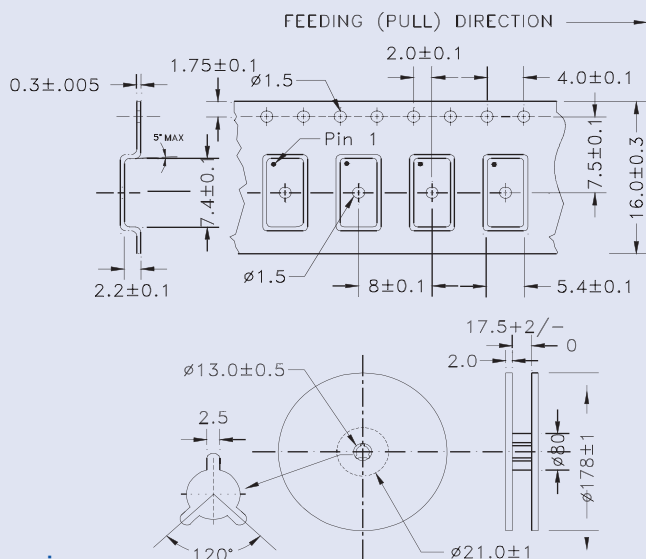

Dimensions: mm

REFLOW PROFILE

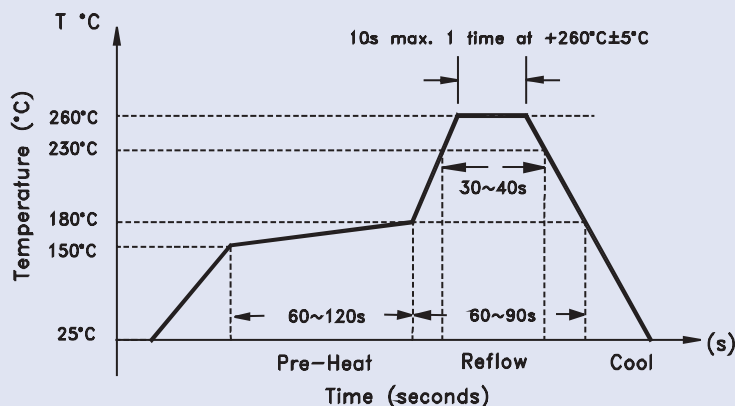

NOTE: Abracon manufactured products are intended for general commercial and industrial use. For applications requiring high reliability and/or presenting extreme operating environment, written consent & authorization from Abracon is required.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCVCXO Oscillators](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[FOX923CH-19.20M](#) [TG-5006CG-12H 26.0000M3](#) [TG-5035CG-13N 19.2000M3](#) [SIT5000ACC8E-33VQ-19.200000X](#) [TG5032SGN](#)
[40.0000M-CBGHNAB](#) [LFTVXO022175Bulk](#) [KT7050A10000KAW33TAD](#) [MAOC-009266-PKG003](#) [ASVTX-09-19.200MHZ-T](#)
[SiT5000AICGE-33E0-25.000000X](#) [LFTVXO075674CUTT](#) [ASVTX-12-C-19.200MHz-I15-T](#) [LFTVXO075803Cutt](#) [LFTVXO076348CUTT](#)
[LFTVXO075802Cutt](#) [LFTVXO076344CUTT](#) [KT2016K40000DAZ18TAV](#) [KT2016K27600ZAW18TCS](#) [LFTVXO076343CUTT](#)
[LFTVXO073010Cutt](#) [LFTVXO072344CUTT](#) [LFTVXO073008Cutt](#) [LFTVXO076347CUTT](#) [LFTVXO076349CUTT](#) [LFTVXO076194CUTT](#)
[ASVTX-09-20.000MHz-T](#) [KT1612A26000ACW28TAN](#) [LFTVXO009901BULK](#) [ASGTX-C-100.000MHz-1](#) [ASGTX-C-120.000MHz-1](#)
[ASGTX-D-100.000MHz-1](#) [ASGTX-D-1.000GHz-1](#) [ASGTX-D-125.000MHz-1](#) [ASGTX-D-500.000MHz-1](#) [ASGTX-P-1.000GHz-1](#) [ASGTX-](#)
[P-1.500GHz-1](#) [ASGTX-P-500.000MHz-2](#) [ASGTX-D-1.000GHZ-2](#) [ASVTX-09-14.400MHZ-T](#) [ASVTX-09-16.000MHZ-T](#) [ASVTX-09-](#)
[16.800MHZ-T](#) [ASVTX-11-A-38.400MHz-T](#) [ASVTX-12-A-19.200MHZ-H10-T](#) [ASVTX-12-D-16.369MHz-I05-T](#) [ASVTX-12-D-19.200MHz-](#)
[I05-T](#) [ASVTX-13-C-16.369MHz-I05-T](#) [ASVTX-13-C-19.200MHz-I05-T](#) [ASVTX-13-C-26.000MHz-I05-T](#) [ASVTX-13-C-26.000MHz-I15-T](#)
[ASVTX-13-C-32.000MHz-I15-T](#)