

Unidirectional Electret Condenser Microphone

BCM9750U

Unidirectional microphone for general use


Specifications

1. Sensitivity: See below
2. Impedance: Less than 680ohm
3. Directional: Unidirectional
4. S/N Ratio: More than 58dB(0dB=1V/Pa,1kHz)
5. Max. Input Sound Level: 100dB S.P.L
6. Frequency Response: 100Hz-10kHz
7. Rate Voltage: 1.5V
8. Decreasing Voltage characteristic: -3dB(at 1V)


Notes:

1. Test Condition $V_s=1.5V$, $R_L=680ohm$
Sensitivity (1KHz): $-47 \pm 4dB$, $-50 \pm 4(0dB=1V/Pa,1kHz)$

Frequency Resonse Curve

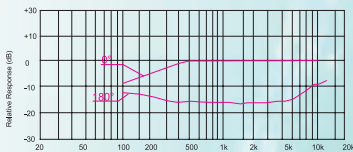

Drawing

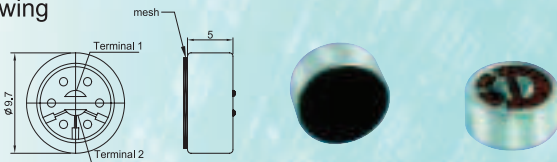

Omni-Directional Electret Condenser Microphone

BCM9745PC

Highest performance, electret condenser microphone cartridge.
useful for almost any type of telephone and other applications


Specifications

1. Sensitivity: See below
2. Impedance: Less than 2Kohm
3. Directional: Omnidirectional
4. S/N Ratio: more than 60dB(0dB=1V/Pa,1kHz)
5. Max. Input Sound Level: 100dB S.P.L
6. Frequency Response: 20Hz-16kHz
7. Rate Voltage: 1.5V
8. Operating Voltage: 1.5-10V
9. Capacitor: 10pF
10. Decreasing Voltage characteristic: -3dB(at 1V)


Notes:

1. Test Condition $V_s=1.5V$, $R_L=2kohm$
Sensitivity (1KHz): $-38 \pm 2dB$, $-40 \pm 2(0dB=1V/Pa,1kHz)$

Frequency Resonse Curve



Drawing

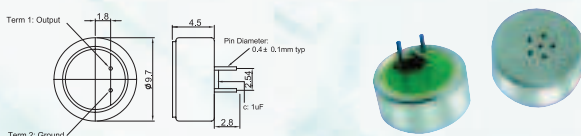

Omni-Directional Electret Condenser Microphone

BCM9745 BCM-9745P

useful for almost any type of telephone and other applications


Specifications:

1. Sensitivity: see below
2. Impedance: 2.2Kohm
3. Directivity: omnidirectional
4. Frequency: 100 - 16,000Hz
5. Max. operation voltage: 10V
6. Current consumption: 0.6mA (max.)
7. Sensitivity reduction: within -3dB ($V_s=2.0V \rightarrow 1.5V$)
8. S/N ratio: more than 60dB


Notes:

1. Test Condition $V_s=2.5V$, $R_L=2.2Kohm$
Sensitivity (1KHz): $0dB=1V/Pa$, -38 ± 3 , -40 ± 3 , -42 ± 3 , -44 ± 3
built-in capacitor is available according to clients' requests

Frequency Resonse Curve



Drawing

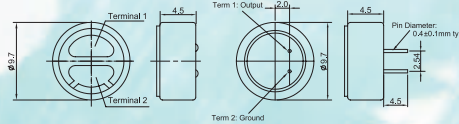

Omni-Directional Electret Condenser Microphone

BCM9765 BCM9765P


Useful for tape recorders, toys, telephones, and almost any other applications

1. Sensitivity: see below
2. Impedance: 2.2kohm
3. Directivity: omnidirectional
4. Frequency: 20 - 16,000Hz
5. Max. operation voltage: 10V
6. Current consumption: 0.5mA (max.)
7. Sensitivity reduction: within -3dB ($V_s=4.5V \rightarrow 1.5V$)
8. S/N ratio: more than 60dB


Notes:

1. Test Condition $V_s=4.5V$, $R_L=2.2Kohm$
Sensitivity: $0dB=1V/Pa, 1kHz$, -44 ± 2 , -42 ± 2 , -40 ± 2 , -38 ± 2 , -36 ± 2 , -34 ± 2 , -32 ± 2

Frequency Resonse Curve



Drawing



Omni-Directional Electret Condenser Microphone

BCM9767 BCM9767P

Useful for tape recorders, toys, telephones, and almost any other applications


Specifications:

1. Sensitivity: see below
2. Impedance: Less than 2.2kohm
3. Directivity: omnidirectional
4. Frequency: 20 - 16,000Hz
5. Max. operation voltage: 10V
6. Current consumption: 0.5mA (max.)
7. Sensitivity reduction: within -3dB ($V_s=1.5V$)
8. S/N ratio: more than 60dB


Notes:

1. Test Condition $V_s=3.0V$, $R_L=2.2Kohm$
Sensitivity (1KHz): $0dB=1V/Pa$, -44 ± 2 , -42 ± 2 , -40 ± 2 , -38 ± 2 , -36 ± 2
2. Test Condition $V_s=1.5V$, $R_L=2Kohm$
Sensitivity (1KHz): $0dB=1V/Pa$, -36 ± 2 , -38 ± 2 , -40 ± 2

Frequency Resonse Curve



Drawing



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Microphones](#) category:

Click to view products by [Bestar](#) manufacturer:

Other Similar products are found below :

[BCM4013OLFC-42-JST-ZHR-2](#) [TO38-30702-B20](#) [FG-23329-P142](#) [254-ECM6441-RO](#) [AOM-6742P-2-R](#) [SPM04C-38/1186-T/R](#) [POM-2244L-C33-R](#) [AOM-6545P-R](#) [ANM-5254L-R](#) [AOM-6738L-R](#) [AOM-6738P-R](#) [AOM-4546P-R](#) [BCM4013OSBC-42 LF](#) [ANM-5254L-LW100-R](#) [PUM-3046L-R](#) [TOM-1545L-R](#) [POM-2738L-LW100-R](#) [POM-2738P-C33-R](#) [POM-3542P-R](#) [POM-3535L-3-LW100-R](#) [POW-2742P-C3310-B-R](#) [AOM-6742L-R](#) [AOM-6738L-LW100-R](#) [AOW-4544P-C3310-B-R](#) [POM-2735P-R](#) [PUM-5250L-C3310-R](#) [POM-5038P-C3310-R](#) [TOW-1242P-R](#) [POM-5046P-C3310-R](#) [TC-32348-000](#) [TC-32485-000](#) [BCM9745-44](#) [BCM9767P](#) [LD-MC-0905P](#) [LD-MC-6035](#) [LD-MC-9765](#) [CMC-4015-40P](#) [PMO-6022SN-42UQ](#) [PMOF-6027WN-44KDQ](#) [PMO-4015PN-42KDQ](#) [CMC-6027-42L100](#) [PMO-6027P-40KDQ](#) [PMOF-6050S-44UQ](#) [PMO-4530PN-47UQ](#) [PMO-4015MN-42HXQ](#) [CMC-6036-40T](#) [CMC-4015-25T](#) [CMC-6027-24T](#) [PMOF-9767NP-46DQ](#) [PMOF-9745W-42UQ](#)