

SMT POWER INDUCTORS

Shielded Drum Core - P1168NL/P1169NL Series




- Height: 4.5mm Max
- Footprint: 12.2mm x 12.2mm Max
- Current Rating: up to 14A
- Inductance Range: .32µH to 750µH

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C



Part ^{2,3} Numbers	Inductance @ 0A _{DC} (µH)	Inductance @ Rated (µH) MIN	Rated ⁵ (A _{DC})	DCR (mΩ)		Saturation ⁶ Current -25% (A)	Heating ⁷ Current +40°C(A)	Core Loss ⁸ Factor (K2)	SRF (MHz)
				TYP	MAX				
P1168.501NL	P1169.501NL	0.5*	0.32	14	2.3	18	14	100	>40
P1168.102NL	P1169.102NL	1.0*	0.65	11	3.0	3.7	14	11	>40
P1168.162NL	P1169.162NL	1.6*	1.0	8.5	5.4	6.3	10	8.5	180
P1168.242NL	P1169.242NL	2.4*	1.6	7.5	6.9	8.1	8.1	7.5	220
P1168.332NL	P1169.332NL	3.3*	2.2	6.4	9.5	11	7.3	6.4	260
P1168.452NL	P1169.452NL	4.5*	2.9	6.0	11	13	6.4	6.0	310
P1168.562NL	P1169.562NL	5.6*	3.6	5.5	13	15	5.7	5.5	340
P1168.682NL	P1169.682NL	6.8*	4.4	4.6	18	22	5.2	4.6	370
P1168.103NL	P1169.103NL	10	7.5	3.6	29	35	4.1	3.6	440
P1168.123NL	P1169.123NL	12	9.0	3.5	32	37	3.8	3.5	490
P1168.153NL	P1169.153NL	15	11.3	3.1	40	47	3.3	3.1	570
P1168.183NL	P1169.183NL	18	13.5	2.8	48	58	2.9	2.8	590
P1168.223NL	P1169.223NL	22	16.5	2.6	55	67	2.7	2.6	640
P1168.273NL	P1169.273NL	27	20.3	2.4	67	79	2.4	2.4	740
P1168.333NL	P1169.333NL	33	24.8	2.2	76	94	2.2	2.2	820
P1168.393NL	P1169.393NL	39	29.3	1.9	101	126	2.0	1.9	880
P1168.473NL	P1169.473NL	47	35.3	1.8	112	140	1.9	1.8	980
P1168.563NL	P1169.563NL	56	42.0	1.7	129	157	1.7	1.7	1000
P1168.683NL	P1169.683NL	68	51.0	1.5	169	202	1.5	1.6	1200
P1168.823NL	P1169.823NL	82	61.5	1.4	191	232	1.4	1.5	1300
P1168.104NL	P1169.104NL	100	75.0	1.2	222	270	1.2	1.4	1400
P1168.124NL	P1169.124NL	120	90.0	1.1	252	316	1.1	1.3	1500
P1168.154NL	P1169.154NL	150	113	1.0	346	456	1.0	1.1	1700
P1168.184NL	P1169.184NL	180	135	0.90	385	497	0.90	1.1	1900
P1168.224NL	P1169.224NL	220	165	0.80	506	681	0.80	0.93	2100
P1168.274NL	P1169.274NL	270	203	0.70	596	775	0.70	0.85	2300
P1168.334NL	P1169.334NL	330	248	0.66	764	955	0.66	0.75	2600
P1168.394NL	P1169.394NL	390	293	0.62	870	1087	0.62	0.71	2800
P1168.474NL	P1169.474NL	470	353	0.57	1150	1403	0.57	0.61	3100
P1168.564NL	P1169.564NL	560	420	0.53	1283	1623	0.53	0.58	3300
P1168.684NL	P1169.684NL	680	510	0.50	1493	1824	0.50	0.54	3700
P1168.824NL	P1169.824NL	820	615	0.44	1924	2355	0.44	0.47	4000
P1168.105NL	P1169.105NL	1000	750	0.40	2174	2850	0.40	0.45	4500
*Inductance at 0A _{DC} tolerance on indicated part numbers is ±30%; tolerance is ±20% on all other parts.									

NOTES FROM TABLE: (See page 43)

Mechanical

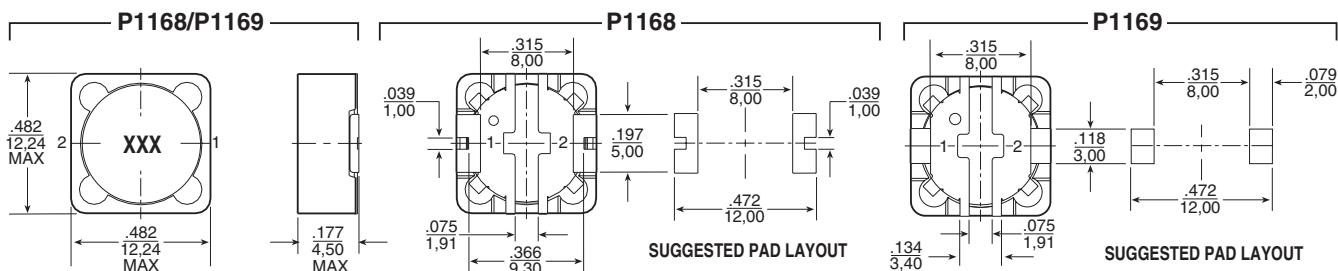

Schematic:

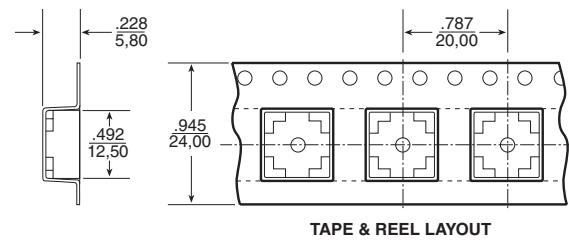

Weight 2.5 grams
Tape & Reel 500/reel

Dimensions: Inches
mm

Unless otherwise specified, all tolerances are ± $\frac{.010}{.25}$

SMT POWER INDUCTORS

Shielded Drum Core Series




Notes from Tables (pages 27 - 42)

1. Unless otherwise specified, all testing is made at 100kHz, 0.1VAC.
2. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. P1166.102NL becomes P1166.102NLT). Pulse complies with industry standard Tape and Tape & Reel specification EIA481.
3. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.
4. Temperature of the component (ambient plus temperature rise) must be within specified operating temperature range.
5. The rated current (Irated) as listed is either the saturation current or the heating current depending on which value is lower.
6. The saturation current, Isat, is the current at which the component inductance drops by the indicated percentage (typical) at an ambient temperature of 25°C. This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
7. The heating current, Idc, is the DC current required to raise the component temperature by the indicated delta (approximately). The heating current is determined by mounting the component on a typical PCB and applying current for 30 minutes. The temperature is measured by placing the thermocouple on top of the unit under test.

Part No.	Trise Factor (K0)	Core Loss Factor (K1)
PG0085/86	2.3	5.29E-10
PG0087	5.8	15.2E-10
PG0040/41	0.8	2.80E-10
P1174	0.8	6.47E-10
PF0601	4.6	14.0E-10
PF0464	3.6	24.7E-10
PF0465	3.6	33.4E-10
P1166	1.9	29.6E-10
P1167	2.1	42.2E-10
PF0560NL	5.5	136E-10
P1168/69	4.8	184E-10
P1170/71	4.3	201E-10
P1172/73	5.6	411E-10
PF0552NL	8.3	201E-10
PF0553NL	7.1	411E-10

Take note that the component's temperature rise varies depending on the system condition. It is suggested that the component be tested at the system level, to verify the temperature rise of the component during system operation.

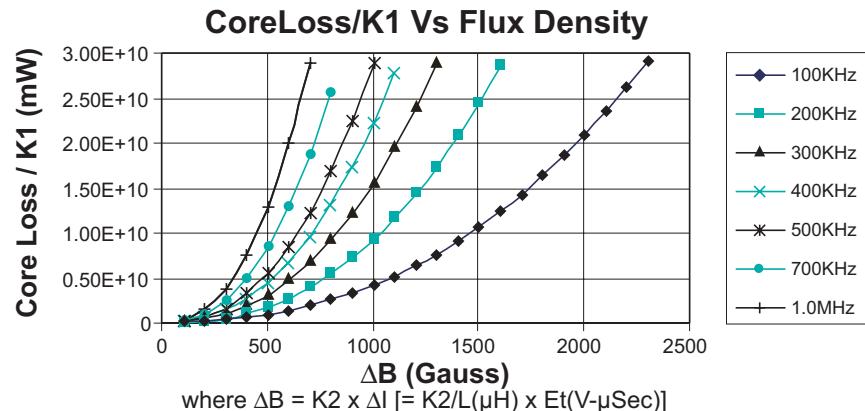

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Fixed Inductors category:

Click to view products by Pulse manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)
[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)
[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)
[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)
[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)