

Fishino MEGA

Fishino Mega is an evolution of Fishino UNO, and it's 100% compatible with Arduino Mega. Having bigger dimensions, it provides many more I/O ports and bigger processor's memories than Fishino UNO; it can also be powered by a single cell LiPo battery, with embedded charger:

Fishino Mega

Power supply:

- 5Volt from microUSB connector
- 5 Volt in +5V pin
- from 3.5 to 20 Volt on Vin input
- from 3.5 to 20 Volt on supply plug
- single cell, 3.7 Volt LiPo battery on bat connector

Digital levels :

- 5 Volt

Controller :

- 8 bit ATmega 2560

Clock :

- 16 MHz

Memory :

- 256 KBytes Flash
- 8 KBytes RAM
- 4 KBytes EEPROM

I/O ports :

- 54 digital ports of which 16 PWM enabled
- 16 analogic inputs
- 2-6 additional 3.3V digital I/O on WiFi module
- 1 additional serial port on WiFi module
- 1 additional analog input on WiFi module

Available interfaces :



- 1 x SPI
- 1 x I2C



Additional modules on board :

- WiFi
- microSD connector
- RTC module with backup battery


Special features :

- Full switching power supplies
- Sketches can be uploaded by WiFi

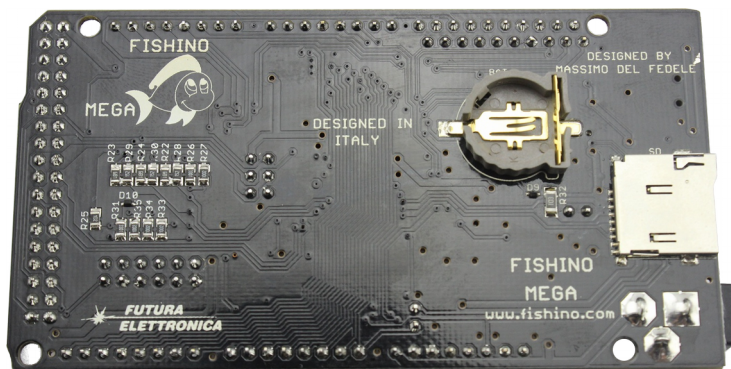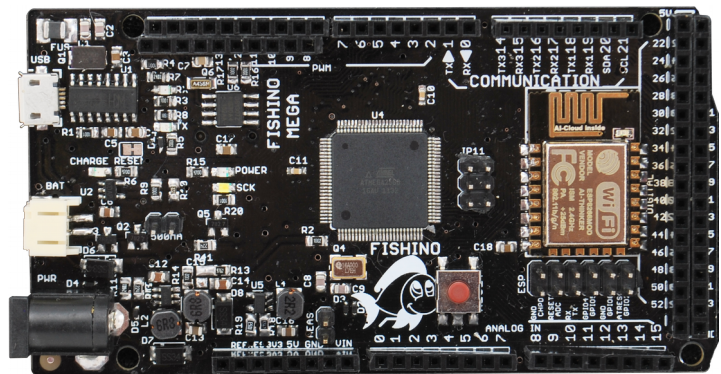

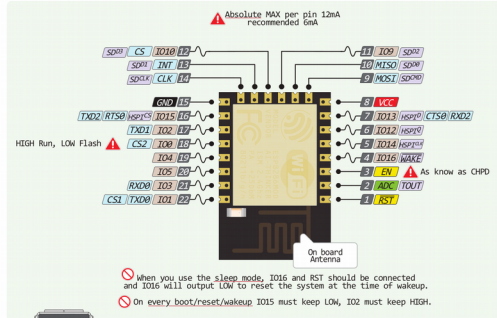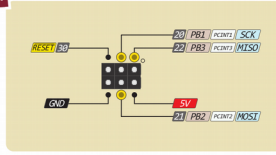

- IDE
- Power
- GND
- Serial Pin
- Analog Pin
- Control
- INT INT
- Physical Pin Physical Pin
- Port Pin Port Pin
- Pin function Pin function
- Interrupt Pin Interrupt Pin
- PWM Pin PWM Pin
- Port Power Port Power ▲

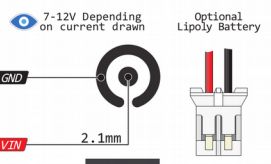


⚠ Absolute MAX per pin 12mA recommended 6mA

⚠ HIGH Run, LOW Flash


⚠ When you use the sleep mode, IO16 and RST should be connected and IO16 will output LOW to reset the system at the time of wakeup.

⚠ On every boot/reset/wakeup IO15 must keep LOW, IO2 must keep HIGH.

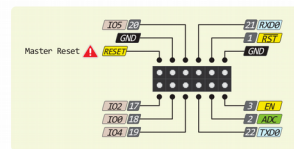

⚠ The power sum for each pin's group should not exceed 100mA

- IOREF provides a logic reference voltage for shields that use it. It is connected to the 5V bus.
- 3V3 The output from 3.3V Regulator Absolute MAX 60mA
- VIN The input voltage to the board when it is running from external power. Not USB bus power.

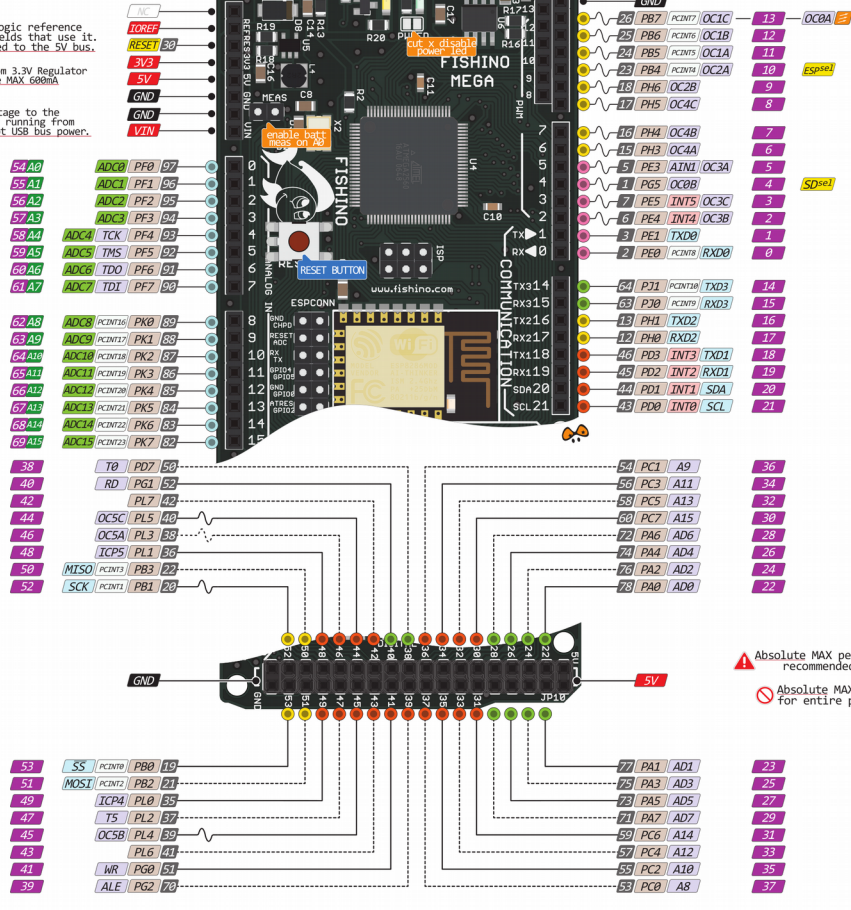

⚠ Absolute MAX per pin 20mA recommended 10mA

⚠ Absolute MAX 200mA for entire package



Links :

Official website, with technical details, libraries, demo, apps and firmware updates:
www.fishino.com

Open-Electronics website with an overview of all Fishino boards family, technical details, articles and demos:
www.open-electronics.org/tag/fishino/

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Development Boards & Kits - Other Processors](#) category:

Click to view products by [Futura](#) manufacturer:

Other Similar products are found below :

[KIT_AURIX_TC233LP_TRB](#) [EVB-MEC1418MECC](#) [SPC56XVTOP-M](#) [ADZS-BF506F-EZLITE](#) [ADZS-SADA2-BRD](#) [20-101-1252](#)
[T1023RDB-PC](#) [20-101-1267](#) [T1042D4RDB-PA](#) [ML610Q174](#) [REFERENCE BOARD](#) [MPC574XG-MB](#) [BSC9132QDS](#) [C29XPCIE-RDB](#)
[KIT_TC1793_SK](#) [CC-ACC-18M433](#) [P1010RDB-PB](#) [P1020RDB-PD](#) [P2020COME-DS-PB](#) [STM8S/32-D/RAIS](#) [T4240RDB-PB](#) [TRK-USB-](#)
[MPC5604B](#) [TWR-56F8200](#) [CY3674](#) [SPC58XXADPT176S](#) [MAX1464EVKIT](#) [TRK-MPC5606B](#) [RTE510Y470TGB00000R](#) [STM8128-](#)
[MCKIT](#) [MAXQ622-KIT#](#) [YRPBRL78G11](#) [SPC58EEMU](#) [QB-R5F10JGC-TB](#) [YQB-R5F11BLE-TB](#) [SPC564A70AVB176](#)
[RTE5117GC0TGB00000R](#) [QB-R5F100LE-TB](#) [YR0K50571MS000BE](#) [YQB-R5F1057A-TB](#) [QB-R5F104PJ-TB](#) [CC-ACC-ETHMX](#)
[LFM34INTPQA](#) [SPC563M64A176S](#) [Y-BLDC-SK-RL78F14](#) [P1021RDB-PC](#) [SPC58XCADPT176S](#) [RTE510MPG0TGB00000R](#)
[YRPBRX71M](#) [LFMAJ04PLT](#) [KITAURIXTC234LPSTRBTOBO1](#) [OV-7604-C7-EVALUATION-BOARD](#)