

Future Technology Devices International

Datasheet

ME810A-HV35R Display Module



General Purpose Multi Media Controller

1 Introduction

The ME810A-HV35R is a development module for FTDI's FT810, Embedded Video Engine (EVE) graphics controller IC. This module behaves as an SPI slave, and requires a SPI Master for proper micro-controller interface and system integration.

The ME810A-HV35R module includes a 3.5 inch 320*480, portrait TFT LCD panel with resistive touch screen and buzzer for audio output. Users can also connect to different LCD screens which meet the FT810 technical specification and fit with the ME810A-HV35R LCD interface connector.

1.1 Features

The ME810A-HV35R utilises the FTDI FT810 Embedded Video Engine. Graphic, audio and touch features of the FT810 can be accessed with the ME810A-HV35R. For a full list of the FT810's features, please see the [FT81x datasheet](#).

The ME810A-HV35R has the following features:

- Ready to use LCD module.
- Supports resistive touch with pressure sensing.
- Supports portrait and landscape display mode.
- Supports mono audio output.
- On board LCD backlight LED driver.
- On board buzzer with a transistor control.
- +3.3V single power supply.
- Supports configurable LCD with 4-line SPI.
- Direct connect with MM900EV module series as a display module.
- Bezel with four mounting holes for system assembly.

Neither the whole nor any part of the information contained in, or the product described in this manual, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. This product and its documentation are supplied on an as-is basis and no warranty as to their suitability for any particular purpose is either made or implied. Future Technology Devices International Ltd will not accept any claim for damages howsoever arising as a result of use or failure of this product. Your statutory rights are not affected. This product or any variant of it is not intended for use in any medical appliance, device or system in which the failure of the product might reasonably be expected to result in personal injury. This document provides preliminary information that may be subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow G41 1HH United Kingdom. Scotland Registered Company Number: SC136640

2 Ordering Information

| Part No. | Description |
|-----------------|---|
| ME810A-HV35R-BK | FT810 module, with FPC/FFC 50 LCD connector, 3.5 inch TFT LCD display panel preinstalled with resistive touch. Black bezel. |
| ME810A-HV35R-PL | FT810 module, with FPC/FFC 50 LCD connector, 3.5 inch TFT LCD display panel preinstalled with resistive touch. Pearl bezel. |

Table 2-1 – Ordering information

Note: This module is recommended as an accessory to the **MM900EV series** (due Nov 2015) for development purposes. For more information on the **MM900EV series**, refer to: <http://www.ftdichip.com/Products/ICs/FT90x.html>.

Table of Contents

| | | |
|--|---|-----------|
| 1 | Introduction | 1 |
| 1.1 | Features | 1 |
| 2 | Ordering Information | 2 |
| 3 | Board Interface Description | 4 |
| 3.1 | Board Profile | 4 |
| 3.2 | J1- SPI interface and control signals | 5 |
| 3.3 | JP1- On board buzzer enable | 5 |
| 4 | Application Example..... | 6 |
| 4.1 | Getting Start With an MM900EV Module | 6 |
| 4.2 | Hardware Setup | 6 |
| 4.3 | Software Setup | 7 |
| 5 | Mechanical Dimensions | 8 |
| 5.1 | J1 Pin Header Dimensions | 8 |
| 5.2 | Bezel Mechanical Drawing | 9 |
| 5.3 | Board Schematics | 10 |
| 6 | Specifications | 11 |
| 6.1 | Electrical Specification | 11 |
| 6.2 | Display Specification | 11 |
| 6.3 | Optical Specification..... | 12 |
| 7 | Contact Information..... | 13 |
| Appendix A - References..... | | 14 |
| | Document References | 14 |
| | Acronyms and Abbreviations | 14 |
| Appendix B - List of Figures and Tables | | 15 |
| | List of Figures | 15 |
| | List of Tables | 15 |
| Appendix C – Revision History..... | | 16 |

3 Board Interface Description

The ME810A-HV35R module is intended for direct use into existing applications that require a display.

This module is suitable for interfacing with an external microcontroller (e.g. MM900EV series) that has a SPI Master channel.

3.1 Board Profile

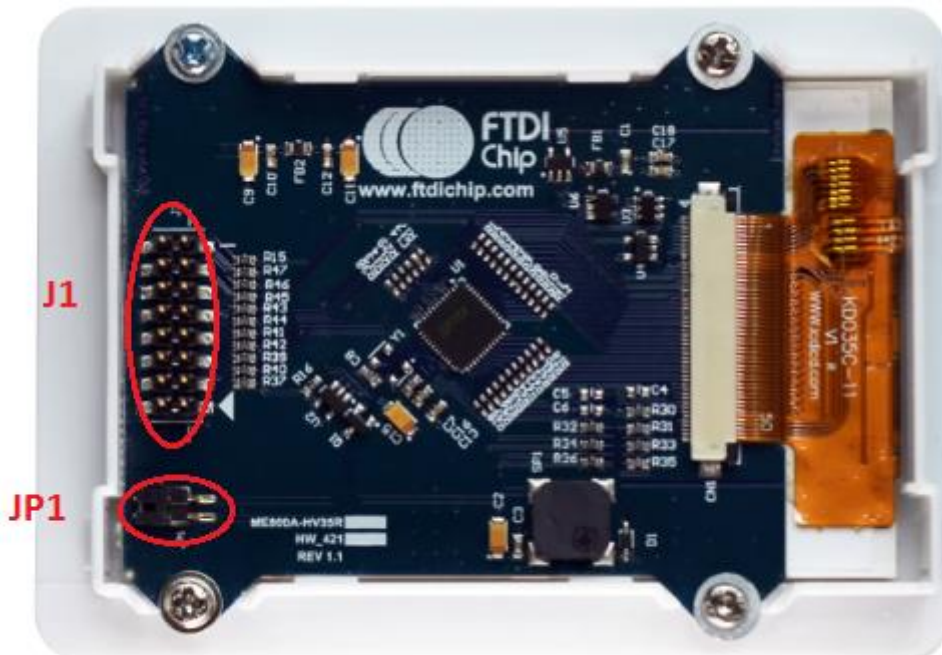


Figure 3-1 – ME810A-HV35R board bottom view

3.2 J1- SPI interface and control signals

| Pin No. | Name | Type | Description |
|---------|---------|------|---|
| 1 | J1_SCK | I | SPI clock input |
| 2 | J1_CS0# | I | FT810 SPI chip select, active low |
| 3 | J1_MISO | I/O | SPI master input, slave output or QSPI IO1 |
| 4 | J1_MOSI | I/O | SPI master output, slave input or QSPI IO0 |
| 5 | J1_IO3 | I/O | FT810 GPIO1 or QSPI IO3 |
| 6 | J1_IO2 | I/O | FT810 GPIO0 or QSPI IO2 |
| 7 | J1_DCX | I | LCD panel data / command selection pin Low: Command High: Parameter |
| 8 | J1_CS1# | I | LCD panel SPI chip select, active low |
| 9 | J1_3V3 | P | 3.3V power supply input |
| 10 | J1_5V | P | NC |
| 11 | GND | P | Ground |
| 12 | GND | P | Ground |
| 13 | J1_PD# | I | FT810 powers down input, active low. Connect to 3.3V if not used. |
| 14 | J1_INT# | O | FT810 interrupts output, active low. On board 10kΩ pull-up to 3.3V. |
| 15 | J1_AUDL | O | FT810 PWM audio output |
| 16 | J1_DISP | I | LCD display reset. Connect to GND if not used. |

Table 3-1 – J1 Pinout

3.3 JP1- On board buzzer enable

Jumper fitted by default. Remove the jumper to disable the buzzer.

4 Application Example

4.1 Getting Start With an MM900EV Module

As a quick start with the ME810A-HV35R development board, connecting to an MM900EV module development platform is recommended. Demo applications are provided for users to experiment and experience the FT810 in the ME810A system. The following paragraphs provide a short description for development procedures.

The MM900EV series of FT900 MCU evaluation platforms allows user to develop various applications with rich peripheral interfaces. The following MM900EV modules are compatible:

- **MM900EV1A:** with a 32-bit high performance FT900 MCU, 10/100Mbps Ethernet, USB2.0 Host, USB2.0 Device, SD3.0, Audio Codec, SPI Master Quad Interface, and 40-pin external GPIOs.
- **MM900EV-Lite:** Tiny board with a 32-bit high performance FT900 MCU, USB2.0 Device, SD3.0, SPI Master Quad Interface, and 40-pin external GPIOs.

Detailed information of MM900EV module can be found at:

<http://www.ftdichip.com/Products/ICs/FT90x.html>

4.2 Hardware Setup

Figure 4-1 shows the ME810A-HV35R module connected to an MM900EV-Lite module.

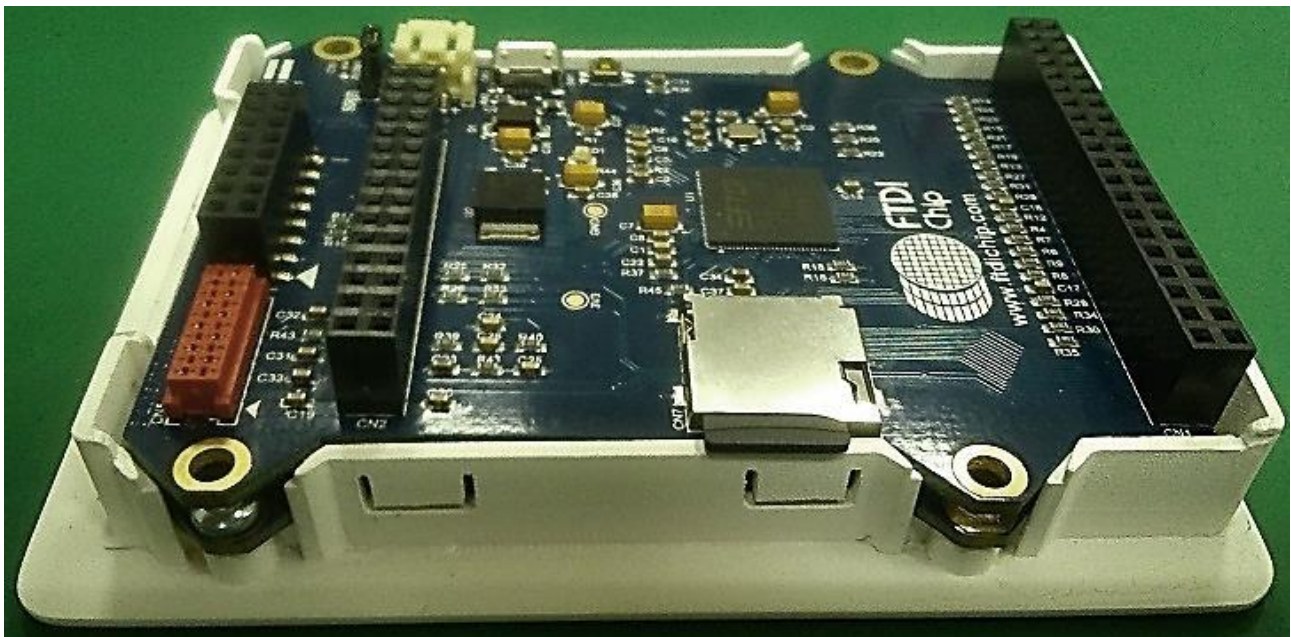


Figure 4-1 – ME810A-HV35R connects to MM900EV Module

The ME810A-HV35R **J1** pin header connects to the MM900EV module **J2** dual-enter socket (See Table 4-1 for pin mapping).

- Connect a USB cable or Power Supply to the MM900EV module to power the system.

| Pin number | J1 Signal | J2 Signal |
|------------|-----------|-----------|
| 1 | J1_SCK | SPIM_SCK |
| 2 | J1_CS0# | SPIM_SS0 |
| 3 | J1_MISO | SPIM_MISO |
| 4 | J1_MOSI | SPIM_MOSI |
| 5 | J1_IO3 | SPIM_IO3 |
| 6 | J1_IO2 | SPIM_IO2 |
| 7 | J1_DCX | DCX |
| 8 | J1_CS1# | CS1# |
| 9 | J1_3V3 | VDD_3V3 |
| 10 | NC | VDD_5V |
| 11 | GND | GND |
| 12 | GND | GND |
| 13 | J1_PD# | PWD# |
| 14 | J1_INT# | INT# |
| 15 | J1_AUDL | AUD_LIN |
| 16 | J1_DISP | DISP |

Table 4-1 – ME810A-HV35R J1 and MM900EV module J2 connection

4.3 Software Setup

- Download the FT90x toolchain and sample application for ME810A-HV35R from the FTDI website at <http://www.ftdichip.com/Products/ICs/FT90x.html>.
- Install the FT90x toolchain on a Windows PC.
- Download the sample application binary file to the MM900EV module.

The sample applications will demonstrate display, touch and audio functions of the ME810A-HV35R module. Refer to [AN 381 ME810A HV35R Sample Application](#) for more details.

5 Mechanical Dimensions

5.1 J1 Pin Header Dimensions

J1 pin header is a 2x8 way, 2.54mm pitch vertical pin. The Figure 6-2 illustrates the first pin dimensions and pin header parameters (in millimeters).

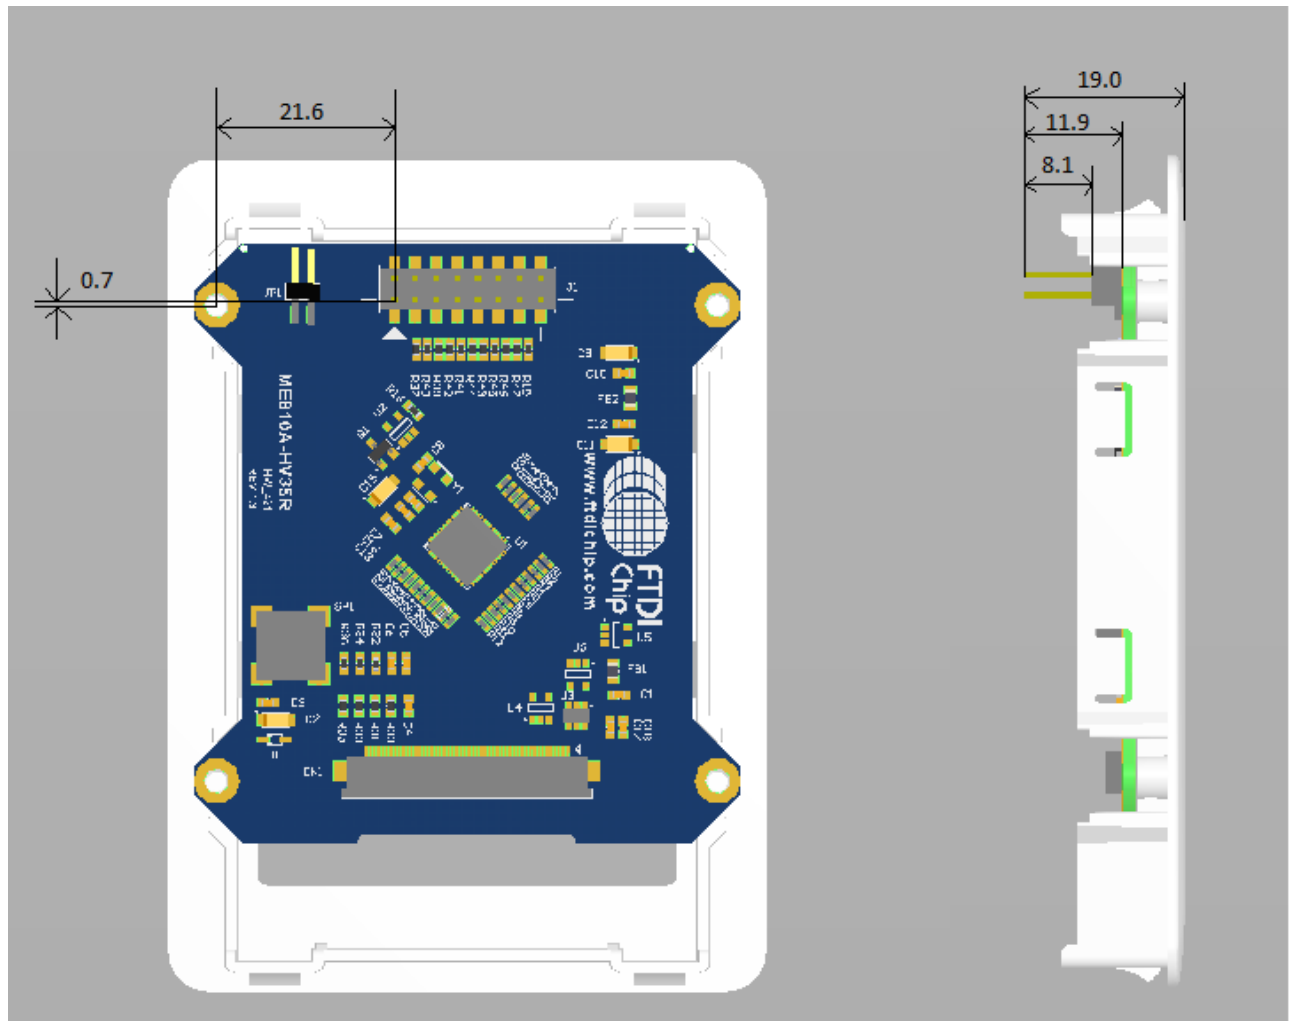


Figure 5-1 – J1 Pin Header Dimensions

5.2 Bezel Mechanical Drawing

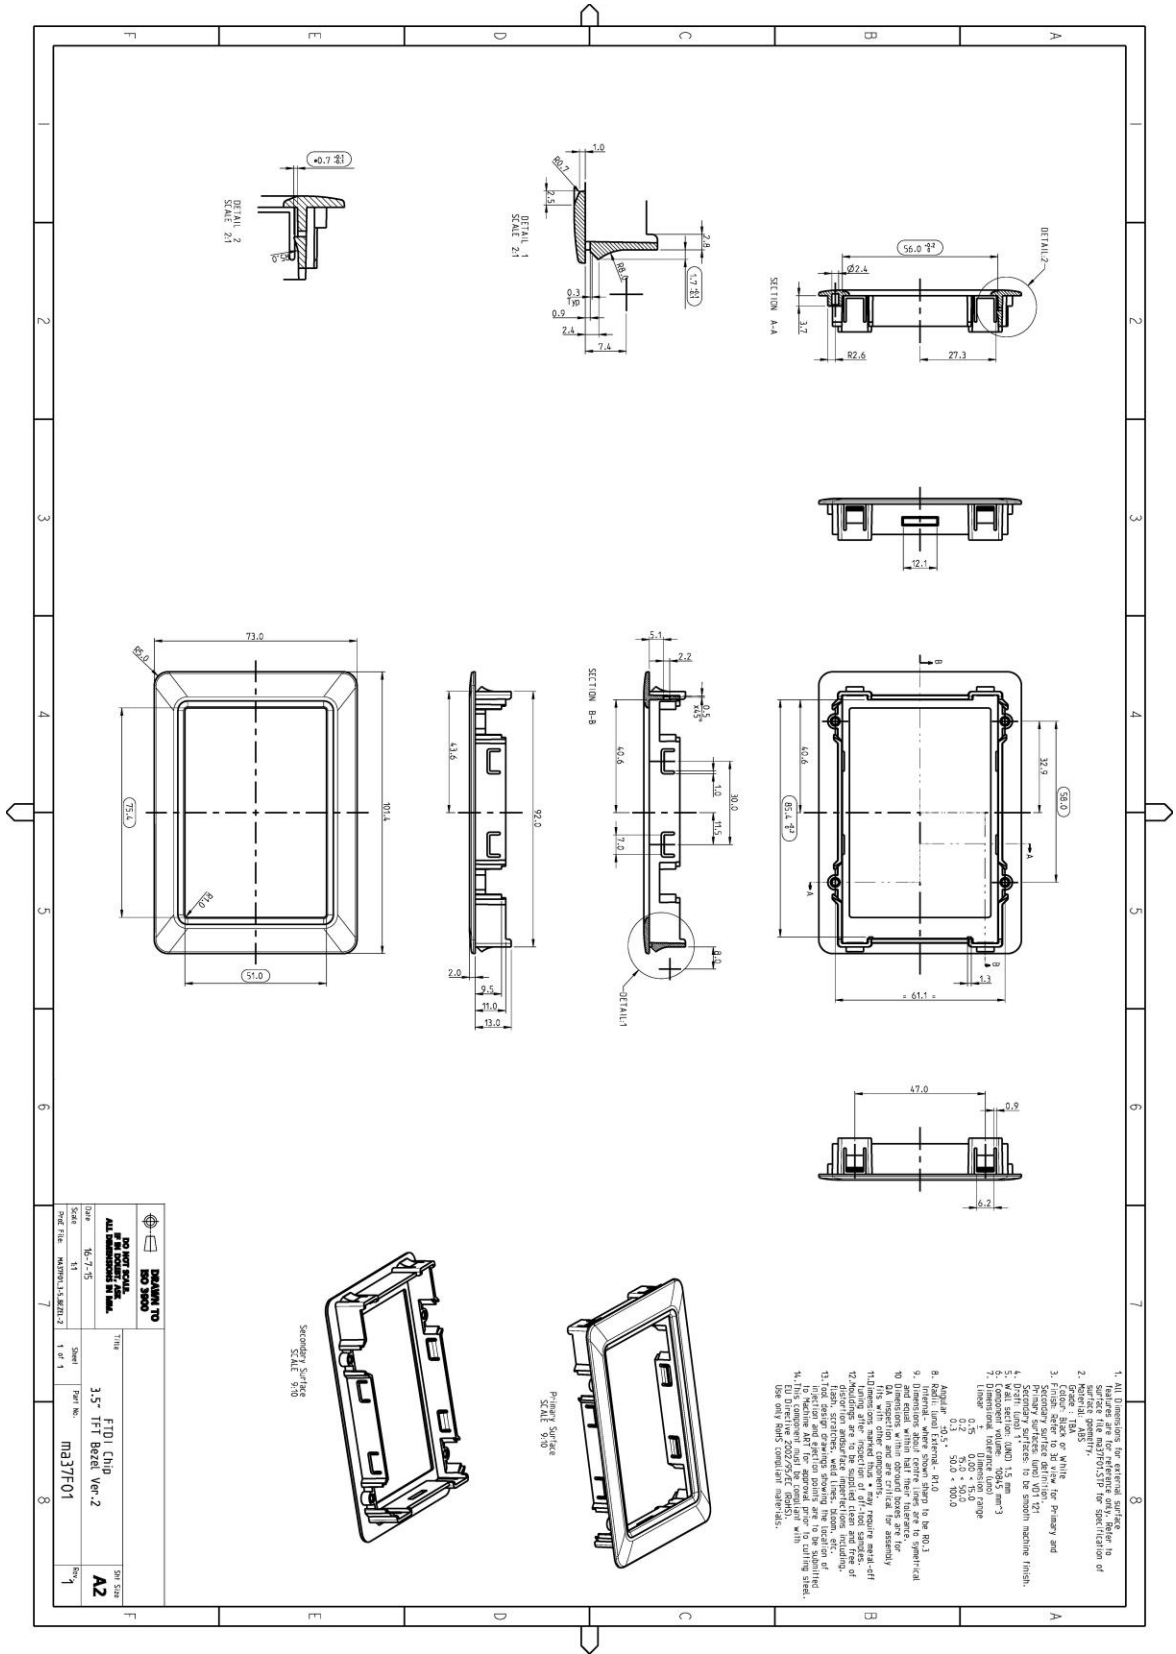


Figure 5-2 - Bezel dimensions

5.3 Board Schematics

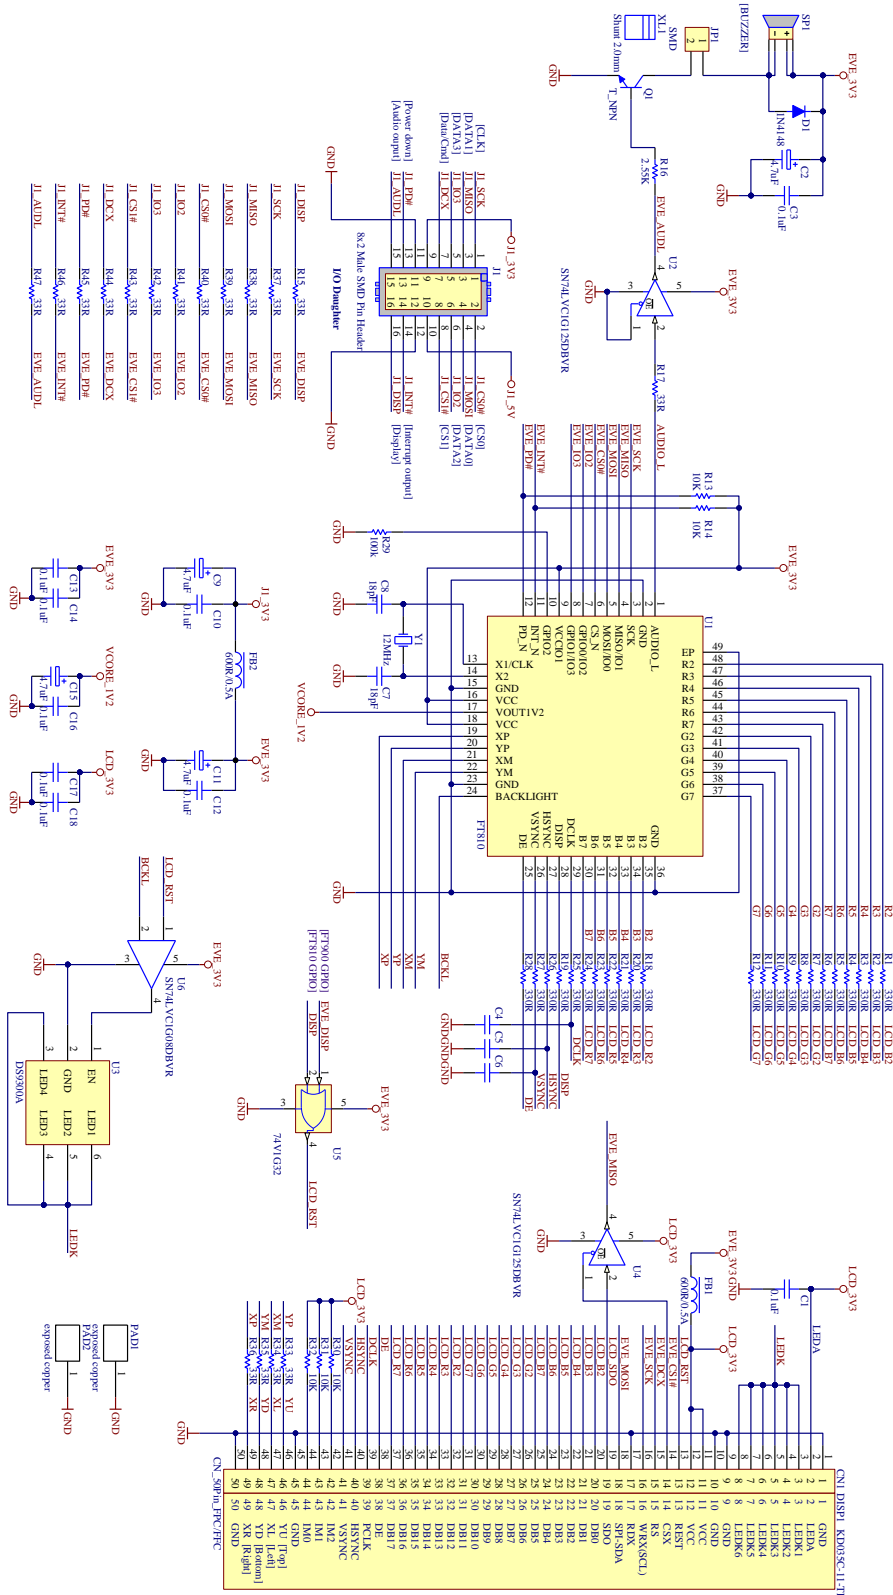


Figure 5-3 – Board Schematic

6 Specifications

6.1 Electrical Specification

| Parameter | Description | Minimum | Typical | Maximum | Units | Notes |
|-----------|------------------------------|---------|---------|---------|-------|------------------|
| VCC | VCC operating supply voltage | 3.0 | 3.3 | 3.6 | V | J1 pin 9 |
| Icc | VCC operating current | | 110 | | mA | Backlight LED on |
| Voh | Output Voltage High | VCC-0.4 | - | - | V | |
| Vol | Output Voltage Low | - | - | 0.4 | V | |
| Vih | Input High Voltage | 2.0 | - | - | V | |
| Vil | Input Low Voltage | - | - | 0.8 | V | |
| T | Operating temperature | -20 | - | +70 | °C | |

Table 6-1 - Operating Voltage and Current

6.2 Display Specification

| Item | Spec | Units | Notes |
|------------------|------------------------------|-------------------|-------------------|
| Display area(AA) | 49.0(H) * 73.4(V) | mm | 3.5 inch diagonal |
| Driver Element | TFT active matrix | mA | |
| Display Colors | 262K | - | |
| Number of Pixels | 320(RGB)*480 | dots | |
| Pixel pitch | 0.051(H) * 0.051(V) | mm | |
| Viewing Angle | 6:00 | o'clock | |
| Display mode | Transmissive/ Normally White | - | |
| LCD Luminance | 100 | cd/m ² | |
| Touch screen | resistive | - | |

Table 6-2 - LCD and Touch Information

6.3 Optical Specification

| Item | Symbol | Conditions | Specifications | | | Unit | Note |
|----------------|-----------|--|----------------|-------|-------|------|---|
| | | | Min. | Typ. | Max. | | |
| Transmittance | T% | Viewing normal angle $\theta_x = \theta_y = 0^\circ$ | | 5.5 | | % | All left side data are based on CMO's following condition – 1. LC Mode: TN 2. Light Source : CMO LED BLU 3. Film : Linear Polarizer+WV (Nitto NPF-TEG1424DU) 4. Machine : DMS 803 |
| Contrast Ratio | CR | | | 500 | - | - | |
| Response Time | T_{on} | | - | 5 | | ms | |
| | T_{off} | - | 15 | | ms | | |
| Viewing Angle | Hor. | θ_{x+} | - | 70 | - | deg | |
| | | θ_{x-} | - | 70 | - | | |
| | Ver. | θ_{y+} | - | 60 | - | | |
| | | θ_{y-} | - | 60 | - | | |
| Chromaticity | Red | X_R | 0.611 | 0.641 | 0.671 | - | Under C light Simulation CG : NTSC 60% |
| | | Y_R | 0.290 | 0.320 | 0.350 | - | |
| | Green | X_G | 0.270 | 0.300 | 0.330 | - | |
| | | Y_G | 0.536 | 0.566 | 0.596 | - | |
| | Blue | X_B | 0.104 | 0.134 | 0.164 | - | |
| | | Y_B | 0.098 | 0.128 | 0.158 | - | |
| | White | X_W | 0.267 | 0.297 | 0.327 | - | |
| | | Y_W | 0.301 | 0.331 | 0.361 | - | |

*Note (1) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$


L63: Luminance of gray level 63

L 0: Luminance of gray level 0

$$CR = CR (5)$$

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (5).

*Note (2) Definition of Response Time (T_{on} , T_{off}):

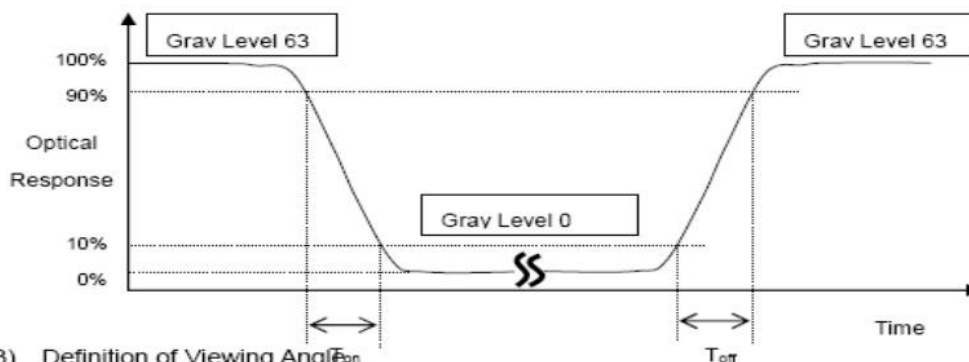

*Note(3) Definition of Viewing Angle θ_{on}

Table 6-3 - 3.5" TFT Optical specification

7 Contact Information

Head Office – Glasgow, UK

Unit 1, 2 Seaward Place, Centurion Business Park
Glasgow G41 1HH
United Kingdom
Tel: +44 (0) 141 429 2777
Fax: +44 (0) 141 429 2758

E-mail (Sales) sales1@ftdichip.com
E-mail (Support) support1@ftdichip.com
E-mail (General Enquiries) admin1@ftdichip.com

Branch Office – Tigard, Oregon, USA

7130 SW Fir Loop
Tigard, OR 97223
USA
Tel: +1 (503) 547 0988
Fax: +1 (503) 547 0987

E-Mail (Sales) us.sales@ftdichip.com
E-Mail (Support) us.support@ftdichip.com
E-Mail (General Enquiries) us.admin@ftdichip.com

Branch Office – Taipei, Taiwan

2F, No. 516, Sec. 1, NeiHu Road
Taipei 114
Taiwan, R.O.C.
Tel: +886 (0) 2 8797 1330
Fax: +886 (0) 2 8751 9737

E-mail (Sales) tw.sales1@ftdichip.com
E-mail (Support) tw.support1@ftdichip.com
E-mail (General Enquiries) tw.admin1@ftdichip.com

Branch Office – Shanghai, China

Room 1103, No. 666 West Huaihai Road,
Shanghai, 200052
China
Tel: +86 (0)21 6235 1596
Fax: +86 (0)21 6235 1595

E-mail (Sales) cn.sales@ftdichip.com
E-mail (Support) cn.support@ftdichip.com
E-mail (General Enquiries) cn.admin@ftdichip.com

Web Site

<http://ftdichip.com>

Distributor and Sales Representatives

Please visit the Sales Network page of the [FTDI Web site](#) for the contact details of our distributor(s) and sales representative(s) in your country.

System and equipment manufacturers and designers are responsible to ensure that their systems, and any Future Technology Devices International Ltd (FTDI) devices incorporated in their systems, meet all applicable safety, regulatory and system-level performance requirements. All application-related information in this document (including application descriptions, suggested FTDI devices and other materials) is provided for reference only. While FTDI has taken care to assure it is accurate, this information is subject to customer confirmation, and FTDI disclaims all liability for system designs and for any applications assistance provided by FTDI. Use of FTDI devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify and hold harmless FTDI from any and all damages, claims, suits or expense resulting from such use. This document is subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Neither the whole nor any part of the information contained in, or the product described in this document, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. Future Technology Devices International Ltd, Unit 1, 2 Seaward Place, Centurion Business Park, Glasgow G4 1 1HH, United Kingdom. Scotland Registered Company Number: SC136640

Appendix A - References

Document References

For module documentations, please refer to URL below :

FT81x datasheet: [DS_FT81x](#)

FT81x software programming guide: [FT81x Programmer Guide](#)

Acronyms and Abbreviations

| Terms | Description |
|-------|-----------------------------|
| EVE | Embedded Video Engine |
| IC | Integrated Circuit |
| LCD | Liquid Crystal Display |
| LED | Light Emitting Diode |
| PC | Personal Computer |
| SPI | Serial Peripheral Interface |
| TFT | Thin Film Transistor |

Appendix B - List of Figures and Tables

List of Figures

| | |
|--|----|
| Figure 3-1 – ME810A-HV35R board bottom view | 4 |
| Figure 4-1 – ME810A-HV35R connects to MM900EV Module | 6 |
| Figure 5-1 – J1 Pin Header Dimensions..... | 8 |
| Figure 5-2 – Bezel dimensions..... | 9 |
| Figure 5-3 – Board Schematic..... | 10 |

List of Tables

| | |
|--|----|
| Table 2-1 – Ordering information..... | 2 |
| Table 3-1 – J1 Pinout | 5 |
| Table 4-1 – ME810A-HV35R J1 and MM900EV module J2 connection | 7 |
| Table 6-1 - Operating Voltage and Current | 11 |
| Table 6-2 - LCD and Touch Information | 11 |
| Table 6-3 - 3.5" TFT Optical specification..... | 12 |

Appendix C – Revision History

Document Title: ME810A-HV35R module
Document Reference No.: FT_001232
Clearance No.: FTDI# 468
Product Page: <http://www.ftdichip.com/eve.htm>
Document Feedback: [Send Feedback](#)

| Revision | Changes | Date |
|----------|-----------------|------------|
| 1.0 | Initial Release | 2015-09-29 |
| 1.1 | Updated Release | 2016-03-11 |