




(2,00mm) .0787"

TMM SERIES

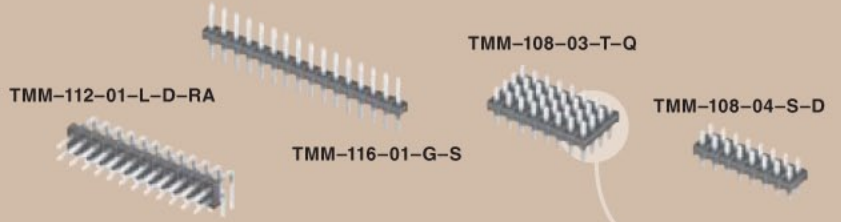

LOW PROFILE THROUGH-HOLE HEADER

SPECIFICATIONS


For complete specifications see www.samtec.com?TMM

Insulator Material:
Black Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze
Plating:
Sn or Au over 50µ" (1,27µm) Ni




Operating Temp Range:
-55°C to +105°C with Tin;
-55°C to +125°C with Gold
Voltage Rating:
500 VAC mated with SQW
450 VAC mated with SQT
RoHS Compliant:
Yes
Lead-Free Solderable:
Yes

Mates with:
CLT, SQT, SQW, ESQT,
TLE, SMM, MMS,
TCSD, TLSD

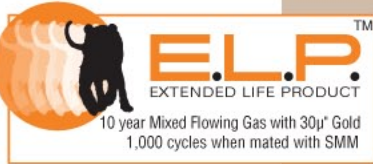

APPLICATION



Single, double and quad row

Ultra-low profile (1,50mm) .059"

Choice of five lead styles

APPLICATIONS



CURRENT RATING	
AMBIENT TEMP	Mated with SMM
20°C	3.9A
40°C	3.5A
60°C	3A
95°C	2A

6 POSITIONS (2x3) POWERED

Note: Some lengths, styles and options are non-standard, non-returnable.

Also Available

Press Fit
See PTT Series.

Surface Mount
See TMM Series.

Elevated
See TW Series.

High Density
See TMMH Series.


Shrouded Four Row Vertical & Right Angle
See TMMS Series.

Paste In Hole (PIH) processing.
Contact Samtec ASP Group.

TMM - **1** **NO. PINS PER ROW** - **LEAD STYLE** - **PLATING OPTION** - **ROW OPTION** - **OTHER OPTION**

01 thru 50

Specify LEAD STYLE from chart below.

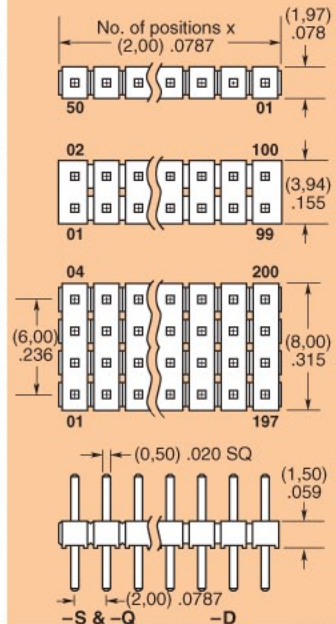

LEAD STYLE	A	B	C
-01	(3,20)	(3,50)	
	.126	.138	
-02	(8,20)	(3,70)	(3,00)
	.323	.146	.118
-03	(5,69)	(1,91)	(2,29)
	.224	.075	
-04	(5,43)	(1,65)	.090
	.214	.065	
-05	(9,58)	(3,20)	(4,88)
	.377	.126	.192
-06			

-F
= Gold flash on post, Matte Tin on tail

-L
= 10µ" (0,25µm) Gold on post, Matte Tin on tail

-G
= 20µ" (0,51µm) Gold on post, Gold flash on tail

-S
= 30µ" (0,76µm) Gold on post, Matte Tin on tail

-T
= Matte Tin

-S
= Single Row



-D
= Double Row

-Q
= Four Row

-RA & -RE
= Right Angle (Lead Style -01 only) (2 positions minimum, -Q row)

-RC
= Retention Clip (Mates with TCSD) (Double row only, 4 positions minimum, only available -06 lead style)

"XXX"
= Polarized Position (Specify position of omitted pin)

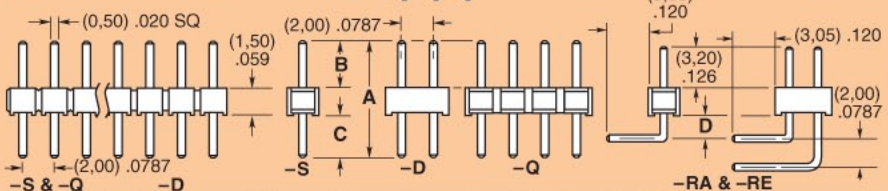

OPTION	D
-RA	(1,27) .050
-RE	(3,56) .140

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [Samtec](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)