
## SPECIFICATION CONTROL DRAWING

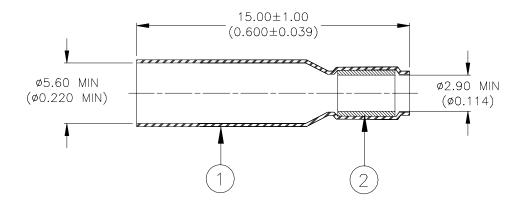

## **MATERIALS**

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. SEALING RING: Thermally stabilized thermoplastic.

## **APPLICATION**

- 1. This device is used to cover a stub splice. It is suitable for crimps from 22AWG to 14AWG.
- 2. The recommended heating tool is the CV-1983 fitted with PR25 reflector.

Electronics 307 Constitution Drive Menlo Park, CA 94025, USA				Raychem	TI	SEALING SLEEVE				
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.						DOCUMENT NO.: <b>B-006-04</b>				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	amend this draw		drawing a	es reserves the right to ving at any time. Users the suitability of the r application.		DCR NUMBER: D010423		REPLACES: N/A		
DRAWN BY: M. FORONDA		DATE: 10-Jul-01		PROD. REV. D		DOC ISSUE: 1	SCALE: None	SIZE:	SHEET: 1 of 1	

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for te connectivity manufacturer:

Other Similar products are found below:

570416-000 CLTEQ-M81CE-SSRELAY-4-20V 4-1633138-8 D38999/24FJ4AN 4-1195131-0 650069-000 SMD100-2 2EDL4CM
DTS20W19-11PD-3028 DTS20W19-11PD-3028-LC DTS20W19-32SD-3028-LC DTS20W19-32SD-3028 NC6-P104-06 TXR64AB903616AI DTS26F21-41HE DTS26F21-41AE DTS26F21-41PE-LC DTS26F21-11SE-3028-LC D38999/24WF32JE D38999/24WF32SE-LC
DTS24W19-32HE D38999/20JB35HA D38999/24WJ20PA 164-8033-08 D38999/24FF32JE D38999/24FF32SE-LC D38999/24WF32JB
D38999/24WG11HA D38999/24WG11HN MS27467T21F11H DJT16E21-11HA DTS24F19-32HE DTS20W19-32SA-3028-LC DTS24F1911SC-3028-LC DTS24F19-11SC-3028 DJT14E13-98HB D38999/20WC8BB 1-330599-5 DTS24F21-41HN-LC DTS24F21-41HN
DTS24F21-41AN DTS24F21-39HN DTS24F21-41PN-LC AFD50-10-6SN-1A-LC DJT10F17-26HC DTS24W19-32HB ACT20JE99HA
DJT10E17-26HC DJT10E17-26HN DJT10F17-26HA