



Short form catalog

Motor protection and control

Manual motor starters, contactors and overload relays

Motor rated operational powers and currents

The currents given below concern standard three-phase four-pole cage motors (1500 r.p.m. at 50 Hz 1800 r.p.m. at 60 Hz). These values are given for guidance and may vary according to the motor manufacturer and depending on the number of poles.

| IEC | Motor nominal current: standardized values in blue colour (according to IEC 60947-4-1 Annex G) | | | | | | | | | |
|----------------|---------------------------------------------------------------------------------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Motor power kW | 220 V A | 230 V A | 240 V A | 380 V A | 400 V A | 415 V A | 440 V A | 500 V A | 660 V A | 690 V A |
| 0.06 | 0.37 | 0.35 | 0.34 | 0.21 | 0.2 | 0.19 | 0.18 | 0.16 | 0.13 | 0.12 |
| 0.09 | 0.54 | 0.52 | 0.50 | 0.32 | 0.3 | 0.29 | 0.26 | 0.24 | 0.18 | 0.17 |
| 0.12 | 0.73 | 0.7 | 0.67 | 0.46 | 0.44 | 0.42 | 0.39 | 0.32 | 0.24 | 0.23 |
| 0.18 | 1 | 1 | 1 | 0.63 | 0.6 | 0.58 | 0.53 | 0.48 | 0.37 | 0.35 |
| 0.25 | 1.6 | 1.5 | 1.4 | 0.9 | 0.85 | 0.82 | 0.74 | 0.68 | 0.51 | 0.49 |
| 0.37 | 2.0 | 1.9 | 1.8 | 1.2 | 1.1 | 1.1 | 1 | 0.88 | 0.67 | 0.64 |
| 0.55 | 2.7 | 2.6 | 2.5 | 1.6 | 1.5 | 1.4 | 1.3 | 1.2 | 0.91 | 0.87 |
| 0.75 | 3.5 | 3.3 | 3.2 | 2.0 | 1.9 | 1.8 | 1.7 | 1.5 | 1.15 | 1.1 |
| 1.1 | 4.9 | 4.7 | 4.5 | 2.8 | 2.7 | 2.6 | 2.4 | 2.2 | 1.7 | 1.6 |
| 1.5 | 6.6 | 6.3 | 6 | 3.8 | 3.6 | 3.5 | 3.2 | 2.9 | 2.2 | 2.1 |
| 2.2 | 8.9 | 8.5 | 8.1 | 5.2 | 4.9 | 4.7 | 4.3 | 3.9 | 2.9 | 2.8 |
| 3 | 11.8 | 11.3 | 10.8 | 6.8 | 6.5 | 6.3 | 5.7 | 5.2 | 4 | 3.8 |
| 4 | 15.7 | 15 | 14.4 | 8.9 | 8.5 | 8.2 | 7.4 | 6.8 | 5.1 | 4.9 |
| 5.5 | 20.9 | 20 | 19.2 | 12.1 | 11.5 | 11.1 | 10.1 | 9.2 | 7 | 6.7 |
| 7.5 | 28.2 | 27 | 25.9 | 16.3 | 15.5 | 14.9 | 13.6 | 12.4 | 9.3 | 8.9 |
| 11 | 39.7 | 38 | 36.4 | 23.2 | 22 | 21.2 | 19.3 | 17.6 | 13.4 | 12.8 |
| 15 | 53.3 | 51 | 48.9 | 30.5 | 29 | 28 | 25.4 | 23 | 17.8 | 17 |
| 18.5 | 63.8 | 61 | 58.5 | 36.8 | 35 | 33.7 | 30.7 | 28 | 22 | 21 |
| 22 | 75.3 | 72 | 69 | 43.2 | 41 | 39.5 | 35.9 | 33 | 25.1 | 24 |
| 30 | 100 | 96 | 92 | 57.9 | 55 | 53 | 48.2 | 44 | 33.5 | 32 |
| 37 | 120 | 115 | 110 | 69 | 66 | 64 | 58 | 53 | 40.8 | 39 |
| 45 | 146 | 140 | 134 | 84 | 80 | 77 | 70 | 64 | 49.1 | 47 |
| 55 | 177 | 169 | 162 | 102 | 97 | 93 | 85 | 78 | 59.6 | 57 |
| 75 | 240 | 230 | 220 | 139 | 132 | 127 | 116 | 106 | 81 | 77 |
| 90 | 291 | 278 | 266 | 168 | 160 | 154 | 140 | 128 | 97 | 93 |
| 110 | 355 | 340 | 326 | 205 | 195 | 188 | 171 | 156 | 118 | 113 |
| 132 | 418 | 400 | 383 | 242 | 230 | 222 | 202 | 184 | 140 | 134 |
| 160 | 509 | 487 | 467 | 295 | 280 | 270 | 245 | 224 | 169 | 162 |
| 200 | 637 | 609 | 584 | 368 | 350 | 337 | 307 | 280 | 212 | 203 |
| 250 | 782 | 748 | 717 | 453 | 430 | 414 | 377 | 344 | 261 | 250 |
| 315 | 983 | 940 | 901 | 568 | 540 | 520 | 473 | 432 | 327 | 313 |
| 355 | 1109 | 1061 | 1017 | 642 | 610 | 588 | 535 | 488 | 370 | 354 |
| 400 | 1255 | 1200 | 1150 | 726 | 690 | 665 | 605 | 552 | 418 | 400 |
| 500 | 1545 | 1478 | 1416 | 895 | 850 | 819 | 745 | 680 | 515 | 493 |
| 560 | 1727 | 1652 | 1583 | 1000 | 950 | 916 | 832 | 760 | 576 | 551 |
| 630 | 1928 | 1844 | 1767 | 1116 | 1060 | 1022 | 929 | 848 | 643 | 615 |
| 710 | 2164 | 2070 | 1984 | 1253 | 1190 | 1147 | 1043 | 952 | 721 | 690 |
| 800 | 2446 | 2340 | 2243 | 1417 | 1346 | 1297 | 1179 | 1076 | 815 | 780 |
| 900 | 2760 | 2640 | 2530 | 1598 | 1518 | 1463 | 1330 | 1214 | 920 | 880 |
| 1000 | 3042 | 2910 | 2789 | 1761 | 1673 | 1613 | 1466 | 1339 | 1014 | 970 |

| UL / CSA | Motor nominal current: standardized values (according to IEC 60947-4-1 Annex G and UL 508) | | | | |
|----------------|-----------------------------------------------------------------------------------------------|-------------|-------------|-------------|-------------|
| Motor power hp | 208 V A | 220-240 V A | 380-415 V A | 440-480 V A | 550-600 V A |
| 1/2 | 2.4 | 2.2 | 1.3 | 1.1 | 0.9 |
| 3/4 | 3.5 | 3.2 | 1.8 | 1.6 | 1.3 |
| 1 | 4.6 | 4.2 | 2.3 | 2.1 | 1.7 |
| 1-1/2 | 6.6 | 6 | 3.3 | 3 | 2.4 |
| 2 | 7.5 | 6.8 | 4.3 | 3.4 | 2.7 |
| 3 | 10.6 | 9.6 | 6.1 | 4.8 | 3.9 |
| 5 | 16.7 | 15.2 | 9.7 | 7.6 | 6.1 |
| 7-1/2 | 24.2 | 22 | 14 | 11 | 9 |
| 10 | 30.8 | 28 | 18 | 14 | 11 |
| 15 | 46.2 | 42 | 27 | 21 | 17 |
| 20 | 59.4 | 54 | 34 | 27 | 22 |
| 25 | 74.8 | 68 | 44 | 34 | 27 |
| 30 | 88 | 80 | 51 | 40 | 32 |
| 40 | 114 | 104 | 66 | 52 | 41 |
| 50 | 143 | 130 | 83 | 65 | 52 |
| 60 | 169 | 154 | 103 | 77 | 62 |
| 75 | 211 | 192 | 128 | 96 | 77 |
| 100 | 273 | 248 | 165 | 124 | 99 |
| 125 | 343 | 312 | 208 | 156 | 125 |
| 150 | 396 | 360 | 240 | 180 | 144 |
| 200 | 528 | 480 | 320 | 240 | 192 |
| 250 | - | 604 | 403 | 302 | 242 |
| 300 | - | 722 | 482 | 361 | 289 |
| 350 | - | 828 | 560 | 414 | 336 |
| 400 | - | 954 | 636 | 477 | 382 |
| 450 | - | 1030 | - | 515 | 412 |
| 500 | - | 1180 | 786 | 590 | 472 |

Motor protection and control

Manual motor starters, contactors and overload relays

| | |
|-----------------------------------------------------------|----|
| Overview | 1 |
| Manual motor starters | 2 |
| B mini contactors | 3 |
| AS contactors with screw terminals | 4 |
| AF and EK contactors with screw terminals | 5 |
| Overload relays | 6 |
| DRAS and DRAF enclosed starters | 7 |
| R contactors | 8 |
| Certifications and approvals | 9 |
| Index | 10 |
| Marketing material | 11 |



More product information and technical data available in main catalog 1SBC100192C0203

For direct product details information, use product type or order code, ex:
www.abb.com/productdetails/AF09-30-10-13 or www.abb.com/productdetails/1SBL137001R1310

ABB sets a new standard in motor control and power switching

1

Featuring AF technology as standard, the latest range of ABB's contactors establishes a new industry benchmark. The electronically controlled coil offers multiple benefits over conventional alternatives, and together with ABB's wide product offering – an optimal configuration, every time.



Access Global Support

The contactor and motor protection range from ABB is compatible with all major national and international standards and is available worldwide via a global distribution network. One contactor coil now handles 100 V – 250 V, AC / DC for use in Europe or Asia as well as North America.




Simplify design

By reducing contactor coil energy consumption by up to 80 %, panels can be built smaller and transformers more compact. All the features of the AF technology, along with access to drawings and coordination tables online, simplifies your design and assembly process.



Optimize logistics

With its contactor and motor protection range, ABB has managed to reduce the number of contactor coils to just four. The total number of product variants has been reduced by up to 90 %. This simplifies the customers' logistics and cuts administration costs.

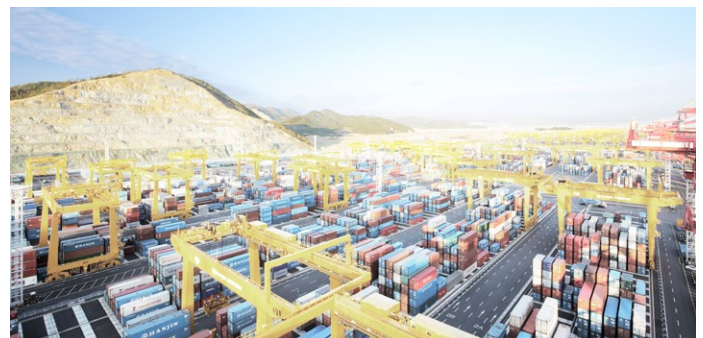

Secure uptime

Time to prevent stoppages caused by voltage fluctuations. The AF contactor ensures distinct operation in unstable networks and signifies a major advance in motor control and power switching. Voltage sags, dips and surges pose no threat. The AF contactor secures your uptime.



MacGregor. Keeping turnarounds brief.

Until the AF range was installed, voltage sags were affecting MacGregor's deck cranes. Conventional contactors welded shut, leading to several stoppages a week. No longer. Known for superior quality and an ability to operate in the most hostile environments, MacGregor deck cranes enjoy a global reputation for reliability. A small but vital component, the AF contactor helps maintain this reputation.

To keep things moving, you need Control. Connect to Control.

Explore all our case studies at www.abb.com/connecttocontrol

SSAB
Making certainty
standard


Gamesa
Taming the wind

LKAB
Providing fresh air

Contactors and motor protection

For a wide variety of segments

1

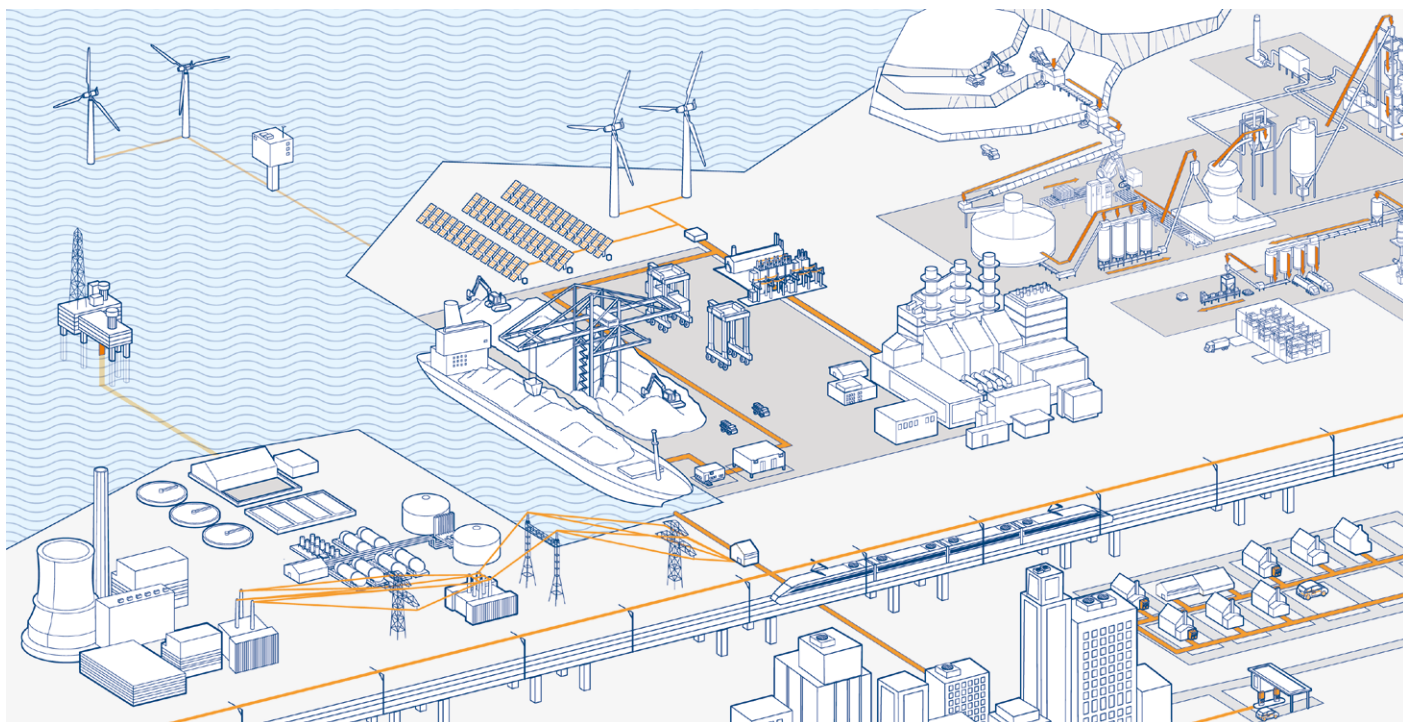

HVAC, General Machinery, Rail, Critical Power, Wind, Solar, Marine and Water & Wastewater

Contactors for any use

The AF contactor range covers small motor starting solutions from 4 kW / 5 hp up to big power switching solutions with our unique AF2650, the biggest single case block contactor in the world.

The contactor and motor protection range is part of one of the widest product offerings on the market meaning that ABB not only can provide the contactor but the full solution.

In addition to the standard product range ABB also offer products for special needs such as Bar contactors, GAF and contactors for capacitor switching.

Cooperating with customers

ABB cooperates closely with its customers to ensure that products meet requirements from their specific segments and applications. With over 100 years' experience in motor control and power switching ABB knows how to create efficient solutions for its customers.

AF technology

Benefits




Reliable in all networks

The electronic system within the AF contactor rectifies the AC or DC control circuit voltage to a DC control voltage that is applied on the coil. The contactor is safely operated in an always optimized condition making it virtually noise free.


Four coils for the entire voltage range

The AF contactor features both AC and DC support. With the complete AF contactor range, functionality is improved. Still, the total number of product variants compared to a conventional range is reduced by 90 %. Only four coils are required to cover 24 V AC, 20 V DC - 500 V AC / DC.

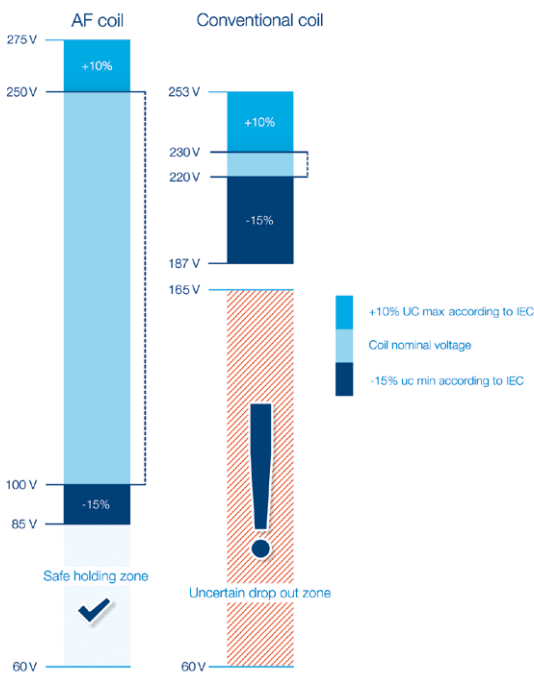

Wide control voltage range

With conventional contactor technology, different contactors were needed for different network voltages. Thanks to the wide operating range of the AF contactor it can operate just as well in Europe as in Asia or North America. The core coil of the AF contactor range covers 100-250 V AC / DC 50/60 Hz.




Built-in surge suppression

With conventional contactor technology it is recommended to use an external surge suppressor, an accessory that could cost as much as half the contactor itself. With the AF technology the surges are handled by the contactor itself and the surge never reaches the control circuit. Neither the surge suppressor nor the actual surge has to be considered anymore. One less product and one less complication to worry about.

Contactors and motor protection

Advanced but simple

1

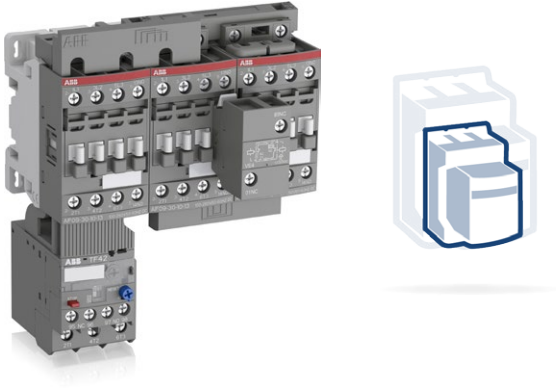

The AF contactor is compact

The AF contactor is compact in size and has had its width reduced by up to 30 % thanks to an 80 % reduction of the coil's energy consumption.



The AF contactor is flexible

AF09 ... AF370 is perfect for motor starting applications and for solutions where space is limited. Interlocked reversing pairs require no spacing between contactors meaning you can fit more functionality into cabinets or other small enclosures.




Coil terminal access in the front

The AF contactor has its coil terminals accessible from the front. The cables or bars do not have to be disconnected in order to perform voltage measurement or servicing work.





More functionality without adding width

The AF116 ... AF2650 can take up to 2 side mounted auxiliary contact blocks without adding to its width and are delivered with 1 N.O. + 1 N.C. as standard.

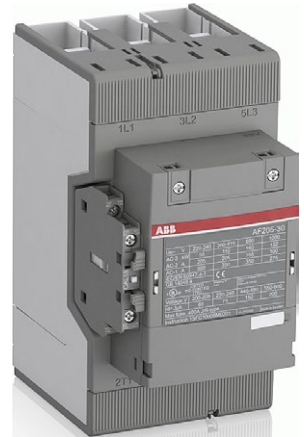


Contactors and motor protection


Mechanical features

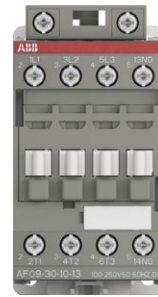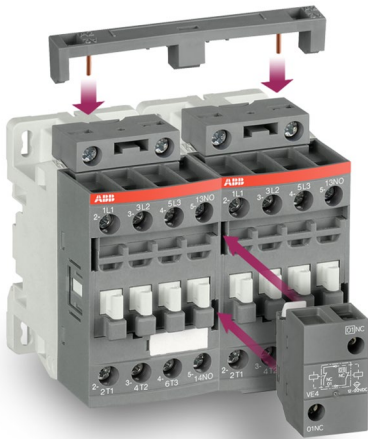

Top-mounted

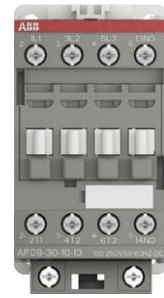

Bottom-mounted

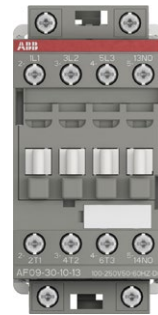

Additional LDC4 coil terminal block



Front-mounted

Easy-to-use accessories

Contactors up to 96 A offer free choice of coil terminal access and can take side and front mounted auxiliary contact blocks. All the accessories: Coil connection terminals, mechanical and electrical interlocks and electronic timers are easily connected through the snap-to-connect function.



Safe control circuit with:

- Mirror contact according to IEC 60947-4-1
- Mechanically linked contacts according to IEC 60947-5-1
- Sealable and transparent protective covers on AF09 ... AF96 and overload relays TF/EF

3-pole contactors

Mini contactors

Contactors for motor control and

1



| | | | | | |
|------------------------|--------------------------------|-------------------------------------------|-----|------------|------------|
| IEC (1) | AC-3 Rated operational power | $\theta \leq 60^\circ\text{C}$ (2), 400 V | kW | 4 | 5.5 |
| UL/CSA | 3-phase motor rating | 480 V | hp | 3 | 5 |
| AC / DC Control supply | | Type | — | — | — |
| AC Control supply | | Type | B6 | B7 | — |
| DC Control supply | | Type | BC6 | BC7 | — |
| IEC | AC-3 Rated operational current | $\theta \leq 60^\circ\text{C}$ (2), 400 V | A | 8.5 | 11.5 |
| | AC-1 Rated operational current | $\theta \leq 40^\circ\text{C}$, 690 V | A | 20 (400 V) | 20 (400 V) |
| UL/CSA | General use rating | 600 V | A | 12 (300 V) | 16 |
| NEMA | NEMA Size | | | — | — |

| | | | | | | | | |
|-------|-------|-------|------|------|------|------|------|------|
| 4 | 5.5 | 7.5 | 4 | 5.5 | 7.5 | 11 | 15 | 18.5 |
| 5 | 7.5 | 10 | 5 | 7.5 | 10 | 15 | 20 | 25 |
| — | — | — | AF09 | AF12 | AF16 | AF26 | AF30 | AF38 |
| AS09 | AS12 | AS16 | AF09 | AF12 | AF16 | AF26 | AF30 | AF38 |
| ASL09 | ASL12 | ASL16 | AF09 | AF12 | AF16 | AF26 | AF30 | AF38 |
| 9 | 12 | 15.5 | 9 | 12 | 18 | 26 | 32 | 38 |
| 22 | 24 | 24 | 25 | 28 | 30 | 45 | 50 | 50 |
| 20 | 20 | 20 | 25 | 28 | 30 | 45 | 50 | 50 |
| 00 | 00 | 0 | 00 | 0 | — | 1 | — | — |

(1) 1000 V IEC ratings available for AF80, AF96 and AF146 ... AF2650 contactors.
 (2) $\theta \leq 55^\circ\text{C}$ for mini contactors and AF400 ... AF2650 contactors.

Main accessories

| | | |
|--------------------------|--------------------------|---------|
| Auxiliary contact blocks | Front mounting | CAF6 |
| | Side mounting | CA6 |
| Timers | Electronic | |
| | Mechanical | |
| Interlocking units (3) | Mechanical / Electrical | |
| Connection sets | For reversing contactors | BSM6-30 |
| Surge suppressors | Varistor (AC/DC) | RV-BC6 |
| | RC type (AC) | |
| | Transil diode (DC) | RD7 |

| | | |
|--------------------|-------------------------------|---------|
| CA3-10 (1 x N.O.) | CA4-10 (1 x N.O.) | |
| CA3-01 (1 x N.C.) | CA4-01 (1 x N.C.) | |
| | CAL4-11 (1 x N.O. + 1 x N.C.) | |
| TEF3-ON | TEF4-ON | |
| TEF3-OFF | TEF4-OFF | |
| VM3 | VM4 | |
| | VEM4 | |
| BER16C-3 | BER16-4 | BER38-4 |
| RV5 (24...440 V) | Built-in surge protection | |
| RC5-1 (24...440 V) | | |
| RT5 (12...264 V) | | |

(3) See available reversing contactors VB6, VB7 and VAS09 ... VAS16.

Overload relays

| | | |
|-------------------|--------------------------------------------|-----------------------|
| Thermal relays | Class 10 (Class 10A for TF140, TA200DU) | T16 (0.10...16 A) |
| Electronic relays | Class 10E, 20E, 30E | E16DU (0.10...18.9 A) |

| | | | |
|-------------------|----------------------|----------------------|-----------------|
| T16 (0.10...16 A) | TF42 (0.10...38 A) | | |
| | EF19 (0.10...18.9 A) | EF19 (0.10...18.9 A) | EF45 (9...45 A) |

Manual motor starters

| | |
|-------------------------------------------|------------------------------------------------------|
| Thermal / magnetic protection Class 10 | MS116 (0.10...32 A) lcs up to 50 kA for class 10A |
| | MS132 (0.10...32 A) lcs up to 100 kA |
| Magnetic only types | MO132 (0.16...32 A) |

| | |
|------------------------------------------------------|----------------------------------------------|
| MS116 (0.10...32 A) lcs up to 50 kA for class 10A | MS165 (4) (10...65 A) lcs up to 100 kA |
| MS132 (0.10...32 A) lcs up to 100 kA | MS497 (22...100 A) lcs up to 100 kA |
| MO132 (0.16...32 A) lcs up to 100 kA | MO165 (4) (16...65 A) lcs up to 100 kA |



| | | | | | |
|-------------|------------------------|----------|---------|---------|---------|
| Accessories | For contactor mounting | BEA7/132 | BEA16-3 | BEA16-4 | BEA38-4 |
|-------------|------------------------|----------|---------|---------|---------|




(4) MS165/MO165 are suitable for use with AF09 ... AF30 for North american applications.
 (5) BEA65-4 suitable for MS165 and MO165 only.

4-pole contactors

1

Mini contactors









| | | | | | |
|-------------------------------|-----------------------------------------------------------------------------------|----------------------------------------|------------|-------------------|-----------|
| IEC | AC-1 Rated operational current | $\theta \leq 40^\circ\text{C}$, 690 V | A | 16 | 20 |
| UL/CSA | General use rating | 600 V | A | 12 (300 V) | 16 |
| AC / DC Control supply |  | Type | — | — | — |
| AC Control supply |  | Type | B6 | B7 | — |
| DC Control supply |  | Type | BC6 | BC7 | — |

Contactor relays

Mini contactor relays



| | | | | | |
|-------------------------------|-------------------------------------------------------------------------------------|-------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| IEC | AC-15 Rated operational current | 400 V | A | 3 | |
| UL/CSA | Pilot duty | | | A600 | |
| | | | |    | |
| AC Control supply |  | Type | K6-22Z | K6-31Z | K6-40E |
| DC Control supply |  | Type | KC6-22Z | KC6-31Z | KC6-40E |
| AC / DC Control supply |  | Type | — | — | — |

R contactors

DC Circuit switching



DC-1 Rated current up to 5000 A
 DC-3/DC-5 Rated current up to 2000 A
 1500 V with poles in series

IOR.. 63-...-CC to IOR.. 5100-...-CC

Specific contactors

DC Circuit switching



100 A, 440 V, DC-1
GA75, GAE75 types



275 to 2050 A, 1000 V, DC-1
GAF185 to GAF2050 types

Contactors




| | | | | | | | | | | | | | | | |
|------|------|------|------|------|------|------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| 25 | 30 | 45 | 55 | 70 | 100 | 125 | 160 | 200 | 275 | 350 | 400 | 500 | 525 | 800 | 1000 |
| 25 | 30 | 45 | 55 | 60 | 80 | 105 | 160 | 175 | 230 | 250 | 300 | 350 | 420 | 540 | — |
| AF09 | AF16 | AF26 | AF38 | AF40 | AF52 | AF80 | AF116 | AF140 | AF190 | AF205 | AF265 | AF305 | AF370 | — | — |
| AF09 | AF16 | AF26 | AF38 | AF40 | AF52 | AF80 | AF116 | AF140 | AF190 | AF205 | AF265 | AF305 | AF370 | EK550 | EK1000 |
| AF09 | AF16 | AF26 | AF38 | AF40 | AF52 | AF80 | AF116 | AF140 | AF190 | AF205 | AF265 | AF305 | AF370 | EK550 | EK1000 |

Contactor relays



| | | | | | |
|------------|--------|--------|------------|-------|-------|
| 3 | | | 3 | | |
| A600, Q300 | | | A600, Q600 | | |
| | | | | | |
| NS22E | NS31E | NS40E | NF22E | NF31E | NF40E |
| NSL22E | NSL31E | NSL40E | NF22E | NF31E | NF40E |
| — | — | — | NF22E | NF31E | NF40E |


AC Circuit switching



AC-1 Rated current up to 5000 A
AC-3 Rated power up to 1500 kW
(1520 A - 440 V)

IOR.. 63-...-MT to IOR.. 5100-...-MT

Special versions

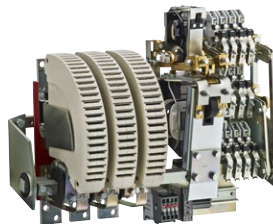


AC/DC Coupling: LOR.. contactors
Slip ring motor control: FOR .. contactors
Field discharge: AM(F)-CC-JORE contactors
AC/DC Switching (N.C./N.O. main poles):
NOR & JOR contactors
Latching contactors for energy saving
and safety requirements: AMA or AME contactors

Capacitor switching



12.5 to 80 kvar
UA16..RA to UA110..RA types
UA16 to UA110 types

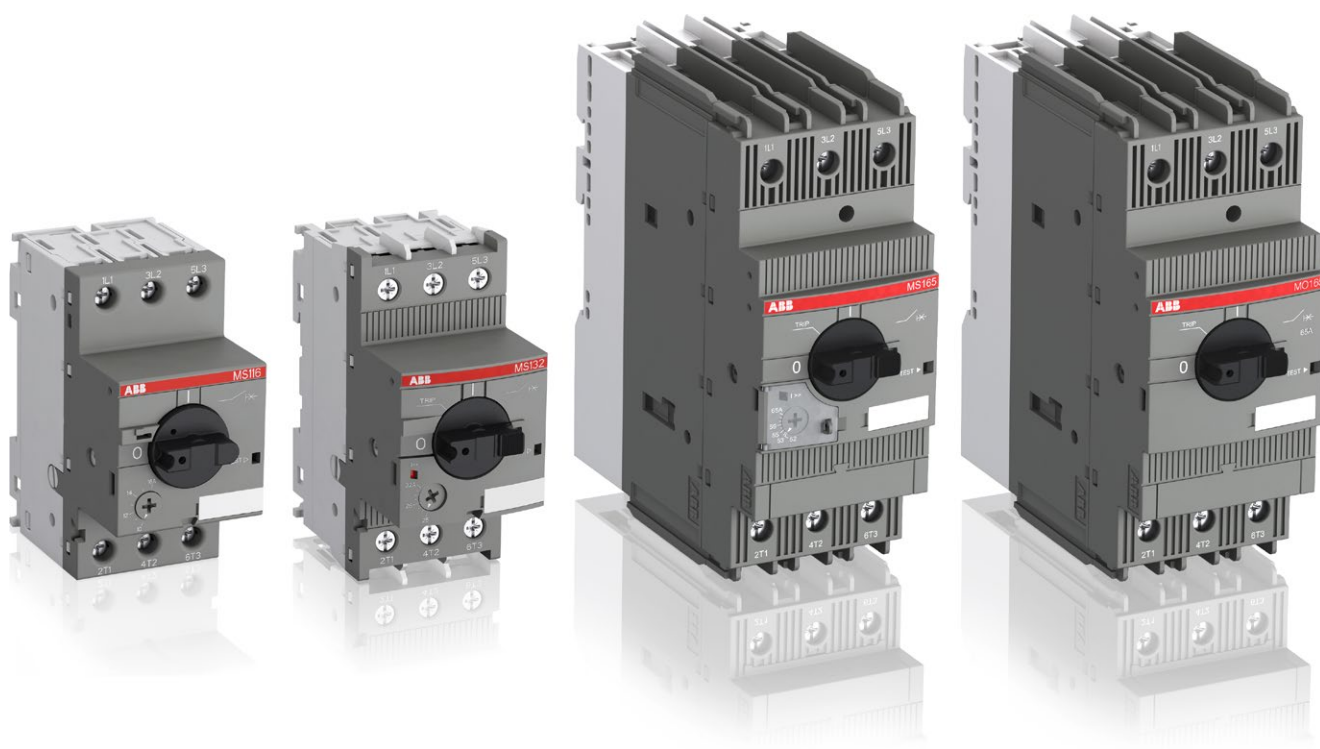

Manual motor starters

Overview

| | |
|----------|-----|
| Benefits | 2/2 |
| Features | 2/3 |
| Overview | 2/4 |

Ordering details – 0.10 to 65 A – with thermal and electromagnetic protection

| | |
|-----------------------------|-----|
| MS116 manual motor starters | 2/6 |
| MS132 manual motor starters | 2/7 |
| MS165 manual motor starters | 2/8 |

Ordering details – 0.16 to 65 A – with electromagnetic protection

| | |
|-------------------------------------------|------|
| MO132 manual motor starters magnetic only | 2/9 |
| MO165 manual motor starters magnetic only | 2/10 |

Ordering details – 0.10 to 25 A – with thermal and electromagnetic protection

| | |
|-----------------------------------------------------|------|
| MS132-T circuit breakers for transformer protection | 2/11 |
|-----------------------------------------------------|------|

Main accessories

Ordering details – 22 to 100 A – with thermal and electromagnetic protection

| | |
|--------------------------------------------|------|
| MS5100, MS495, MS497 manual motor starters | 2/19 |
|--------------------------------------------|------|

Ordering details – 32 to 100 A – with electromagnetic protection

| | |
|----------------------------------------------------------|------|
| MO5100, MO495, MO496 manual motor starters magnetic only | 2/20 |
|----------------------------------------------------------|------|

Main accessories

General accessories

For direct product details information, use product type or order code, ex:
www.abb.com/productdetails/AF09-30-10-13 or www.abb.com/productdetails/1SBL137001R1310

Manual motor starters

Benefits

2

Manual motor starters (MMS) are protection devices for the main circuit. They combine motor control and protection in a single device. MMS are used mainly to switch motors manually ON/OFF and protect them and the installation fuse-less against short-circuit, overload and phase failures. Fuse-less protection with a manual motor starter saves costs, space and ensures a quick reaction under short-circuit condition, by switching off the motor within milliseconds.

Safe, compact, and cost-saving solution

Various motor protection functions in one device

- Overload
- Short-circuit
- Phase loss sensitivity

Efficient planning and installation perfectly matching the ABB contactor family, leads to high flexibility and increased exchangeability. Simple connecting links ensure the electrical and mechanical connection.

Products range for different applications available

- Short-circuit breaking capacity up to 100 kA
- Magnetic-only devices (only short-circuit protection)
- Selected types are certified according to ATEX
- Special version for transformer protection

The manual motor starter range is compatible with all major national and international standards.



Product range

Comprehensive accessory range

Manual motor starters can be equipped with busbars, auxiliary contacts, signalling contacts, undervoltage releases and shunt trips. Moreover it is possible to order IP65 (UL/CSA Type 12) door mounting kits, IP65 (UL/CSA Type 12) enclosures and shafts for doors.

MS116, MS132, MS165, MO132, MO165 and MS132-T share almost the same accessory range. Customers can optimize administration costs and inventory costs through reduced number of order codes by benefiting from a compatible range of accessories.




Manual motor starters with busbar connection



Accessory range



Direct-on-line starters

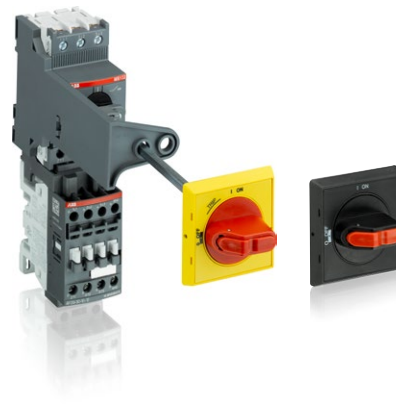

Door mounting kits

Manual motor starters

Features


Features

- Manual control
- Disconnect function
- Handle can be locked in the off position
- Remote control via undervoltage release or shunt trip
- Trip indication
- Temperature compensation
- Adjustable current setting


- Magnetic trip indication for several types available (MS132, MS165, and MS132-T)
- One product family in 45 mm width (MS116, MS132, MO132, and MS132-T)
- Variants from 0.1 up to 100 A available
- Short-circuit service breaking capacity I_{CS} up to 100 kA

- 1 Terminals (1L1, 3L2, 5L3)
- 2 Switch position TRIP
- 3 Lockable handle
- 4 Test function
- 5 Status indication for short-circuit
- 6 Current setting range
- 7 Terminals 2T1, 4T2, 6T3

- 1 Clear trip indication
- 2 Handle in TRIP position
- 3 Optical indication for short-circuit
- 4 Easy locking

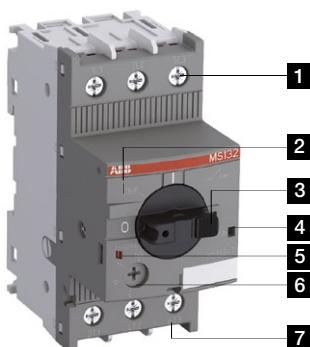

Features of type MS132

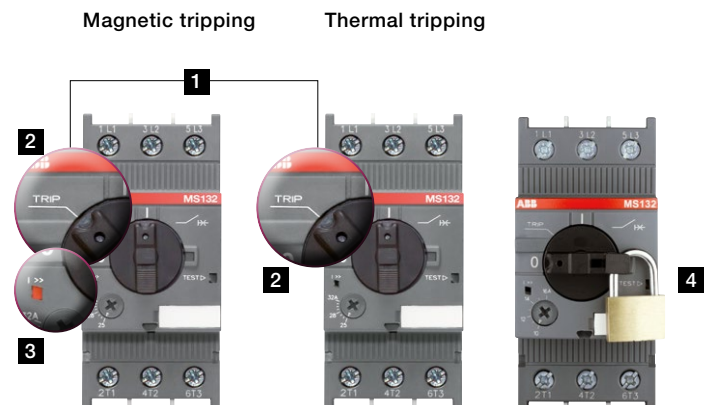

TRIP indication

2CDC131072C0201

Manual motor starters

Overview



| Type | MS116 | MS132 | MS165 | MS5100 |
|----------------------------------------|------------------------------|------------------------------|------------------------------|----------------|
| Thermal and electromagnetic protection | Yes | Yes | Yes | Yes |
| Electromagnetic protection | - | - | - | - |
| Phase loss sensitivity | Yes | Yes | Yes | - |
| Switch position | ON/OFF | ON/OFF/TRIP | ON/OFF/TRIP | ON/OFF/TRIP |
| Magnetic trip indication | - | Yes | Yes | - |
| Lockable handle without accessories | - | Yes | Yes | Yes |
| Disconnecting feature | Yes | Yes | Yes | Yes |
| Width | 45 mm | 45 mm | 55 mm | 90 mm |
| Rated operational current I_n | 0.16 ... 32 A | 0.16 ... 32 A | 16 ... 65 A | 100 A |
| Setting range | 0.1 ... 32 A | 0.1 ... 32 A | 10 ... 65 A | 40 ... 100 A |
| Ambient air temperature | -25 ... +55 °C ¹⁾ | -25 ... +60 °C ¹⁾ | -20 ... +60 °C ¹⁾ | -25 ... +70 °C |

¹⁾ Compensated

Accessories

| | | | |
|--------------------------------------------|-----------|-----|-------|
| Auxiliary contact | HKF1, HK1 | | AUX |
| Signalling contact for tripped alarm | SK1 | | - |
| Signalling contact for short-circuit alarm | - | CK1 | - |
| Shunt trip | AA1 | | SOR-C |
| Undervoltage release | UA1 | | UVR-C |

Table for short-circuit ratings for 400/415 V

| Rated operational power | Setting range for thermal release | Type | Standard range MS116 | | Performance range MS132, MS165, MS5100 | | |
|-------------------------|-----------------------------------|------------|-------------------------|----------|-------------------------------------------|----------|----------|
| | | | I_{CU} | I_{CS} | Type | I_{CU} | I_{CS} |
| 0.03 kW ¹⁾ | 0.1 ... 0.16 A | MS116-0.16 | 50 kA | 50 kA | MS132-0.16 | 100 kA | 100 kA |
| 0.06 kW | 0.16 ... 0.25 A | MS116-0.25 | 50 kA | 50 kA | MS132-0.25 | 100 kA | 100 kA |
| 0.09 kW | 0.25 ... 0.4 A | MS116-0.4 | 50 kA | 50 kA | MS132-0.4 | 100 kA | 100 kA |
| 0.18 kW | 0.4 ... 0.63 A | MS116-0.63 | 50 kA | 50 kA | MS132-0.63 | 100 kA | 100 kA |
| 0.25 kW | 0.63 ... 1.0 A | MS116-1.0 | 50 kA | 50 kA | MS132-1.0 | 100 kA | 100 kA |
| 0.55 kW | 1.0 ... 1.6 A | MS116-1.6 | 50 kA | 50 kA | MS132-1.6 | 100 kA | 100 kA |
| 0.75 kW | 1.6 ... 2.5 A | MS116-2.5 | 50 kA | 50 kA | MS132-2.5 | 100 kA | 100 kA |
| 1.5 kW | 2.5 ... 4.0 A | MS116-4.0 | 50 kA | 50 kA | MS132-4.0 | 100 kA | 100 kA |
| 2.2 kW | 4.0 ... 6.3 A | MS116-6.3 | 50 kA | 50 kA | MS132-6.3 | 100 kA | 100 kA |
| 4.0 kW | 6.3 ... 10 A | MS116-10 | 50 kA | 50 kA | MS132-10 | 100 kA | 100 kA |
| 5.5 kW | 8 ... 12 A | MS116-12 | 25 kA | 25 kA | MS132-12 | 100 kA | 100 kA |
| 7.5 kW | 10 ... 16 A | MS116-16 | 16 kA | 16 kA | MS132-16 / MS165-16 | 100 kA | 100 kA |
| 7.5 kW | 14 ... 20 A | | | | MS165-20 | 100 kA | 100 kA |
| 7.5 kW | 16 ... 20 A | MS116-20 | 15 kA | 10 kA | MS132-20 | 100 kA | 100 kA |
| 11 kW | 18 ... 25 A | | | | MS165-25 | 100 kA | 100 kA |
| 11 kW | 20 ... 25 A | MS116-25 | 15 kA | 10 kA | MS132-25 | 50 kA | 50 kA |
| 15 kW | 25 ... 32 A | MS116-32 | 10 kA | 10 kA | MS132-32 | 50 kA | 25 kA |
| 15 kW | 23 ... 32 A | | | | MS165-32 | 100 kA | 75 kA |
| 22 kW | 30 ... 42 A | | | | MS165-42 | 50 kA | 25 kA |
| 22 kW | 40 ... 54 A | | | | MS165-54 | 50 kA | 25 kA |
| 25 kW | - | | | | | | |
| 30 kW | 52 ... 65 A | | | | MS165-65 | 50 kA | 25 kA |
| 30 kW | - | | | | | | |
| 45 kW | 40 ... 100 A | | | | MS5100-100 | 70 kA | 70 kA |

¹⁾ 690 V



| MO132 | MO165 | MO5100 | MS132-T |
|----------------|----------------|----------------|------------------------------|
| - | - | - | Yes |
| Yes | Yes | Yes | - |
| - | - | - | Yes |
| ON/OFF/TRIP | ON/OFF/TRIP | ON/OFF/TRIP | ON/OFF/TRIP |
| - | - | - | Yes |
| Yes | Yes | Yes | Yes |
| Yes | Yes | Yes | Yes |
| 45 mm | 55 mm | 76.2 mm | 45 mm |
| 0.16 ... 32 A | 16 ... 65 A | 70 ... 100 A | 0.16 ... 32 A |
| - | - | - | 0.1 ... 25 A |
| -25 ... +60 °C | -25 ... +60 °C | -25 ... +70 °C | -25 ... +60 °C ¹⁾ |

| | | |
|-----------|-------|------|
| HKF1, HK1 | AUX | HKF1 |
| SK1 | - | SK1 |
| - | - | CK1 |
| AA1 | SOR-C | AA1 |
| UA1 | UVR-C | UA1 |

| Standard range MO132 | Performance range MO132, MO165, MO5100 | Transformer protection MS132-T |
|-------------------------|-------------------------------------------|-----------------------------------|
|-------------------------|-------------------------------------------|-----------------------------------|

| Type | Short-circuit breaking capacity | | Type | Short-circuit breaking capacity | | Type | Short-circuit breaking capacity |
|------------|---------------------------------|----------|---------------------|---------------------------------|----------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------|
| | I_{cu} | I_{cs} | | I_{cu} | I_{cs} | | I_{cu} / I_{cs} |
| MO132-0.16 | 100 kA | 100 kA | MO132-0.16 | 100 kA | 100 kA | MS132-0.16T | 100 kA |
| MO132-0.25 | 100 kA | 100 kA | MO132-0.25 | 100 kA | 100 kA | MS132-0.25T | 100 kA |
| MO132-0.4 | 100 kA | 100 kA | MO132-0.4 | 100 kA | 100 kA | MS132-0.4T | 100 kA |
| MO132-0.63 | 100 kA | 100 kA | MO132-0.63 | 100 kA | 100 kA | MS132-0.63T | 100 kA |
| MO132-1.0 | 100 kA | 100 kA | MO132-1.0 | 100 kA | 100 kA | MS132-1.0T | 100 kA |
| MO132-1.6 | 100 kA | 100 kA | MO132-1.6 | 100 kA | 100 kA | MS132-1.6T | 100 kA |
| MO132-2.5 | 100 kA | 100 kA | MO132-2.5 | 100 kA | 100 kA | MS132-2.5T | 100 kA |
| MO132-4.0 | 100 kA | 100 kA | MO132-4.0 | 100 kA | 100 kA | MS132-4.0T | 100 kA |
| MO132-6.3 | 100 kA | 100 kA | MO132-6.3 | 100 kA | 100 kA | MS132-6.3T | 100 kA |
| MO132-10 | 100 kA | 100 kA | MO132-10 | 100 kA | 100 kA | MS132-10T | 100 kA |
| MO132-12 | 100 kA | 100 kA | MO132-12 | 100 kA | 100 kA | MS132-12T | 100 kA |
| MO132-16 | 100 kA | 100 kA | MO132-16 / MO165-16 | 100 kA | 100 kA | MS132-16T | 100 kA |
| | | | MO165-20 | 100 kA | 100 kA | | |
| MO132-20 | 100 kA | 100 kA | MO132-20 | 100 kA | 100 kA | MS132-20T | 100 kA |
| MO132-25 | 50 kA | 50 kA | MO132-25 / MO165-25 | 50 kA / 100 kA | 50 kA / 100 kA | MS132-25T | 50 kA |
| MO132-32 | 50 kA | 25 kA | MO132-32 | 50 kA | 25 kA | Transformer protection: The instantaneous short-circuit current setting is 20 times the rated operational current. | |
| | | | MO165-32 | 100 kA | 50 kA | | |
| | | | MO165-42 | 50 kA | 25 kA | | |
| | | | MO165-54 | 50 kA | 25 kA | | |
| | | | MO5100-70 | 36 kA | 36 kA | | |
| | | | MO165-65 | 50 kA | 25 kA | | |
| | | | MO5100-80 | 36 kA | 36 kA | | |
| | | | MO5100-100 | 36 kA | 36 kA | | |

2CDC131055C0201

MS116 manual motor starters

0.10 to 32 A – with thermal and electromagnetic protection

2



2CDC241010F0011

MS116-16



2CDC241001F0011

MS116-25



2CDC241013F0011

MS116-0.16-HKF1-11



2CDC241012F0011

MS116-32-HKF1-11

Description

MS116 is a compact and economic range for motor protection up to 15 kW (400 V) / 32 A in width of 45 mm. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism and a rotary handle with a clear switch position indication. The manual motor starter is suitable for three- and single-phase applications. Auxiliary contacts, signaling contacts, undervoltage releases, shunt trips, power in-feed blocks and locking devices for protection against unauthorized changes are available as accessory. These are suitable throughout the MS116/MS132/MS165-range.

Ordering details


| Rated operational power 400 V AC-3 kW | Setting range A | Short-circuit breaking capacity I_{cs} at 400 V AC kA | Rated instantaneous short-circuit current setting I_i A | Type | Order code | Weight (1 pc) kg |
|------------------------------------------------|--------------------|------------------------------------------------------------|--------------------------------------------------------------|--------------------|-----------------|---------------------|
| 0.03 ²⁾ | 0.10 ... 0.16 | 50 | 2.00 ¹⁾ | MS116-0.16 | 1SAM250000R1001 | 0.225 |
| 0.06 | 0.16 ... 0.25 | 50 | 3.10 ¹⁾ | MS116-0.25 | 1SAM250000R1002 | 0.225 |
| 0.09 | 0.25 ... 0.40 | 50 | 5.00 ¹⁾ | MS116-0.4 | 1SAM250000R1003 | 0.225 |
| 0.18 | 0.40 ... 0.63 | 50 | 7.90 ¹⁾ | MS116-0.63 | 1SAM250000R1004 | 0.225 |
| 0.25 | 0.63 ... 1.00 | 50 | 12.5 ¹⁾ | MS116-1.0 | 1SAM250000R1005 | 0.225 |
| 0.55 | 1.00 ... 1.60 | 50 | 20.0 ¹⁾ | MS116-1.6 | 1SAM250000R1006 | 0.265 |
| 0.75 | 1.60 ... 2.50 | 50 | 31.3 ¹⁾ | MS116-2.5 | 1SAM250000R1007 | 0.265 |
| 1.50 | 2.50 ... 4.00 | 50 | 50.0 | MS116-4.0 | 1SAM250000R1008 | 0.265 |
| 2.20 | 4.00 ... 6.30 | 50 | 78.8 | MS116-6.3 | 1SAM250000R1009 | 0.265 |
| 4.00 | 6.30 ... 10.0 | 50 | 150 | MS116-10 | 1SAM250000R1010 | 0.265 |
| 5.50 | 8.00 ... 12.0 | 25 | 180 | MS116-12 | 1SAM250000R1012 | 0.265 |
| 7.50 | 10.0 ... 16.0 | 16 | 240 | MS116-16 | 1SAM250000R1011 | 0.265 |
| 7.50 | 16.0 ... 20.0 | 10 | 300 | MS116-20 | 1SAM250000R1013 | 0.310 |
| 11.0 | 20.0 ... 25.0 | 10 | 375 | MS116-25 | 1SAM250000R1014 | 0.310 |
| 15.0 | 25.0 ... 32.0 | 10 | 480 | MS116-32 | 1SAM250000R1015 | 0.310 |
| 0.03 ²⁾ | 0.10 ... 0.16 | 50 | 2.00 ¹⁾ | MS116-0.16-HKF1-11 | 1SAM250005R1001 | 0.240 |
| 0.06 | 0.16 ... 0.25 | 50 | 3.10 ¹⁾ | MS116-0.25-HKF1-11 | 1SAM250005R1002 | 0.240 |
| 0.09 | 0.25 ... 0.40 | 50 | 5.00 ¹⁾ | MS116-0.4-HKF1-11 | 1SAM250005R1003 | 0.240 |
| 0.18 | 0.40 ... 0.63 | 50 | 7.90 ¹⁾ | MS116-0.63-HKF1-11 | 1SAM250005R1004 | 0.240 |
| 0.25 | 0.63 ... 1.00 | 50 | 12.5 ¹⁾ | MS116-1.0-HKF1-11 | 1SAM250005R1005 | 0.240 |
| 0.55 | 1.00 ... 1.60 | 50 | 20.0 ¹⁾ | MS116-1.6-HKF1-11 | 1SAM250005R1006 | 0.280 |
| 0.75 | 1.60 ... 2.50 | 50 | 31.3 ¹⁾ | MS116-2.5-HKF1-11 | 1SAM250005R1007 | 0.280 |
| 1.50 | 2.50 ... 4.00 | 50 | 50.0 | MS116-4.0-HKF1-11 | 1SAM250005R1008 | 0.280 |
| 2.20 | 4.00 ... 6.30 | 50 | 78.8 | MS116-6.3-HKF1-11 | 1SAM250005R1009 | 0.280 |
| 4.00 | 6.30 ... 10.0 | 50 | 150 | MS116-10.0-HKF1-11 | 1SAM250005R1010 | 0.280 |
| 5.50 | 8.00 ... 12.0 | 25 | 180 | MS116-12.0-HKF1-11 | 1SAM250005R1012 | 0.280 |
| 7.50 | 10.0 ... 16.0 | 16 | 240 | MS116-16.0-HKF1-11 | 1SAM250005R1011 | 0.280 |
| 7.50 | 16.0 ... 20.0 | 10 | 300 | MS116-20-HKF1-11 | 1SAM250005R1013 | 0.326 |
| 11.0 | 20.0 ... 25.0 | 10 | 375 | MS116-25-HKF1-11 | 1SAM250005R1014 | 0.326 |
| 15.0 | 25.0 ... 32.0 | 10 | 480 | MS116-32-HKF1-11 | 1SAM250005R1015 | 0.326 |

Note: Manual motor starters should always be selected so that the actual motor current is within the setting range.

¹⁾ The data is valid for products, produced after week 34, 2014.

²⁾ 690 V

Main dimensions mm, inches

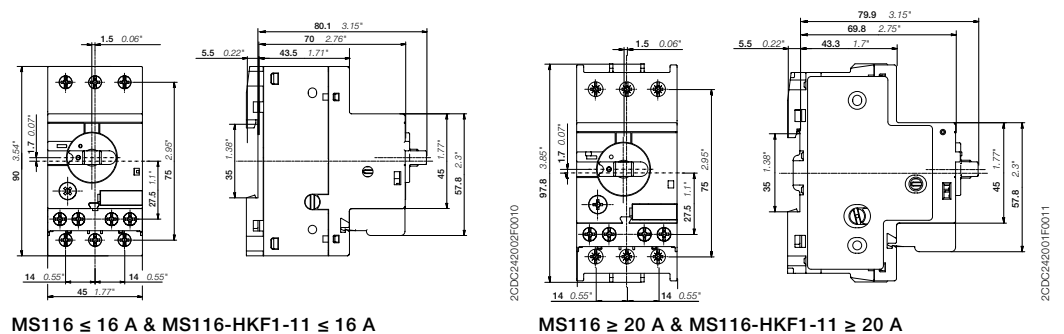

MS132 manual motor starters

0.10 to 32 A – with thermal and electromagnetic protection



1SEB101232F0010

MS132-10



2CDC241001F0011

MS132-32



2CDC241014F0011

MS132-0.16-HKF1-11



2CDC241015F0011

MS132-32-HKF1-11

Description

MS132 is a compact and powerful range for motor protection up to 15 kW (400 V) / 32 A in width of 45 mm. This type has also a clear and reliable indication of fault in a separate window in the event of short-circuit tripping. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism and a rotary handle with a clear switch position indication. The manual motor starter is suitable for three- and single-phase applications. The handle is lockable to protect against unauthorized changes. Auxiliary contacts, signaling contacts, undervoltage releases, shunt trips, power in-feed blocks are available as accessory. These are suitable throughout the MS116/MS132/MS165-range.

Ordering details


| Rated operational power 400 V AC-3 | Setting range | Short-circuit breaking capacity I_{cs} at 400 V AC | Rated instantaneous short-circuit current setting I_i | Type | Order code | Weight (1 pc) |
|------------------------------------------|---------------|------------------------------------------------------|---------------------------------------------------------|--------------------|-----------------|---------------|
| | | | | | | |
| 0.03 ²⁾ | 0.10 ... 0.16 | 100 | 2.00 ¹⁾ | MS132-0.16 | 1SAM350000R1001 | 0.215 |
| 0.06 | 0.16 ... 0.25 | 100 | 3.10 ¹⁾ | MS132-0.25 | 1SAM350000R1002 | 0.215 |
| 0.09 | 0.25 ... 0.40 | 100 | 5.00 ¹⁾ | MS132-0.4 | 1SAM350000R1003 | 0.215 |
| 0.18 | 0.40 ... 0.63 | 100 | 7.90 ¹⁾ | MS132-0.63 | 1SAM350000R1004 | 0.215 |
| 0.25 | 0.63 ... 1.00 | 100 | 12.5 ¹⁾ | MS132-1.0 | 1SAM350000R1005 | 0.215 |
| 0.55 | 1.00 ... 1.60 | 100 | 20.0 ¹⁾ | MS132-1.6 | 1SAM350000R1006 | 0.265 |
| 0.75 | 1.60 ... 2.50 | 100 | 31.3 ¹⁾ | MS132-2.5 | 1SAM350000R1007 | 0.265 |
| 1.50 | 2.50 ... 4.00 | 100 | 50.0 | MS132-4.0 | 1SAM350000R1008 | 0.265 |
| 2.20 | 4.00 ... 6.30 | 100 | 78.8 | MS132-6.3 | 1SAM350000R1009 | 0.265 |
| 4.00 | 6.30 ... 10.0 | 100 | 150 | MS132-10 | 1SAM350000R1010 | 0.265 |
| 5.50 | 8.00 ... 12.0 | 100 | 180 | MS132-12 | 1SAM350000R1012 | 0.310 |
| 7.50 | 10.0 ... 16.0 | 100 | 240 | MS132-16 | 1SAM350000R1011 | 0.310 |
| 7.50 | 16.0 ... 20.0 | 100 | 300 | MS132-20 | 1SAM350000R1013 | 0.310 |
| 11.0 | 20.0 ... 25.0 | 50 | 375 | MS132-25 | 1SAM350000R1014 | 0.310 |
| 15.0 | 25.0 ... 32.0 | 25 | 480 | MS132-32 | 1SAM350000R1015 | 0.310 |
| 0.03 ²⁾ | 0.10 ... 0.16 | 100 | 2.00 ¹⁾ | MS132-0.16-HKF1-11 | 1SAM350005R1001 | 0.231 |
| 0.06 | 0.16 ... 0.25 | 100 | 3.10 ¹⁾ | MS132-0.25-HKF1-11 | 1SAM350005R1002 | 0.231 |
| 0.09 | 0.25 ... 0.40 | 100 | 5.00 ¹⁾ | MS132-0.4-HKF1-11 | 1SAM350005R1003 | 0.231 |
| 0.18 | 0.40 ... 0.63 | 100 | 7.90 ¹⁾ | MS132-0.63-HKF1-11 | 1SAM350005R1004 | 0.231 |
| 0.25 | 0.63 ... 1.00 | 100 | 12.5 ¹⁾ | MS132-1.0-HKF1-11 | 1SAM350005R1005 | 0.231 |
| 0.55 | 1.00 ... 1.60 | 100 | 20.0 ¹⁾ | MS132-1.6-HKF1-11 | 1SAM350005R1006 | 0.281 |
| 0.75 | 1.60 ... 2.50 | 100 | 31.3 ¹⁾ | MS132-2.5-HKF1-11 | 1SAM350005R1007 | 0.281 |
| 1.50 | 2.50 ... 4.00 | 100 | 50.0 | MS132-4.0-HKF1-11 | 1SAM350005R1008 | 0.281 |
| 2.20 | 4.00 ... 6.30 | 100 | 78.8 | MS132-6.3-HKF1-11 | 1SAM350005R1009 | 0.281 |
| 4.00 | 6.30 ... 10.0 | 100 | 150 | MS132-10.0-HKF1-11 | 1SAM350005R1010 | 0.281 |
| 5.50 | 8.00 ... 12.0 | 100 | 180 | MS132-12.0-HKF1-11 | 1SAM350005R1012 | 0.326 |
| 7.50 | 10.0 ... 16.0 | 100 | 240 | MS132-16.0-HKF1-11 | 1SAM350005R1011 | 0.326 |
| 7.50 | 16.0 ... 20.0 | 100 | 300 | MS132-20-HKF1-11 | 1SAM350005R1013 | 0.326 |
| 11.0 | 20.0 ... 25.0 | 50 | 375 | MS132-25-HKF1-11 | 1SAM350005R1014 | 0.326 |
| 15.0 | 25.0 ... 32.0 | 25 | 480 | MS132-32-HKF1-11 | 1SAM350005R1015 | 0.326 |

Note: Manual motor starters should always be selected so that the actual motor current is within the setting range.



¹⁾ The data is valid for products, produced after week 34, 2014.

²⁾ 690 V


Main dimensions mm, inches

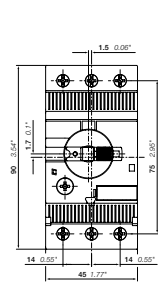

MS132 ≤ 10 A

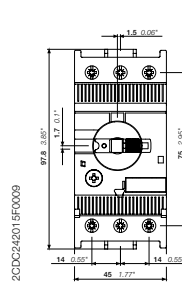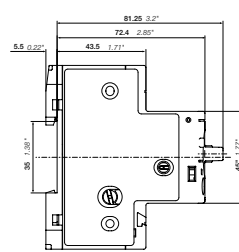

MS132 ≥ 12 A

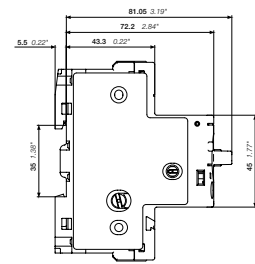

MS165 manual motor starters

10 to 65 A – with thermal and electromagnetic protection

2



MS165-65

2CDC241004V0015

Description


MS165 is a compact and powerful range for motor protection up to 30 kW (400 V) / 65 A in width of 55 mm. This type has also a clear and reliable indication of fault in a separate window in the event of short-circuit tripping. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism and a rotary handle with a clear switch position indication. The manual motor starter is suitable for three- and single-phase applications. The handle is lockable to protect against unauthorized changes. Auxiliary contacts, signaling contacts, undervoltage releases, shunt trips, power in-feed blocks are available as accessory. These are suitable throughout the MS116/MS132/MS165-range.

Ordering details

| Rated operational power 400 V AC-3 | Setting range | Short-circuit breaking capacity I_{cs} at 400 V AC | Rated instantaneous short-circuit current setting I_i | Type | Order code | Weight (1 pc) |
|------------------------------------------|---------------|------------------------------------------------------|---------------------------------------------------------|----------|-----------------|---------------|
| kW | A | kA | A | | | kg |
| 7.5 | 10 ... 16 | 100 | 240 | MS165-16 | 1SAM451000R1011 | 0.950 |
| 7.5 | 14 ... 20 | 100 | 300 | MS165-20 | 1SAM451000R1012 | 0.950 |
| 11 | 18 ... 25 | 100 | 375 | MS165-25 | 1SAM451000R1013 | 0.960 |
| 15 | 23 ... 32 | 75 | 480 | MS165-32 | 1SAM451000R1014 | 0.970 |
| 22 | 30 ... 42 | 25 | 630 | MS165-42 | 1SAM451000R1015 | 0.970 |
| 22 | 40 ... 54 | 25 | 810 | MS165-54 | 1SAM451000R1016 | 0.970 |
| 30 | 52 ... 65 | 25 | 975 | MS165-65 | 1SAM451000R1017 | 0.980 |

Note: Manual motor starters should always be selected so that the actual motor current is within the setting range.

Main dimensions mm, inches

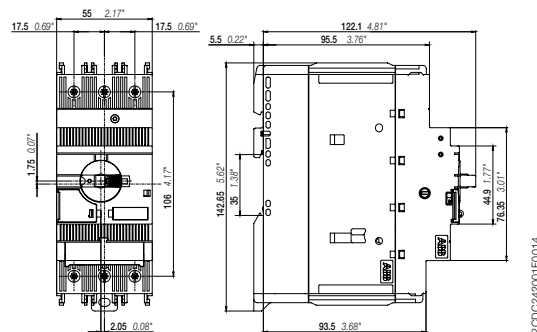

MS165

2CDC242001F0014

2CDC131062C0201a

MO132 manual motor starters magnetic only 0.16 to 32 A – with electromagnetic protection



MO132-6.3

2CDC241008F0011



MO132-32

2CDC241008F0011

Description

Manual motor starters magnetic only are electromechanical protection devices for the main circuit. They are used mainly to switch motors manually ON/OFF and protect them fuse-less against short-circuit.

Fuse-less protection with a manual motor starter saves costs, space and ensures a quick reaction under short-circuit condition, by switching off the motor within milliseconds. Fuse-less starter combinations are setup together with contactors and overload relays.

Ordering details


| Rated operational power 400 V AC-3 ¹⁾ | Rated operational current | Short-circuit breaking capacity I_{cs} at 400 V AC | Rated instantaneous short-circuit current setting I_i | Type | Order code | Weight (1 pc) |
|--------------------------------------------------------|---------------------------|------------------------------------------------------|---------------------------------------------------------|------------|-----------------|---------------|
| kW | A | kA | A | | | kg |
| 0.03 ³⁾ | 0.16 | 100 | 2.00 ²⁾ | MO132-0.16 | 1SAM360000R1001 | 0.215 |
| 0.06 | 0.25 | 100 | 3.10 ²⁾ | MO132-0.25 | 1SAM360000R1002 | 0.215 |
| 0.09 | 0.40 | 100 | 5.00 ²⁾ | MO132-0.4 | 1SAM360000R1003 | 0.215 |
| 0.12 | 0.63 | 100 | 7.90 ²⁾ | MO132-0.63 | 1SAM360000R1004 | 0.215 |
| 0.25 | 1.0 | 100 | 12.5 ²⁾ | MO132-1.0 | 1SAM360000R1005 | 0.215 |
| 0.55 | 1.6 | 100 | 20.0 ²⁾ | MO132-1.6 | 1SAM360000R1006 | 0.265 |
| 0.75 | 2.5 | 100 | 31.3 ²⁾ | MO132-2.5 | 1SAM360000R1007 | 0.265 |
| 1.5 | 4.0 | 100 | 50.0 | MO132-4.0 | 1SAM360000R1008 | 0.265 |
| 2.2 | 6.3 | 100 | 78.8 | MO132-6.3 | 1SAM360000R1009 | 0.265 |
| 4.0 | 10 | 100 | 125 | MO132-10 | 1SAM360000R1010 | 0.265 |
| 5.5 | 12 | 100 | 150 | MO132-12 | 1SAM360000R1012 | 0.310 |
| 7.5 | 16 | 100 | 200 | MO132-16 | 1SAM360000R1011 | 0.310 |
| 7.5 | 20 | 100 | 250 | MO132-20 | 1SAM360000R1013 | 0.310 |
| 11 | 25 | 50 | 313 | MO132-25 | 1SAM360000R1014 | 0.310 |
| 15 | 32 | 25 | 400 | MO132-32 | 1SAM360000R1015 | 0.310 |

¹⁾ For overload protection of motors, an appropriate thermal or electronic overload relay must be used

²⁾ The data is valid for products, produced after week 34, 2014.

³⁾ 690 V

Main dimensions mm, inches

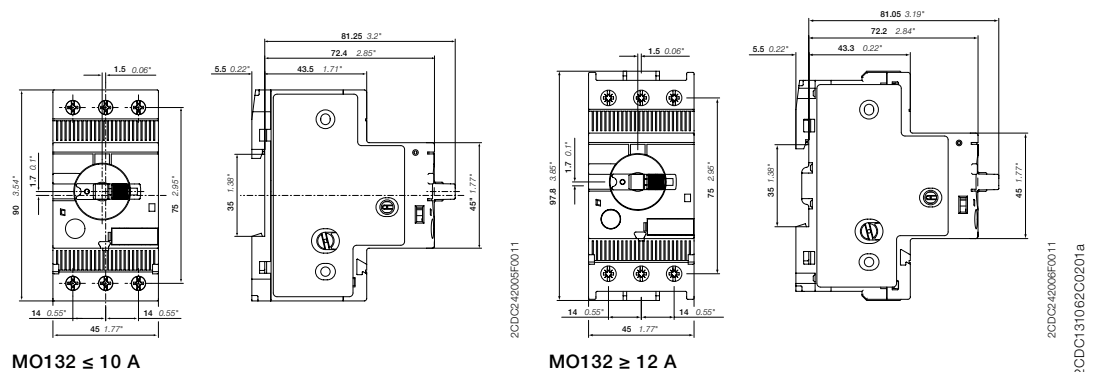

MO165 manual motor starters magnetic only 16 to 65 A – with electromagnetic protection

2



MO165-65

2CDC241005V0015


Description

Manual motor starters magnetic only are electromechanical protection devices for the main circuit. They are used mainly to switch motors manually ON/OFF and protect them fuse-less against short-circuit. Fuse-less protection with a manual motor starter saves costs, space and ensures a quick reaction under short-circuit condition, by switching off the motor within milliseconds. Fuse-less starter combinations are setup together with contactors and overload relays.

Ordering details

| Rated operational power 400 V AC-3 kW | Rated operational current A | Short-circuit breaking capacity I_{cs} at 400 V AC kA | Rated instantaneous short-circuit current setting I_i A | Type | Order code | Weight (1 pc) kg |
|------------------------------------------------|--------------------------------|---------------------------------------------------------------|--------------------------------------------------------------|----------|-----------------|---------------------|
| 7.5 | 16 | 100 | 240 | MO165-16 | 1SAM461000R1011 | 0.950 |
| 7.5 | 20 | 100 | 300 | MO165-20 | 1SAM461000R1012 | 0.950 |
| 11 | 25 | 100 | 375 | MO165-25 | 1SAM461000R1013 | 0.960 |
| 15 | 32 | 50 | 480 | MO165-32 | 1SAM461000R1014 | 0.970 |
| 22 | 42 | 25 | 630 | MO165-42 | 1SAM461000R1015 | 0.970 |
| 22 | 54 | 25 | 810 | MO165-54 | 1SAM461000R1016 | 0.970 |
| 30 | 65 | 25 | 975 | MO165-65 | 1SAM461000R1017 | 0.980 |

Main dimensions mm, inches

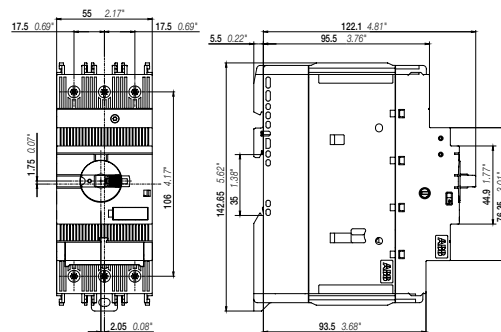

MO165

2CDC24002F0014

2CDC131062C0201a

MS132-T circuit breakers for transformer protection

0.10 to 25 A – with thermal and electromagnetic protection



MS132-10T



MS132-25T

Description

Circuit breakers for transformer protection are electro mechanical protection devices specially designed to protect control transformers on the primary side. They allow fuse-less protection against overload and short-circuit, saving space and cost and ensuring a quick reaction under short-circuit condition by switching off the transformer within milliseconds. The short-circuit current setting is fixed to 20 times the operating current to handle the high inrush current generated by transformers. The device allows manual connection and disconnection of the transformer from the mains.


MS132-T is a 45 mm (width) compact and powerful range for transformer protection up to 12.5 kW (400 V) / 25 A. This type has also a clear and reliable indication of fault in a separate window in the event of short-circuit tripping. Further features are the build-in disconnect function, temperature compensation, trip-free mechanism and a rotary handle with a clear switch position indication. The handle is lockable to protect against unauthorized changes. Auxiliary contacts, signaling contacts, undervoltage releases, shunt trips, power in-feed blocks are available as accessory. These are suitable throughout the MS116/MS132/MS165-range. Moreover ABB offers special accessories for fast single-phase setup.

Ordering details

| Setting range | Short-circuit breaking capacity I_{cs} at 400 V AC | Rated instantaneous short-circuit current setting I_i | Type | Order code | Weight (1 pc) |
|---------------|------------------------------------------------------|---------------------------------------------------------|-------------|-----------------|---------------|
| A | kA | A | | | kg |
| 0.10 ... 0.16 | 100 | 3.2 | MS132-0.16T | 1SAM340000R1001 | 0.215 |
| 0.16 ... 0.25 | 100 | 5 | MS132-0.25T | 1SAM340000R1002 | 0.215 |
| 0.25 ... 0.40 | 100 | 8 | MS132-0.4T | 1SAM340000R1003 | 0.215 |
| 0.40 ... 0.63 | 100 | 12.6 | MS132-0.63T | 1SAM340000R1004 | 0.215 |
| 0.63 ... 1.00 | 100 | 20 | MS132-1.0T | 1SAM340000R1005 | 0.215 |
| 1.00 ... 1.60 | 100 | 32 | MS132-1.6T | 1SAM340000R1006 | 0.265 |
| 1.60 ... 2.50 | 100 | 50 | MS132-2.5T | 1SAM340000R1007 | 0.265 |
| 2.50 ... 4.00 | 100 | 80 | MS132-4.0T | 1SAM340000R1008 | 0.265 |
| 4.00 ... 6.30 | 100 | 126 | MS132-6.3T | 1SAM340000R1009 | 0.265 |
| 6.30 ... 10.0 | 100 | 200 | MS132-10T | 1SAM340000R1010 | 0.265 |
| 8.00 ... 12.0 | 100 | 240 | MS132-12T | 1SAM340000R1012 | 0.310 |
| 10.0 ... 16.0 | 100 | 320 | MS132-16T | 1SAM340000R1011 | 0.310 |
| 16.0 ... 20.0 | 100 | 400 | MS132-20T | 1SAM340000R1013 | 0.310 |
| 20.0 ... 25.0 | 50 | 500 | MS132-25T | 1SAM340000R1014 | 0.310 |

Please check for single-phase equipment chapter Main accessories.


Main dimensions mm, inches

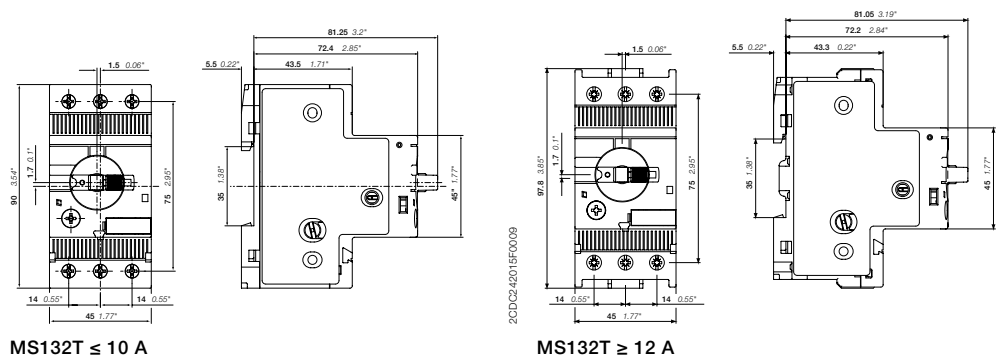

Main accessories


MS116, MS132, MS165, MO132, MO165, MS132-T

Manual motor starters with accessories (MS116, MO132, MO165)

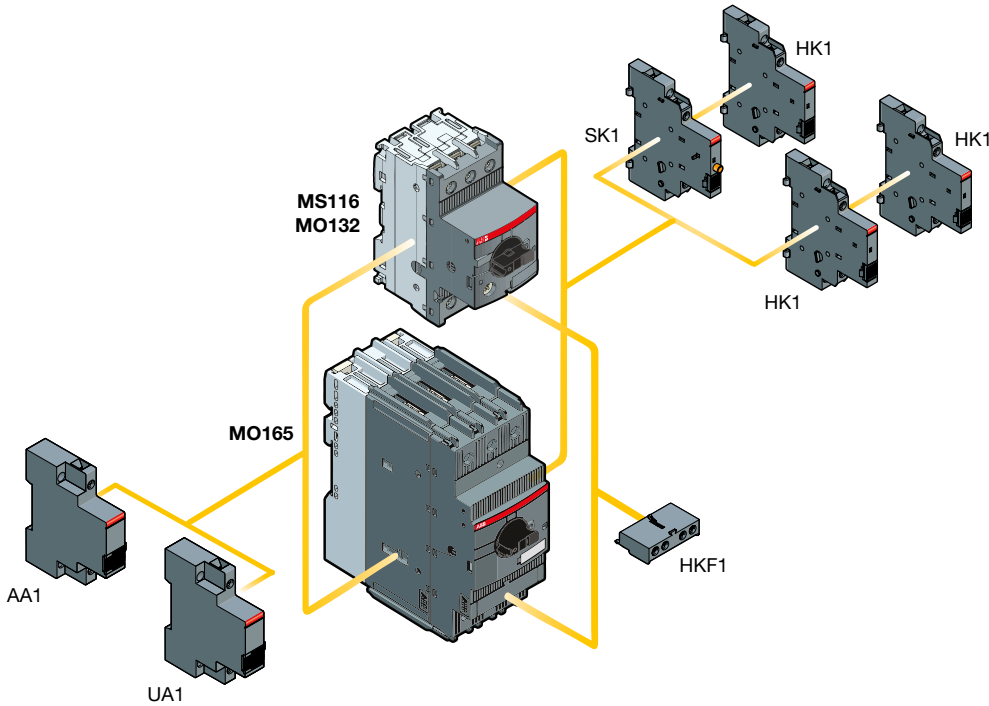

2CDC242001F0015

Manual motor starters with accessories (MS132, MS165) and circuit breaker for transformer protection (MS132-T)

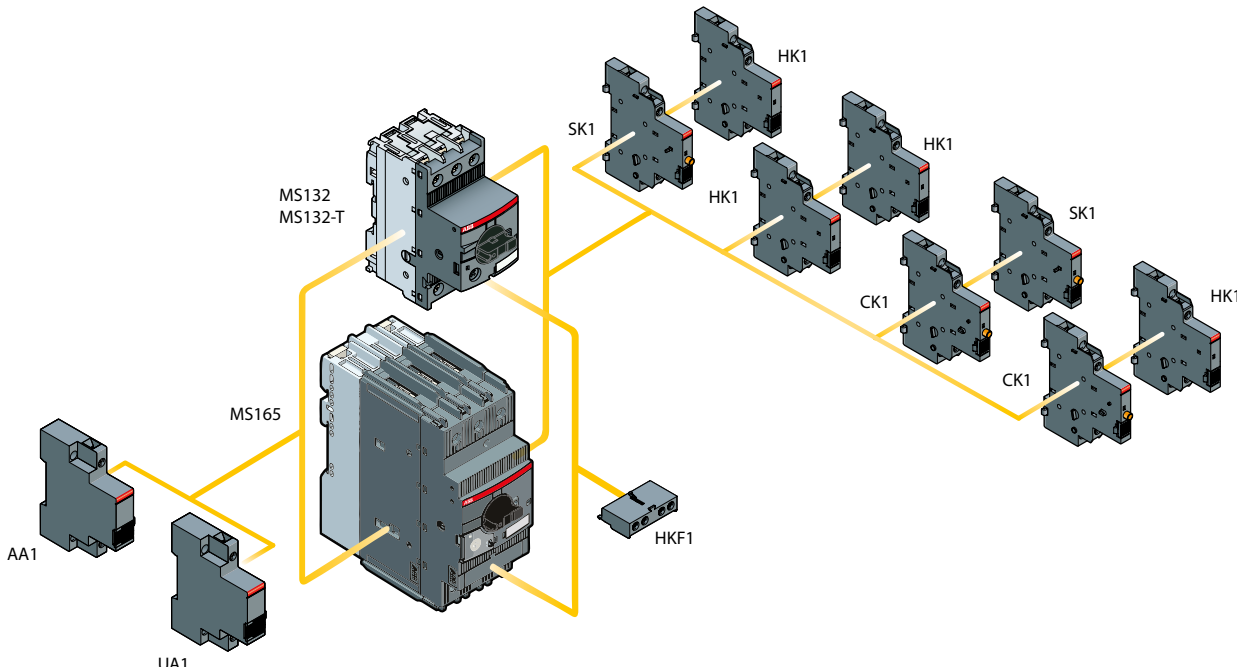

2CDC242001F0015

2CDC131050C0201a

Main accessories

MS116, MS132, MS165, MO132, MO165, MS132-T



HKF1-11

1SBC101208F0014



HK1-11

1SBC101208F0014



SK1-11

1SBC101210F0014



CK1-11

1SBC101288F0014


Description

MMS and MS132-T can be equipped with auxiliary contacts for lateral/front mounting, signaling contacts for lateral mounting, undervoltage releases and shunt trips. Two different signaling contacts are available. The accessories can be fitted wiring free and without tools. A variety of combinations is possible as required for the application. The auxiliary contacts change position with the main contacts. The signaling contact SK signals tripping regardless if it was caused by short-circuit or overload. The signaling contact CK signals tripping in case it was caused by short-circuit. Undervoltage releases are used for remote tripping of the manual motor starters especially for emergency stop circuits. Shunt trips release the MMS used for remote tripping. These main accessories are suitable throughout the MS116/MS132/MS165-range.

Ordering details

| Suitable for | Auxiliary contacts N.O. | Auxiliary contacts N.C. | Description | Type | Order code | Pkg qty | Weight (1 pc) |
|----------------------------------------------------|-------------------------|-------------------------|----------------------------------------|---------|-----------------|---------|---------------|
| | | | | | | pcs | kg |
| Auxiliary contacts – mountable on the front | | | | | | | |
| MS116, | 1 | 1 | | HKF1-11 | 1SAM201901R1001 | 10 | 0.015 |
| MS132, MS165 | 1 | 0 | | HKF1-10 | 1SAM201901R1003 | 10 | 0.013 |
| MO132, MO165 | 0 | 1 | | HKF1-01 | 1SAM201901R1004 | 10 | 0.013 |
| MS132-T | 2 | 0 | | HKF1-20 | 1SAM201901R1002 | 10 | 0.015 |
| Auxiliary contacts – mountable on the right | | | | | | | |
| MS116, | 1 | 1 | max. 2 pieces | HK1-11 | 1SAM201902R1001 | 2 | 0.035 |
| MS132, MS165 | 2 | 0 | max. 2 pieces | HK1-20 | 1SAM201902R1002 | 2 | 0.035 |
| MO132, MO165 | 0 | 2 | max. 2 pieces | HK1-02 | 1SAM201902R1003 | 2 | 0.035 |
| MS132-T | 2 | 0 | with lead contacts | HK1-20L | 1SAM201902R1004 | 2 | 0.035 |
| Signaling contacts – mountable on the right | | | | | | | |
| MS116, | 1 | 1 | for tripped alarm, max. 2 pieces | SK1-11 | 1SAM201903R1001 | 2 | 0.035 |
| MS132, MS165 | 2 | 0 | for tripped alarm, max. 2 pieces | SK1-20 | 1SAM201903R1002 | 2 | 0.035 |
| MO132, MO165 | 0 | 2 | for tripped alarm, max. 2 pieces | SK1-02 | 1SAM201903R1003 | 2 | 0.035 |
| MS132-T | 2 | 0 | for tripped alarm, max. 2 pieces | SK1-20L | 1SAM201903R1004 | 2 | 0.035 |
| MS132, MS165, | 1 | 1 | for short-circuit alarm, max. 2 pieces | CK1-11 | 1SAM301901R1001 | 2 | 0.035 |
| MS132-T | 2 | 0 | for short-circuit alarm, max. 2 pieces | CK1-20 | 1SAM301901R1002 | 2 | 0.035 |
| | 0 | 2 | for short-circuit alarm, max. 2 pieces | CK1-02 | 1SAM301901R1003 | 2 | 0.035 |

Main dimensions mm, inches

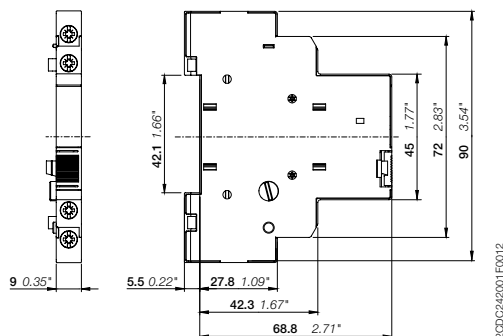

HK1

2CDC242001F0012

2CDC131050C0201a

Main accessories

MS116, MS132, MS165, MO132, MO165, MS132-T

2



AA1-24

1SBC101211F0014




UA1-24

1SBC101212F0014

Ordering details

| Suitable for | Rated control supply voltage | | Type | Order code | Pkg qty | Weight (1 pc) |
|------------------------------------------------------|------------------------------|-------------|---------|-----------------|---------|---------------|
| | 50 Hz V AC | 60 Hz V AC | | | | |
| | | | | | pcs | kg |
| Shunt trips – mountable on the left | | | | | | |
| MS116, MS132, MS165, MO132, MO165, MS132-T | 20 ... 24 | 20 ... 24 | AA1-24 | 1SAM201910R1001 | 1 | 0.100 |
| | 110 | 110 | AA1-110 | 1SAM201910R1002 | 1 | 0.100 |
| | 200 ... 240 | 200 ... 240 | AA1-230 | 1SAM201910R1003 | 1 | 0.100 |
| | 350 ... 415 | 350 ... 415 | AA1-400 | 1SAM201910R1004 | 1 | 0.100 |
| Undervoltage releases – mountable on the left | | | | | | |
| MS116, MS132, MS165, MO132, MO165, MS132-T | 20 | 24 | UA1-20 | 1SAM201904R1010 | 1 | 0.100 |
| | 24 | - | UA1-24 | 1SAM201904R1001 | 1 | 0.100 |
| | 48 | - | UA1-48 | 1SAM201904R1002 | 1 | 0.100 |
| | 60 | - | UA1-60 | 1SAM201904R1003 | 1 | 0.100 |
| | 110 | 120 | UA1-110 | 1SAM201904R1004 | 1 | 0.100 |
| | - | 208 | UA1-208 | 1SAM201904R1008 | 1 | 0.100 |
| | 230 | 240 | UA1-230 | 1SAM201904R1005 | 1 | 0.100 |
| | 400 | - | UA1-400 | 1SAM201904R1006 | 1 | 0.100 |
| | 415 | 480 | UA1-415 | 1SAM201904R1007 | 1 | 0.100 |
| | - | 575 | UA1-575 | 1SAM201904R1009 | 1 | 0.100 |

Main dimensions mm, inches

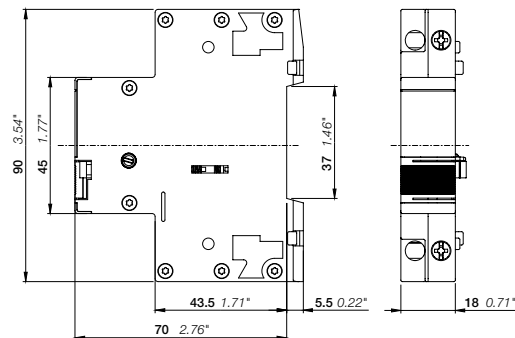

AA1, UA1


2DCDC242002F0012

2CDC131050C0201a


Main accessories

MS116, MS132, MS165, MO132, MO165

Manual motor starter with three-phase busbar systems (MS116, MS132, MO132)

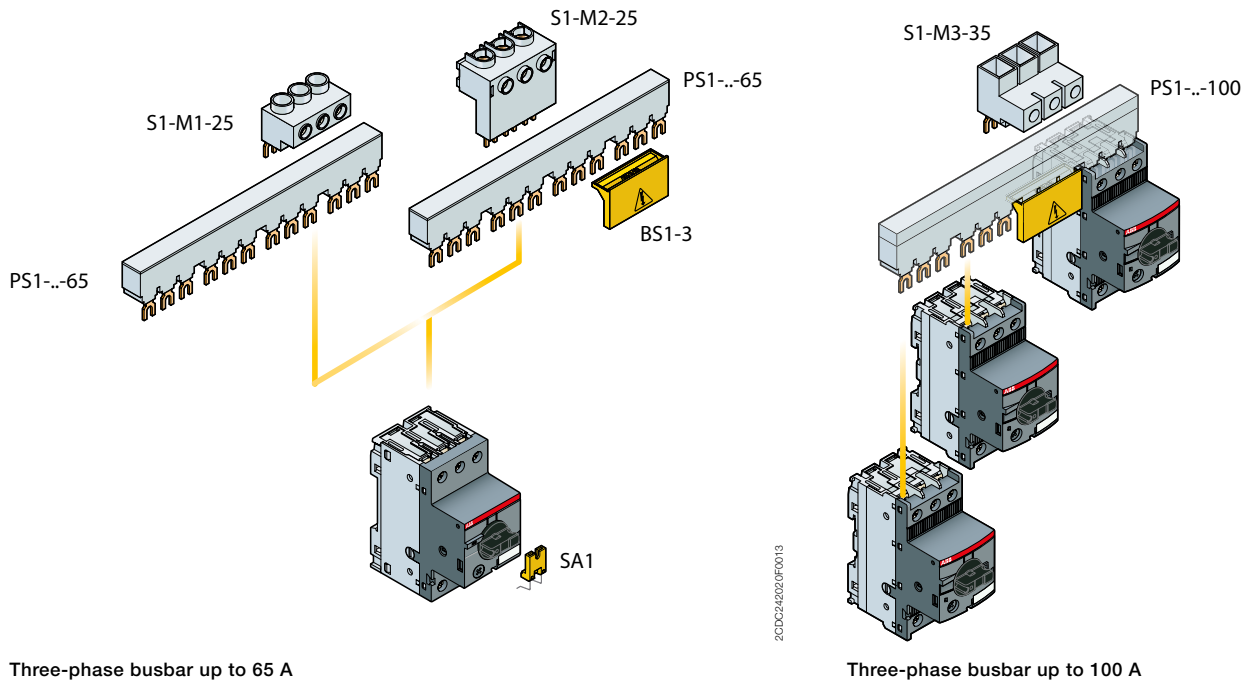


Manual motor starter with three-phase busbar systems (MS165, MO165)

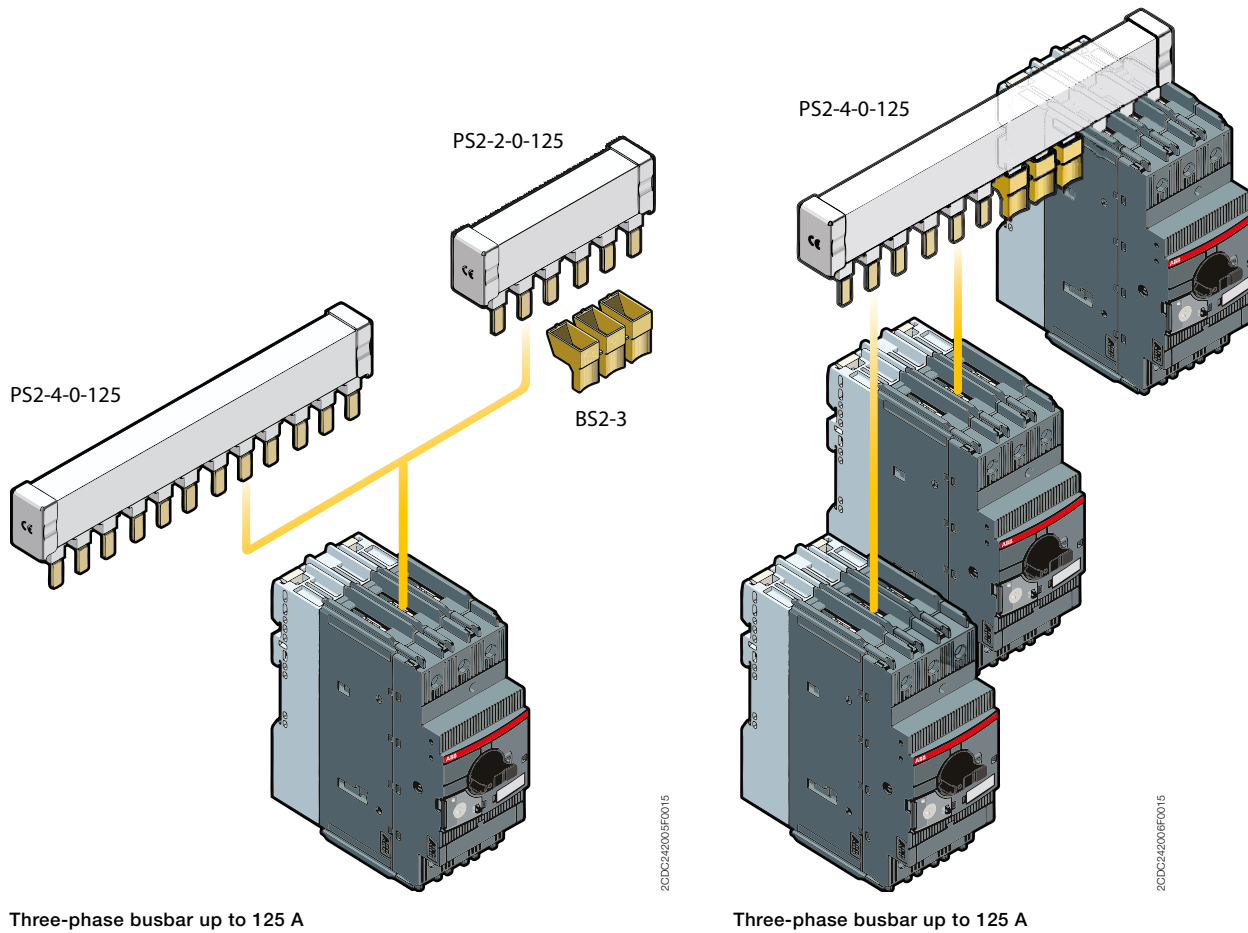

Main accessories


MS116, MS132, MO132, MS132-T

2

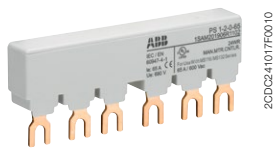


PS1-2-0-65

2CDC241017F0010

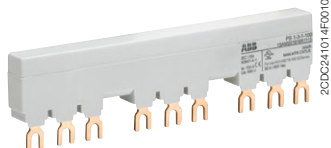

PS1-3-1-100

2CDC241014F0010



S1-M1-25

1SBC101226F0014



S1-M2-25

1SBC101266F0014



SA2

2CDC241023F0013



SA1

SK0108B91



PB1-1-32

2CDC241004R0014



S1-PB1-25

2CDC241005S0014

Description

Three-phase busbars ensure a quick and safe connection and are therefore a cost effective solution. A variety of different three-phase busbars up to 100 A are in the assortment. Between 2 and 5 manual motor starters with none, one or two lateral auxiliary contacts can be connected. Different three-phase feeder terminals are available according to the application.

Phase connecting links and phase power infeed blocks are also available for single-phase applications.

Ordering details

| Suitable for | Rated operational current | Number of MMS | Number of lateral aux. | Type | Order code | Pkg qty | Weight (1 pc) |
|----------------------------|---------------------------|---------------|------------------------|-------------|-----------------|---------|---------------|
| | A | | | | | pcs | kg |
| Three-phase busbars | | | | | | | |
| MS116, MS132, MO132 | 65 | 2 | 0 | PS1-2-0-65 | 1SAM201906R1102 | 10 | 0.034 |
| | 65 | 3 | 0 | PS1-3-0-65 | 1SAM201906R1103 | 10 | 0.055 |
| | 65 | 4 | 0 | PS1-4-0-65 | 1SAM201906R1104 | 10 | 0.077 |
| | 65 | 5 | 0 | PS1-5-0-65 | 1SAM201906R1105 | 10 | 0.098 |
| | 65 | 2 | 1 | PS1-2-1-65 | 1SAM201906R1112 | 10 | 0.036 |
| | 65 | 3 | 1 | PS1-3-1-65 | 1SAM201906R1113 | 10 | 0.060 |
| | 65 | 4 | 1 | PS1-4-1-65 | 1SAM201906R1114 | 10 | 0.087 |
| | 65 | 5 | 1 | PS1-5-1-65 | 1SAM201906R1115 | 10 | 0.108 |
| | 65 | 2 | 2 | PS1-2-2-65 | 1SAM201906R1122 | 10 | 0.040 |
| | 65 | 3 | 2 | PS1-3-2-65 | 1SAM201906R1123 | 10 | 0.067 |
| | 65 | 4 | 2 | PS1-4-2-65 | 1SAM201906R1124 | 10 | 0.095 |
| | 65 | 5 | 2 | PS1-5-2-65 | 1SAM201906R1125 | 10 | 0.122 |
| MS116, MS132, MO132 | 100 | 3 | 0 | PS1-3-0-100 | 1SAM201916R1103 | 10 | 0.084 |
| | 100 | 4 | 0 | PS1-4-0-100 | 1SAM201916R1104 | 10 | 0.117 |
| | 100 | 5 | 0 | PS1-5-0-100 | 1SAM201916R1105 | 10 | 0.154 |
| | 100 | 3 | 1 | PS1-3-1-100 | 1SAM201916R1113 | 10 | 0.094 |
| | 100 | 4 | 1 | PS1-4-1-100 | 1SAM201916R1114 | 10 | 0.134 |
| | 100 | 5 | 1 | PS1-5-1-100 | 1SAM201916R1115 | 10 | 0.172 |
| | 100 | 3 | 2 | PS1-3-2-100 | 1SAM201916R1123 | 10 | 0.105 |


| Suitable for | Rated operational current | Rated cross section | Mounting form | Type | Order code | Pkg qty | Weight (1 pc) |
|-------------------------------------|---------------------------|---------------------|-------------------------|----------|-----------------|---------|---------------|
| | A | mm ² | | | | pcs | kg |
| Three-phase feeder terminals | | | | | | | |
| MS116, MS132, MO132 | 65 | 25 | Flat | S1-M1-25 | 1SAM201907R1101 | 10 | 0.038 |
| | 65 | 25 | High | S1-M2-25 | 1SAM201907R1102 | 10 | 0.051 |
| | 65 | 25 | UL/CSA Type E/F and IEC | S1-M3-25 | 1SAM201907R1103 | 10 | 0.042 |
| | 100 | 35 | UL/CSA Type E/F and IEC | S1-M3-35 | 1SAM201913R1103 | 10 | 0.060 |

| Suitable for | Description | Type | Order code | Pkg qty | Weight (1 pc) |
|------------------------------|------------------------------|-------|-----------------|---------|---------------|
| | | | | pcs | kg |
| MS116, MS132, MO132 | Protection cover for busbars | BS1-3 | 1SAM201908R1001 | 50 | 0.003 |
| MS116, MS132, MO132, MS132-T | Screw fixing kit | FS116 | 1SAM201909R1001 | 1 | 0.020 |
| | Padlock + two keys | SA2 | GJF1101903R0002 | 10 | 0.020 |
| MS116 | Lock handle | SA1 | GJF1101903R0001 | 10 | 0.003 |
| | Lock handle box SA1/SA2 | SA3 | GJF1101903R0003 | 10 | 0.050 |

| Accessories for single-phase connection (IEC only) | | | | | | | |
|-----------------------------------------------------------|--------------------------|-----------|-----------------|---------|---------------|--|--|
| Suitable for | Description | Type | Order code | Pkg qty | Weight (1 pc) | | |
| | | | | pcs | kg | | |
| MS116, MS132, MO132, MS132-T | Phase connecting link | PB1-1-32 | 1SAM201914R1001 | 1 | 0.009 | | |
| | Phase power infeed block | S1-PB1-25 | 1SAM201914R1002 | 1 | 0.013 | | |


Main accessories

MS165, MO165

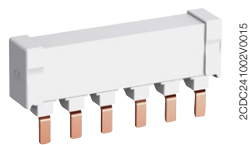

PS2-2-0-125

2CDC241002V0015

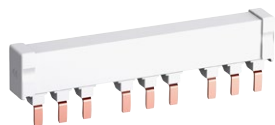

PS2-3-0-125

2CDC241003V0015



KA165

2CDC241010V0014



BS2-3

2CDC241001V0015



SA2

2CDC241023F0013

Description

Three-phase busbars ensure a quick and safe connection and are therefore a cost effective solution. A variety of different three-phase busbars up to 125 A are in the assortment. Between 2 and 5 manual motor starters with none, one or two lateral auxiliary contacts can be connected.

Ordering details

| Suitable for | Rated operational current A | Number of MMS | Number of lateral aux. | Type | Order code | Pkg qty pcs | Weight (1 pc) kg |
|----------------------------|--------------------------------|---------------|------------------------|-------------|-----------------|----------------|---------------------|
| Three-phase busbars | | | | | | | |
| MS165, MO165 | 125 | 2 | 0 | PS2-2-0-125 | 1SAM401920R1002 | 10 | 0.100 |
| | 125 | 3 | 0 | PS2-3-0-125 | 1SAM401920R1003 | 10 | 0.162 |
| | 125 | 4 | 0 | PS2-4-0-125 | 1SAM401920R1004 | 10 | 0.226 |
| | 125 | 2 | 2 | PS2-2-2-125 | 1SAM401920R1022 | 10 | 0.117 |
| | 125 | 3 | 2 | PS2-3-2-125 | 1SAM401920R1023 | 10 | 0.197 |
| | 125 | 4 | 2 | PS2-4-2-125 | 1SAM401920R1024 | 10 | 0.277 |

Other busbar types on request.

| Suitable for | Description | Type | Order code | Pkg qty pcs | Weight (1 pc) kg |
|--------------|------------------------------|-------|-----------------|----------------|---------------------|
| MS165, MO165 | Terminal shroud | KA165 | 1SAM401922R1001 | 10 | 0.025 |
| | Protection cover for busbars | BS2-3 | 1SAM401921R1001 | 50 | 0.005 |
| | Padlock + two keys | SA2 | GJF1101903R0002 | 10 | 0.020 |

Main accessories

MS116, MS132, MO132

2



2CDC241004F0010

IB132-Y



2CDC241003F0010

IB132-G



2CDC241002F0010

DMS132-Y



2CDC241001F0010

DMS132-G

Description

IB132 are IP65 (UL/CSA Type 12) enclosures for single MMS installation. Additional mounting of auxiliary and signaling contacts, shunt trips and undervoltage release is possible. The handle is lockable in OFF position. For detailed specification see installation instruction.

DMS132 are IP65 (UL/CSA Type 12) door mounting kits for MMS installation in any enclosure. Additional mounting of auxiliary, signaling, shunt trips and undervoltage release is possible. The handle is lockable in OFF position. For detailed specification see installation instruction.





Ordering details

| Suitable for | Description | Color | Type | Order code | Pkg qty | Weight (1 pc) |
|-------------------------------------------------|-------------------------------------------------------------|------------|----------|-----------------|---------|---------------|
| | | | | | pcs | kg |
| IP65 enclosures (UL/CSA Type 12) | | | | | | |
| MS116, MS132, MO132 | Padlockable max. 3 padlocks with bail diameter 4 ... 6.5 mm | Yellow/red | IB132-Y | 1SAM201911R1011 | 1 | 0.370 |
| | | Grey/black | IB132-G | 1SAM201911R1010 | 1 | 0.370 |
| IP65 door mounting kits (UL/CSA Type 12) | | | | | | |
| MS116, MS132, MO132 | Padlockable max. 3 padlocks with bail diameter 4 ... 6.5 mm | Yellow/red | DMS132-Y | 1SAM201912R1011 | 1 | 0.170 |
| | | Grey/black | DMS132-G | 1SAM201912R1010 | 1 | 0.170 |

Indication I-O-T and ON-OFF-T

Please check for further equipment chapter General accessories.

Main dimensions mm, inches

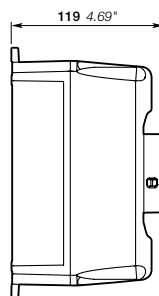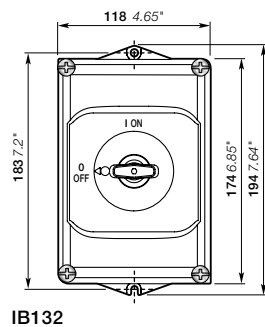

MS5100, MS495, MS497 manual motor starters

22 to 100 A – with thermal and electromagnetic protection



MS5100-100



MS495-40



MS497-100

Description


Manual motor starters (MMS) are protection devices for the main circuit. They combine motor control and protection in a single device. MMS are used mainly to switch motors manually ON/OFF and protect them and the installation fuse-less against short-circuit, overload and phase failures ¹⁾. Fuse-less protection with a manual motor starter saves costs, space and ensures a quick reaction under short-circuit condition, by switching off the motor within milliseconds.

Ordering details


| Rated operational power 400 V AC-3 kW | Setting range A | Short-circuit breaking capacity I_{cs} at 400 V AC kA | Rated instantaneous short-circuit current setting I_i A | Type | Order code | Weight (1 pc) kg |
|------------------------------------------------|--------------------|------------------------------------------------------------|--------------------------------------------------------------|------------|-----------------|---------------------|
| MS5100 manual motor starters | | | | | | |
| 45 | 40 ... 100 | 70 | 600 ... 1300 | MS5100-100 | 1SDA082034R1 | 1.200 |
| MS495 manual motor starters | | | | | | |
| 30 | 45 ... 63 | 25 | 819 | MS495-63 | 1SAM550000R1007 | 2.247 |
| 37 | 57 ... 75 | 25 | 975 | MS495-75 | 1SAM550000R1008 | 2.253 |
| 45 | 70 ... 90 | 25 | 1170 | MS495-90 | 1SAM550000R1009 | 2.280 |
| 55 | 80 ... 100 | 25 | 1235 | MS495-100 | 1SAM550000R1010 | 2.295 |
| MS497 manual motor starters | | | | | | |
| 15 | 22 ... 32 | 50 | 416 | MS497-32 | 1SAM580000R1004 | 2.222 |
| 18.5 | 28 ... 40 | 50 | 520 | MS497-40 | 1SAM580000R1005 | 2.203 |
| 22 | 36 ... 50 | 50 | 650 | MS497-50 | 1SAM580000R1006 | 2.230 |
| 30 | 45 ... 63 | 50 | 819 | MS497-63 | 1SAM580000R1007 | 2.255 |
| 37 | 57 ... 75 | 50 | 975 | MS497-75 | 1SAM580000R1008 | 2.266 |
| 45 | 70 ... 90 | 50 | 1170 | MS497-90 | 1SAM580000R1009 | 2.268 |
| 55 | 80 ... 100 | 50 | 1235 | MS497-100 | 1SAM580000R1010 | 2.275 |

¹⁾ The MS49x range offers phase loss sensitivity

Main dimensions mm, inches

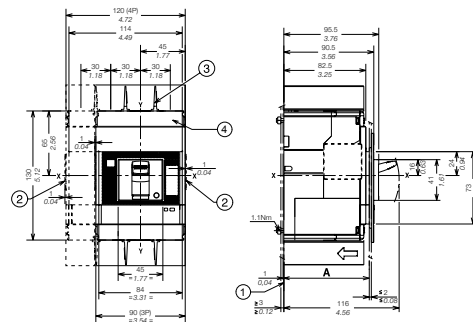

MS5100

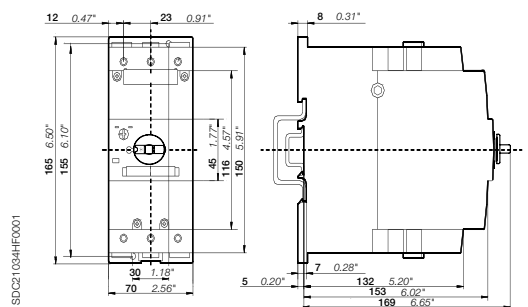

MS495, MS497

MO5100, MO495, MO496 manual motor starters magnetic only 32 to 100 A – with electromagnetic protection

2



MO5100-100 no mirror

MO5100-100



STO2801

MO495-75



2CDC241021F0011

MO496-100

Description

The manual motor starter magnetic only is used to manually switch on and off motors and to protect them reliably and without the need for a fuse from short-circuits.


Ordering details

| Rated operational power 400 V AC-3 ¹⁾ kW | Rated operational current A | Short-circuit breaking capacity I_{cs} at 400 V AC kA | Rated instantaneous short-circuit current setting I_i A | Type | Order code | Weight (1 pc) kg |
|--------------------------------------------------------------|--------------------------------|------------------------------------------------------------|--------------------------------------------------------------|------------|-----------------|---------------------|
| MO5100 manual motor starter magnetic only | | | | | | |
| 25 | 70 | 36 ²⁾ | 210 ... 770 | MO5100-70 | 1SDA082031R1 | 1.100 |
| 30 | 80 | 36 ²⁾ | 240 ... 880 | MO5100-80 | 1SDA082032R1 | 1.100 |
| 45 | 100 | 36 ²⁾ | 300 ... 1100 | MO5100-100 | 1SDA082033R1 | 1.100 |
| MO495 manual motor starter magnetic only | | | | | | |
| 30 | 63 | 25 | 819 | MO495-63 | 1SAM560000R1007 | 2.244 |
| 37 | 75 | 25 | 975 | MO495-75 | 1SAM560000R1008 | 2.247 |
| 45 | 90 | 25 | 1170 | MO495-90 | 1SAM560000R1009 | 2.269 |
| 55 | 100 | 25 | 1235 | MO495-100 | 1SAM560000R1010 | 2.292 |
| MO496 manual motor starter magnetic only | | | | | | |
| 15 | 32 | 50 | 416 | MO496-32 | 1SAM590000R1004 | 2.208 |
| 18.5 | 40 | 50 | 520 | MO496-40 | 1SAM590000R1005 | 2.218 |
| 22 | 50 | 50 | 650 | MO496-50 | 1SAM590000R1006 | 2.218 |
| 30 | 63 | 50 | 819 | MO496-63 | 1SAM590000R1007 | 2.248 |
| 37 | 75 | 50 | 975 | MO496-75 | 1SAM590000R1008 | 2.278 |
| 45 | 90 | 50 | 1170 | MO496-90 | 1SAM590000R1009 | 2.266 |
| 55 | 100 | 50 | 1235 | MO496-100 | 1SAM590000R1010 | 2.293 |


¹⁾ For overload protection of motors, an appropriate thermal or electronic overload relay must be used

²⁾ I_{cs} at 415 V AC

Main dimensions mm, inches

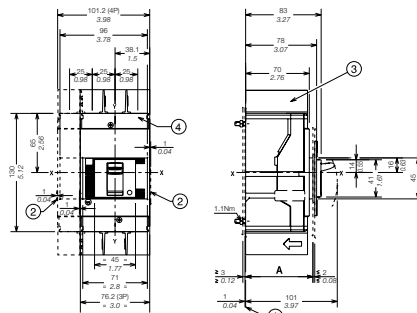

MO5100

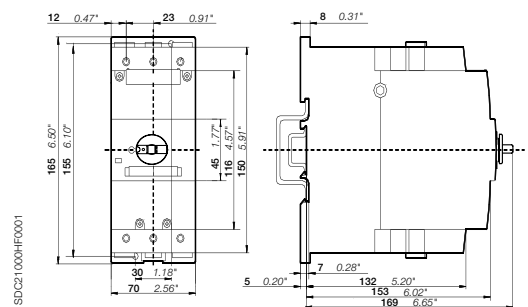

MO495, MO496

Main accessories

MS5100, MO5100 manual motor starters



XT AUX-Con cable/01



XT SOR-Con cable/01



1SDCA1026E0001

Description

Manual motor starters can be equipped with auxiliary contacts, undervoltage release and shunt trips. Undervoltage release are used for remote tripping of the manual motor starter especially for emergency stop circuits. Shunt trips release the MMS used for remote tripping. For this manual motor starter range we also offer key lock solutions for customer applications.

Ordering details

| Suitable for | Auxiliary contacts N.O. | Auxiliary contacts N.C. | Description | Type | Order code | Pkg qty | Weight (1 pc) |
|--------------|-------------------------|-------------------------|-------------|------|------------|---------|---------------|
| | | | | | | pcs | kg |

Auxiliary contacts - mountable inside the breaker on the left slot (cabled version)

| | | | | | | | |
|--------|--|--|------------|--------------------------|--------------|---|------|
| MS5100 | | | Changeover | AUX-C 1Q+1SY 250V AC | 1SDA066431R1 | 2 | 0.06 |
| MO5100 | | | Changeover | AUX-C 2Q+1SY 250V AC | 1SDA066433R1 | 3 | 0.09 |
| MS5100 | | | Changeover | AUX-C 2Q+2SY+1SA 250V AC | 1SDA066438R1 | 5 | 0.15 |
| | | | Changeover | AUX-C 3Q+1SY 250V AC | 1SDA066434R1 | 4 | 0.12 |
| MO5100 | | | Changeover | AUX-C 3Q+2SY 250V AC | 1SDA066436R1 | 5 | 0.15 |
| | | | Changeover | AUX-C 1Q+1SY 24V DC | 1SDA066446R1 | 2 | 0.06 |

| Suitable for | Rated control supply voltage V | Description | Type | Order code | Pkg qty | Weight (1 pc) |
|--------------|--------------------------------|-------------|------|------------|---------|---------------|
| | | | | | pcs | kg |

Shunt trips units - mountable inside the breaker on the left slot (cabled version)

| | | | | | | |
|--------|--|------------------------|---------------------------------|--------------|---|------|
| MS5100 | | Normally NON energized | SOR-C 12V DC | 1SDA066321R1 | 1 | 0.14 |
| MO5100 | | Normally NON energized | SOR-C 24-30V AC/DC | 1SDA066322R1 | 1 | 0.14 |
| | | Normally NON energized | SOR-C 48-60V AC/DC | 1SDA066323R1 | 1 | 0.14 |
| | | Normally NON energized | SOR-C 110-127V AC / 110-125V DC | 1SDA066324R1 | 1 | 0.14 |
| | | Normally NON energized | SOR-C 220-240V AC / 220-250V DC | 1SDA066325R1 | 1 | 0.14 |
| | | Normally NON energized | SOR-C 380-440V AC | 1SDA066326R1 | 1 | 0.14 |
| | | Normally NON energized | SOR-C 480-525V AC | 1SDA066327R1 | 1 | 0.14 |

Undervoltages releases - mountable inside the breaker on the left slot (cabled version)

| | | | | | | |
|--------|--|--------------------|---------------------------------|--------------|---|------|
| MS5100 | | Normally energized | UVR-C 24-30V AC/DC | 1SDA066396R1 | 1 | 0.14 |
| MO5100 | | Normally energized | UVR-C 48V AC/DC | 1SDA060965R1 | 1 | 0.14 |
| | | Normally energized | UVR-C 60V AC/DC | 1SDA066397R1 | 1 | 0.14 |
| | | Normally energized | UVR-C 110-127V AC / 110-125V DC | 1SDA066398R1 | 1 | 0.14 |
| | | Normally energized | UVR-C 220-240V AC / 220-250V DC | 1SDA066399R1 | 1 | 0.14 |
| | | Normally energized | UVR-C 380-440V AC | 1SDA066400R1 | 1 | 0.14 |
| | | Normally energized | UVR-C 480-525V AC | 1SDA066401R1 | 1 | 0.14 |

| Suitable for | Description | Type | Order code | Pkg qty | Weight (1 pc) |
|--------------|-------------|------|------------|---------|---------------|
| | | | | pcs | kg |

Key locks


| | | | | | |
|--------|-----------------------------------------------------------------------------|-------------------------|--------------|---|----|
| MS5100 | Key lock on the circuit breaker, different keys, removable in open position | KLC Ronis ¹⁾ | 1SDA066599R1 | 1 | NA |
| MO5100 | Key lock on the circuit breaker, different keys, removable in open position | KLC Ronis ¹⁾ | 1SDA066593R1 | 1 | NA |

¹⁾ UL Listed


Main accessories

MS49x, MO49x manual motor starters

Manual motor starter MS49x with accessories

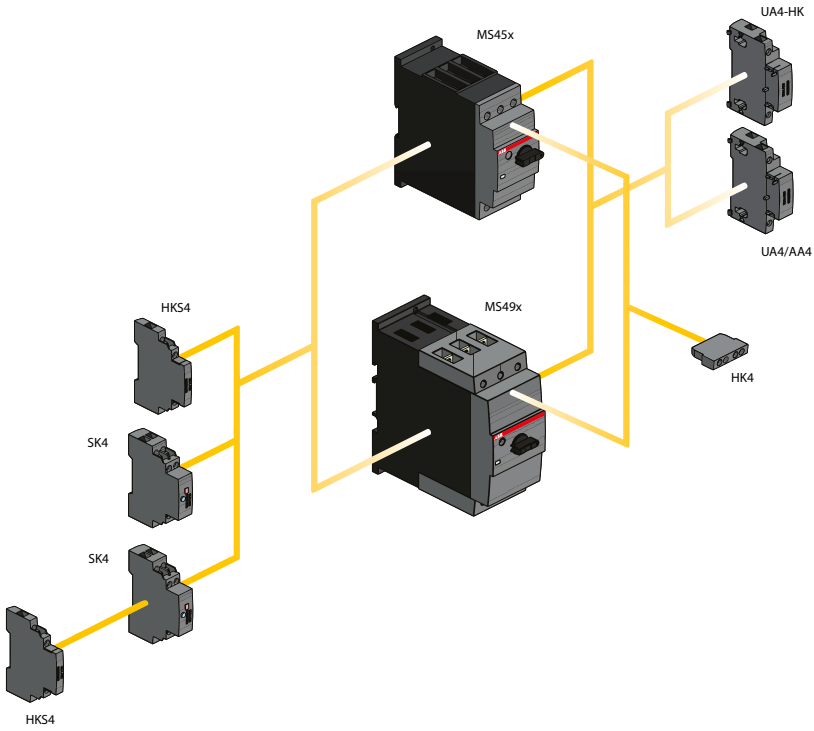

Manual motor starter MO49x with accessories

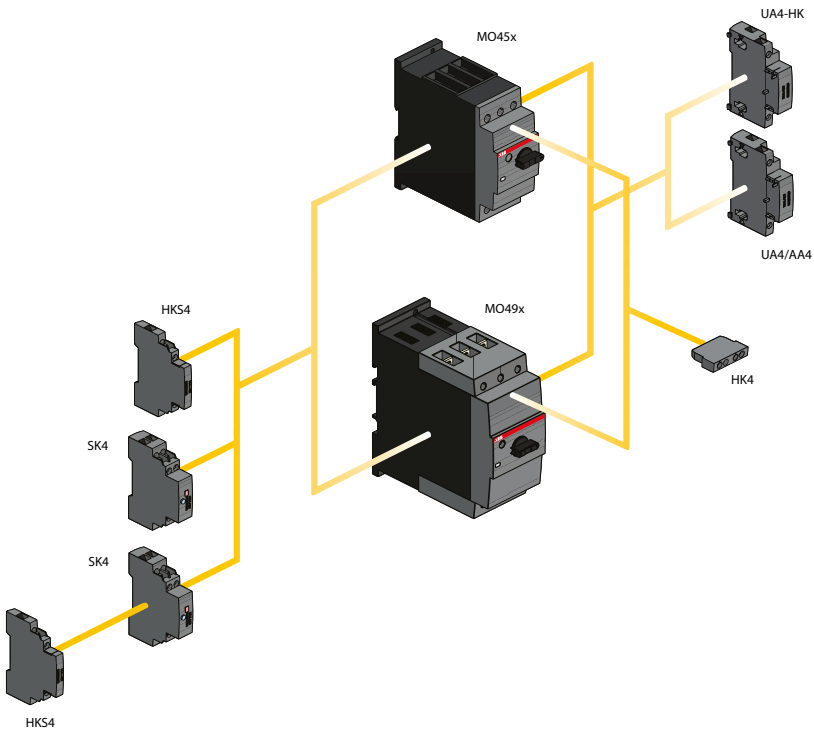

Main accessories

MS49x, MO49x manual motor starters



2CDC241023F0011

HK4-11



2CDC241023F0011

HKS4-20



2CDC241023F0011

SK4-11



2CDC241023F0011

AA4-24



2CDC241023F0011

UA4-110



2CDC241023F0013

SA2

Description

Manual motor starters can be equipped with auxiliary contacts for lateral/front mounting, signalling contact for lateral mounting, undervoltage release and shunt trips. The accessories can be fitted wiring free and without tools. A variety of combinations is possible as required for the application. The auxiliary contacts change position with the main contacts. Undervoltage release are used for remote tripping of the manual motor starter especially for emergency stop circuits. Shunt trips release the MMS used for remote tripping. For this manual motor starter range we offer terminal shrouds, terminal insulation barriers and different lock/key solutions for customer solutions.

Ordering details

| Suitable for | Auxiliary con- tacts N.O. | Auxiliary con- tacts N.C. | Description | Type | Order code | Pkg qty | Weight (1 pc) |
|-------------------------------------------------------|---------------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|-----------------|------------|------------------|
| | | | | | | pcs | kg |
| Auxiliary contacts – mountable on the front | | | | | | | |
| MS49x, MO49x | 1 | 1 | | HK4-11 | 1SAM401901R1001 | 10 | 0.017 |
| | | | Changeover | HK4-W | 1SAM401901R1002 | 10 | 0.015 |
| Auxiliary contacts – mountable on the left | | | | | | | |
| MS49x, MO49x | 1 | 1 | Max. 1 piece | HKS4-11 | 1SAM401902R1001 | 2 | 0.045 |
| | 2 | 0 | Max. 1 piece | HKS4-20 | 1SAM401902R1002 | 2 | 0.045 |
| | 0 | 2 | Max. 1 piece | HKS4-02 | 1SAM401902R1003 | 2 | 0.045 |
| Signalling contacts – mountable on the left | | | | | | | |
| MS49x, MO49x | 2 | 2 | Separate signalling acc. UL508E 1 N.O. + 1 N.C. for short circuit alarm and 1 N.O. + 1 N.C. for tripped alarm, max. 1x SK4-11 + 1 x HKS4-xx | SK4-11 | 1SAM401904R1001 | 1 | 0.093 |
| Shunt trip units – mountable on the right | | | | | | | |
| MS49x, MO49x | 20 ... 24 | | 50/60 | AA4-24 | 1SAM401907R1001 | 1 | 0.135 |
| | 90 ... 110 | | 50/60 | AA4-110 | 1SAM401907R1002 | 1 | 0.135 |
| | 200 ... 240 | | 50/60 | AA4-230 | 1SAM401907R1003 | 1 | 0.128 |
| | 350 ... 415 | | 50/60 | AA4-400 | 1SAM401907R1004 | 1 | 0.125 |
| Undervoltage releases – mountable on the right | | | | | | | |
| MS49x, MO49x | 24 | | 50/60 | UA4-24 | 1SAM401905R1004 | 1 | 0.134 |
| | 110/120 | | 50/60 | UA4-110 | 1SAM401905R1001 | 1 | 0.134 |
| | 230/240 | | 50/60 | UA4-230 | 1SAM401905R1002 | 1 | 0.131 |
| | 400/440 | | 50/60 | UA4-400 | 1SAM401905R1003 | 1 | 0.129 |
| | 230/240 | | 50/60 | UA4-HK-230 | 1SAM401906R1001 | 1 | 0.140 |
| | 400/440 | | 50/60 | UA4-HK-400 | 1SAM401906R1002 | 1 | 0.137 |
| Terminal shrouds and insulation barriers | | | | | | | |
| MS495, MS497, MO495, MO496 | | | Terminal shroud | KA495 | 1SAM501901R1001 | 10 | 0.018 |
| | | | Terminal shroud | KA495C ¹⁾ | 1SAM501902R1001 | 10 | 0.038 |
| | | | Terminal insulation barrier for UL508E | DX495 | 1SAM401912R1001 | 1 | 0.154 |
| MS495, MS497, MO495, MO496 | | | Padlock + two keys | SA2 | GJF1101903R0002 | 10 | 0.020 |

¹⁾ Is plugged onto the housing after removing the box terminals, if using cable lugs.

General accessories

MS116, MS132, MO132, MS5100, MO5100, MS49x, MO49x

2



MSHD-LB

2CDC241003F0011



MSHD-LY

2CDC241002S0011




MSMN

2CDC241004F0011



MSH-AR

2CDC241001F0012

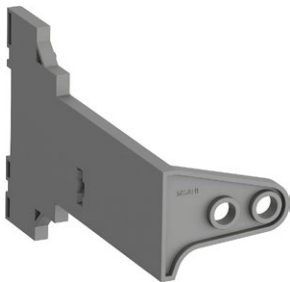

MSAH1

2CDC241017V0013



RHD Normal Direct Handle

RHD-01

Description

With this solution of door coupling rotary mechanism it is possible to operate a manual motor starter in the back of a switch cabinet from outside. The door coupling mechanism prevents opening of the door of a switch cabinet with the manual motor starter in ON position.

The complete mechanism includes handle, shaft, driver, shaft alignment ring and shaft supporter.

Most accessories fit for 6 mm shafts with a maximum length of 180 mm. The degree of protection for handles MSHD is IP64 (UL/CSA Type 1, 3R, 12).

Ordering details

| Suitable for | Description | Shaft length mm | Color | Type | Order code | Pkg qty pcs | Weight (1 pc) kg |
|---------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|------------------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------|----------------------------------|
| Shafts | | | | | | | |
| MS116, MS132, MO132, MS4xx, MO4xx | For MSHD handles. Shaft diameter 6 mm. Shaft extension for door coupling driver. | 85 105 130 180 | | OXS6X85 OXS6X105 OXS6X130 OXS6X180 | 1SCA101647R1001 1SCA108043R1001 1SCA101655R1001 1SCA101659R1001 | 1 1 1 1 | 0.020 0.020 0.030 0.040 |
| IP64 handles (UL/CSA Type 1, 3R, 12) | | | | | | | |
| MS116, MS132, MO132, MS4xx, MO4xx | Padlockable max. 3 padlocks with bail diameter 5 ... 8 mm, door interlock in ON position defeatable, for use with 6 mm OXS6...types up to 180 mm or driver shafts MSOX. | | Black Yellow Black Yellow | MSHD-LB ¹⁾ MSHD-LY ¹⁾ MSHD-LTB ²⁾ MSHD-LTY ²⁾ | 1SAM201920R1001 1SAM201920R1002 1SAM201920R1011 1SAM201920R1012 | 1 1 1 1 | 0.065 0.065 0.065 0.065 |
| Driver | | | | | | | |
| MS116, MS132, MO132, MS4xx, MO4xx | Coupling driver for use with 6 mm OXS6... types up to 180 mm. | | | MSMN ³⁾ MSMNO ⁴⁾ | 1SAM101923R0002 1SAM101923R0012 | 1 1 | 0.002 0.002 |
| Shaft alignment ring | | | | | | | |
| MS116, MS132, MO132, MS4xx, MO4xx | The MSH-AR supports the long shafts for alignment to the handle inlet. It makes closing panel doors more easy. Use for OXS6X > 105 mm. | | | MSH-AR | 1SAM201920R1000 | 1 | 0.010 |
| Shaft supporter | | | | | | | |
| MS116, MS132, MO132 | With the MSAH1 it is possible to support the shaft in the extension of handle (MSHD). It is mandatory for the usage of shafts >130 mm. | | | MSAH1 | 1SAM201909R1021 | 1 | 0.035 |
| Rotary handle operating mechanism | | | | | | | |
| MS5100 | Rotary handle operating mechanism | | | RHD Normal Direct Handle ⁵⁾ | 1SDA069053R1 | 1 | 0.4 |
| MO5100 | Rotary handle operating mechanism | | | RHD Normal Direct Handle ⁵⁾ | 1SDA066475R1 | 1 | 0.4 |

¹⁾ Indication I-O and ON-OFF (recommended for MS116, MS4xx, MO4xx)

²⁾ Indication I-O and ON-OFF + Trip indication


³⁾ Coded - Positioning of ON indication dependent from mounting orientation of the MMS

⁴⁾ Uncoded - Positioning of ON indication dependent from mounting orientation of the MMS

⁵⁾ UL Listed

General accessories

MS116, MS132, MO132, MS4xx, MO4xx

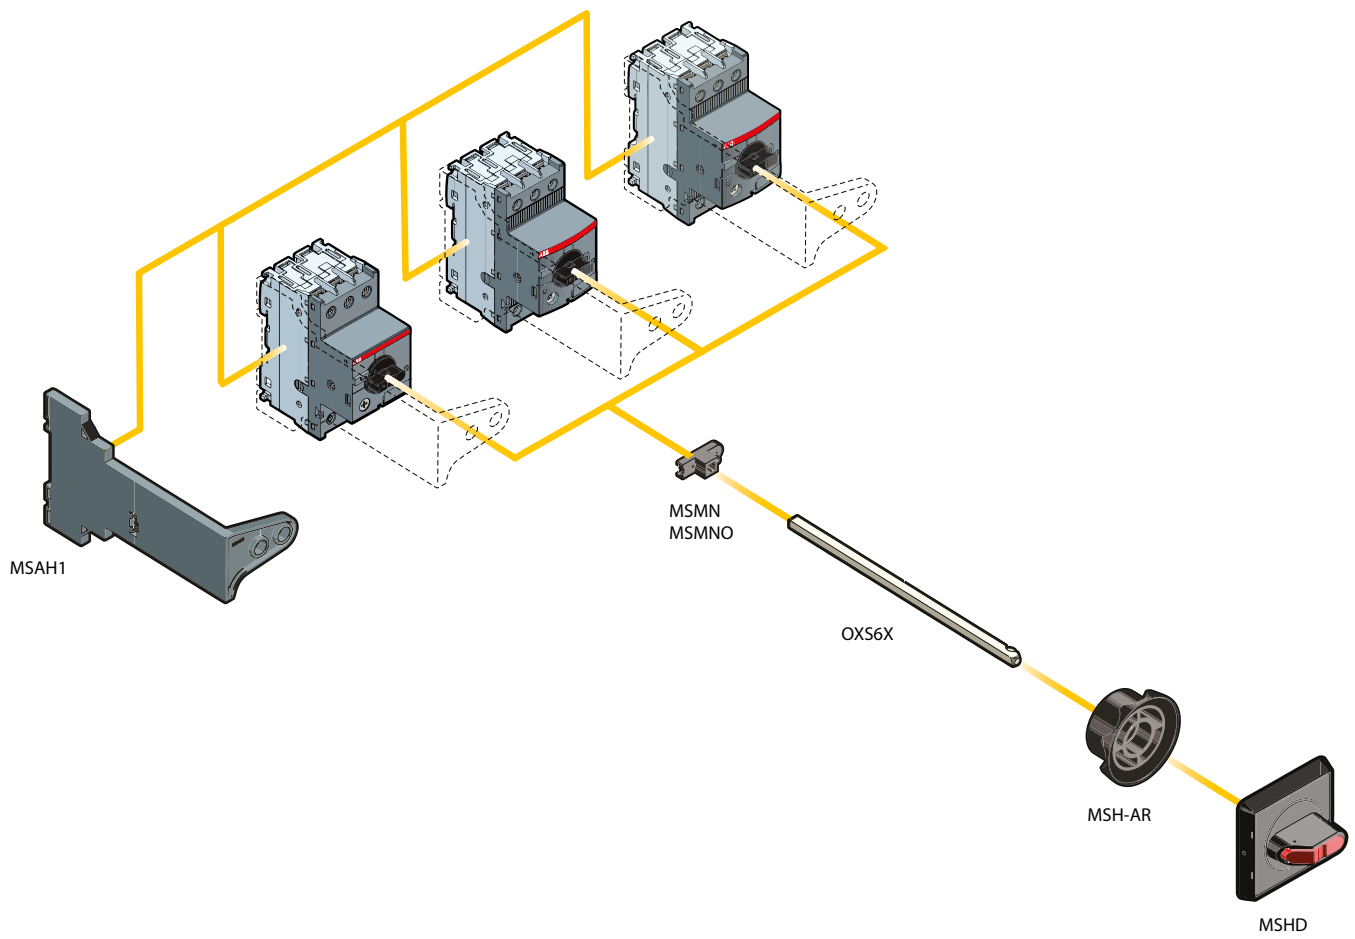

2CDC24002F0013



B mini contactors

K mini contactor relays

With screw terminals

3-pole contactors

| | |
|---------------------------|-----|
| B6, B7 AC operated | 3/4 |
| BC6, BC7, B7D DC operated | 3/5 |

3-pole reversing contactors

| | |
|------------------------|-----|
| VB6, VB7 AC operated | 3/6 |
| VBC6, VBC7 DC operated | 3/7 |

3-pole interface contactors

| | |
|----------------------------------------------|-----|
| BC6, BC7 DC operated | 3/8 |
| 3-pole contactors - large coil voltage range | |
| TBC7 DC operated | 3/9 |

4-pole contactors

| | |
|----------------------------------------------|------|
| B6, B7 AC operated | 3/10 |
| BC6, B7D DC operated | 3/11 |
| 4-pole contactors - large coil voltage range | |
| TBC7 DC operated | 3/12 |

Contactors relays

| | |
|-----------------|------|
| K6 AC operated | 3/13 |
| KC6 DC operated | 3/14 |

Interface contactor relays

| | |
|-----------------|------|
| KC6 DC operated | 3/15 |
|-----------------|------|

Contactors relays - large coil voltage range



| | |
|------------------|------|
| TKC6 DC operated | 3/16 |
|------------------|------|

| | |
|--------------------|-------------|
| Accessories | 3/17 |
|--------------------|-------------|

For direct product details information, use product type or order code, ex:
www.abb.com/productdetails/AF09-30-10-13 or www.abb.com/productdetails/1SBL137001R1310

Mini contactors



| | | | Screw terminals | | | |
|------------------------------------------------------------------------------------------------------------|---------------------------------------|------|-------------------------|---------------------------------------|------------------------------------------|------------------------------------------|
| AC Control supply  | | | | | | |
| 3-pole contactors | Coil consumption 3.5 W | Type | B6 | B7 | - | - |
| 3-pole reversing contactors | Coil consumption 3.5 W | Type | - | - | VB6 VB6A²⁾ | VB7 VB7A²⁾ |
| 4-pole contactors | Coil consumption 3.5 W | Type | B6 | B7 | - | - |
| DC Control supply  | | | | | | |
| 3-pole contactors | Coil consumption 3.5 W | Type | BC6 | BC7 B7D¹⁾ | - | - |
| 3-pole interface contactors | Coil consumption 1.4 ... 2.4 W | Type | BC6 | BC7 | - | - |
| 3-pole reversing contactors | Coil consumption 3.5 W | Type | - | - | VBC6 VBC6A²⁾ | VBC7 VBC7A²⁾ |
| 4-pole contactors | Coil consumption 3.5 W | Type | BC6 | B7D | - | - |
| Wide range types | Extended coil voltage and temperature | Type | - | TBC7 | - | - |
| PLC types | Coil consumption 1.7 W | Type | B6S¹⁾ | B7S¹⁾ | - | - |
| IEC Rated operational power AC-3 | 220-230-240 V | kW | 2.2 | 3 | 2.2 | 3 |
| | 380-400 V | kW | 4 | 5.5 | 4 | 5.5 |
| Rated operational current AC-1 | 400 V, $\theta \leq 40^\circ\text{C}$ | A | 20 | 20 | 20 | 20 |
| UL/CSA 3-phase motor rating | 220-240 V AC | hp | 2 | 3 | 2 | 3 |
| | 440-480 V AC | hp | 3 | 5 | 3 | 5 |
| General use rating | | A | 12 (300 V) | 16 (600 V) | 12 (300 V) | 16 (600 V) |

¹⁾ With integrated surge suppressor

²⁾ With safety blocking function

Main accessories

| | | |
|---------------------------------|--------------------------|---------|
| Auxiliary contact blocks | Front mounting | CAF6 |
| | Side mounting | CA6 |
| Connection sets | For reversing contactors | BSM6-30 |
| Surge suppressors | Varistor (AC/DC) | RV-BC6 |

Overload relays



| | | |
|------------------------------------------------------------------|---------------------|-------|
| Thermal overload relays | Class 10 | T16 |
| Thermal and phase failure protection, with single setup possible | | |
| Electronic overload relays | Class 10E, 20E, 30E | E16DU |
| With single setup possible | | |

Manual motor starters

| | | |
|------------------------------------------|----------|--------------|
| Thermal / magnetic protection | Class 10 | MS116, MS132 |
| Magnetic only types | | MO132 |
| Connecting link to manual motor starters | | BEA7/132 |

Contactor relays



| | | | Screw terminals | | | |
|--------------------------------------------------------------------------------------------------------------|---------------------------------------|---------|-----------------|--|--|--|
| AC Control supply  | | | | | | |
| 4-pole contactor relays | Coil consumption 3.5 W | Type | K6 | | | |
| DC Control supply  | | | | | | |
| 4-pole contactor relays | Coil consumption 3.5 W | Type | KC6 | | | |
| 4-pole interface contactor relays | Coil consumption 1.4 ... 2.4 W | Type | KC6 | | | |
| Wide range types | Extended coil voltage and temperature | Type | TKC6 | | | |
| IEC Rated operational current AC-15 | 220-230-240 V | A | 4 | | | |
| | 380-400 V | A | 3 | | | |
| Rated operational current DC-13 | 24 V | A | 2.5 | | | |
| Main accessories | | | | | | |
| Auxiliary contact blocks | Front mounting | CAF6 | | | | |
| | Side mounting | CA6-11K | | | | |

3CDC102040C0201



| Soldering pins | | | | Flat pins | | | |
|----------------|-----------------------|-------------------------|-------------------------|------------|-----------------------|-------------------------|-------------------------|
| B6...P | B7...P | - | - | B6...F | B7...F | - | - |
| - | - | VB6...P | VB7...P | - | - | VB6...F | VB7...F |
| - | - | VB6A...P ²⁾ | VB7A...P ²⁾ | - | - | VB6A...F ²⁾ | VB7A...F ²⁾ |
| BC6...P | BC7...P | - | - | BC6...F | BC7...F | - | - |
| BC6...P | B7D...P ¹⁾ | - | - | BC6...F | B7D...F ¹⁾ | - | - |
| - | BC7...P | - | - | BC6...F | BC7...F | - | - |
| - | - | VBC6...P | VBC7...P | - | - | VBC6...F | VBC7...F |
| - | - | VBC6A...P ²⁾ | VBC7A...P ²⁾ | - | - | VBC6A...F ²⁾ | VBC7A...F ²⁾ |
| 2.2 | 3 | 2.2 | 3 | 2.2 | 3 | 2.2 | 3 |
| 4 | 5.5 | 4 | 5.5 | 4 | 5.5 | 4 | 5.5 |
| 12 | 12 | 12 | 12 | 20 | 20 | 20 | 20 |
| 2 | 3 | 2 | 3 | 2 | 3 | 2 | 3 |
| 3 | 5 | 3 | 5 | 3 | 5 | 3 | 5 |
| 12 (300 V) | 16 (600 V) | 12 (300 V) | 16 (600 V) | 12 (300 V) | 16 (600 V) | 12 (300 V) | 16 (600 V) |

| | |
|-----------|-----------|
| - | - |
| CA6-11K-P | CA6-11K-F |
| - | - |
| - | - |

| | |
|---|---|
| - | - |
| - | - |

| | |
|--------------|--------------|
| MS116, MS132 | MS116, MS132 |
| MO132 | MO132 |
| - | - |



| Soldering pins | | Flat pins | |
|----------------|--|-----------|--|
| K6...P | | K6...F | |
| KC6...P | | KC6...F | |
| KC6...P | | KC6...F | |
| 4 | | 4 | |
| 3 | | 3 | |
| 2.5 | | 2.5 | |
| - | | - | |
| CA6-11K-P | | CA6-11K-F | |

B6, B7 3-pole mini contactors – with screw terminals

4 to 5.5 kW

AC operated



2CDC211001R0010

B6-30-10



2CDC211014R0011

B7-30-10

Description

B6, B7 3-pole mini contactors are compact control products mainly used for switching resistive or motor loads up to 690 V AC.

These contactors are designed with:

- 3 main poles and one built-in auxiliary contact
- control circuit: AC operated
 - low coil consumption (3.5 VA at pull-in and at holding)
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories
- hum-free coil
- designed for rail or wall mounting

Ordering details

| IEC | UL/CSA | Rated control circuit voltage U_c | | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) |
|-------------------------|-----------------------------------------------------|-------------------------------------|-------|---------------------------|------|------------|---------|----------------|
| Rated operational power | 3-phase motor rating | General use rating | 50 Hz | 60 Hz | | | | |
| 400 V AC-3 kW | current $\theta \leq 40^\circ\text{C}$ AC-1 A | 480 V hp | V AC | V AC | | | | kg |

B6 mini contactors


| | | | | | | | | | | |
|---|----|---|--------------|-------------|-------------|-----|-------------|-----------------|----|-------|
| 4 | 20 | 3 | 300 V / 12 A | 24 | 24 | 1 0 | B6-30-10-01 | GJL1211001R0101 | 10 | 0.175 |
| | | | | 42 | 42 | 0 1 | B6-30-01-01 | GJL1211001R0011 | 10 | 0.175 |
| | | | | 48 | 48 | 1 0 | B6-30-10-02 | GJL1211001R0102 | 10 | 0.175 |
| | | | | | | 0 1 | B6-30-01-02 | GJL1211001R0012 | 10 | 0.175 |
| | | | | 110 ... 127 | 110 ... 127 | 1 0 | B6-30-10-03 | GJL1211001R0103 | 10 | 0.175 |
| | | | | | | 0 1 | B6-30-01-03 | GJL1211001R0013 | 10 | 0.175 |
| | | | | 220 ... 240 | 220 ... 240 | 1 0 | B6-30-10-84 | GJL1211001R8104 | 10 | 0.175 |
| | | | | | | 0 1 | B6-30-01-84 | GJL1211001R8014 | 10 | 0.175 |
| | | | | 380 ... 415 | 380 ... 415 | 1 0 | B6-30-10-80 | GJL1211001R8100 | 10 | 0.175 |
| | | | | | | 0 1 | B6-30-01-80 | GJL1211001R8010 | 10 | 0.175 |
| | | | | 380 ... 415 | 380 ... 415 | 1 0 | B6-30-10-85 | GJL1211001R8105 | 10 | 0.175 |
| | | | | | | 0 1 | B6-30-01-85 | GJL1211001R8015 | 10 | 0.175 |

B7 mini contactors

| | | | | | | | | | | |
|-----|----|---|--------------|-------------|-------------|-----|-------------|-----------------|----|-------|
| 5.5 | 20 | 5 | 600 V / 16 A | 24 | 24 | 1 0 | B7-30-10-01 | GJL1311001R0101 | 10 | 0.175 |
| | | | | 42 | 42 | 0 1 | B7-30-01-01 | GJL1311001R0011 | 10 | 0.175 |
| | | | | 48 | 48 | 1 0 | B7-30-10-02 | GJL1311001R0102 | 10 | 0.175 |
| | | | | | | 0 1 | B7-30-01-02 | GJL1311001R0012 | 10 | 0.175 |
| | | | | 110 ... 127 | 110 ... 127 | 1 0 | B7-30-10-03 | GJL1311001R0103 | 10 | 0.175 |
| | | | | | | 0 1 | B7-30-01-03 | GJL1311001R0013 | 10 | 0.175 |
| | | | | 220 ... 240 | 220 ... 240 | 1 0 | B7-30-10-84 | GJL1311001R8104 | 10 | 0.175 |
| | | | | | | 0 1 | B7-30-01-84 | GJL1311001R8014 | 10 | 0.175 |
| | | | | 380 ... 415 | 380 ... 415 | 1 0 | B7-30-10-80 | GJL1311001R8100 | 10 | 0.175 |
| | | | | | | 0 1 | B7-30-01-80 | GJL1311001R8010 | 10 | 0.175 |
| | | | | 380 ... 415 | 380 ... 415 | 1 0 | B7-30-10-85 | GJL1311001R8105 | 10 | 0.175 |
| | | | | | | 0 1 | B7-30-01-85 | GJL1311001R8015 | 10 | 0.175 |

Other types on request

Main dimensions mm, inches

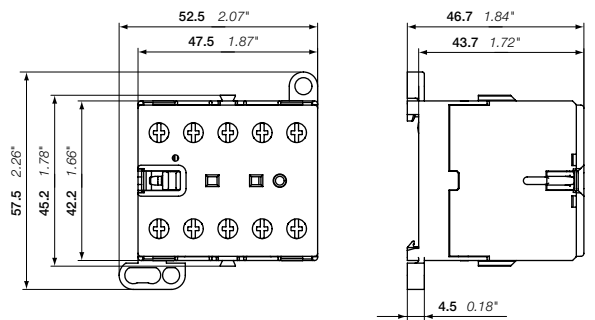

B6, B7

BC6, BC7, B7D 3-pole mini contactors – with screw terminals

4 to 5.5 kW

DC operated



BC6-30-10

2CDC21104RF0011



BC7-30-10

2CDC211019F0011

Description

BC6, BC7, B7D 3-pole mini contactors are compact control products mainly used for switching resistive or motor loads up to 690 V AC.

These contactors are designed with:

- 3 main poles and one built-in auxiliary contact
- control circuit: DC operated, low consumption (3.5 W at pull-in and at holding)
- hum-free coil
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories
- designed for rail or wall mounting

Ordering details

| IEC | UL/CSA | Rated control circuit voltage: U_c | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) |
|---------------------------------------------|------------------------------------------------------------------------------------|--------------------------------------|---------------------------|------|------------|---------|----------------|
| Rated operational power 400 V AC-3 kW | 3-phase motor rating $\theta \leq 40^\circ\text{C}$ AC-1 A hp 480 V | General use rating V DC | | | | | kg |

BC6 mini contactors

| Rated operational power (kW) | UL/CSA (AC-1 A) | 3-phase motor rating (hp) | General use rating (V DC) | Rated control circuit voltage (U_c) | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) (kg) |
|------------------------------|-----------------|---------------------------|---------------------------|-----------------------------------------|---------------------------|--------------|-----------------|---------|---------------------|
| 4 | 20 | 3 | 300 V / 12 A | 12 | 1 0 | BC6-30-10-07 | GJL1213001R0107 | 10 | 0.175 |
| | | | | | 0 1 | BC6-30-01-07 | GJL1213001R0017 | 10 | 0.175 |
| | | | | 24 | 1 0 | BC6-30-10-01 | GJL1213001R0101 | 10 | 0.175 |
| | | | | | 0 1 | BC6-30-01-01 | GJL1213001R0011 | 10 | 0.175 |
| | | | | 48 | 1 0 | BC6-30-10-16 | GJL1213001R1106 | 10 | 0.175 |
| | | | | | 0 1 | BC6-30-01-16 | GJL1213001R1016 | 10 | 0.175 |
| | | | | 60 | 1 0 | BC6-30-10-03 | GJL1213001R0103 | 10 | 0.175 |
| | | | | | 0 1 | BC6-30-01-03 | GJL1213001R0013 | 10 | 0.175 |
| | | | | 110 ... 125 | 1 0 | BC6-30-10-04 | GJL1213001R0104 | 10 | 0.175 |
| | | | | | 0 1 | BC6-30-01-04 | GJL1213001R0014 | 10 | 0.175 |
| | | | | 220 ... 240 | 1 0 | BC6-30-10-05 | GJL1213001R0105 | 10 | 0.175 |
| | | | | | 0 1 | BC6-30-01-05 | GJL1213001R0015 | 10 | 0.175 |

BC7 mini contactors


| Rated operational power (kW) | UL/CSA (AC-1 A) | 3-phase motor rating (hp) | General use rating (V DC) | Rated control circuit voltage (U_c) | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) (kg) |
|------------------------------|-----------------|---------------------------|---------------------------|-----------------------------------------|---------------------------|--------------|-----------------|---------|---------------------|
| 5.5 | 20 | 5 | 600 V / 16 A | 12 | 1 0 | BC7-30-10-07 | GJL1313001R0107 | 10 | 0.175 |
| | | | | | 0 1 | BC7-30-01-07 | GJL1313001R0017 | 10 | 0.175 |
| | | | | 24 | 1 0 | BC7-30-10-01 | GJL1313001R0101 | 10 | 0.175 |
| | | | | | 0 1 | BC7-30-01-01 | GJL1313001R0011 | 10 | 0.175 |
| | | | | 48 | 1 0 | BC7-30-10-16 | GJL1313001R1106 | 10 | 0.175 |
| | | | | | 0 1 | BC7-30-01-16 | GJL1313001R1016 | 10 | 0.175 |
| | | | | 60 | 1 0 | BC7-30-10-03 | GJL1313001R1103 | 10 | 0.175 |
| | | | | | 0 1 | BC7-30-01-03 | GJL1313001R0013 | 10 | 0.175 |
| | | | | 110 ... 125 | 1 0 | BC7-30-10-04 | GJL1313001R0104 | 10 | 0.175 |
| | | | | | 0 1 | BC7-30-01-04 | GJL1313001R0014 | 10 | 0.175 |
| | | | | 220 ... 240 | 1 0 | BC7-30-10-05 | GJL1313001R0105 | 10 | 0.175 |
| | | | | | 0 1 | BC7-30-01-05 | GJL1313001R0015 | 10 | 0.175 |

B7D mini contactors with integrated suppressor diode

| Rated operational power (kW) | UL/CSA (AC-1 A) | 3-phase motor rating (hp) | General use rating (V DC) | Rated control circuit voltage (U_c) | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) (kg) |
|------------------------------|-----------------|---------------------------|---------------------------|-----------------------------------------|---------------------------|--------------|-----------------|---------|---------------------|
| 5.5 | 20 | 5 | 600 V / 16 A | 24 | 1 0 | B7D-30-10-01 | GJL1317001R0101 | 10 | 0.175 |
| | | | | | 0 1 | B7D-30-01-01 | GJL1317001R0011 | 10 | 0.175 |
| | | | | 220 | 1 0 | B7D-30-10-05 | GJL1317001R0105 | 10 | 0.175 |
| | | | | | 0 1 | B7D-30-01-05 | GJL1317001R0015 | 10 | 0.175 |

Other types on request

Main dimensions mm, inches

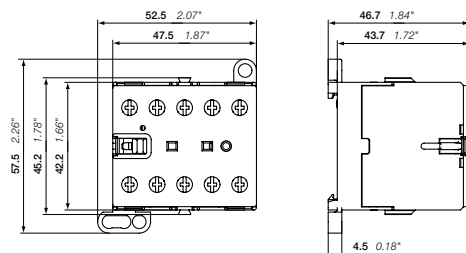

BC6, BC7, B7D

2CDC212001F0011

2CDC102015C0201

VB6, VB7 3-pole mini reversing contactors – with screw terminals

4 to 5.5 kW

AC operated



2CDC21005F0011

3

VB7-30-10

Description

VB6, VB7 3-pole compact design reversing contactors are space optimized control products mainly used for switching resistive or motor loads up to 690 V AC.

These reversing contactors are designed with:


- built-in mechanical interlock. The coils must be mutually interlocked electrically and coils must be de-energised for 50 ms at least to prevent phase to phase short circuit on the arc.
- control circuit: AC operated
 - low coil consumption (3.5 VA at pull-in and at holding)
 - hum-free coil
- add-on auxiliary contact blocks for front mounting
- designed for rail or wall mounting

Ordering details

| IEC Rated power 400 V AC-3 kW | operational current $\theta \leq 40^\circ\text{C}$ AC-1 A | UL/CSA | | Rated control circuit voltage U_c | | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) kg | | | | | |
|-------------------------------------------|-----------------------------------------------------------------------|-------------------------------------------|--------------------------|-------------------------------------------|--------------------------------------|-------------------------------------|--------------|-----------------|-----------------|-------------------------|-------|--------------|-----------------|---|-------|
| | | 3-phase motor rating 480 V hp | General use rating | 50 Hz V AC | 60 Hz V AC | | | | | | | | | | |
| VB6 mini reversing contactors | | | | | | | | | | | | | | | |
| 4 | 20 | 3 | 300 V / 12 A | 24 | 24 | 1 0 | VB6-30-10-01 | GJL1211901R0101 | 5 | 0.355 | | | | | |
| | | | | | 42 | 42 | 0 1 | VB6-30-01-01 | GJL1211901R0011 | 5 | 0.355 | | | | |
| | | | | | 48 | 48 | 1 0 | VB6-30-10-02 | GJL1211901R0102 | 5 | 0.355 | | | | |
| | | | | | | | 0 1 | VB6-30-01-02 | GJL1211901R0012 | 5 | 0.355 | | | | |
| | | | | | 110 ... 127 | 110 ... 127 | 1 0 | VB6-30-10-03 | GJL1211901R0103 | 5 | 0.355 | | | | |
| | | | | | | | 0 1 | VB6-30-01-03 | GJL1211901R0013 | 5 | 0.355 | | | | |
| | | | | | 220 ... 240 | 220 ... 240 | 1 0 | VB6-30-10-84 | GJL1211901R8104 | 5 | 0.355 | | | | |
| | | | | | | | 0 1 | VB6-30-01-84 | GJL1211901R8014 | 5 | 0.355 | | | | |
| | | | | | 380 ... 415 | 380 ... 415 | 1 0 | VB6-30-10-80 | GJL1211901R8100 | 5 | 0.355 | | | | |
| | | | | | | | 0 1 | VB6-30-01-80 | GJL1211901R8010 | 5 | 0.355 | | | | |
| | | | | | 380 ... 415 | 380 ... 415 | 1 0 | VB6-30-10-85 | GJL1211901R8105 | 5 | 0.355 | | | | |
| | | | | | | | 0 1 | VB6-30-01-85 | GJL1211901R8015 | 5 | 0.355 | | | | |
| | | | | | VB7 mini reversing contactors | | | | | | | | | | |
| | | | | | 5.5 | 20 | 5 | 600 V / 16 A | 24 | 24 | 1 0 | VB7-30-10-01 | GJL1311901R0101 | 5 | 0.355 |
| 42 | 42 | 0 1 | VB7-30-01-01 | GJL1311901R0011 | | | | | 5 | 0.355 | | | | | |
| 48 | 48 | 1 0 | VB7-30-10-02 | GJL1311901R0102 | | | | | 5 | 0.355 | | | | | |
| | | 0 1 | VB7-30-01-02 | GJL1311901R0012 | | | | | 5 | 0.355 | | | | | |
| 110 ... 127 | 110 ... 127 | 1 0 | VB7-30-10-03 | GJL1311901R0103 | | | | | 5 | 0.355 | | | | | |
| | | 0 1 | VB7-30-01-03 | GJL1311901R0013 | | | | | 5 | 0.355 | | | | | |
| 220 ... 240 | 220 ... 240 | 1 0 | VB7-30-10-84 | GJL1311901R8104 | | | | | 5 | 0.355 | | | | | |
| | | 0 1 | VB7-30-01-84 | GJL1311901R8014 | | | | | 5 | 0.355 | | | | | |
| 380 ... 415 | 380 ... 415 | 1 0 | VB7-30-10-80 | GJL1311901R8100 | | | | | 5 | 0.355 | | | | | |
| | | 0 1 | VB7-30-01-80 | GJL1311901R8010 | | | | | 5 | 0.355 | | | | | |
| 380 ... 415 | 380 ... 415 | 1 0 | VB7-30-10-85 | GJL1311901R8105 | | | | | 5 | 0.355 | | | | | |
| | | 0 1 | VB7-30-01-85 | GJL1311901R8015 | | | | | 5 | 0.355 | | | | | |

Other types on request

Main dimensions mm, inches

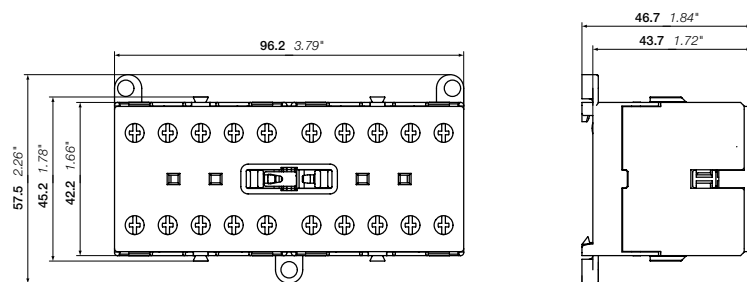

VB6, VB7

2CDC21005F0011

2CDC102016C0201

VBC6, VBC7 3-pole mini reversing contactors – with screw terminals

4 to 5.5 kW

DC operated



VBC6-30-10

2CDC211049R0011



VBC7-30-10

2CDC211001R0011

Description

VBC6, VBC7 3-pole compact design reversing contactors are space optimized control products mainly used for switching resistive or motor loads up to 690 V AC.

These reversing contactors are designed with:

- built-in mechanical interlock. The coils must be mutually interlocked electrically and coils must be de-energised for 50 ms at least to prevent phase to phase short circuit on the arc.
- control circuit: DC operated
 - low coil consumption (3.5 W at pull-in and at holding)
- hum-free coil
- add-on auxiliary contact blocks for front mounting
- designed for rail or wall mounting

Ordering details

| IEC | UL/CSA | Rated control circuit voltage: U _c | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) |
|-------------------------|----------------------|-----------------------------------------------|---------------------------|------|------------|---------|----------------|
| Rated operational power | 3-phase motor rating | General use rating | | | | | kg |
| 400 V AC-3 kW | AC-1 A | 480 V hp | V DC | | | | |

VBC6 mini reversing contactors


| Rated operational power | 3-phase motor rating | General use rating | Rated control circuit voltage: U _c | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) | |
|-------------------------|----------------------|--------------------|-----------------------------------------------|---------------------------|---------------|-----------------|-----------------|-----------------|-----------------|
| 4 | 20 | 3 | 300 V / 12 A | 1 0 | VBC6-30-10-07 | GJL1213901R0107 | 5 | 0.355 | |
| | | | | | | 0 1 | VBC6-30-01-07 | GJL1213901R0017 | 5 |
| | | | | 24 | 1 0 | VBC6-30-10-01 | GJL1213901R0101 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC6-30-01-01 | GJL1213901R0011 |
| | | | | 48 | 1 0 | VBC6-30-10-16 | GJL1213901R1106 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC6-30-01-16 | GJL1213901R1016 |
| | | | | 60 | 1 0 | VBC6-30-10-03 | GJL1213901R0103 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC6-30-01-03 | GJL1213901R0013 |
| | | | | 110 ... 125 | 1 0 | VBC6-30-10-04 | GJL1213901R0104 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC6-30-01-04 | GJL1213901R0014 |
| | | | | 220 ... 240 | 1 0 | VBC6-30-10-05 | GJL1213901R0105 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC6-30-01-05 | GJL1213901R0015 |

VBC7 mini reversing contactors

| Rated operational power | 3-phase motor rating | General use rating | Rated control circuit voltage: U _c | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) | |
|-------------------------|----------------------|--------------------|-----------------------------------------------|---------------------------|---------------|-----------------|-----------------|-----------------|-----------------|
| 5.5 | 20 | 5 | 600 V / 16 A | 1 0 | VBC7-30-10-07 | GJL1313901R0107 | 5 | 0.355 | |
| | | | | | | 0 1 | VBC7-30-01-07 | GJL1313901R0017 | 5 |
| | | | | 24 | 1 0 | VBC7-30-10-01 | GJL1313901R0101 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC7-30-01-01 | GJL1313901R0011 |
| | | | | 48 | 1 0 | VBC7-30-10-16 | GJL1313901R1106 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC7-30-01-16 | GJL1313901R1016 |
| | | | | 60 | 1 0 | VBC7-30-10-03 | GJL1313901R0103 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC7-30-01-03 | GJL1313901R0013 |
| | | | | 110 ... 125 | 1 0 | VBC7-30-10-04 | GJL1313901R0104 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC7-30-01-04 | GJL1313901R0014 |
| | | | | 220 ... 240 | 1 0 | VBC7-30-10-05 | GJL1313901R0105 | 5 | 0.355 |
| | | | | | | | 0 1 | VBC7-30-01-05 | GJL1313901R0015 |

Other types on request

Main dimensions mm, inches

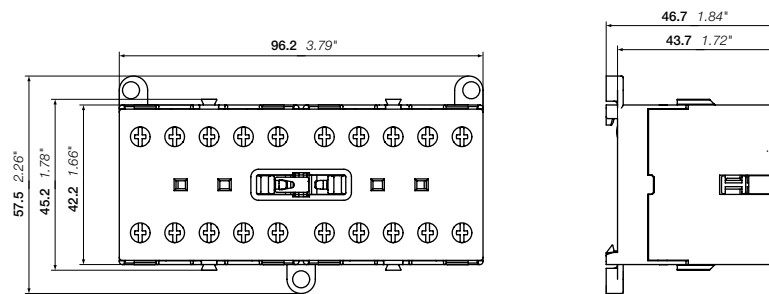

VBC6, VBC7

2CDC212005R0011

2CDC102017C0201

BC6, BC7 3-pole interface mini contactors – with screw terminals

4 to 5.5 kW

DC operated



2CDC21104F0011

BC6-30-10



2CDC21109F0011

BC7-30-10

Description

BC6, BC7 3-pole interface mini contactors are compact control products mainly used for switching resistive or motor loads up to 690 V AC.

These contactors are designed with:

- 3 main poles and one built-in auxiliary contact
- control circuit: DC operated, very low coil consumption. Suitable for direct control by PLC outputs
- hum-free coil
- no auxiliary contact block permitted for mounting
- designed for rail or wall mounting

Ordering details


| IEC | UL/CSA | Rated control circuit voltage U_c | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) | | |
|-----------------------------------------|------------------------------------------------|-------------------------------------|---------------------------|-----------|------------|--------------------------------------|------------------------------------|----------|----------------|
| Rated operational power | 3-phase: motor rating General use rating | V DC | | | | | kg | | |
| 400 V AC-3 kW | $\theta \leq 40^\circ\text{C}$ AC-1 A hp | | | | | | | | |
| DC operation 24 V / 1.4 W | | | | | | | | | |
| 4 | 20 | 3 | 300 V / 12 A | 24 | 1 0 0 1 | BC6-30-10-1.4-81 BC6-30-01-1.4-81 | GJL1213001R8101 GJL1213001R8011 | 10 10 | 0.175 0.175 |
| 5.5 | 20 | 5 | 600 V / 16 A | 24 | 1 0 0 1 | BC7-30-10-1.4-81 BC7-30-01-1.4-81 | GJL1313001R8101 GJL1313001R8011 | 10 10 | 0.175 0.175 |
| DC operation 17 ... 32 V / 2.4 W | | | | | | | | | |
| 4 | 20 | 3 | 300 V / 12 A | 17 ... 32 | 1 0 0 1 | BC6-30-10-2.4-51 BC6-30-01-2.4-51 | GJL1213001R5101 GJL1213001R5011 | 10 10 | 0.175 0.175 |
| 5.5 | 20 | 5 | 600 V / 16 A | 17 ... 32 | 1 0 0 1 | BC7-30-10-2.4-51 BC7-30-01-2.4-51 | GJL1313001R5101 GJL1313001R5011 | 10 10 | 0.175 0.175 |

Connection to PLCs with integrated protective circuit

| | | | | | | | | | |
|-----------------------------------------|----|---|--------------|-----------|------------|--------------------------------------|------------------------------------|----------|----------------|
| DC operation 24 V / 1.7 W | | | | | | | | | |
| 4 | 20 | 3 | 300 V / 12 A | 24 | 1 0 0 1 | B6S-30-10-1.7-71 B6S-30-01-1.7-71 | GJL1213001R7101 GJL1213001R7011 | 10 10 | 0.175 0.175 |
| 5.5 | 20 | 5 | 600 V / 16 A | 24 | 1 0 0 1 | B7S-30-10-1.7-71 B7S-30-01-1.7-71 | GJL1313001R7101 GJL1313001R7011 | 10 10 | 0.175 0.175 |
| DC operation 17 ... 32 V / 2.8 W | | | | | | | | | |
| 4 | 20 | 3 | 300 V / 12 A | 17 ... 32 | 1 0 0 1 | B6S-30-10-2.8-72 B6S-30-01-2.8-72 | GJL1213001R7102 GJL1213001R7012 | 10 10 | 0.175 0.175 |
| 5.5 | 20 | 5 | 600 V / 16 A | 17 ... 32 | 1 0 0 1 | B7S-30-10-2.8-72 B7S-30-01-2.8-72 | GJL1313001R7102 GJL1313001R7012 | 10 10 | 0.175 0.175 |

Other types on request

Main dimensions mm, inches

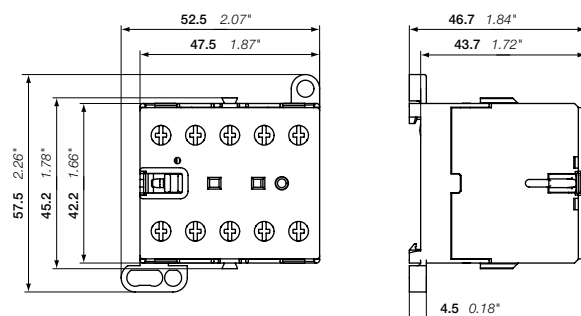

BC6, BC7

2CDC212001F0011

2CDC102010C0201

TBC7 3-pole mini contactors – with screw terminals

4 to 5.5 kW

DC operated – large coil voltage range



TBC7-30-10

2CDC21101F0011

Description

TBC7 3-pole mini contactors are compact control products mainly used for switching resistive or motor loads up to 690 V AC.

These contactors are designed with:


- 3 main poles and one built-in auxiliary contact
- control circuit: DC operated
 - low coil consumption (5 W at pull-in and at holding)
 - hum-free coil
- expanded ambient temperature range -30 ... +70 °C and wide range voltage supply
- no auxiliary contact block permitted for mounting
- designed for rail or wall mounting
- material is approved for railway applications

Ordering details

| IEC | | UL/CSA | | Rated control circuit voltage: $U_{Cmin} \dots U_{Cmax}$ | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) kg |
|-----------------------------|----------------------------------------------------------------|-------------------------------|--------------------|-------------------------------------------------------------|-------------------------------|---------------|-----------------|---------|----------------------|
| Rated power | operational current $\theta \leq 40 \text{ }^\circ\text{C}$ | 3-phase motor rating 480 V | General use rating | | | | | | |
| 400 V AC-3 kW | AC-1 A | hp | | V DC | | | | | |
| TBC7 mini contactors | | | | | | | | | |
| 5.5 | 20 | 5 | 600 V / 16 A | 17 ... 32 | 1 0 | TBC7-30-10-51 | GJL1313061R5101 | 10 | 0.185 |
| | | | | | 0 1 | TBC7-30-01-51 | GJL1313061R5011 | 10 | 0.185 |
| | | | | 50 ... 90 | 1 0 | TBC7-30-10-55 | GJL1313061R5105 | 10 | 0.185 |
| | | | | | 0 1 | TBC7-30-01-55 | GJL1313061R5015 | 10 | 0.185 |
| | | | | 77 ... 143 | 1 0 | TBC7-30-10-62 | GJL1313061R6102 | 10 | 0.185 |
| | | | | | 0 1 | TBC7-30-01-62 | GJL1313061R6012 | 10 | 0.185 |
| | | | | 140 ... 260 | 1 0 | TBC7-30-10-68 | GJL1313061R6108 | 10 | 0.185 |
| | | | | | 0 1 | TBC7-30-01-68 | GJL1313061R6018 | 10 | 0.185 |

Other types on request

Main dimensions mm, inches

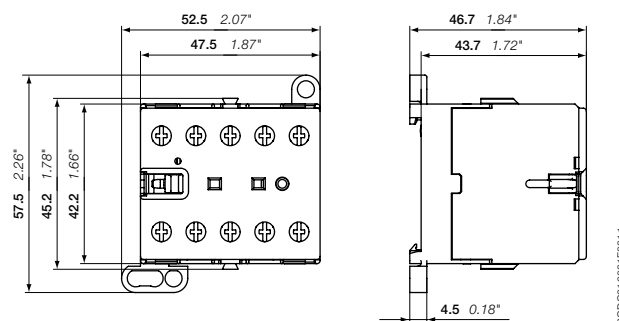

TBC7

2CDC211001F0011

2CDC102020 C0201

B6, B7 4-pole mini contactors – with screw terminals

4 to 5.5 kW

AC operated



2CDC21102BF0011

3

B6-22-00

Description

B6, B7 4-pole mini contactors are compact control products mainly used for switching resistive loads up to 690 V AC.

These contactors are designed with:


- 4 main poles
- control circuit: AC operated
 - low coil consumption (3.5 VA at pull-in and at holding)
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories
- hum-free coil
- designed for rail or wall mounting

Ordering details

| IEC | UL/CSA | Rated control circuit voltage U_c | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) |
|---------------------------------------------------------------------|--------------------|-------------------------------------|---------------------------|-------------|-----------------|---------|----------------|
| Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 | General use rating | 50/60 Hz | | | | | |
| A | | V AC | | | | | kg |
| 4 N.O. main poles | | | | | | | |
| 20 | 300 V / 12 A | 24 | 0 0 | B6-40-00-01 | GJL1211201R0001 | 10 | 0.175 |
| | | 42 | 0 0 | B6-40-00-02 | GJL1211201R0002 | 10 | 0.175 |
| | | 48 | 0 0 | B6-40-00-03 | GJL1211201R0003 | 10 | 0.175 |
| | | 110 ... 127 | 0 0 | B6-40-00-84 | GJL1211201R8004 | 10 | 0.175 |
| | | 220 ... 240 | 0 0 | B6-40-00-80 | GJL1211201R8000 | 10 | 0.175 |
| 20 | 600 V / 16 A | 24 | 0 0 | B7-40-00-01 | GJL1311201R0001 | 10 | 0.175 |
| | | 42 | 0 0 | B7-40-00-02 | GJL1311201R0002 | 10 | 0.175 |
| | | 48 | 0 0 | B7-40-00-03 | GJL1311201R0003 | 10 | 0.175 |
| | | 110 ... 127 | 0 0 | B7-40-00-84 | GJL1311201R8004 | 10 | 0.175 |
| | | 220 ... 240 | 0 0 | B7-40-00-80 | GJL1311201R8000 | 10 | 0.175 |
| 2 N.O. + 2 N.C. main poles | | | | | | | |
| 20 | 300 V / 12 A | 24 | 0 0 | B6-22-00-01 | GJL1211501R0001 | 10 | 0.175 |
| | | 42 | 0 0 | B6-22-00-02 | GJL1211501R0002 | 10 | 0.175 |
| | | 48 | 0 0 | B6-22-00-03 | GJL1211501R0003 | 10 | 0.175 |
| | | 110 ... 127 | 0 0 | B6-22-00-84 | GJL1211501R8004 | 10 | 0.175 |
| | | 220 ... 240 | 0 0 | B6-22-00-80 | GJL1211501R8000 | 10 | 0.175 |
| 20 | 600 V / 16 A | 24 | 0 0 | B7-22-00-01 | GJL1311501R0001 | 10 | 0.175 |
| | | 42 | 0 0 | B7-22-00-02 | GJL1311501R0002 | 10 | 0.175 |
| | | 48 | 0 0 | B7-22-00-03 | GJL1311501R0003 | 10 | 0.175 |
| | | 110 ... 127 | 0 0 | B7-22-00-84 | GJL1311501R8004 | 10 | 0.175 |
| | | 220 ... 240 | 0 0 | B7-22-00-80 | GJL1311501R8000 | 10 | 0.175 |

Other types on request

Main dimensions mm, inches

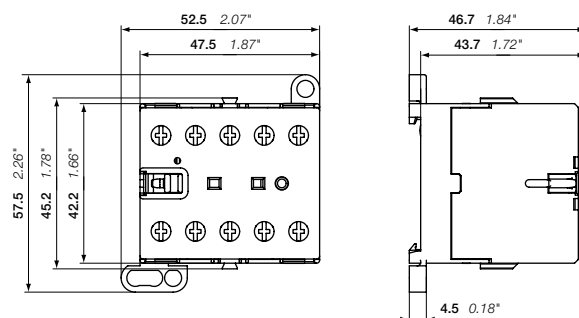

B6, B7

2CDC212001R0011

2CDC102009C0201

BC6, B7D 4-pole mini contactors – with screw terminals

4 to 5.5 kW

DC operated



BC6-22-00

2CDC211032R0011

Description

BC6, B7D 4-pole mini contactors are compact control products mainly used for switching resistive loads up to 690 V AC.

These contactors are designed with:


- 4 main poles
- control circuit: DC operated
 - low coil consumption (3.5 W at pull-in and at holding)
 - hum-free coil
- add-on auxiliary contact blocks for front or side mounting
- designed for rail or wall mounting

Ordering details

| IEC | UL/CSA | Rated control circuit voltage: U_c | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) |
|-----------------------------------------------------------------------|--------------------|--------------------------------------|---------------------------|--------------|-----------------|---------|----------------|
| Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 A | General use rating | V DC | | | | | kg |
| 4 N.O. main poles | | | | | | | |
| 20 | 600 V / 16 A | 24 | 0 0 | B7D-40-00-01 | GJL1317201R0001 | 10 | 0.175 |
| | | 220 | 0 0 | B7D-40-00-05 | GJL1317201R0005 | 10 | 0.175 |
| 2 N.O. + 2 N.C. main poles | | | | | | | |
| 20 | 300 V / 12 A | 12 | 0 0 | BC6-22-00-07 | GJL1213501R0007 | 10 | 0.175 |
| | | 24 | 0 0 | BC6-22-00-01 | GJL1213501R0001 | 10 | 0.175 |
| | | 42 | 0 0 | BC6-22-00-02 | GJL1213501R0002 | 10 | 0.175 |
| | | 48 | 0 0 | BC6-22-00-16 | GJL1213501R1006 | 10 | 0.175 |
| | | 60 | 0 0 | BC6-22-00-03 | GJL1213501R0003 | 10 | 0.175 |
| | | 110 ... 125 | 0 0 | BC6-22-00-04 | GJL1213501R0004 | 10 | 0.175 |
| | | 220 ... 240 | 0 0 | BC6-22-00-05 | GJL1213501R0005 | 10 | 0.175 |

Other types on request

Main dimensions mm, inches

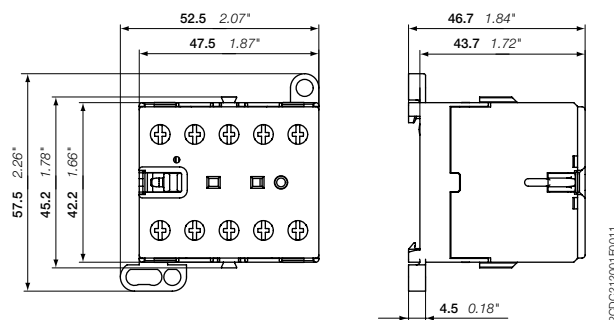

BC6, B7D

2CDC212001R0011

2CDC102021C0201

TBC7 4-pole mini contactors – with screw terminals

4 to 5.5 kW

DC operated – large coil voltage range



2CDC211028F0011

3

TBC7-31-00

Description

TBC7 4-pole mini contactors are compact control products mainly used for switching resistive or motor loads up to 690 V AC.

These contactors are designed with:


- 4 main poles
- control circuit: DC operated
 - low coil consumption (5 W at pull-in and at holding)
 - hum-free coil
- expanded ambient temperature range -30 ... +70 °C and wide range voltage supply
- no auxiliary contact block permitted for mounting
- designed for rail or wall mounting
- material is approved for railway applications

Ordering details

| IEC | UL/CSA | Rated control circuit voltage $U_{Cmin} \dots U_{Cmax}$ | Auxiliary contacts fitted | Type | Order code | Pkg qty | Weight (1 pce) |
|--------------------------------------------------------------------------|--------------------|------------------------------------------------------------|---------------------------|---------------|-----------------|---------|----------------|
| Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 A | General use rating | V DC | | | | | kg |
| 3 N.O. + 1 N.C. main poles | | | | | | | |
| 20 | 600 V / 16 A | 50 ... 90 | 0 0 | TBC7-31-00-55 | GJL1313461R5005 | 10 | 0.185 |
| | | 77 ... 143 | 0 0 | TBC7-31-00-62 | GJL1313461R6002 | 10 | 0.185 |
| | | 140 ... 260 | 0 0 | TBC7-31-00-68 | GJL1313461R6008 | 10 | 0.185 |
| 2 N.O. + 2 N.C. main poles | | | | | | | |
| 20 | 600 V / 16 A | 50 ... 90 | 0 0 | TBC7-22-00-55 | GJL1313561R5005 | 10 | 0.185 |
| | | 77 ... 143 | 0 0 | TBC7-22-00-62 | GJL1313561R6002 | 10 | 0.185 |
| | | 140 ... 260 | 0 0 | TBC7-22-00-68 | GJL1313561R6008 | 10 | 0.185 |

Other types on request

Main dimensions mm, inches

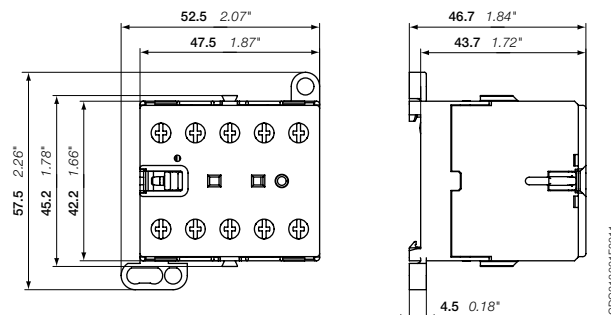

TBC7

2CDC212001F0011

2CDC102022C0201

K6 4-pole mini contactor relays – with screw terminals AC operated



K6-22Z



K6-31Z

Description

K6 4-pole mini-contactor relays are space optimized control products mainly used for control functions or for small loads up to 4 A.

These contactors are designed with:


- 4-poles with various contact combinations
- control circuit: AC operated
 - low coil consumption (3.5 VA at pull-in and at holding)
 - hum-free coil
- add-on auxiliary contact blocks for front or side mounting
- designed for rail or wall mounting

Ordering details

| Rated control circuit voltage U_c | | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------------------------------|---------------|-----------|-----------------|------------|-------------------|
| 50 Hz V AC | 60 Hz V AC | | | | kg |
| K6 4-pole mini contactor relays | | | | | |
| 24 | 24 | K6-22Z-01 | GJH1211001R0221 | 10 | 0.175 |
| 42 | 42 | K6-22Z-02 | GJH1211001R0222 | 10 | 0.175 |
| 48 | 48 | K6-22Z-03 | GJH1211001R0223 | 10 | 0.175 |
| 110 ... 127 | 110 ... 127 | K6-22Z-84 | GJH1211001R8224 | 10 | 0.175 |
| 220 ... 240 | 220 ... 240 | K6-22Z-80 | GJH1211001R8220 | 10 | 0.175 |
| 380 ... 415 | 380 ... 415 | K6-22Z-85 | GJH1211001R8225 | 10 | 0.175 |
| 24 | 24 | K6-31Z-01 | GJH1211001R0311 | 10 | 0.175 |
| 42 | 42 | K6-31Z-02 | GJH1211001R0312 | 10 | 0.175 |
| 48 | 48 | K6-31Z-03 | GJH1211001R0313 | 10 | 0.175 |
| 110 ... 127 | 110 ... 127 | K6-31Z-84 | GJH1211001R8314 | 10 | 0.175 |
| 220 ... 240 | 220 ... 240 | K6-31Z-80 | GJH1211001R8310 | 10 | 0.175 |
| 380 ... 415 | 380 ... 415 | K6-31Z-85 | GJH1211001R8315 | 10 | 0.175 |
| 24 | 24 | K6-40E-01 | GJH1211001R0401 | 10 | 0.175 |
| 42 | 42 | K6-40E-02 | GJH1211001R0402 | 10 | 0.175 |
| 48 | 48 | K6-40E-03 | GJH1211001R0403 | 10 | 0.175 |
| 110 ... 127 | 110 ... 127 | K6-40E-84 | GJH1211001R8404 | 10 | 0.175 |
| 220 ... 240 | 220 ... 240 | K6-40E-80 | GJH1211001R8400 | 10 | 0.175 |
| 380 ... 415 | 380 ... 415 | K6-40E-85 | GJH1211001R8405 | 10 | 0.175 |

Other types on request

Main dimensions mm, inches

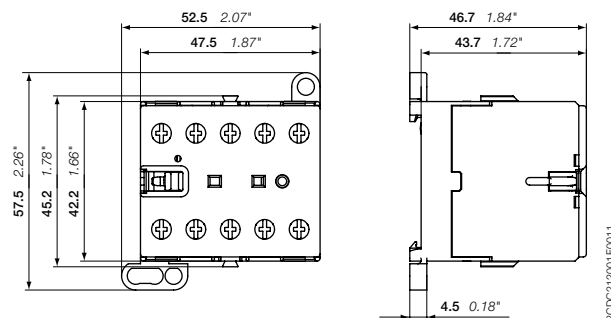

K6

KC6 4-pole mini contactor relays – with screw terminals DC operated



2CDC21101R00011

3

KC6-22Z

Description

KC6 4-pole mini-contactor relays are space optimized control products mainly used for control functions or for small loads up to 4 A.

These contactors are designed with:


- 4-poles with various contact combinations
- control circuit: DC operated
 - low coil consumption (3.5 W at pull-in and at holding)
- hum-free coil
- add-on auxiliary contact blocks for front or side mounting
- designed for rail or wall mounting

Ordering details

| Rated control circuit voltage U_c V DC | Type | Order code | Pkg qty | Weight (1 pce) kg |
|------------------------------------------------|------------|-----------------|------------|-------------------------|
| KC6 4-pole mini contactor relays | | | | |
| 12 | KC6-22Z-07 | GJH1213001R0227 | 10 | 0.175 |
| 24 | KC6-22Z-01 | GJH1213001R0221 | 10 | 0.175 |
| 48 | KC6-22Z-16 | GJH1213001R1226 | 10 | 0.175 |
| 60 | KC6-22Z-03 | GJH1213001R0223 | 10 | 0.175 |
| 110 ... 125 | KC6-22Z-04 | GJH1213001R0224 | 10 | 0.175 |
| 220 ... 240 | KC6-22Z-05 | GJH1213001R0225 | 10 | 0.175 |
| 12 | KC6-31Z-07 | GJH1213001R0317 | 10 | 0.175 |
| 24 | KC6-31Z-01 | GJH1213001R0311 | 10 | 0.175 |
| 48 | KC6-31Z-16 | GJH1213001R1316 | 10 | 0.175 |
| 60 | KC6-31Z-03 | GJH1213001R0313 | 10 | 0.175 |
| 110 ... 125 | KC6-31Z-04 | GJH1213001R0314 | 10 | 0.175 |
| 220 ... 240 | KC6-31Z-05 | GJH1213001R0315 | 10 | 0.175 |
| 12 | KC6-40E-07 | GJH1213001R0407 | 10 | 0.175 |
| 24 | KC6-40E-01 | GJH1213001R0401 | 10 | 0.175 |
| 48 | KC6-40E-16 | GJH1213001R1406 | 10 | 0.175 |
| 60 | KC6-40E-03 | GJH1213001R0403 | 10 | 0.175 |
| 110 ... 125 | KC6-40E-04 | GJH1213001R0404 | 10 | 0.175 |
| 220 ... 240 | KC6-40E-05 | GJH1213001R0405 | 10 | 0.175 |

Other types on request

Main dimensions mm, inches

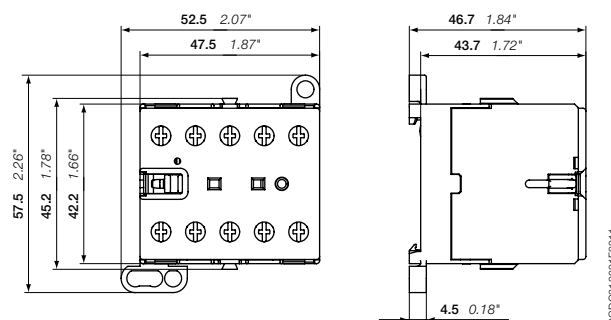

KC6

2CDC211001R00011

2CDC102012C0201

KC6 4-pole interface mini contactor relays – with screw terminals DC operated



KC6-31Z

Description

KC6 4-pole interface mini-contactor relays are space optimized control products mainly used for control functions or for small loads up to 4 A.

These contactors are designed with:


- 4-poles with various contact combinations
- control circuit: DC operated
 - low coil consumption (1.4 ... 2.8 W at pull-in and at holding)
- hum-free coil
- no auxiliary contact block permitted for mounting
- designed for rail or wall mounting

Ordering details

| Rated control circuit voltage U_c V DC | Type | Order code | Pkg qty | Weight (1 pce) kg |
|------------------------------------------------|----------------|-----------------|------------|-------------------------|
| DC operation 24 V / 1.4 W | | | | |
| 24 | KC6-31Z-1.4-81 | GJH1213001R8311 | 10 | 0.175 |
| 24 | KC6-40E-1.4-81 | GJH1213001R8401 | 10 | 0.175 |
| DC operation 17 ... 32 V / 2.4 W | | | | |
| 17 ... 32 | KC6-31Z-2.4-51 | GJH1213001R5311 | 10 | 0.175 |
| 17 ... 32 | KC6-40E-2.4-51 | GJH1213001R5401 | 10 | 0.175 |
| DC operation 24 V / 1.7 W | | | | |
| 24 | K6S-22Z-1.7-71 | GJH1213001R7221 | 10 | 0.175 |
| 24 | K6S-31Z-1.7-71 | GJH1213001R7311 | 10 | 0.175 |
| 24 | K6S-40E-1.7-71 | GJH1213001R7401 | 10 | 0.175 |
| DC operation 17 ... 32 V / 2.8 W | | | | |
| 17 ... 32 | K6S-22Z-2.8-72 | GJH1213001R7222 | 10 | 0.175 |
| 17 ... 32 | K6S-31Z-2.8-72 | GJH1213001R7312 | 10 | 0.175 |
| 17 ... 32 | K6S-40E-2.8-72 | GJH1213001R7402 | 10 | 0.175 |

Other types on request

Main dimensions mm, inches

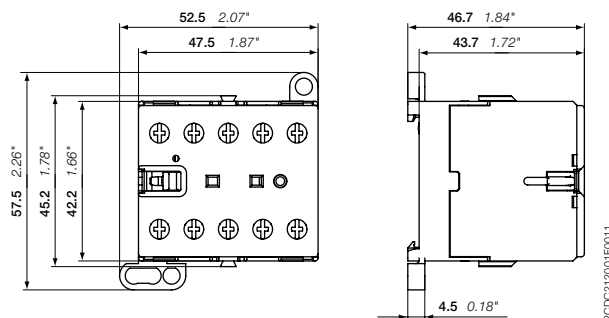

KC6

TKC6 4-pole mini contactor relays – with screw terminals

DC operated – large coil voltage range



2CDC211021F0011

3

TKC6-31Z

Description

TKC6 4-pole mini contactors are space optimized control products mainly used for control functions or for small loads up to 4 A.

These contactors are designed with:


- 4-poles with various contact combinations
- control circuit: DC operated, hum free, low consumption (5 W at pull-in and at holding)
- expanded ambient temperature range -30 ... +70 °C and wide range voltage supply
- material is suitable for railway applications
- humfree operating DC coil
- no auxiliary contact block permitted for mounting
- designed for rail or wall mounting

Ordering details

| Rated control circuit voltage $U_{C \min} \dots U_{C \max}$ V DC | Type | Order code | Pkg qty | Weight (1 pce) kg |
|------------------------------------------------------------------------|-------------|-----------------|------------|-------------------------|
| 17 ... 32 | TKC6-22Z-51 | GJH1213061R5221 | 10 | 0.180 |
| 50 ... 90 | TKC6-22Z-55 | GJH1213061R5225 | 10 | 0.180 |
| 77 ... 143 | TKC6-22Z-62 | GJH1213061R6222 | 10 | 0.180 |
| 140 ... 260 | TKC6-22Z-68 | GJH1213061R6228 | 10 | 0.180 |
| 17 ... 32 | TKC6-31Z-51 | GJH1213061R5311 | 10 | 0.180 |
| 50 ... 90 | TKC6-31Z-55 | GJH1213061R5315 | 10 | 0.180 |
| 77 ... 143 | TKC6-31Z-62 | GJH1213061R6312 | 10 | 0.180 |
| 140 ... 260 | TKC6-31Z-68 | GJH1213061R6318 | 10 | 0.180 |
| 17 ... 32 | TKC6-40E-51 | GJH1213061R5401 | 10 | 0.180 |
| 50 ... 90 | TKC6-40E-55 | GJH1213061R5405 | 10 | 0.180 |
| 77 ... 143 | TKC6-40E-62 | GJH1213061R6402 | 10 | 0.180 |
| 140 ... 260 | TKC6-40E-68 | GJH1213061R6408 | 10 | 0.180 |

Other types on request

Main dimensions mm, inches

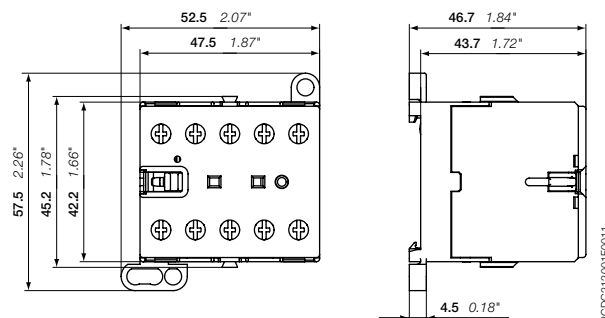

TKC6

2CDC212001F0011

2CDC102014C0201

B6, B7, BC6, BC7 3 and 4-pole mini contactors VB6, VB7, VBC6, VBC7 3-pole mini reversing contactors Accessories



CAF6-11N

2CDC2110750010



RV-BC6/250

2CDC21100750010



CA6-11E-P

2CDC21103650010



CA6-11E

2CDC21101850011



BSM6-30

5S127792R



T16

2CDC231012F0011

Ordering details

| For contactors | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|--------------------|------|------------|---------|----------------|
| | | | | | kg |

Front-mounted instantaneous auxiliary contact blocks (not allowed for mounting on TBC, B6S, B7S, interface contactors) (1)

| | | | | | |
|----------------------------------|-----|----------|-----------------|----|-------|
| B6-, B7-40-00, BC6-, BC7-40-00 | 1 1 | CAF6-11E | GJL1201330R0002 | 10 | 0.020 |
| VB6, VB7, VBC6, VBC7, VB6A, VB7A | 2 0 | CAF6-20E | GJL1201330R0006 | 10 | 0.020 |
| VBC6A, VBC7A | 0 2 | CAF6-02E | GJL1201330R0010 | 10 | 0.020 |
| B6-, B7-30-10, BC6-, BC7-30-10 | 1 1 | CAF6-11M | GJL1201330R0003 | 10 | 0.020 |
| VB6, VB7, VBC6, VBC7, VB6A, VB7A | 2 0 | CAF6-20M | GJL1201330R0007 | 10 | 0.020 |
| VBC6A, VBC7A | 0 2 | CAF6-02M | GJL1201330R0011 | 10 | 0.020 |
| B6-, B7-30-01, BC6-, BC7-30-01 | 1 1 | CAF6-11N | GJL1201330R0004 | 10 | 0.020 |
| VB6, VB7, VBC6, VBC7, VB6A, VB7A | 2 0 | CAF6-20N | GJL1201330R0008 | 10 | 0.020 |
| VBC6A, VBC7A | 0 2 | CAF6-02N | GJL1201330R0012 | 10 | 0.020 |

Side-mounted instantaneous auxiliary contact block (1)

| | | | | | |
|--------------------------------|-----|---------|-----------------|----|-------|
| B6-, B7-40-00, BC6-, BC7-40-00 | 1 1 | CA6-11E | GJL1201317R0002 | 10 | 0.030 |
| B6-, B7-30-10, BC6-, BC7-30-10 | 1 1 | CA6-11M | GJL1201317R0003 | 10 | 0.030 |
| B6-, B7-30-01, BC6-, BC7-30-01 | 1 1 | CA6-11N | GJL1201317R0004 | 10 | 0.030 |

(1) CA6 and CAF6 must not be fitted simultaneously.

| For contactors | Rated control circuit voltage U _c V DC | Connection type | Type | Order code | Pkg qty | Weight (1 pce) kg |
|----------------|------------------------------------------------------|-----------------|------|------------|---------|----------------------|
|----------------|------------------------------------------------------|-----------------|------|------------|---------|----------------------|

Surge suppressors for contactor coils

| | | | | | | |
|----------|----------|------------------|--------------|-----------------|----|-------|
| BC6, BC7 | 24...60 | Cable lug | RV-BC6/60 | GHV2501902R0002 | 10 | 0.005 |
| | | Flat pin, 2.8 mm | RV-BC6-F/60 | GHV2501902R0003 | 10 | 0.005 |
| | 50...250 | Cable lug | RV-BC6/250 | GHV2501903R0002 | 10 | 0.005 |
| | | Flat pin, 2.8 mm | RV-BC6-F/250 | GHV2501903R0003 | 10 | 0.010 |
| | 380 | Cable lug | RV-BC6/380 | GHV2501904R0002 | 10 | 0.005 |
| | | Flat pin, 2.8 mm | RV-BC6-F/380 | GHV2501904R0003 | 10 | 0.010 |

Note: Mini contactors for AC operation have an integrated protective circuit.

Connecting links with manual motor starters

| | | | | |
|---------------------------------------------------|----------|-----------------|----|-------|
| To connect B..VB.. mini contactor to MS116, MS132 | BEA7/132 | 1SBN080906R1002 | 10 | 0.013 |
| To connect B..VB.. mini contactors to MS325 | BEA7/325 | 1SBN080906R1001 | 10 | 0.021 |

Connection sets for reversing contactors

| | | | | |
|--------------------------------------------------------------------------------------|---------|-----------------|----|-------|
| VB6, VB7, VBC6, VBC7, VB6A, VB7A, VBC6A, VBC7A, cross-section 1.8 mm ² | BSM6-30 | GJL1201908R0001 | 10 | 0.010 |
|--------------------------------------------------------------------------------------|---------|-----------------|----|-------|

Parallel connecting link

| | | | | |
|------------------|-----|-----------------|-----|-------|
| B6, B7, BC6, BC7 | LP6 | GJL1201907R0001 | 100 | 0.009 |
|------------------|-----|-----------------|-----|-------|

Cover cap, transparent fitting to DIN rail design, sealable

| | | | | |
|------------------|-------|-----------------|----|-------|
| B6, B7, BC6, BC7 | LT6-B | GJL1201906R0001 | 10 | 0.015 |
|------------------|-------|-----------------|----|-------|

Overload relays fitting details (2)

| Contactor types | Thermal overload relays | Electronic overload relays |
|------------------|-------------------------|----------------------------|
| B6, B7, BC6, BC7 | T16 (0.10...16 A) | E16DU (0.10...18.9 A) |

(2) Direct mounting - No kit required. Ordering details, see overload relays section.

K6, KC6 4-pole mini contactor relays

Accessories



CAF6-11K

2DCD211019S0011



CA6-11K

2DCD211006S0010



CA6-11K-P

2DCD211011S0010



LT6-B

2DCD211006S0010



RV-BC6/250

2DCD211007S0010

Ordering details

| For contactors | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|--------------------|------|------------|---------|----------------|
| | | | | | kg |

Front-mounted instantaneous auxiliary contact blocks (1)

| | | | | | |
|---------|-----|----------|-----------------|----|-------|
| K6, KC6 | 1 1 | CAF6-11K | GJL1201330R0001 | 10 | 0.020 |
| | 2 0 | CAF6-20K | GJL1201330R0005 | 10 | 0.020 |
| | 0 2 | CAF6-02K | GJL1201330R0009 | 10 | 0.020 |

Side-mounted instantaneous auxiliary contact block (1)

| | | | | | |
|---------|-----|---------|-----------------|----|-------|
| K6, KC6 | 1 1 | CA6-11K | GJL1201317R0001 | 10 | 0.030 |
|---------|-----|---------|-----------------|----|-------|

(1) CA6 and CAF6 must not be fitted simultaneously.

| For contactors | Rated control circuit voltage U _c V DC | Connection type | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|------------------------------------------------------|-----------------|------|------------|---------|----------------|
| | | | | | | kg |

Surge suppressors for contactor coils

| | | | | | | |
|-----|----------|------------------|--------------|-----------------|----|-------|
| KC6 | 24...60 | Cable lug | RV-BC6/60 | GHV2501902R0002 | 10 | 0.005 |
| | | Flat pin, 2.8 mm | RV-BC6-F/60 | GHV2501902R0003 | 10 | 0.005 |
| | 50...250 | Cable lug | RV-BC6/250 | GHV2501903R0002 | 10 | 0.005 |
| | | Flat pin, 2.8 mm | RV-BC6-F/250 | GHV2501903R0003 | 10 | 0.010 |
| | 380 | Cable lug | RV-BC6/380 | GHV2501904R0002 | 10 | 0.005 |
| | | Flat pin, 2.8 mm | RV-BC6-F/380 | GHV2501904R0003 | 10 | 0.010 |


Note: Mini contactors for AC operation have an integrated protective circuit.

Cover cap, transparent fitting to DIN rail design, sealable

| | | | | | |
|---------|--|-------|-----------------|----|-------|
| K6, KC6 | | LT6-B | GJL1201906R0001 | 10 | 0.015 |
|---------|--|-------|-----------------|----|-------|

Notes

A series of horizontal dotted lines for taking notes, spanning the width of the page.

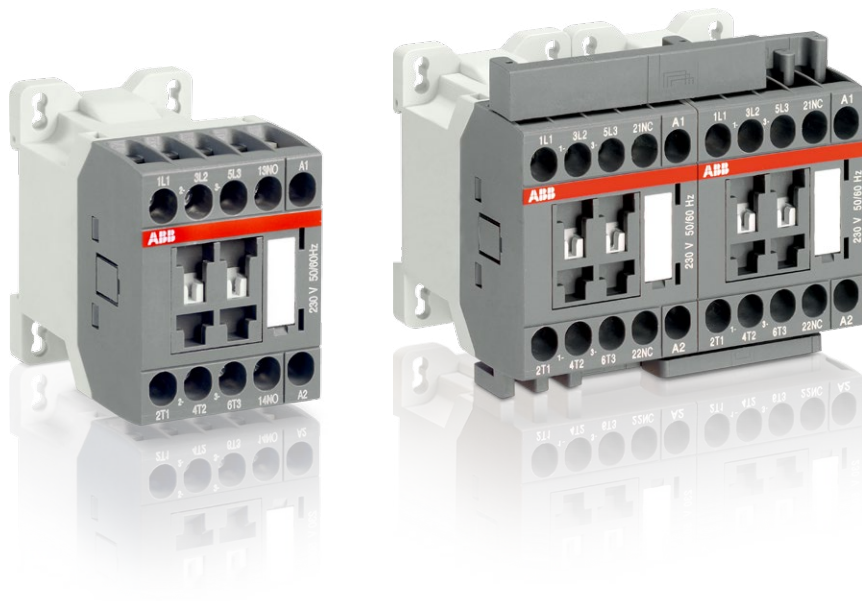

AS 3-pole contactors and NS contactor relays with screw terminals

[Overview](#) 4/2

3-pole contactors

| | | |
|------------------|-----------------------|-----|
| AS09 ... AS16 | AC operated | 4/4 |
| ASL09 ... ASL16 | DC operated | 4/5 |
| AS09 ... AS16 | AC operated - 2-stack | 4/6 |
| ASL09 ... ASL16 | DC operated - 2-stack | 4/7 |
| Main accessories | | 4/8 |

Contactors relays

| | | |
|------------------|-------------|------|
| NS | AC operated | 4/10 |
| NSL | DC operated | 4/11 |
| Main accessories | | 4/12 |

[Voltage code table](#) 4/14

For direct product details information, use product type or order code, ex:
www.abb.com/productdetails/AF09-30-10-13 or www.abb.com/productdetails/1SBL137001R1310


Compact Optimize your equipment dimensions!

One frame size for contactors up to 7.5 kW - 400 V

Same dimensions


for AC and DC operated contactors with screw or spring terminals

4

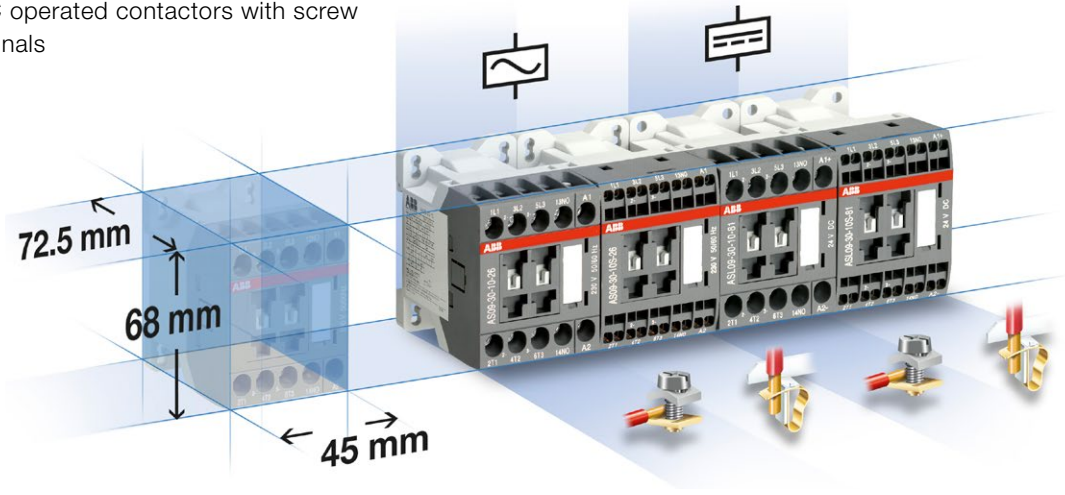


Reversing contactors

including mechanical and electrical interlocking without additional width

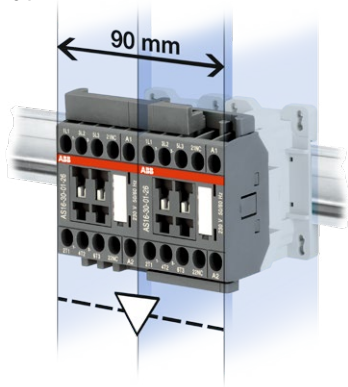


Direct control by PLC

removing any use of interface relay and reducing panel power consumption

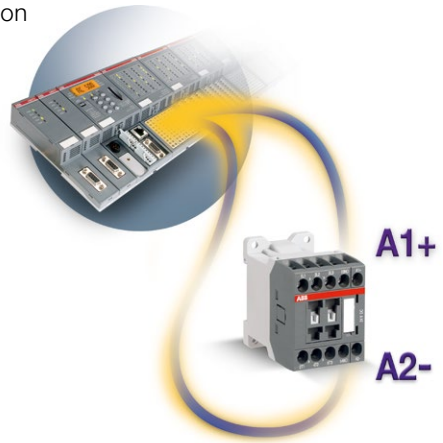

Side clipped-on surge suppressors

integrated into overall contactor dimensions allowing free access to coil terminals

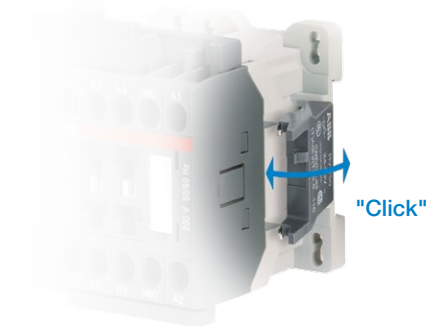

Multiple packaging available for all products



Simple


Choose reliable and time-saving solutions

Select compact starters:

- Direct-on-line and reversing starters up to 7.5 kW – 400 V
- Star-delta starters up to 11 KW – 400 V.


Protect your motors against short-circuits and overloads

- Type 1 or type 2 coordination guaranteed between contactors and short-circuit protection devices (manual motor starters or fuses)

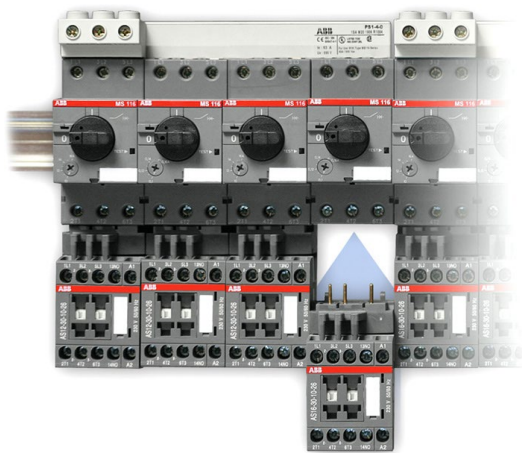

Time/cost saving solutions with

- Connection sets for reversing and star-delta starter
- Easy, fast and secure assembly, fitting and wiring of components
- Direct 35 mm rail mounting: no additional mounting plate required
- Easy installation and dismantling of contactors: no unwiring of manual motor starters.

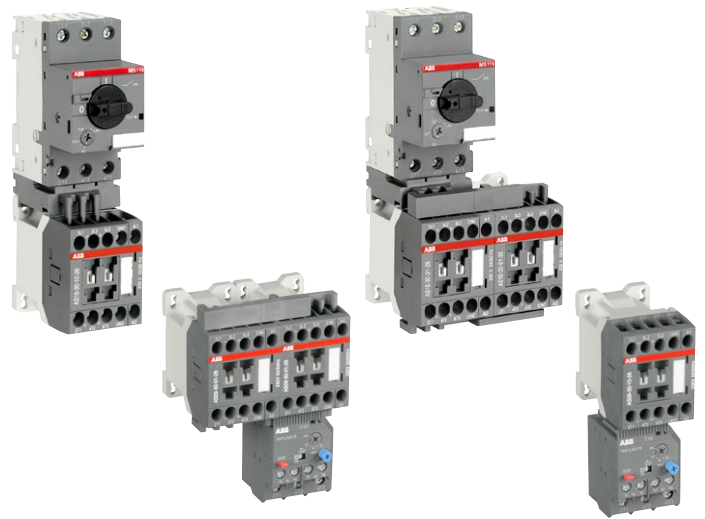

Compliant to International standards Complies with RoHS European directives



Make your control circuits safe



High reliability for low signals




Mechanically linked contacts according to IEC 60947-5-1 Annex L 3.0



Mirror contact according to IEC 60947-4-1 Annex F 2.1

Time and space-saving solutions, suitable for your applications

- Escalators
- Elevators
- Conveyors
- Compressors
- Door control
- Hvac
- Pumps
- Washing machines...

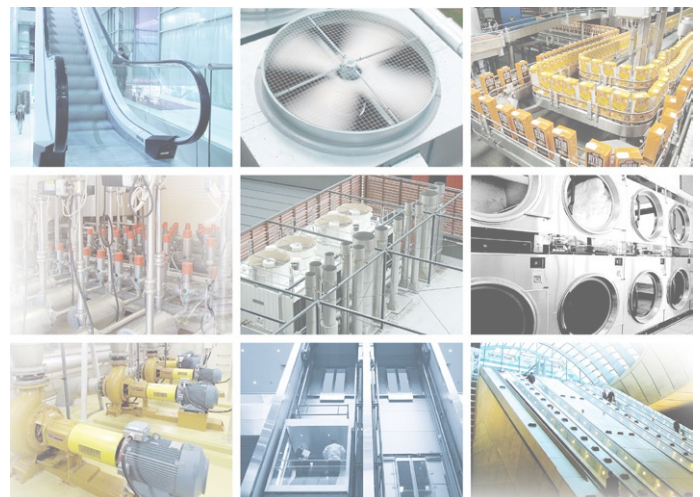

AS09 ... AS16 3-pole contactors

4 to 7.5 kW

AC operated



AS09-30-10

4

Description

AS09 ... AS16 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC and 220 V DC.

These contactors are of the block type design with:

- 3 main poles and 1 built-in auxiliary contact
- control circuit: AC operated
- add-on auxiliary contact blocks for front mounting and a comprehensive range of accessories.


Ordering details

| IEC Rated operational power 400 V AC-3 kW | Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 A | UL/CSA 3-phase motor rating 480 V hp | General use rating 600 V AC A | Rated control circuit voltage Uc (1) | | Auxiliary contacts fitted | Type | Order code | Weight Pkg (1 pce) kg | | | | |
|----------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------|-------------------------------------------|-----------------------------------------------|---------|-------------------------------------|---------------|-----------------|--------------------------------|-----|---------------|-----------------|-------|
| | | | | V 50 Hz | V 60 Hz | | | | | | | | |
| 4 | 22 | 5 | 20 | 24 | 24 | 1 0 | AS09-30-10-20 | 1SBL101001R2010 | 0.220 | | | | |
| | | | | | | 0 1 | AS09-30-01-20 | 1SBL101001R2001 | 0.220 | | | | |
| | | | | - | 120 | 1 0 | AS09-30-10-16 | 1SBL101001R1610 | 0.220 | | | | |
| | | | | | | 0 1 | AS09-30-01-16 | 1SBL101001R1601 | 0.220 | | | | |
| | | | | 230 | 230 | 1 0 | AS09-30-10-26 | 1SBL101001R2610 | 0.220 | | | | |
| | | | | | | 0 1 | AS09-30-01-26 | 1SBL101001R2601 | 0.220 | | | | |
| | | | | 400 | 400 | 1 0 | AS09-30-10-28 | 1SBL101001R2810 | 0.220 | | | | |
| | | | | | | 0 1 | AS09-30-01-28 | 1SBL101001R2801 | 0.220 | | | | |
| | | | | 5.5 | 24 | 7.5 | 20 | 24 | 24 | 1 0 | AS12-30-10-20 | 1SBL111001R2010 | 0.220 |
| | | | | | | | | | | 0 1 | AS12-30-01-20 | 1SBL111001R2001 | 0.220 |
| - | 120 | 1 0 | AS12-30-10-16 | | | | | 1SBL111001R1610 | 0.220 | | | | |
| | | 0 1 | AS12-30-01-16 | | | | | 1SBL111001R1601 | 0.220 | | | | |
| 230 | 230 | 1 0 | AS12-30-10-26 | | | | | 1SBL111001R2610 | 0.220 | | | | |
| | | 0 1 | AS12-30-01-26 | | | | | 1SBL111001R2601 | 0.220 | | | | |
| 400 | 400 | 1 0 | AS12-30-10-28 | | | | | 1SBL111001R2810 | 0.220 | | | | |
| | | 0 1 | AS12-30-01-28 | | | | | 1SBL111001R2801 | 0.220 | | | | |
| 7.5 | 24 | 10 | 20 | | | | | 24 | 24 | 1 0 | AS16-30-10-20 | 1SBL121001R2010 | 0.220 |
| | | | | | | | | | | 0 1 | AS16-30-01-20 | 1SBL121001R2001 | 0.220 |
| | | | | - | 120 | 1 0 | AS16-30-10-16 | 1SBL121001R1610 | 0.220 | | | | |
| | | | | | | 0 1 | AS16-30-01-16 | 1SBL121001R1601 | 0.220 | | | | |
| | | | | 230 | 230 | 1 0 | AS16-30-10-26 | 1SBL121001R2610 | 0.220 | | | | |
| | | | | | | 0 1 | AS16-30-01-26 | 1SBL121001R2601 | 0.220 | | | | |
| | | | | 400 | 400 | 1 0 | AS16-30-10-28 | 1SBL121001R2810 | 0.220 | | | | |
| | | | | | | 0 1 | AS16-30-01-28 | 1SBL121001R2801 | 0.220 | | | | |

Note: for multiple packaging, please contact your ABB local sales organization.

(1) Other control voltages see voltage code table.

Main dimensions mm, inches

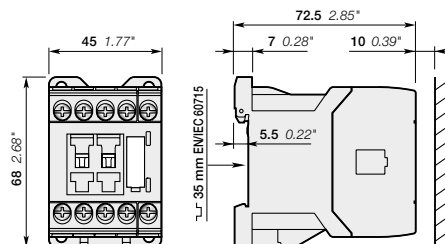

AS09, AS12, AS16

ASL09 ... ASL16 3-pole contactors

4 to 7.5 kW

DC operated



ASL09-30-10



Description

ASL09 ... ASL16 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC and 220 V DC.

These contactors are of the block type design with:

- 3 main poles and 1 built-in auxiliary contact
- control circuit: low consumption (3 W at pull-in and holding) DC operated with solid core magnet. Suitable for direct control by PLC outputs (the polarity on the coil terminals A1+ and A2- must be respected)
- add-on auxiliary contact blocks for front mounting and a comprehensive range of accessories.


Ordering details

| IEC | | UL/CSA | | Rated control circuit voltage Uc (1) | Auxiliary contacts fitted | Type | Order code | Weight Pkg (1 pce) kg |
|-------------------------|-------------------------------------------------|-------------------------------|--------------------------------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|--------------------------------|
| Rated operational power | Rated current $\theta \leq 40^\circ\text{C}$ | 3-phase motor rating 480 V | General use rating 600 V AC | | | | | |
| 400 V AC-3 kW | AC-1 A | hp | A | V DC |   | | | |
| 4 | 22 | 5 | 20 | 24 | 1 0 | ASL09-30-10-81 | 1SBL103001R8110 | 0.280 |
| | | | | | 0 1 | ASL09-30-01-81 | 1SBL103001R8101 | 0.280 |
| | | | | | 1 0 | ASL09-30-10-83 | 1SBL103001R8310 | 0.280 |
| | | | | | 0 1 | ASL09-30-01-83 | 1SBL103001R8301 | 0.280 |
| | | | | | 1 0 | ASL09-30-10-86 | 1SBL103001R8610 | 0.280 |
| | | | | | 0 1 | ASL09-30-01-86 | 1SBL103001R8601 | 0.280 |
| 5.5 | 24 | 7.5 | 20 | 24 | 1 0 | ASL12-30-10-81 | 1SBL113001R8110 | 0.280 |
| | | | | | 0 1 | ASL12-30-01-81 | 1SBL113001R8101 | 0.280 |
| | | | | | 1 0 | ASL12-30-10-83 | 1SBL113001R8310 | 0.280 |
| | | | | | 0 1 | ASL12-30-01-83 | 1SBL113001R8301 | 0.280 |
| | | | | | 1 0 | ASL12-30-10-86 | 1SBL113001R8610 | 0.280 |
| | | | | | 0 1 | ASL12-30-01-86 | 1SBL113001R8601 | 0.280 |
| 7.5 | 24 | 10 | 20 | 24 | 1 0 | ASL16-30-10-81 | 1SBL123001R8110 | 0.280 |
| | | | | | 0 1 | ASL16-30-01-81 | 1SBL123001R8101 | 0.280 |
| | | | | | 1 0 | ASL16-30-10-83 | 1SBL123001R8310 | 0.280 |
| | | | | | 0 1 | ASL16-30-01-83 | 1SBL123001R8301 | 0.280 |
| | | | | | 1 0 | ASL16-30-10-86 | 1SBL123001R8610 | 0.280 |
| | | | | | 0 1 | ASL16-30-01-86 | 1SBL123001R8601 | 0.280 |
| 7.5 | 24 | 10 | 20 | 24 | 1 0 | ASL16-30-10-88 | 1SBL123001R8810 | 0.280 |
| | | | | | 0 1 | ASL16-30-01-88 | 1SBL123001R8801 | 0.280 |
| | | | | | 1 0 | ASL16-30-10-81 | 1SBL123001R8110 | 0.280 |
| | | | | | 0 1 | ASL16-30-01-81 | 1SBL123001R8101 | 0.280 |
| | | | | | 1 0 | ASL16-30-10-83 | 1SBL123001R8310 | 0.280 |
| | | | | | 0 1 | ASL16-30-01-83 | 1SBL123001R8301 | 0.280 |

Note: for multiple packaging, please contact your ABB local sales organization.

(1) Other control voltages see voltage code table.

Main dimensions mm, inches

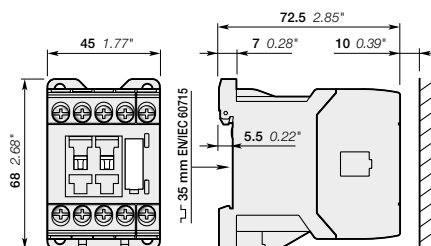

ASL09, ASL12, ASL16

AS09 ... AS16 2-stack 3-pole contactors

4 to 7.5 kW

AC operated



AS09-30-32

Description

AS09 ... AS16 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC and 220 V DC.

These contactors are of the block type design with:

- 1st stack with 3 main poles and 1 N.O. built-in auxiliary contact
- 2nd stack with permanently fixed 2 N.O. + 2 N.C. auxiliary contact block. The auxiliary contact elements are mechanically linked (side-marked symbol) and the N.C. auxiliary contacts are mirror contacts
- control circuit: AC operated
- a comprehensive range of accessories.


Ordering details

| IEC Rated operational power 400 V AC-3 kW | UL/CSA 3-phase motor rating 480 V hp | General use rating 600 V AC A | Rated control circuit voltage Uc (1) | | Auxiliary contacts fitted | Type | Order code | Weight Pkg (1 pce) kg | |
|----------------------------------------------------------|-----------------------------------------------------|-------------------------------------------|-----------------------------------------------|---------|---------------------------------|------|---------------|--------------------------------|-----------------|
| | | | V 50 Hz | V 60 Hz | | | | | |
| 4 | 22 | 5 | 20 | 24 | 24 | 3 2 | AS09-30-32-20 | 1SBL101001R2032 | 0.260 |
| | | | | - | 120 | | 3 2 | AS09-30-32-16 | 1SBL101001R1632 |
| | | | | 230 | 230 | 3 2 | AS09-30-32-26 | 1SBL101001R2632 | 0.260 |
| | | | | 400 | 400 | 3 2 | AS09-30-32-28 | 1SBL101001R2832 | 0.260 |
| 5.5 | 24 | 7.5 | 20 | 24 | 24 | 3 2 | AS12-30-32-20 | 1SBL111001R2032 | 0.260 |
| | | | | - | 120 | | 3 2 | AS12-30-32-16 | 1SBL111001R1632 |
| | | | | 230 | 230 | 3 2 | AS12-30-32-26 | 1SBL111001R2632 | 0.260 |
| | | | | 400 | 400 | 3 2 | AS12-30-32-28 | 1SBL111001R2832 | 0.260 |
| 7.5 | 24 | 10 | 20 | 24 | 24 | 3 2 | AS16-30-32-20 | 1SBL121001R2032 | 0.260 |
| | | | | - | 120 | | 3 2 | AS16-30-32-16 | 1SBL121001R1632 |
| | | | | 230 | 230 | 3 2 | AS16-30-32-26 | 1SBL121001R2632 | 0.260 |
| | | | | 400 | 400 | 3 2 | AS16-30-32-28 | 1SBL121001R2832 | 0.260 |

Note: for multiple packaging, please contact your ABB local sales organization.

(1) Other control voltages see voltage code table.

Main dimensions mm, inches

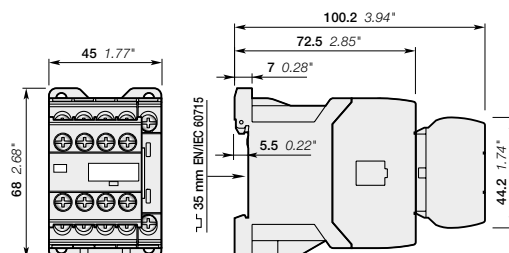

AS09, AS12, AS16

ASL09 ... ASL16 2-stack 3-pole contactors

4 to 7.5 kW

DC operated



ASL09-30-32

Description

ASL09 ... ASL16 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC and 220 V DC.

These contactors are of the block type design with:

- 1st stack with 3 main poles and 1 N.O. built-in auxiliary contact
- 2nd stack with permanently fixed 2 N.O. + 2 N.C. auxiliary contact block. The auxiliary contact elements are mechanically linked (side-marked symbol) and the N.C. auxiliary contacts are mirror contacts
- control circuit: low consumption (3 W at pull-in and holding) DC operated with solid core magnet. Suitable for direct control by PLC outputs (the polarity on the coil terminals A1+ and A2- must be respected)
- a comprehensive range of accessories.


Ordering details

| IEC | Rated power | operational current $\theta \leq 40^\circ\text{C}$ | UL/CSA 3-phase motor rating 480 V | General use rating 600 V AC | Rated control circuit voltage U_c (1) | Auxiliary contacts fitted | Type | Order code | Weight |
|------------|-------------|-------------------------------------------------------|-----------------------------------------|--------------------------------|-----------------------------------------------|---------------------------|-----------------|------------|-------------|
| 400 V AC-3 | kW | A | hp | A | VDC | I L | | | Pkg (1 pce) |
| | | | | | | | | | kg |
| 4 | 22 | 5 | 20 | 24 | 3 2 | ASL09-30-32-81 | 1SBL103001R8132 | 0.320 | |
| | | | | 48 | 3 2 | ASL09-30-32-83 | 1SBL103001R8332 | 0.320 | |
| | | | | 110 | 3 2 | ASL09-30-32-86 | 1SBL103001R8632 | 0.320 | |
| | | | | 220 | 3 2 | ASL09-30-32-88 | 1SBL103001R8832 | 0.320 | |
| 5.5 | 24 | 7.5 | 20 | 24 | 3 2 | ASL12-30-32-81 | 1SBL113001R8132 | 0.320 | |
| | | | | 48 | 3 2 | ASL12-30-32-83 | 1SBL113001R8332 | 0.320 | |
| | | | | 110 | 3 2 | ASL12-30-32-86 | 1SBL113001R8632 | 0.320 | |
| | | | | 220 | 3 2 | ASL12-30-32-88 | 1SBL113001R8832 | 0.320 | |
| 7.5 | 24 | 10 | 20 | 24 | 3 2 | ASL16-30-32-81 | 1SBL123001R8132 | 0.320 | |
| | | | | 48 | 3 2 | ASL16-30-32-83 | 1SBL123001R8332 | 0.320 | |
| | | | | 110 | 3 2 | ASL16-30-32-86 | 1SBL123001R8632 | 0.320 | |
| | | | | 220 | 3 2 | ASL16-30-32-88 | 1SBL123001R8832 | 0.320 | |

Note: for multiple packaging, please contact your ABB local sales organization.

(1) Other control voltages see voltage code table.

Main dimensions mm, inches

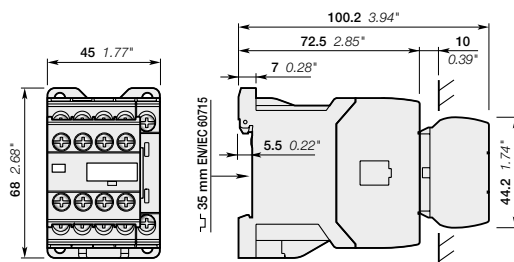


ASL09, ASL12, ASL16

AS09 ... AS16 and ASL09 ... ASL16 3-pole contactors

Main accessories

Contactor and main accessories (other accessories available)

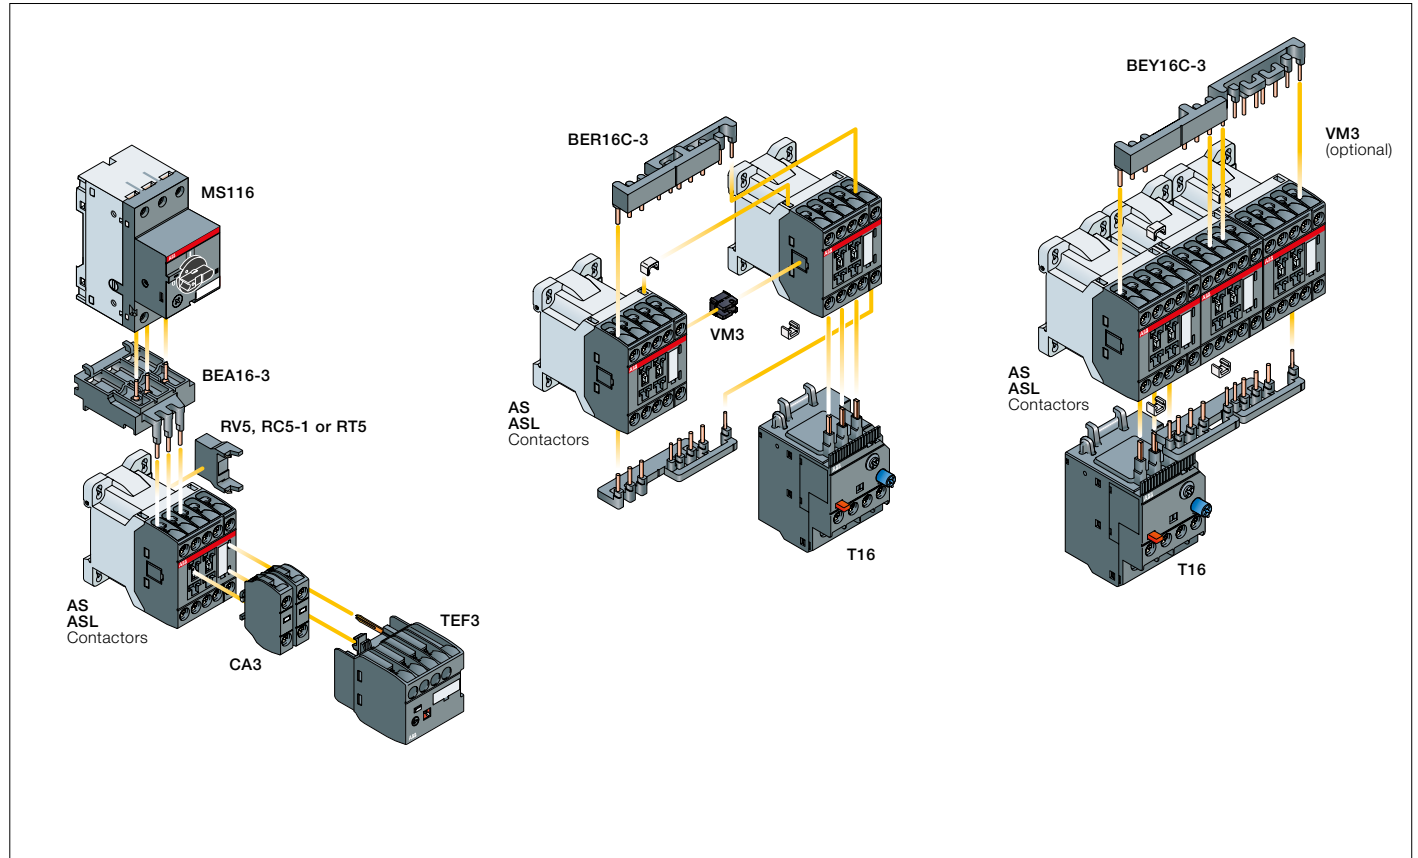

Main accessory fitting details

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.

| Contactor types | Main poles | Built-in auxiliary contacts | Front-mounted accessories | | | Side-mounted accessories | | | | |
|-----------------|------------|-----------------------------|---------------------------|------------------|--------------------------------------------------|--------------------------|-----|-----|-------|-----|
| | | | Auxiliary contact blocks | Electronic timer | Mechanical interlock unit (between 2 contactors) | Surge suppressors | | | | |
| AS09 ... AS16 | 3 0 | 1 0 | 1-pole CA3 | TEF3 | VM3 | + | RV5 | or | RC5-1 | |
| | | | 2 max. | or 1 | + | 1 | + | or | RT5 | |
| AS09 ... AS16 | 3 0 | 3 2 | - | - | 1 | + | RV5 | or | RC5-1 | |
| ASL09 ... ASL16 | 3 0 | 1 0 | 2 max. | or 1 | + | 1 | + | RV5 | or | RT5 |
| ASL09 ... ASL16 | 3 0 | 0 1 | - | - | 1 | + | RV5 | or | RT5 | |

Overload relays fitting details (1)

| Contactor types | Thermal overload relays |
|-----------------|-------------------------|
| AS09 ... AS16 | T16 (0.10...16 A) |
| ASL09 ... ASL16 | |

The addition of an overload relay on the contactor does not prevent fitting of many other accessories as shown above.

(1) Direct mounting - No kit required.

AS09 ... AS16 and ASL09 ... ASL16 3-pole contactors

Main accessories



CA3-10

Front-mounted instantaneous auxiliary contact blocks

| For contactors | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) kg |
|-----------------|--------------------|--------|-----------------|---------|----------------------|
| AS09 ... AS16 | 1 0 | CA3-10 | 1SBN011010T1010 | 10 | 0.011 |
| ASL09 ... ASL16 | 0 1 | CA3-01 | 1SBN011010T1001 | 10 | 0.011 |



TEF3-ON

Front-mounted electronic timer

| For contactors | Rated control circuit voltage - U _c V | Type | Order code | Pkg qty | Weight (1 pce) kg |
|--------------------------------|-----------------------------------------------------|----------|-----------------|---------|----------------------|
| ON-delay | | | | | |
| AS09 ... AS16, ASL09 ... ASL16 | 24...240 V AC/DC | TEF3-ON | 1SBN021012R1000 | 1 | 0.065 |
| OFF-delay | | | | | |
| AS09 ... AS16, ASL09 ... ASL16 | 24...240 V AC/DC | TEF3-OFF | 1SBN021014R1000 | 1 | 0.065 |



VM3

Mechanical interlock unit

| For contactors | Type | Order code | Pkg qty | Weight (1 pce) kg |
|--------------------------------|------|-----------------|---------|----------------------|
| AS09 ... AS16, ASL09 ... ASL16 | VM3 | 1SBN031005T1000 | 10 | 0.002 |



RV5

Surge suppressors


| For contactors | Rated control circuit voltage - U _c | | Type | Order code | Pkg qty | Weight (1 pce) kg |
|-----------------------------------|------------------------------------------------|-------|-----------|-----------------|---------|----------------------|
| | V | AC DC | | | | |
| AS09 ... AS16, ASL09 ... ASL16 | 24...50 | ● ● | RV5/50 | 1SBN050010R1000 | 2 | 0.015 |
| | 50...133 | ● ● | RV5/133 | 1SBN050010R1001 | 2 | 0.015 |
| | 110...250 | ● ● | RV5/250 | 1SBN050010R1002 | 2 | 0.015 |
| | 250...440 | ● ● | RV5/440 | 1SBN050010R1003 | 2 | 0.015 |
| AS09 ... AS16 | 24...50 | ● - | RC5-1/50 | 1SBN050100R1000 | 2 | 0.012 |
| | 50...133 | ● - | RC5-1/133 | 1SBN050100R1001 | 2 | 0.012 |
| | 110...250 | ● - | RC5-1/250 | 1SBN050100R1002 | 2 | 0.012 |
| | 250...440 | ● - | RC5-1/440 | 1SBN050100R1003 | 2 | 0.012 |
| ASL09 ... ASL16 | 12...32 | - ● | RT5/32 | 1SBN050020R1000 | 2 | 0.015 |
| | 25...65 | - ● | RT5/65 | 1SBN050020R1001 | 2 | 0.015 |
| | 50...90 | - ● | RT5/90 | 1SBN050020R1002 | 2 | 0.015 |
| | 77...150 | - ● | RT5/150 | 1SBN050020R1003 | 2 | 0.015 |
| | 150...264 | - ● | RT5/264 | 1SBN050020R1004 | 2 | 0.015 |



BEA16-3

Connecting links with manual motor starters

| For contactors | Manual motor starter | Type | Order code | Pkg qty | Weight (1 pce) kg |
|-----------------|-------------------------|---------|-----------------|---------|----------------------|
| AS09 ... AS16 | MS116-0.16 ... MS116-16 | BEA16-3 | 1SBN081006T1000 | 10 | 0.019 |
| ASL09 ... ASL16 | MS132-0.16 ... MS132-16 | | | | |




BER16C-3

Connection sets for reversing contactors

| For contactors | Mechanical interlock unit | Type | Order code | Pkg qty | Weight (1 pce) kg |
|--------------------------------|---------------------------|----------|-----------------|---------|----------------------|
| AS09 ... AS16, ASL09 ... ASL16 | with or without VM3 | BER16C-3 | 1SBN081012R1000 | 1 | 0.035 |

Note: BER16C-3 connection set includes two BB3 fixing clips, and an electrical interlocking when fitted on contactors with built-in N.C. auxiliary contacts. BER16C-3 can be used with or without VM3 mechanical interlock unit.

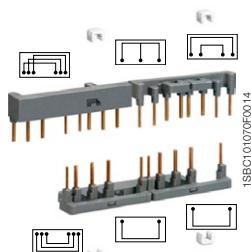

BEY16C-3

Connection sets for star-delta starting

| For contactors | Mech. interlock unit between Star & Delta contactors | Type | Order code | Pkg qty | Weight (1 pce) kg |
|--------------------------------|------------------------------------------------------|----------|-----------------|---------|----------------------|
| AS09 ... AS12, ASL09 ... ASL12 | with or without VM3 | BEY16C-3 | 1SBN081018R2000 | 1 | 0.041 |

Note: BEY16C-3 connection set includes two BB3 fixing clips, and an electrical interlocking when fitted on Star and Delta contactors with built-in N.C. auxiliary contacts. BEY16C-3 can be used with or without VM3 mechanical interlock unit.

NS contactor relays

AC operated



NS22E

Description

NS contactor relays are used for switching auxiliary and control circuits.

These contactor relays are designed with:

- 4 poles or 8 poles. Contactor relays have mechanically linked auxiliary contact elements (side-marked symbol)
- control circuit: AC operated
- add-on auxiliary contact blocks for front mounting and a comprehensive range of accessories.


Ordering details

| Number of contacts 1st stack | 2nd stack | Rated control circuit voltage Uc (1) | | Type | Order code | Weight Pkg (1 pce) kg |
|---------------------------------|-----------|-----------------------------------------------|---------|----------|-----------------|------------------------------------|
| | | V 50 Hz | V 60 Hz | | | |
| | | 24 | 24 | NS22E-20 | 1SBH101001R2022 | 0.220 |
| | | - | 120 | NS22E-16 | 1SBH101001R1622 | 0.220 |
| | | 230 | 230 | NS22E-26 | 1SBH101001R2622 | 0.220 |
| | | 24 | 24 | NS22E-28 | 1SBH101001R2822 | 0.220 |
| | | - | 120 | NS22E-16 | 1SBH101001R1631 | 0.220 |
| | | 230 | 230 | NS22E-26 | 1SBH101001R2631 | 0.220 |
| | | 400 | 400 | NS22E-28 | 1SBH101001R2831 | 0.220 |
| | | 230 | 230 | NS22E-26 | 1SBH101001R2640 | 0.220 |
| | | 400 | 400 | NS22E-28 | 1SBH101001R2840 | 0.220 |
| | | 24 | 24 | NS31E-20 | 1SBH101001R2031 | 0.220 |
| | | - | 120 | NS31E-16 | 1SBH101001R1631 | 0.220 |
| | | 230 | 230 | NS31E-26 | 1SBH101001R2631 | 0.220 |
| | | 400 | 400 | NS31E-28 | 1SBH101001R2831 | 0.220 |
| | | 230 | 230 | NS31E-26 | 1SBH101001R2640 | 0.220 |
| | | 400 | 400 | NS31E-28 | 1SBH101001R2840 | 0.220 |
| | | 24 | 24 | NS40E-20 | 1SBH101001R2040 | 0.220 |
| | | - | 120 | NS40E-16 | 1SBH101001R1640 | 0.220 |
| | | 230 | 230 | NS40E-26 | 1SBH101001R2640 | 0.220 |
| | | 400 | 400 | NS40E-28 | 1SBH101001R2840 | 0.220 |
| | | 230 | 230 | NS40E-26 | 1SBH101001R2644 | 0.260 |
| | | 400 | 400 | NS40E-28 | 1SBH101001R2844 | 0.260 |
| | | 24 | 24 | NS44E-20 | 1SBH101001R2044 | 0.260 |
| | | - | 120 | NS44E-16 | 1SBH101001R1644 | 0.260 |
| | | 230 | 230 | NS44E-26 | 1SBH101001R2644 | 0.260 |
| | | 400 | 400 | NS44E-28 | 1SBH101001R2844 | 0.260 |
| | | 230 | 230 | NS44E-26 | 1SBH101001R2653 | 0.260 |
| | | 400 | 400 | NS44E-28 | 1SBH101001R2853 | 0.260 |
| | | 24 | 24 | NS53E-20 | 1SBH101001R2053 | 0.260 |
| | | - | 120 | NS53E-16 | 1SBH101001R1653 | 0.260 |
| | | 230 | 230 | NS53E-26 | 1SBH101001R2653 | 0.260 |
| | | 400 | 400 | NS53E-28 | 1SBH101001R2853 | 0.260 |
| | | 230 | 230 | NS53E-26 | 1SBH101001R2662 | 0.260 |
| | | 400 | 400 | NS53E-28 | 1SBH101001R2862 | 0.260 |
| | | 24 | 24 | NS62E-20 | 1SBH101001R2062 | 0.260 |
| | | - | 120 | NS62E-16 | 1SBH101001R1662 | 0.260 |
| | | 230 | 230 | NS62E-26 | 1SBH101001R2662 | 0.260 |
| | | 400 | 400 | NS62E-28 | 1SBH101001R2862 | 0.260 |
| | | 230 | 230 | NS62E-26 | 1SBH101001R2671 | 0.260 |
| | | 400 | 400 | NS62E-28 | 1SBH101001R2871 | 0.260 |
| | | 24 | 24 | NS71E-20 | 1SBH101001R2071 | 0.260 |
| | | - | 120 | NS71E-16 | 1SBH101001R1671 | 0.260 |
| | | 230 | 230 | NS71E-26 | 1SBH101001R2671 | 0.260 |
| | | 400 | 400 | NS71E-28 | 1SBH101001R2871 | 0.260 |
| | | 230 | 230 | NS71E-26 | 1SBH101001R2680 | 0.260 |
| | | 400 | 400 | NS71E-28 | 1SBH101001R2880 | 0.260 |
| | | 24 | 24 | NS80E-20 | 1SBH101001R2080 | 0.260 |
| | | - | 120 | NS80E-16 | 1SBH101001R1680 | 0.260 |
| | | 230 | 230 | NS80E-26 | 1SBH101001R2680 | 0.260 |
| | | 400 | 400 | NS80E-28 | 1SBH101001R2880 | 0.260 |

Note: for multiple packaging, please contact your ABB local sales organization.

(1) Other control voltages see voltage code table.

Main dimensions mm, inches

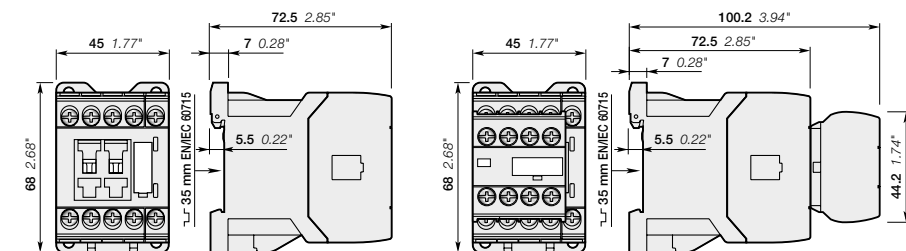

NS22E, NS31E, NS40E

NS44E, NS53E, NS62E, NS71E, NS80E

1SBH101475S0201

NSL contactor relays

DC operated



NSL22E

Description

NSL contactor relays are used for switching auxiliary and control circuits.

These contactor relays are designed with:

- 4 poles or 8 poles. Contactor relays have mechanically linked auxiliary contact elements (side-marked symbol)
- control circuit: low coil consumption (3 W at pull-in and holding) DC operated with solid core magnet. Suitable for direct control by PLC outputs (the polarity on the coil terminals A1+ and A2- must be respected)
- add-on auxiliary contact blocks for front mounting and a comprehensive range of accessories.


Ordering details

| Number of contacts | | Rated control circuit voltage U _c (1) V DC | Type | Order code | Weight Pkg (1 pce) kg |
|--------------------|-----------|----------------------------------------------------------------|-----------|-----------------|--------------------------------|
| 1st stack | 2nd stack | | | | |
| | | 24 | NSL22E-81 | 1SBH103001R8122 | 0.280 |
| | | 48 | NSL22E-83 | 1SBH103001R8322 | 0.280 |
| | | 110 | NSL22E-86 | 1SBH103001R8622 | 0.280 |
| | | 220 | NSL22E-88 | 1SBH103001R8822 | 0.280 |
| | | 24 | NSL31E-81 | 1SBH103001R8131 | 0.280 |
| | | 48 | NSL31E-83 | 1SBH103001R8331 | 0.280 |
| | | 110 | NSL31E-86 | 1SBH103001R8631 | 0.280 |
| | | 220 | NSL31E-88 | 1SBH103001R8831 | 0.280 |
| | | 24 | NSL40E-81 | 1SBH103001R8140 | 0.280 |
| | | 48 | NSL40E-83 | 1SBH103001R8340 | 0.280 |
| | | 110 | NSL40E-86 | 1SBH103001R8640 | 0.280 |
| | | 220 | NSL40E-88 | 1SBH103001R8840 | 0.280 |
| | | 24 | NSL44E-81 | 1SBH103001R8144 | 0.320 |
| | | 48 | NSL44E-83 | 1SBH103001R8344 | 0.320 |
| | | 110 | NSL44E-86 | 1SBH103001R8644 | 0.320 |
| | | 220 | NSL44E-88 | 1SBH103001R8844 | 0.320 |
| | | 24 | NSL53E-81 | 1SBH103001R8153 | 0.320 |
| | | 48 | NSL53E-83 | 1SBH103001R8353 | 0.320 |
| | | 110 | NSL53E-86 | 1SBH103001R8653 | 0.320 |
| | | 220 | NSL53E-88 | 1SBH103001R8853 | 0.320 |
| | | 24 | NSL62E-81 | 1SBH103001R8162 | 0.320 |
| | | 48 | NSL62E-83 | 1SBH103001R8362 | 0.320 |
| | | 110 | NSL62E-86 | 1SBH103001R8662 | 0.320 |
| | | 220 | NSL62E-88 | 1SBH103001R8862 | 0.320 |
| | | 24 | NSL71E-81 | 1SBH103001R8171 | 0.320 |
| | | 48 | NSL71E-83 | 1SBH103001R8371 | 0.320 |
| | | 110 | NSL71E-86 | 1SBH103001R8671 | 0.320 |
| | | 220 | NSL71E-88 | 1SBH103001R8871 | 0.320 |
| | | 24 | NSL80E-81 | 1SBH103001R8180 | 0.320 |
| | | 48 | NSL80E-83 | 1SBH103001R8380 | 0.320 |
| | | 110 | NSL80E-86 | 1SBH103001R8680 | 0.320 |
| | | 220 | NSL80E-88 | 1SBH103001R8880 | 0.320 |

Note: for multiple packaging, please contact your ABB local sales organization.

(1) Other control voltages see voltage code table.

Main dimensions mm, inches

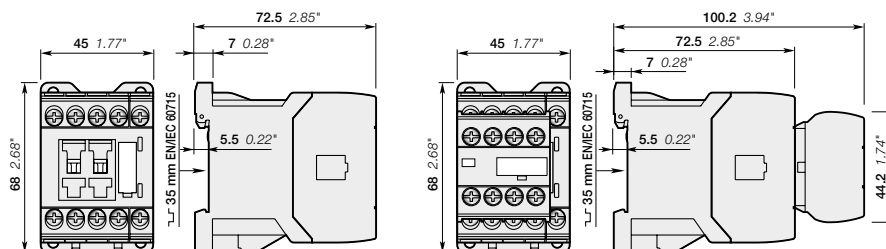


NSL22E, NSL31E, NSL40E

NSL44E, NSL53E, NSL62E, NSL71E, NSL80E

NS and NSL contactor relays

Main accessories

Contactor relays and main accessories (other accessories available)

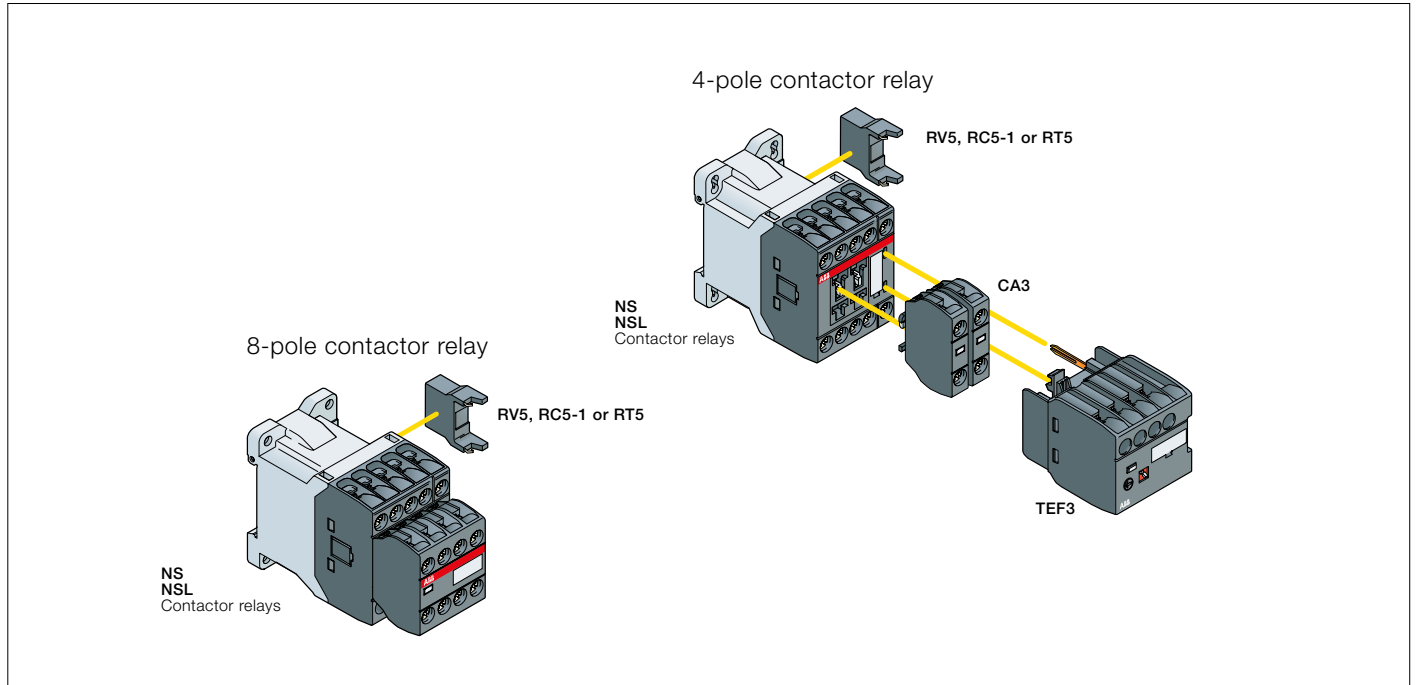

Main accessory fitting details

| Contactor types | Main poles | Front-mounted accessories | | Side-mounted accessories | |
|-----------------|------------|---------------------------|------------------|--------------------------|--------------|
| | | Auxiliary contact blocks | Electronic timer | Surge suppressors | |
| | | 1-pole CA3 | TEF3 | | |
| NS.. | 2 2 E | 2 max. | or 1 | + | RV5 or RC5-1 |
| NS.. | 3 1 E | | | | |
| NS.. | 4 0 E | | | | |
| NS.. | 4 4 E | - | - | | RV5 or RC5-1 |
| NS.. | 5 3 E | | | | |
| NS.. | 6 2 E | | | | |
| NS.. | 7 1 E | | | | |
| NS.. | 8 0 E | | | | |
| NSL.. | 2 2 E | 2 max. | or 1 | + | RV5 or RT5 |
| NSL.. | 3 1 E | | | | |
| NSL.. | 4 0 E | | | | |
| NSL.. | 4 4 E | - | - | | RV5 or RT5 |
| NSL.. | 5 3 E | | | | |
| NSL.. | 6 2 E | | | | |
| NSL.. | 7 1 E | | | | |
| NSL.. | 8 0 E | | | | |

NS and NSL contactor relays

Main accessories



CA3-10



TEF3-ON



RV5

Front-mounted instantaneous auxiliary contact blocks

| For contactor relays | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------------|--------------------|--------|-----------------|---------|----------------|
| | | CA3-10 | 1SBN011010T1010 | 10 | 0.011 |
| | | CA3-01 | 1SBN011010T1001 | 10 | 0.011 |

Front-mounted electronic timer

| For contactors | Rated control circuit voltage - U _c V | Type | Order code | Pkg qty | Weight (1 pce) |
|------------------|-----------------------------------------------------|----------|-----------------|---------|----------------|
| ON-delay | | | | | |
| NS, NSL | 24...240 V AC/DC | TEF3-ON | 1SBN021012R1000 | 1 | 0.065 |
| OFF-delay | | | | | |
| NS, NSL | 24...240 V AC/DC | TEF3-OFF | 1SBN021014R1000 | 1 | 0.065 |

Surge suppressors

| For contactor relays | Rated control circuit voltage - U _c | | Type | Order code | Pkg qty | Weight (1 pce) | |
|----------------------|------------------------------------------------|----|------|------------|-----------------|----------------|-------|
| | V | AC | | | | | DC |
| NS, NSL | 24...50 | ● | ● | RV5/50 | 1SBN050010R1000 | 2 | 0.015 |
| | 50...133 | ● | ● | RV5/133 | 1SBN050010R1001 | 2 | 0.015 |
| | 110...250 | ● | ● | RV5/250 | 1SBN050010R1002 | 2 | 0.015 |
| | 250...440 | ● | ● | RV5/440 | 1SBN050010R1003 | 2 | 0.015 |
| NS | 24...50 | ● | - | RC5-1/50 | 1SBN050100R1000 | 2 | 0.012 |
| | 50...133 | ● | - | RC5-1/133 | 1SBN050100R1001 | 2 | 0.012 |
| | 110...250 | ● | - | RC5-1/250 | 1SBN050100R1002 | 2 | 0.012 |
| | 250...440 | ● | - | RC5-1/440 | 1SBN050100R1003 | 2 | 0.012 |
| NSL | 12...32 | - | ● | RT5/32 | 1SBN050020R1000 | 2 | 0.015 |
| | 25...65 | - | ● | RT5/65 | 1SBN050020R1001 | 2 | 0.015 |
| | 50...90 | - | ● | RT5/90 | 1SBN050020R1002 | 2 | 0.015 |
| | 77...150 | - | ● | RT5/150 | 1SBN050020R1003 | 2 | 0.015 |
| | 150...264 | - | ● | RT5/264 | 1SBN050020R1004 | 2 | 0.015 |

Voltage code table

The below tables indicate the available coil voltages and corresponding digits for order codes. When placing an order, please give either type or order code. Select a standard contactor from ordering detail pages. Change the **coil voltage code** in the type or in the order code according to the table below. Example: for contactor AS09-30-10 and coil 42 V 50/60 Hz, type is AS09-30-10-21 and order code is 1SBL101001R2110.

3-pole contactors

Type

AS16 - 30 - 10 - 26

Auxiliary contacts
N.O. N.C.

Main contacts
N.O. N.C.

Contactor type
AS AC operated
ASL DC operated

Order code

1SBL121001R 26 10

AC coil code

| | 50 Hz | 60 Hz |
|----|-------|-------|
| 20 | 24 V | 24 V |
| 21 | 42 V | 42 V |
| 22 | 48 V | 48 V |
| 23 | 110 V | 110 V |
| 24 | 115 V | 115 V |
| 16 | - | 120 V |
| 25 | 220 V | 220 V |
| 26 | 230 V | 230 V |
| 27 | 240 V | 240 V |
| 17 | - | 277 V |
| 13 | 380 V | - |
| 28 | 400 V | 400 V |
| 29 | 415 V | 415 V |

DC coil code

| | |
|----|-------|
| 80 | 12 V |
| 81 | 24 V |
| 83 | 48 V |
| 84 | 60 V |
| 86 | 110 V |
| 87 | 125 V |
| 88 | 220 V |
| 89 | 240 V |

3-pole reversing contactors

Type

VAS12 S EM - 26 M

Surge suppressor

Contactor type
VAS AC operated
VASL DC operated

Order code

1SBK113800M 26 00

AC coil code

| | 50 Hz | 60 Hz |
|----|-------|-------|
| 20 | 24 V | 24 V |
| 21 | 42 V | 42 V |
| 22 | 48 V | 48 V |
| 23 | 110 V | 110 V |
| 24 | 115 V | 115 V |
| 16 | - | 120 V |
| 25 | 220 V | 220 V |
| 26 | 230 V | 230 V |
| 27 | 240 V | 240 V |
| 17 | - | 277 V |
| 13 | 380 V | - |
| 28 | 400 V | 400 V |
| 29 | 415 V | 415 V |

DC coil code

| | |
|----|----------|
| 80 | 12 V (1) |
| 81 | 24 V |
| 83 | 48 V |
| 84 | 60 V |
| 86 | 110 V |
| 87 | 125 V |
| 88 | 220 V |
| 89 | 240 V |

(1) Not for VASL..SEM

Contactor relays

Type

NS 40 E - 26

N.O. N.C.
Number contacts

Contactor type
NS AC operated
NSL DC operated

Order code

1SBH101001R 26 40

AC coil code


| | 50 Hz | 60 Hz |
|----|-------|-------|
| 20 | 24 V | 24 V |
| 21 | 42 V | 42 V |
| 22 | 48 V | 48 V |
| 23 | 110 V | 110 V |
| 24 | 115 V | 115 V |
| 16 | - | 120 V |
| 25 | 220 V | 220 V |
| 26 | 230 V | 230 V |
| 27 | 240 V | 240 V |
| 17 | - | 277 V |
| 13 | 380 V | - |
| 28 | 400 V | 400 V |
| 29 | 415 V | 415 V |

DC coil code

| | |
|----|-------|
| 80 | 12 V |
| 81 | 24 V |
| 83 | 48 V |
| 84 | 60 V |
| 86 | 110 V |
| 87 | 125 V |
| 88 | 220 V |
| 89 | 240 V |

Notes

A series of horizontal dotted lines for taking notes, spanning the width of the page.

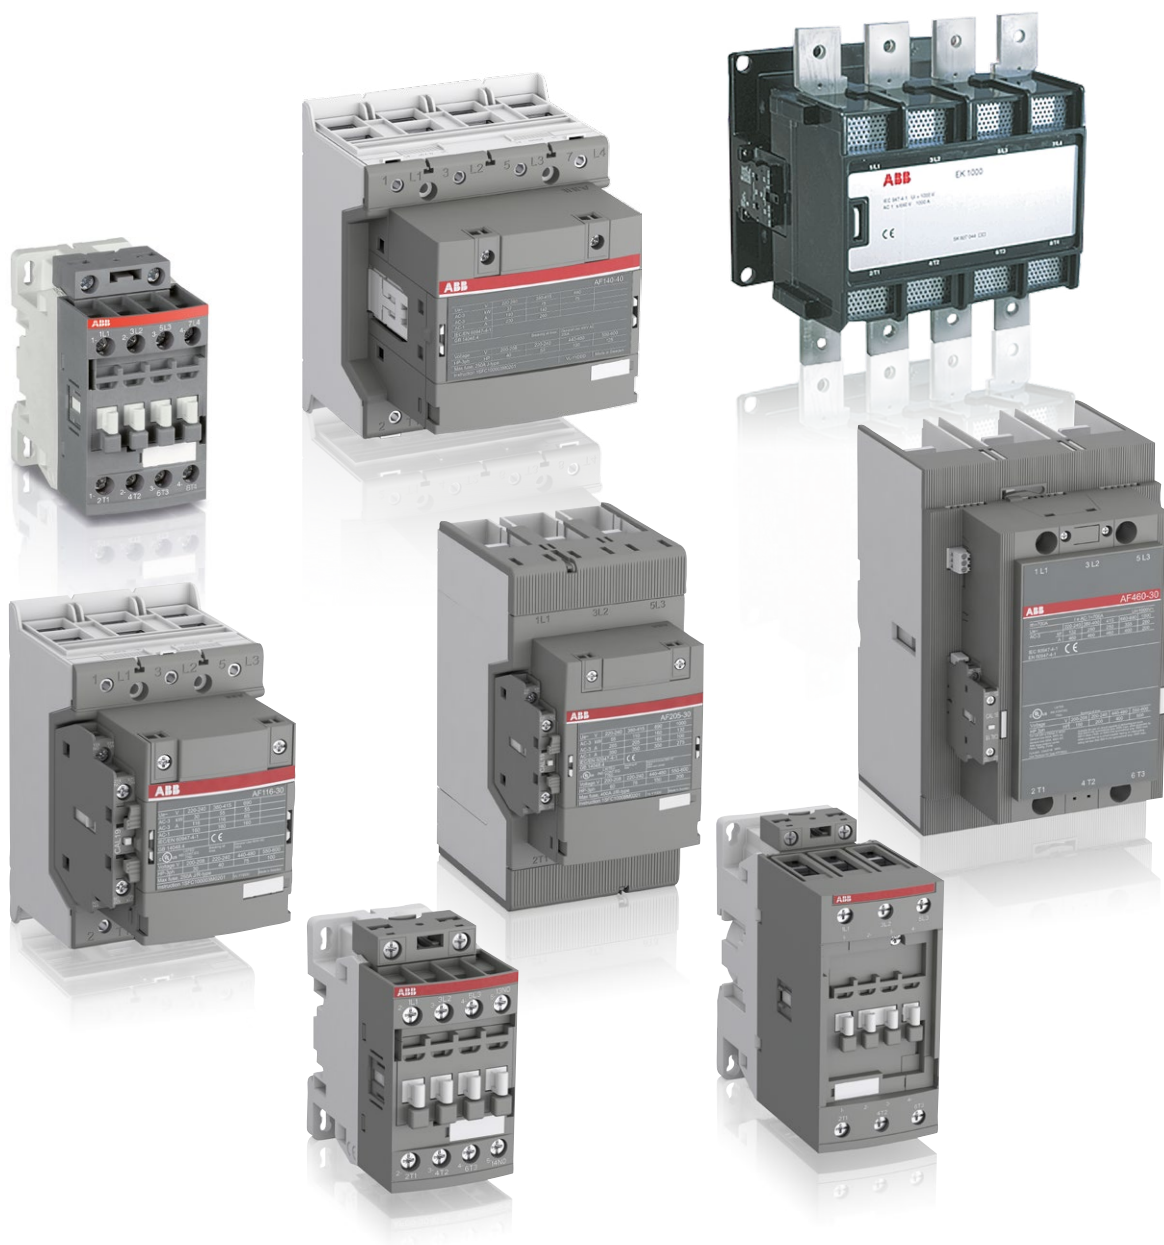

AF, EK contactors and NF contactor relays

Motor starting solution, in kit form

| | |
|---------------------------------------------------------------|------|
| DOL and reversing starters protected by manual motor starters | 5/2 |
| DOL starters protected by moulded-case circuit-breakers | 5/8 |
| DOL and reversing starters protected by overload relays | 5/14 |
| Star-delta starters protected by overload relays | 5/20 |

AF 3-pole contactors - Overview

5/26

4 to 45 kW / 5 to 60 hp

| | | |
|------------------|------------------------------------|------|
| AF09 ... AF38 | AC / DC operated | 5/28 |
| AF09Z ... AF38Z | AC / DC operated - low consumption | 5/29 |
| AF40 ... AF96 | AC / DC operated | 5/30 |
| Main accessories | | 5/32 |

55 to 200 kW / 75 to 350 hp

| | | |
|------------------|------------------|------|
| AF116 ... AF146 | AC / DC operated | 5/34 |
| AF190 ... AF370 | AC / DC operated | 5/36 |
| Main accessories | | 5/38 |

200 to 560 kW / 350 to 900 hp

| | | |
|-------------------|------------------|------|
| AF400 ... AF750 | AC / DC operated | 5/40 |
| AF1250 ... AF2650 | AC / DC operated | 5/41 |
| Main accessories | | 5/42 |

AF and EK 4-pole contactors - Overview

5/44

25 to 125 A AC-1

| | | |
|------------------|------------------------------------|------|
| AF09 ... AF38 | AC / DC operated | 5/46 |
| AF09Z ... AF38Z | AC / DC operated - low consumption | 5/47 |
| AF40 ... AF80 | AC / DC operated | 5/48 |
| Main accessories | | 5/50 |

160 to 525 A AC-1

| | | |
|------------------|------------------|------|
| AF116 ... AF140 | AC / DC operated | 5/52 |
| AF190 ... AF370 | AC / DC operated | 5/53 |
| Main accessories | | 5/54 |

800 to 1000 A AC-1

| | | |
|------------------|-------------|------|
| EK550, EK1000 | AC operated | 5/56 |
| EK550, EK1000 | DC operated | 5/57 |
| Main accessories | | 5/58 |

NF contactor relays

| | | |
|------------------|------------------------------------|------|
| NF | AC / DC operated | 5/60 |
| NFZ | AC / DC operated - low consumption | 5/61 |
| Main accessories | | 5/62 |

Voltage code table

5/64


For direct product details information, use product type or order code, ex:
www.abb.com/productdetails/AF09-30-10-13 or www.abb.com/productdetails/1SBL137001R1310

DOL and reversing starters protected by manual motor starters With AF contactors - open type version in kit form

5




1SFC101102X0001



Application

Full voltage direct-on-line (DOL) starting and reversing starting for controlling three-phase asynchronous motors is a simple and economic solution characterised by a high starting torque (1.9 to 2.1 times full-speed torque) and a starting current 5.5 to 7 times nominal current.

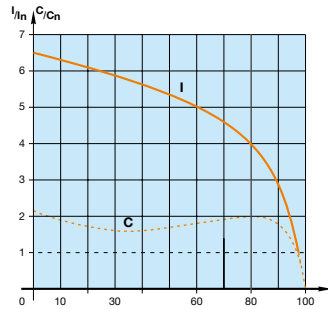

I = current
C = torque
In = nominal current
Cn = nominal torque

DOL starter


MS132-10 + BEA16-4 + AF09-30-10

Coordination types

The contactor and the manual motor starter control and protect motors against overload and short-circuits according to coordination types 1 and 2 (IEC 60947-4-1 / EN 60947-4-1) defining the anticipated level of service continuity as follow:

Type 1: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will not be able to then operate without being repaired or having parts replaced.

Type 2: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will be able to operate afterwards. The risk of contacts light welding is acceptable.



1SFC101105V0001


Reversing starter

MS132-10 + BEA16-4 + BER16-4
+ VEM4 + AF09-30-10


Main Technical Data

| | | |
|------------------------------------------|--------------------------------------------------------------------------|---------|
| Standards | IEC 60947-4-1 / EN 60947-4-1 | |
| Rated operational voltage Ue max. | 690 V - 50/60 Hz | |
| Rated insulation voltage Ui | | |
| acc. to IEC 60947-4-1 | 690 V | |
| acc. to UL / CSA | 600 V | |
| Switching frequency | | |
| | ≤ 15 starts/hour - 80 % max. load factor - with max. 1.5 s starting time | |
| | ≤ 30 starts/hour - 50 % max. load factor - with max. 1.5 s starting time | |
| Ambient air temperature | | |
| Close to the device | use with MS116 | ≤ 55 °C |
| | use with MS132, MS165, MS495 | ≤ 60 °C |
| Degree of protection | IP20 | |

Mounting positions

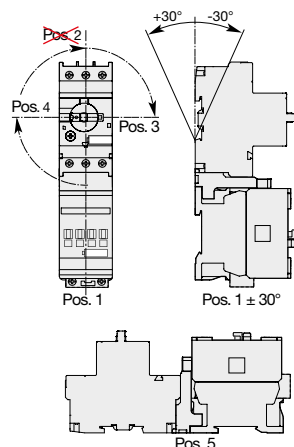


DOL starters

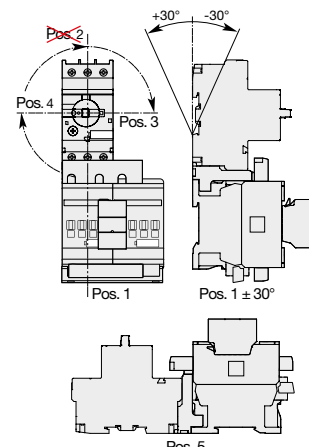

Reversing starters


DOL and reversing starters protected by manual motor starters With AF contactors - open type version in kit form

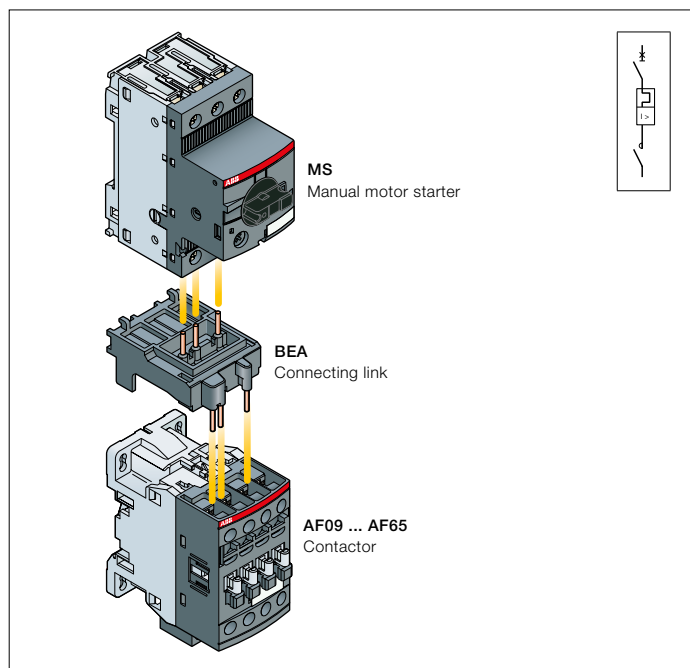

Direct-on-line starters

Description

You can easily assemble a direct-on-line starter by using the BEA...-4 connecting link 3-pole insulated. It is used to electrically and mechanically connect MS116, MS132 or MS165 manual motor starter and AF09 ... AF65 contactor, AC or DC operated.

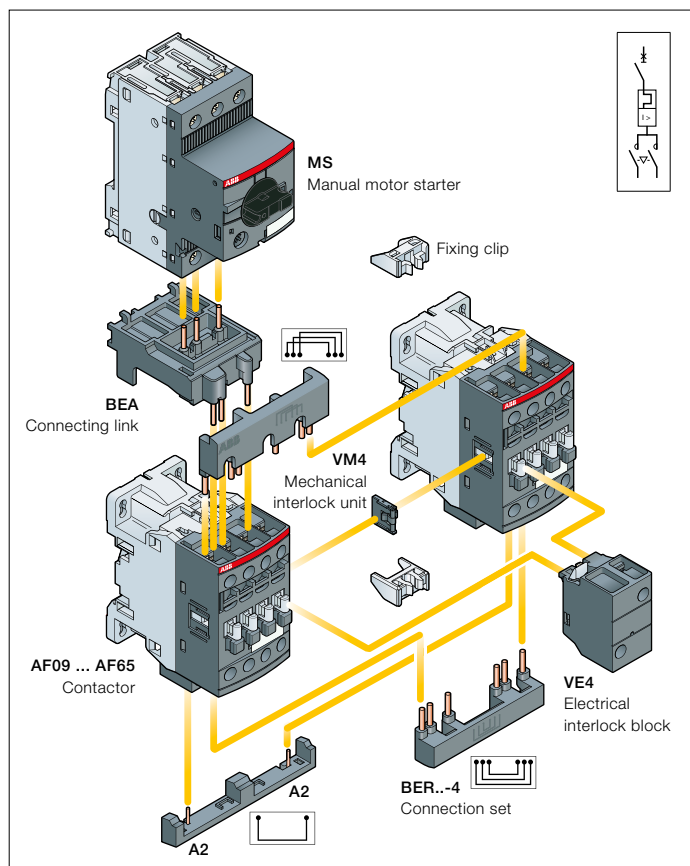

Reversing starters

Description

You can easily assemble reversing starter thanks to our complete range of accessories:

- BEA...-4 connecting link 3-pole insulated: it is used to electrically and mechanically connect MS116, MS132 or MS165 manual motor starter and AF09 ... AF65 contactor, AC or DC operated
- For AF09 ... AF38, use VEM4 mechanical and electrical interlock set for reversing starter in 90 mm width. It includes:
 - VM4 mechanical interlock unit including 2 fixing clips
 - VE4 electrical interlock block with A2-A2 connection.
- For AF40 ... AF96, use VM96-4 mechanical interlock unit and additional auxiliary contact blocks for electrical interlocking
- BER...-4 connection set: it assures a safe and simple reversing connection between both contactor main terminals.

Select now easily and quickly your starter in the following pages for coordination type 1 or 2 at 400 V, 50/60 Hz, I_q = 16 kA up to 18.5 kW and I_q = 50 kA up to 45 kW.






For the full coordination tables:

www.abb.com/lowvoltage then go to the right menu: "Support", select: "Online Product Selection Tools" then select "Coordination Tables for motor protection"

DOL starters protected by MS manual motor starters

Coordination type 1

Coordination type 1, AC-3, 16 kA or 50 kA, 400 V, 50/60 Hz

| | | Manual motor starters | | | | | Contactors | | | | | Accessories | |
|----------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|----------------------------------|--------------------------------------|----------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|------------------------------------|-----------------|------------|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | |  | | | | |  | | | | |   | |
| IEC AC-3, 400 V Rated operational power kW | Type (1) | Order code | Current setting range A | Magnetic tripping current A | Rated control circuit voltage Uc min. ... Uc max. (2) | Type (3) | Order code | Allowed setting current A | Type | Order code | | | |
| 0.06 | 0.2 | MS132-0.25 | 1SAM350000R1002 | 0.16...0.25 | 2.44 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.25 | BEA16-4 | 1SBN081306T1000 | |
| 0.09 | 0.3 | MS132-0.4 | 1SAM350000R1003 | 0.25...0.40 | 3.9 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.4 | | | |
| 0.12 | 0.44 | MS132-0.63 | 1SAM350000R1004 | 0.40...0.63 | 6.14 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.63 | | | |
| 0.18 | 0.6 | MS132-0.63 | 1SAM350000R1004 | 0.40...0.63 | 6.14 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.63 | | | |
| 0.25 | 0.85 | MS132-1.0 | 1SAM350000R1005 | 0.63...1.00 | 11.5 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1 | | | |
| 0.37 | 1.1 | MS132-1.6 | 1SAM350000R1006 | 1.00...1.60 | 18.4 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1.6 | | | |
| 0.55 | 1.5 | MS132-1.6 | 1SAM350000R1006 | 1.00...1.60 | 18.4 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1.6 | | | |
| 0.75 | 1.9 | MS132-2.5 | 1SAM350000R1007 | 1.60...2.50 | 28.75 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 2.5 | | | |
| 1.1 | 2.7 | MS132-4.0 | 1SAM350000R1008 | 2.50...4.00 | 50 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 4 | | | |
| 1.5 | 3.6 | MS132-4.0 | 1SAM350000R1008 | 2.50...4.00 | 50 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 4 | | | |
| 2.2 | 4.9 | MS132-6.3 | 1SAM350000R1009 | 4.00...6.30 | 78.75 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 6.3 | | | |
| 3 | 6.5 | MS132-10 | 1SAM350000R1010 | 6.30...10.0 | 150 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 9 | | | |
| 4 | 8.5 | MS132-10 | 1SAM350000R1010 | 6.30...10.0 | 150 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 9 | | | |
| 5.5 | 11.5 | MS132-12 | 1SAM350000R1012 | 8.00...12.0 | 180 | 24...60 | 20...60 | AF12Z-30-10-21 | 1SBL156001R2110 | 12 | | | |
| 7.5 | 15.5 | MS132-16 | 1SAM350000R1011 | 10.0...16.0 | 240 | 24...60 | 20...60 | AF16Z-30-10-21 | 1SBL176001R2110 | 16 | | | |
| 11 | 22 | MS132-25 | 1SAM350000R1014 | 20.0...25.0 | 375 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 25 | + BEA38-4 CA4-10 | 1SBN082306T2000 1SBN010110R1010 | |
| 15 | 29 | MS132-32 | 1SAM350000R1015 | 25.0...32.0 | 480 | 24...60 | 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | 32 | | | |
| 18.5 | 35 | MS165-42 | 1SAM451000R1015 | 30.0...42.0 | 630 | 24...60 | 20...60 | AF40-30-00-11 | 1SBL347001R1100 | 40 | | | |
| 22 | 41 | MS165-54 | 1SAM451000R1016 | 40.0...54.0 | 810 | 24...60 | 20...60 | AF52-30-00-11 | 1SBL367001R1100 | 53 | BEA65-4 CA4-10 | 1SBN083406R1000 1SBN010110R1010 | |
| 30 | 55 | MS165-65 | 1SAM451000R1017 | 52.0...65.0 | 975 | 24...60 | 20...60 | AF65-30-00-11 | 1SBL387001R1100 | 65 | | | |
| 37 | 66 | MS495-75 | 1SAM550000R1008 | 57.0...75.0 | 975 | 24...60 | 20...60 | AF80-30-00-11 | 1SBL397001R1100 | 75 | | | |
| 45 | 80 | MS495-90 | 1SAM550000R1009 | 70.0...90.0 | 1170 | 24...60 | 20...60 | AF96-30-00-11 | 1SBL407001R1100 | 90 | | | |

(1) MS116 manual motor starter can be selected according to the current setting range indicated on the coordination line, up to:

- 15 kW, 400 V - AC-3 at 16 kA
- 4 kW, 400 V - AC-3 at 50 kA.






(2) For other control voltages, see "Voltage code table".

(3) AF38 3-pole contactor can be selected for coordination type 1, 16 kA and 50 kA, 18.5 kW, 400 V - AC-3 (BEA65-4 available for AF40 ... AF65 only).

DOL starters protected by MS manual motor starters

Coordination type 2

Coordination type 2, AC-3, 16 kA or 50 kA, 400 V, 50/60 Hz

| | | Manual motor starters | | | | | Contactors | | | | | Accessories | |
|-----------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|----------------------------------|--------------------------------------|----------------------------------------------------------------|----------------|-----------------------------------------------------------------------------------|------------------------------------|-------------|------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|  | |  | | | | |  | | | | |  BEA-4  CA4-10 | |
| IEC AC-3, 400 V Rated operational power kW | Type (1) | Order code | Current setting range A | Magnetic tripping current A | Rated control circuit voltage Uc min. ... Uc max. (2) | Type (3) | Order code | Allowed setting current A | Type (4) | Order code | | | |
| current | | | | | V 50/60 Hz V DC | | | | | | | | |
| 0.06 | 0.2 | MS132-0.25 1SAM350000R1002 | 0.16...0.25 | 2.44 | 24...60 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.25 | | BEA16-4 | 1SBN081306T1000 | | |
| | | | | | 100...250 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | | |
| 0.09 | 0.3 | MS132-0.4 1SAM350000R1003 | 0.25...0.40 | 3.9 | 24...60 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.4 | | | | | |
| | | | | | 100...250 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | | |
| 0.12 | 0.44 | MS132-0.63 1SAM350000R1004 | 0.40...0.63 | 6.14 | 24...60 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.63 | | | | | |
| | | | | | 100...250 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | | |
| 0.18 | 0.6 | MS132-0.63 1SAM350000R1004 | 0.40...0.63 | 6.14 | 24...60 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.63 | | | | | |
| | | | | | 100...250 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | | |
| 0.25 | 0.85 | MS132-1.0 1SAM350000R1005 | 0.63...1.00 | 11.5 | 24...60 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1 | | | | | |
| | | | | | 100...250 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | | |
| 0.37 | 1.1 | MS132-1.6 1SAM350000R1006 | 1.00...1.60 | 18.4 | 24...60 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1.6 | | | | | |
| | | | | | 100...250 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | | |
| 0.55 | 1.5 | MS132-1.6 1SAM350000R1006 | 1.00...1.60 | 18.4 | 24...60 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1.6 | | | | | |
| | | | | | 100...250 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | | |
| 0.75 | 1.9 | MS132-2.5 1SAM350000R1007 | 1.60...2.50 | 28.75 | 24...60 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 2.5 | | | | | |
| | | | | | 100...250 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | | |
| 1.1 | 2.7 | MS132-4.0 1SAM350000R1008 | 2.50...4.00 | 50 | 24...60 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 4 | | BEA26-4 | 1SBN082306T1000 | | |
| | | | | | 100...250 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | + | CA4-10 | 1SBN010110R1010 | | |
| 1.5 | 3.6 | MS132-4.0 1SAM350000R1008 | 2.50...4.00 | 50 | 24...60 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 4 | | | | | |
| | | | | | 100...250 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | | | | | |
| 2.2 | 4.9 | MS132-6.3 1SAM350000R1009 | 4.00...6.30 | 78.75 | 24...60 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 6.3 | | | | | |
| | | | | | 100...250 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | | | | | |
| 3 | 6.5 | MS132-10 1SAM350000R1010 | 6.30...10.0 | 150 | 24...60 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 10 | | | | | |
| | | | | | 100...250 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | | | | | |
| 4 | 8.5 | MS132-10 1SAM350000R1010 | 6.30...10.0 | 150 | 24...60 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 10 | | | | | |
| | | | | | 100...250 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | | | | | |
| 5.5 | 11.5 | MS132-12 1SAM350000R1012 | 8.00...12.0 | 180 | 24...60 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 12 | | BEA38-4 | 1SBN082306T2000 | | |
| | | | | | 100...250 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | + | CA4-10 | 1SBN010110R1010 | | |
| 7.5 | 15.5 | MS132-16 1SAM350000R1011 | 10.0...16.0 | 240 | 24...60 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | 16 | | | | | |
| | | | | | 100...250 100...250 | AF30-30-00-13 | 1SBL277001R1300 | | | | | | |
| 11 | 22 | MS132-25 1SAM350000R1014 | 20.0...25.0 | 375 | 24...60 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | 25 | | | | | |
| | | | | | 100...250 100...250 | AF30-30-00-13 | 1SBL277001R1300 | | | | | | |
| 15 | 29 | MS132-32 1SAM350000R1015 | 25.0...32.0 | 480 | 24...60 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | 32 | | | | | |
| | | | | | 100...250 100...250 | AF30-30-00-13 | 1SBL277001R1300 | | | | | | |
| 18.5 | 35 | MS165-42 1SAM451000R1015 | 30.0...42.0 | 630 | 24...60 20...60 | AF40-30-00-11 | 1SBL347001R1100 | 40 | | BEA65-4 | 1SBN083406R1000 | | |
| | | | | | 100...250 100...250 | AF40-30-00-13 | 1SBL347001R1300 | | | CA4-10 | 1SBN010110R1010 | | |
| 22 | 41 | MS165-54 1SAM451000R1016 | 40.0...54.0 | 810 | 24...60 20...60 | AF52-30-00-11 | 1SBL367001R1100 | 53 | | | | | |
| | | | | | 100...250 100...250 | AF52-30-00-13 | 1SBL367001R1300 | | | | | | |
| 30 | 55 | MS165-65 1SAM451000R1017 | 52.0...65.0 | 975 | 24...60 20...60 | AF65-30-00-11 | 1SBL387001R1100 | 65 | | | | | |
| | | | | | 100...250 100...250 | AF65-30-00-13 | 1SBL387001R1300 | | | | | | |
| 37 | 66 | MS495-75 1SAM550000R1008 | 57.0...75.0 | 975 | 24...60 20...60 | AF80-30-00-11 | 1SBL397001R1100 | 75 | | | | | |
| | | | | | 100...250 100...250 | AF80-30-00-13 | 1SBL397001R1300 | | | | | | |
| 45 | 80 | MS495-90 1SAM550000R1009 | 70.0...90.0 | 1170 | 24...60 20...60 | AF96-30-00-11 | 1SBL407001R1100 | 90 | | | | | |
| | | | | | 100...250 100...250 | AF96-30-00-13 | 1SBL407001R1300 | | | | | | |

(1) MS116 manual motor starter can be selected according to the current setting range indicated on the coordination line, up to

- 15 kW 400V - AC-3 at 16 kA
- 4 kW, 400 V - AC-3 at 50 kA.

(2) For other control voltages, see "Voltage code table".

(3) AF26 3-pole contactor can be selected for coordination type 2, 16 kA, 7.5 kW, 400 V - AC-3.

AF38 3-pole contactor can be selected for coordination type 2, 16 kA and 50 kA, 18.5 kW, 400 V - AC-3 (BEA65-4 available for AF40 ... AF65 only).

(4) BEA26-4 should be selected with MS116-12 ... MS116-16 and AF26 ... AF38.

BEA38-4 can only be selected with MS116-20 ... MS116-32.

Reversing starters protected by MS manual motor starters

Coordination type 1

Coordination type 1, AC-3, 16 kA or 50 kA, 400 V, 50/60 Hz

| | | Manual motor starters | | | | Contactors | | | | Accessories | | | |
|-------------------------|---------|-----------------------|-----------------------|---------------------------|-------------------------------|------------|------------|-------------------------|-----------------|-------------|-----|---------|-----------------|
| | | | | | | | | | | | | | |
| IEC | Type | Order code | Current setting range | Magnetic tripping current | Rated control circuit voltage | Type | Order code | Allowed setting current | Type | Order code | | | |
| AC-3, 400 V | (1) | | A | A | Uc min. ... Uc max. | (3) | | A | | | | | |
| Rated operational power | current | | | | V 50/60 Hz : V DC | | | | | | | | |
| kW | A | | | | | | | | | | | | |
| 0.06 | 0.2 | MS132-0.25 | 1SAM350000R1002 | 0.16...0.25 | 2.44 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.25 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | + | BEA16-4 | 1SBN081306T1000 |
| | | | | | | | | | | | + | BER16-4 | 1SBN081311R1000 |
| | | | | | | | | | | | | VEM4 | 1SBN030111R1000 |
| 0.09 | 0.3 | MS132-0.4 | 1SAM350000R1003 | 0.25...0.40 | 3.9 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.4 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 0.12 | 0.44 | MS132-0.63 | 1SAM350000R1004 | 0.40...0.63 | 6.14 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.63 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 0.18 | 0.6 | MS132-0.63 | 1SAM350000R1004 | 0.40...0.63 | 6.14 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.63 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 0.25 | 0.85 | MS132-1.0 | 1SAM350000R1005 | 0.63...1.00 | 11.5 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 0.37 | 1.1 | MS132-1.6 | 1SAM350000R1006 | 1.00...1.60 | 18.4 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1.6 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 0.55 | 1.5 | MS132-1.6 | 1SAM350000R1006 | 1.00...1.60 | 18.4 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1.6 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 0.75 | 1.9 | MS132-2.5 | 1SAM350000R1007 | 1.60...2.50 | 28.75 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 2.5 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 1.1 | 2.7 | MS132-4.0 | 1SAM350000R1008 | 2.50...4.00 | 50 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 4 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 1.5 | 3.6 | MS132-4.0 | 1SAM350000R1008 | 2.50...4.00 | 50 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 4 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 2.2 | 4.9 | MS132-6.3 | 1SAM350000R1009 | 4.00...6.30 | 78.75 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 6.3 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 3 | 6.5 | MS132-10 | 1SAM350000R1010 | 6.30...10.0 | 150 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 9 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 4 | 8.5 | MS132-10 | 1SAM350000R1010 | 6.30...10.0 | 150 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 9 | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 5.5 | 11.5 | MS132-12 | 1SAM350000R1012 | 8.00...12.0 | 180 | 24...60 | 20...60 | AF12Z-30-10-21 | 1SBL156001R2110 | 12 | | | |
| | | | | | | 100...250 | 100...250 | AF12-30-10-13 | 1SBL157001R1310 | | | | |
| 7.5 | 15.5 | MS132-16 | 1SAM350000R1011 | 10.0...16.0 | 240 | 24...60 | 20...60 | AF16Z-30-10-21 | 1SBL176001R2110 | 16 | | | |
| | | | | | | 100...250 | 100...250 | AF16-30-10-13 | 1SBL177001R1310 | | | | |
| 11 | 22 | MS132-25 | 1SAM350000R1014 | 20.0...25.0 | 375 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 25 | | | |
| | | | | | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | + | BEA38-4 | 1SBN082306T2000 |
| | | | | | | | | | | | + | BER38-4 | 1SBN082311R1000 |
| | | | | | | | | | | | + | VEM4 | 1SBN030111R1000 |
| | | | | | | | | | | | +2x | CA4-10 | 1SBN010110R1010 |
| 15 | 29 | MS132-32 | 1SAM350000R1015 | 25.0...32.0 | 480 | 24...60 | 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | 32 | | | |
| | | | | | | 100...250 | 100...250 | AF30-30-00-13 | 1SBL277001R1300 | | | | |
| 18.5 | 35 | MS165-42 | 1SAM451000R1015 | 30.0...42.0 | 630 | 24...60 | 20...60 | AF40-30-00-11 | 1SBL347001R1100 | 40 | | | |
| | | | | | | 100...250 | 100...250 | AF40-30-00-13 | 1SBL347001R1300 | | + | BEA65-4 | 1SBN083406R1000 |
| | | | | | | | | | | | + | BER65-4 | 1SBN083411R1000 |
| | | | | | | | | | | | + | VM96-4 | 1SBN033405T1000 |
| | | | | | | | | | | | +2x | CA4-10 | 1SBN010110R1010 |
| | | | | | | | | | | | +2x | CA4-01 | 1SBN010110R1001 |
| 22 | 41 | MS165-54 | 1SAM451000R1016 | 40.0...54.0 | 810 | 24...60 | 20...60 | AF52-30-00-11 | 1SBL367001R1100 | 53 | | | |
| | | | | | | 100...250 | 100...250 | AF52-30-00-13 | 1SBL367001R1300 | | | | |
| 30 | 55 | MS165-65 | 1SAM451000R1017 | 52.0...65.0 | 975 | 24...60 | 20...60 | AF65-30-00-11 | 1SBL387001R1100 | 65 | | | |
| | | | | | | 100...250 | 100...250 | AF65-30-00-13 | 1SBL387001R1300 | | | | |
| 37 | 66 | MS495-75 | 1SAM550000R1008 | 57.0...75.0 | 975 | 24...60 | 20...60 | AF80-30-00-11 | 1SBL397001R1100 | 75 | | | |
| | | | | | | 100...250 | 100...250 | AF80-30-00-13 | 1SBL397001R1300 | | + | BER96-4 | 1SBN083911R1000 |
| | | | | | | | | | | | + | VM96-4 | 1SBN033405T1000 |
| | | | | | | | | | | | +2x | CA4-10 | 1SBN010110R1010 |
| | | | | | | | | | | | +2x | CA4-01 | 1SBN010110R1001 |
| 45 | 80 | MS495-90 | 1SAM550000R1009 | 70.0...90.0 | 1170 | 24...60 | 20...60 | AF96-30-00-11 | 1SBL407001R1100 | 90 | | | |
| | | | | | | 100...250 | 100...250 | AF96-30-00-13 | 1SBL407001R1300 | | | | |

(1) MS116 manual motor starter can be selected according to the current setting range indicated on the coordination line, up to:
 - 15 kW, 400 V - AC-3 at 16 kA
 - 4 kW, 400 V - AC-3 at 50 kA.

(2) For other control voltages, see "Voltage code table".

(3) AF38 3-pole contactor can be selected for coordination type 1, 16 kA and 50 kA, 18.5 kW, 400 V - AC-3 (BEA65-4 available for AF40 ... AF65 only).

Reversing starters protected by MS manual motor starters

Coordination type 2

Coordination type 2, AC-3, 16 kA or 50 kA, 400 V, 50/60 Hz

| | | Manual motor starters | | | | | Contactors | | | | | Accessories | | |
|-------------------------|------|-----------------------|-----------------------|---------------------------|-------------------------------|-----------|------------|-------------------------|-----------------|------------|------------|-----------------|--|--|
| | | | | | | | | | | | | | | |
| IEC | Type | Order code | Current setting range | Magnetic tripping current | Rated control circuit voltage | Type | Order code | Allowed setting current | Type | Order code | | | | |
| AC-3, 400 V | (1) | | | | Uc min. ... Uc max. | (3) | | (4) | | | | | | |
| Rated operational power | | | | | (2) | | | | | | | | | |
| kW | A | | A | A | V 50/60 Hz V DC | | A | | | | | | | |
| 0.06 | 0.2 | MS132-0.25 | 1SAM350000R1002 | 0.16...0.25 | 2.44 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.25 | | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | BEA16-4 | 1SBN081306T1000 | | |
| 0.09 | 0.3 | MS132-0.4 | 1SAM350000R1003 | 0.25...0.40 | 3.9 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.4 | BER16-4 | 1SBN081311R1000 | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | VEM4 | 1SBN030111R1000 | | |
| 0.12 | 0.44 | MS132-0.63 | 1SAM350000R1004 | 0.40...0.63 | 6.14 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.63 | | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | |
| 0.18 | 0.6 | MS132-0.63 | 1SAM350000R1004 | 0.40...0.63 | 6.14 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.63 | | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | |
| 0.25 | 0.85 | MS132-1.0 | 1SAM350000R1005 | 0.63...1.00 | 11.5 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1 | | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | |
| 0.37 | 1.1 | MS132-1.6 | 1SAM350000R1006 | 1.00...1.60 | 18.4 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1.6 | | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | |
| 0.55 | 1.5 | MS132-1.6 | 1SAM350000R1006 | 1.00...1.60 | 18.4 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 1.6 | | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | |
| 0.75 | 1.9 | MS132-2.5 | 1SAM350000R1007 | 1.60...2.50 | 28.75 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 2.5 | | | | |
| | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | |
| 1.1 | 2.7 | MS132-4.0 | 1SAM350000R1008 | 2.50...4.00 | 50 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 4 | BEA26-4 | 1SBN082306T1000 | | |
| | | | | | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | BER38-4 | 1SBN082311R1000 | | |
| 1.5 | 3.6 | MS132-4.0 | 1SAM350000R1008 | 2.50...4.00 | 50 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 4 | VEM4 | 1SBN030111R1000 | | |
| | | | | | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | +2x CA4-10 | 1SBN010110R1010 | | |
| 2.2 | 4.9 | MS132-6.3 | 1SAM350000R1009 | 4.00...6.30 | 78.75 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 6.3 | | | | |
| | | | | | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | | | | |
| 3 | 6.5 | MS132-10 | 1SAM350000R1010 | 6.30...10.0 | 150 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 10 | | | | |
| | | | | | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | | | | |
| 4 | 8.5 | MS132-10 | 1SAM350000R1010 | 6.30...10.0 | 150 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 10 | | | | |
| | | | | | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | | | | |
| 5.5 | 11.5 | MS132-12 | 1SAM350000R1012 | 8.00...12.0 | 180 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 12 | BEA38-4 | 1SBN082306T2000 | | |
| | | | | | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | BER38-4 | 1SBN082311R1000 | | |
| 7.5 | 15.5 | MS132-16 | 1SAM350000R1011 | 10.0...16.0 | 240 | 24...60 | 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | 16 | VEM4 | 1SBN030111R1000 | | |
| | | | | | | 100...250 | 100...250 | AF30-30-00-13 | 1SBL277001R1300 | | +2x CA4-10 | 1SBN010110R1010 | | |
| 11 | 22 | MS132-25 | 1SAM350000R1014 | 20.0...25.0 | 375 | 24...60 | 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | 25 | | | | |
| | | | | | | 100...250 | 100...250 | AF30-30-00-13 | 1SBL277001R1300 | | | | | |
| 15 | 29 | MS132-32 | 1SAM350000R1015 | 25.0...32.0 | 480 | 24...60 | 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | 32 | | | | |
| | | | | | | 100...250 | 100...250 | AF30-30-00-13 | 1SBL277001R1300 | | | | | |
| 18.5 | 35 | MS165-42 | 1SAM451000R1015 | 30.0...42.0 | 630 | 24...60 | 20...60 | AF40-30-00-11 | 1SBL347001R1100 | 40 | BEA65-4 | 1SBN083406R1000 | | |
| | | | | | | 100...250 | 100...250 | AF40-30-00-13 | 1SBL347001R1300 | | BER65-4 | 1SBN083411R1000 | | |
| 22 | 41 | MS165-54 | 1SAM451000R1016 | 40.0...54.0 | 810 | 24...60 | 20...60 | AF52-30-00-11 | 1SBL367001R1100 | 53 | VM96-4 | 1SBN033405T1000 | | |
| | | | | | | 100...250 | 100...250 | AF52-30-00-13 | 1SBL367001R1300 | | +2x CA4-10 | 1SBN010110R1010 | | |
| 30 | 55 | MS165-65 | 1SAM451000R1017 | 52.0...65.0 | 975 | 24...60 | 20...60 | AF65-30-00-11 | 1SBL387001R1100 | 65 | +2x CA4-01 | 1SBN010110R1001 | | |
| | | | | | | 100...250 | 100...250 | AF65-30-00-13 | 1SBL387001R1300 | | | | | |
| 37 | 66 | MS495-75 | 1SAM550000R1008 | 57.0...75.0 | 975 | 24...60 | 20...60 | AF80-30-00-11 | 1SBL397001R1100 | 75 | BER96-4 | 1SBN083911R1000 | | |
| | | | | | | 100...250 | 100...250 | AF80-30-00-13 | 1SBL397001R1300 | | VM96-4 | 1SBN033405T1000 | | |
| 45 | 80 | MS495-90 | 1SAM550000R1009 | 70.0...90.0 | 1170 | 24...60 | 20...60 | AF96-30-00-11 | 1SBL407001R1100 | 90 | +2x CA4-10 | 1SBN010110R1010 | | |
| | | | | | | 100...250 | 100...250 | AF96-30-00-13 | 1SBL407001R1300 | | +2x CA4-01 | 1SBN010110R1001 | | |

(1) MS116 manual motor starter can be selected according to the current setting range indicated on the coordination line, up to

- 15 kW 400V - AC-3 at 16 kA
- 4 kW, 400 V - AC-3 at 50 kA.

(2) For other control voltages, see "Voltage code table".

(3) AF26 3-pole contactor can be selected for coordination type 2, 16 kA, 7.5 kW, 400 V - AC-3.

AF38 3-pole contactor can be selected for coordination type 2, 16 kA and 50 kA, 18.5 kW, 400 V - AC-3 (BEA65-4 available for AF40 ... AF65 only).

(4) BEA26-4 should be selected with MS116-12 ... MS116-16 and AF26 ... AF38.

BEA38-4 can only be selected with MS116-20 ... MS116-32.

DOL starters protected by moulded-case circuit-breakers and overload relays

With AF contactors - Open type version in kit form


5



XT2S 160 + BEA140/XT2 + AF140-30-11

Application

Full voltage direct-on-line (DOL) starting for controlling three-phase asynchronous motors is a simple and economic solution characterised by a high starting torque (1.9 to 2.1 times full-speed torque) and a starting current 5.5 to 7 times nominal current.

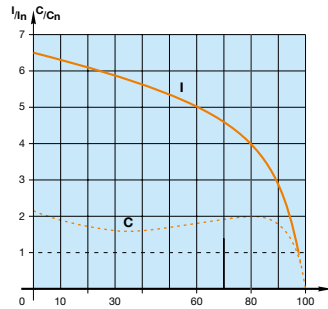

I = current
C = torque
In = nominal current
Cn = nominal torque

Coordination types

The contactor and the moulded-case circuit-breaker control and protect motors against overload and short-circuits according to coordination types 1 and 2 (IEC 60947-4-1/EN 60947-4-1) defining the anticipated level of service continuity as follows:

Type 1: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will not be able to then operate without being repaired or having parts replaced.

Type 2: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will be able to operate afterwards. The risk of contacts light welding is acceptable.


Main Technical Data

| | |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standards | IEC 60947-4-1 / EN 60947-4-1 |
| Rated operational voltage Ue max. | 400 V - 50/60 Hz |
| Rated insulation voltage Ui | |
| acc. to IEC 60947-4-1 | 690 V |
| acc. to UL / CSA | 600 V |
| Switching frequency | ≤ 15 starts/hour - 80 % max. load factor - with max. 1.5 s starting time ≤ 30 starts/hour - 50 % max. load factor - with max. 1.5 s starting time |
| Ambient air temperature | |
| Close to the device | < 55 °C |
| Degree of protection | IP20 |



XT2S 160 + BEA140/XT2 + AF140-30-11 + EF146

Mounting positions

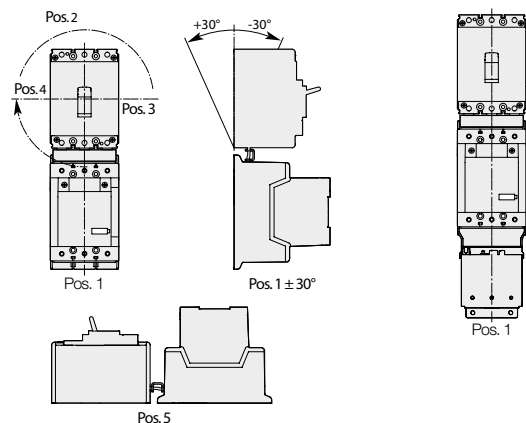

Direct-on-line
MCCB + AF

Direct-on-line
MCCB + AF + OL

DOL starters protected by moulded-case circuit-breakers and overload relays

With AF contactors - Open type version in kit form


Description

You can easily assemble a direct-on-line starter by using the BEA connection bars. It is used to electrically connect MCCB moulded-case circuit-breaker and AF116 ... AF370 contactor, AC or DC operated.

Select now easily and quickly your starter in the following pages for coordination type 1 or 2 at 400 V, 50/60 Hz, I_q = 50 kA up to 200 kW.


For the full coordination tables:
www.abb.com/lowvoltage then go to the right menu: "Support", select: "Online Product Selection Tools" then select "Coordination Tables for motor protection"

5

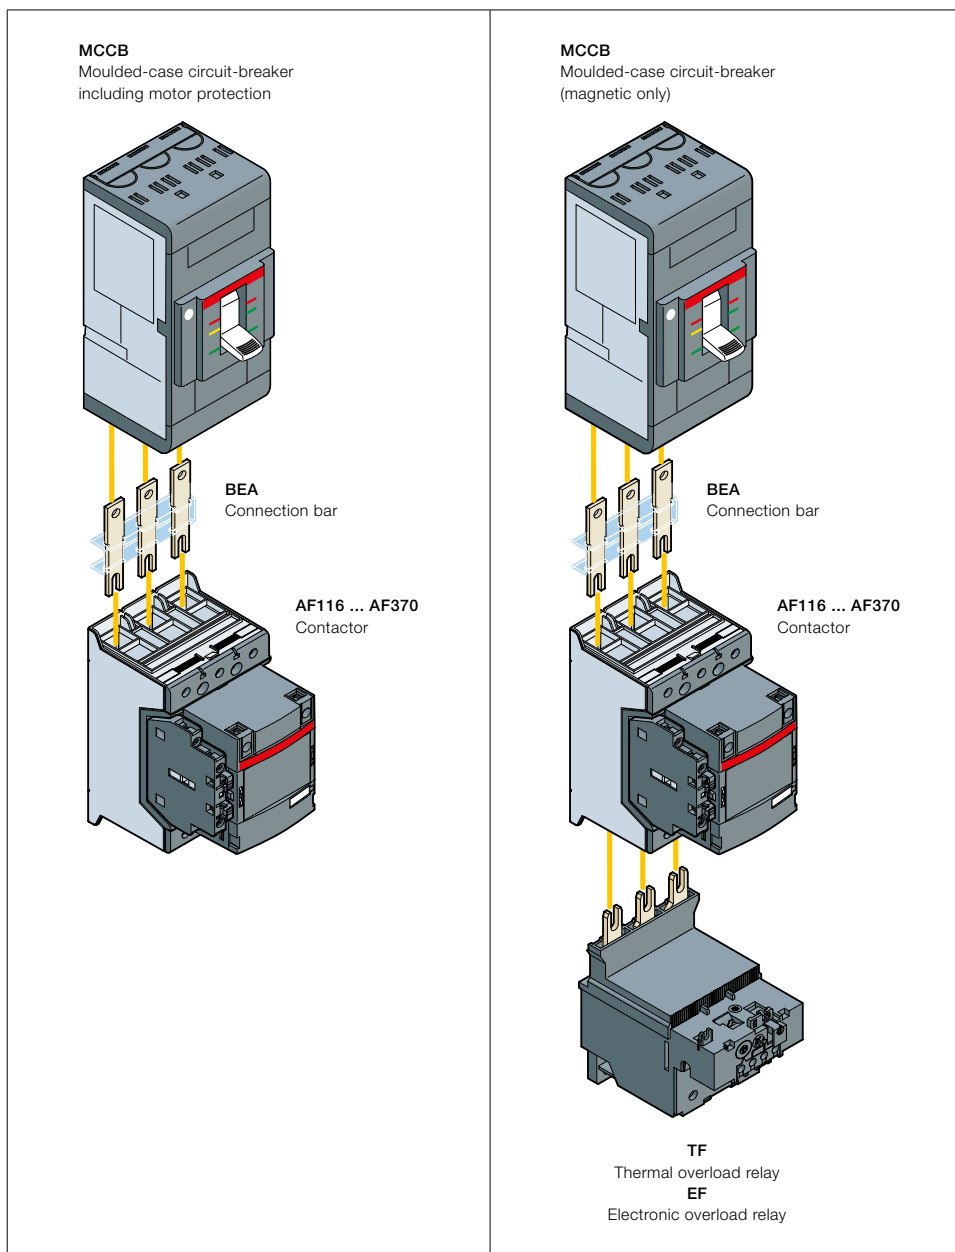

DOL starters protected by MCCB including motor protection Coordination type 1 or 2


Coordination type 1 or 2, AC-3, 50 kA, 400 V, 50/60 Hz

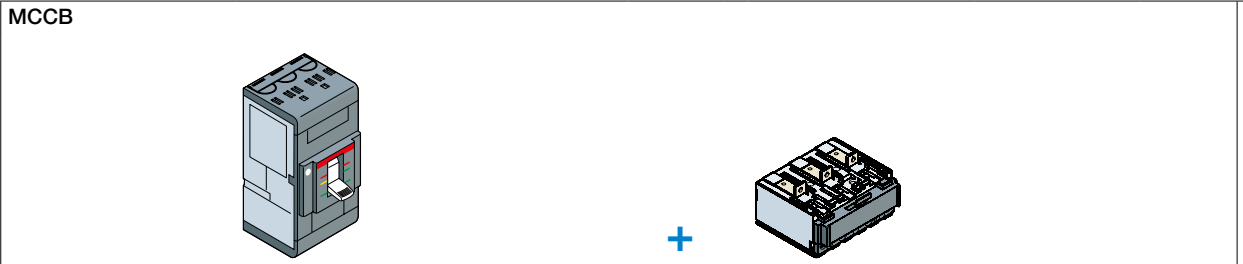

| IEC AC-3, 400 V Rated power kW | Rated current A | Magnetic tripping current setting A | Max. allowed thermal setting | Base | | Trip unit | | |
|-----------------------------------------|--------------------|-------------------------------------------------|---------------------------------|-----------------------|--------------|-----------|------------------|--------------|
| | | | | Type | Order code | Type | Order code | |
| 55 | 97 | 1440 | 116 | XT2S 160 | 1SDA068164R1 | + | Ekip M-LIU In160 | 1SDA067355R1 |
| 75 | 132 | 1920 | 140 | XT2S 160 | 1SDA068164R1 | + | Ekip M-LIU In160 | 1SDA067355R1 |
| 90 | 160 | 2400 | 190 | T4S 250 PR222MP In200 | 1SDA054527R1 | | Included | - |
| 110 | 195 | 2880 | 205 | T5S 400 PR222MP In320 | 1SDA054553R1 | | Included | - |
| 132 | 230 | 3600 | 265 | T5S 400 PR222MP In400 | 1SDA054554R1 | | Included | - |
| 160 | 280 | 4400 | 305 | T5S 400 PR222MP In400 | 1SDA054554R1 | | Included | - |

5

Contactors



Connection bars



Control voltage
Uc min. ... Uc max.

Type

Order code

Type

Order code

V 50/60 Hz



V DC

| V 50/60 Hz | V DC | Type | Order code | Type | Order code |
|------------|-----------|----------------|-----------------|------------|-----------------|
| 24...60 | 20...60 | AF116-30-11-11 | 1SFL427001R1111 | BEA140/XT2 | 1SFN084206R1000 |
| 100...250 | 100...250 | AF116-30-11-13 | 1SFL427001R1311 | | |
| 24...60 | 20...60 | AF140-30-11-11 | 1SFL447001R1111 | BEA205/T4 | 1SFN084806R1001 |
| 100...250 | 100...250 | AF140-30-11-13 | 1SFL447001R1311 | | |
| 24...60 | 20...60 | AF190-30-11-11 | 1SFL487002R1111 | BEA205/T4 | 1SFN084806R1001 |
| 100...250 | 100...250 | AF190-30-11-13 | 1SFL487002R1311 | | |
| 24...60 | 20...60 | AF205-30-11-11 | 1SFL527002R1111 | BEA370/T5 | 1SFN085406R1000 |
| 100...250 | 100...250 | AF205-30-11-13 | 1SFL527002R1311 | | |
| 24...60 | 20...60 | AF265-30-11-11 | 1SFL547002R1111 | BEA370/T5 | 1SFN085406R1000 |
| 100...250 | 100...250 | AF265-30-11-13 | 1SFL547002R1311 | | |
| 24...60 | 20...60 | AF305-30-11-11 | 1SFL587002R1111 | BEA370/T5 | 1SFN085406R1000 |
| 100...250 | 100...250 | AF305-30-11-13 | 1SFL587002R1311 | | |

DOL starters protected by MCCB (magnetic only) and overload relays

Coordination type 1 or 2

Coordination type 1 or 2, AC-3, 50 kA, 400 V, 50/60 Hz

| | |
|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| MCCB  | Contactors  |
|--------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|


Thermal overload relays

| IEC AC-3, 400 V Rated power kW | Rated current A | Magnetic tripping current A | Type | Order code | Control voltage Uc min. ... Uc max. | | Type | Order code |
|-----------------------------------------|--------------------|--------------------------------|-----------------------|--------------|----------------------------------------|-----------|----------------|-----------------|
| | | | | | V 50/60 Hz | V DC | | |
| 55 | 97 | 1600 | XT2S 160 MA 160 | 1SDA076530R1 | 24...60 | 20...60 | AF116-30-11-11 | 1SFL427001R1111 |
| | | | | | 100...250 | 100...250 | AF116-30-11-13 | 1SFL427001R1311 |
| 75 | 132 | 1920 | XT2S 160 MA 160 | 1SDA076530R1 | 24...60 | 20...60 | AF140-30-11-11 | 1SFL447001R1111 |
| | | | | | 100...250 | 100...250 | AF140-30-11-13 | 1SFL447001R1311 |
| 90 | 160 | 2250 | XT4S 250 Ekip I In250 | 1SDA068480R1 | 24...60 | 20...60 | AF190-30-11-11 | 1SFL487002R1111 |
| | | | | | 100...250 | 100...250 | AF190-30-11-13 | 1SFL487002R1311 |
| 110 | 195 | 2720 | T4S 320 PR221-I In320 | 1SDA054126R1 | 24...60 | 20...60 | AF205-30-11-11 | 1SFL527002R1111 |
| | | | | | 100...250 | 100...250 | AF205-30-11-13 | 1SFL527002R1311 |


Electronic overload relays

| | | | | | | | | |
|-----|-----|------|-----------------------|--------------|-----------|-----------|----------------|-----------------|
| 55 | 97 | 1600 | XT2S 160 MA 160 | 1SDA076530R1 | 24...60 | 20...60 | AF116-30-11-11 | 1SFL427001R1111 |
| | | | | | 100...250 | 100...250 | AF116-30-11-13 | 1SFL427001R1311 |
| 75 | 132 | 1920 | XT2S 160 MA 160 | 1SDA076530R1 | 24...60 | 20...60 | AF140-30-11-11 | 1SFL447001R1111 |
| | | | | | 100...250 | 100...250 | AF140-30-11-13 | 1SFL447001R1311 |
| 90 | 160 | 2250 | XT4S 250 Ekip I In250 | 1SDA068480R1 | 24...60 | 20...60 | AF190-30-11-11 | 1SFL487002R1111 |
| | | | | | 100...250 | 100...250 | AF190-30-11-13 | 1SFL487002R1311 |
| 110 | 195 | 2720 | T4S 320 PR221-I In320 | 1SDA054126R1 | 24...60 | 20...60 | AF205-30-11-11 | 1SFL527002R1111 |
| | | | | | 100...250 | 100...250 | AF205-30-11-13 | 1SFL527002R1311 |
| 132 | 230 | 3200 | T5S 400 PR221-I In400 | 1SDA054335R1 | 24...60 | 20...60 | AF265-30-11-11 | 1SFL547002R1111 |
| | | | | | 100...250 | 100...250 | AF265-30-11-13 | 1SFL547002R1311 |
| 160 | 280 | 4000 | T5S 400 PR221-I In400 | 1SDA054335R1 | 24...60 | 20...60 | AF305-30-11-11 | 1SFL587002R1111 |
| | | | | | 100...250 | 100...250 | AF305-30-11-13 | 1SFL587002R1311 |
| 200 | 350 | 5040 | T5S 630 PR221-I In630 | 1SDA054405R1 | 24...60 | 20...60 | AF370-30-11-11 | 1SFL607002R1111 |
| | | | | | 100...250 | 100...250 | AF370-30-11-13 | 1SFL607002R1311 |

Overload relays




Connection bars




| Setting ranges | Max. allowed setting current | Type | Order code | Type | Order code |
|----------------|------------------------------|-------------|-----------------|------------|-----------------|
| A | A | | | | |
| 80...110 | 110 | TF140DU-110 | 1SAZ431201R1002 | BEA140/XT2 | 1SFN084206R1000 |
| 110...142 | 140 | TF140DU-142 | 1SAZ431201R1004 | | |
| 130...175 | 175 | TA200DU-175 | 1SAZ421201R1005 | BEA205/XT4 | 1SFN084806R1000 |
| 155...200 | 200 | TA200DU-200 | 1SAZ421201R1006 | BEA205/T4 | 1SFN084806R1001 |
| 54...150 | 116 | EF146-150 | 1SAX351001R1101 | BEA140/XT2 | 1SFN084206R1000 |
| 54...150 | 140 | EF146-150 | 1SAX351001R1101 | | |
| 63...210 | 190 | EF205-210 | 1SAX531001R1101 | BEA205/XT4 | 1SFN084806R1000 |
| 63...210 | 205 | EF205-210 | 1SAX531001R1101 | BEA205/T4 | 1SFN084806R1001 |
| 115...380 | 265 | EF370-380 | 1SAX611001R1101 | BEA370/T5 | 1SFN085406R1000 |
| 115...380 | 305 | EF370-380 | 1SAX611001R1101 | | |
| 115...380 | 350 | EF370-380 | 1SAX611001R1101 | | |

DOL and reversing starters protected by overload relays With AF contactors - Open type version in kit form

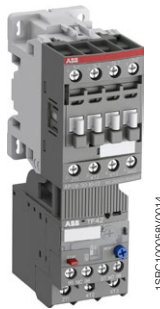


AF09-30-10 + TF42



Application

Full voltage direct-on-line and reversing starting for controlling three-phase asynchronous motors is a simple and economic solution characterised by a high starting torque (1.9 to 2.1 times full-speed torque) and a starting current 5.5 to 7 times nominal current.

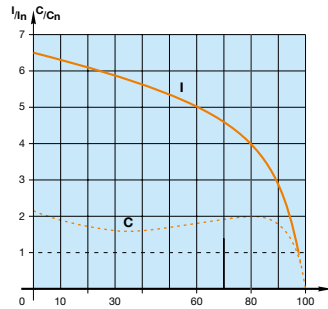

I = current
C = torque
In = nominal current
Cn = nominal torque



AF140-30-11 + TF140DU

Coordination Types

The contactor, the short-circuit protection device and the thermal overload relay control and protect motors against overload and short-circuits according to coordination types 1 and 2 (IEC 60947-4-1 / EN 60947-4-1) defining the anticipated level of service continuity as follow:

Type 1: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will not be able to then operate without being repaired or having parts replaced.

Type 2: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will be able to operate afterwards. The risk of contacts light welding is acceptable.

Main Technical Data

| | |
|------------------------------------------|----------------------------------------------|
| Standards | IEC 60947-4-1 / EN 60947-4-1 |
| Rated operational voltage Ue max. | 690 V - 50/60 Hz |
| Rated insulation voltage Ui | |
| acc. to IEC 60947-4-1 | 690 V |
| acc. to UL / CSA | 600 V |
| Ambient air temperature | |
| Close to the device | ≤ 60 °C (TF42: 38 A above ≤ 50 °C) |
| Degree of protection | IP20 |
| Switching frequency | Refer to "Switching frequency diagrams" page |



AF09-30-10 + BER16-4 + VEM4 + TF42




AF140-30-11 + BER140-4 + VM19 + TF140DU

Mounting positions




Pos. 1
Direct-on-line



Pos. 1
Reversing

DOL and reversing starters protected by overload relays

With AF contactors - Open type version in kit form

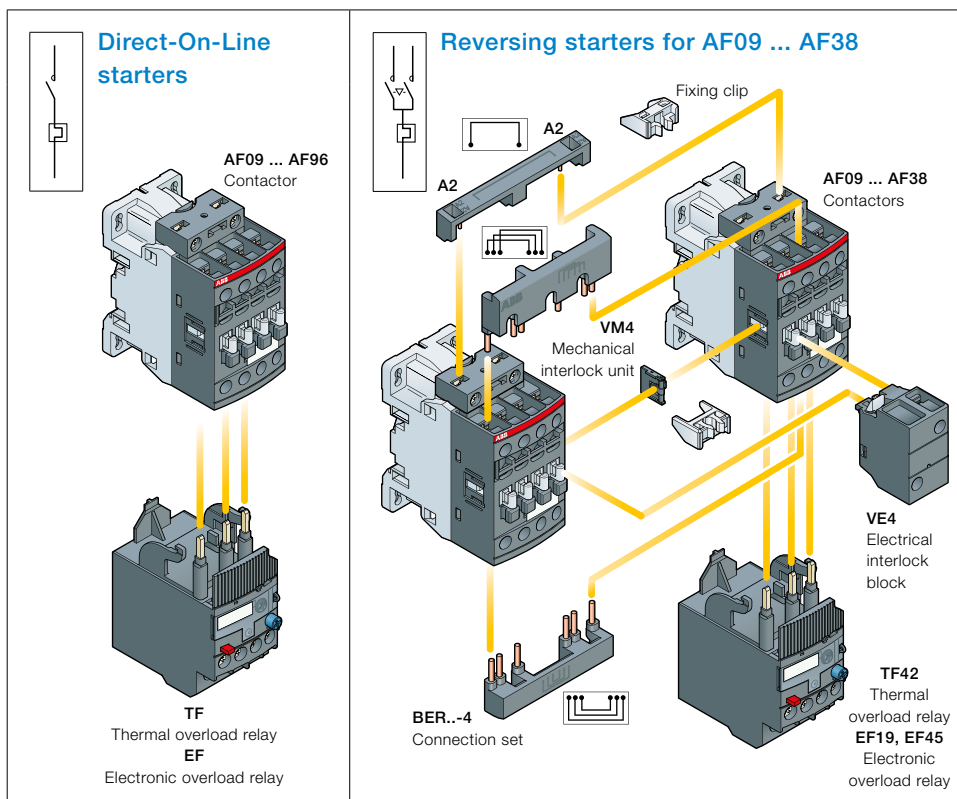

Description


You can easily assemble a direct-on-line starter by connecting AF contactor and TF thermal overload relay or EF electronic overload relay.

You can also easily assemble reversing starter thanks to our complete range of accessories:

- For AF09 ... AF38, use VEM4 mechanical and electrical interlock set for reversing starter in 90 mm width. It includes:
 - VM4 mechanical interlock unit including 2 fixing clips
 - VE4 electrical interlock block with A2-A2 connection.
- For AF40 ... AF370, use VM mechanical interlock unit and additional auxiliary contact blocks for electrical interlocking.
- BER...-4 connection set: it assures a safe and simple reversing connection between both contactor main terminals.

Select now easily and quickly your starter in the following pages at 400 V, up to 200 kW.

For the full coordination tables: www.abb.com/lowvoltage then go to the right menu: "Support", select: "Online Product Selection Tools" then select "Coordination Tables for motor protection"

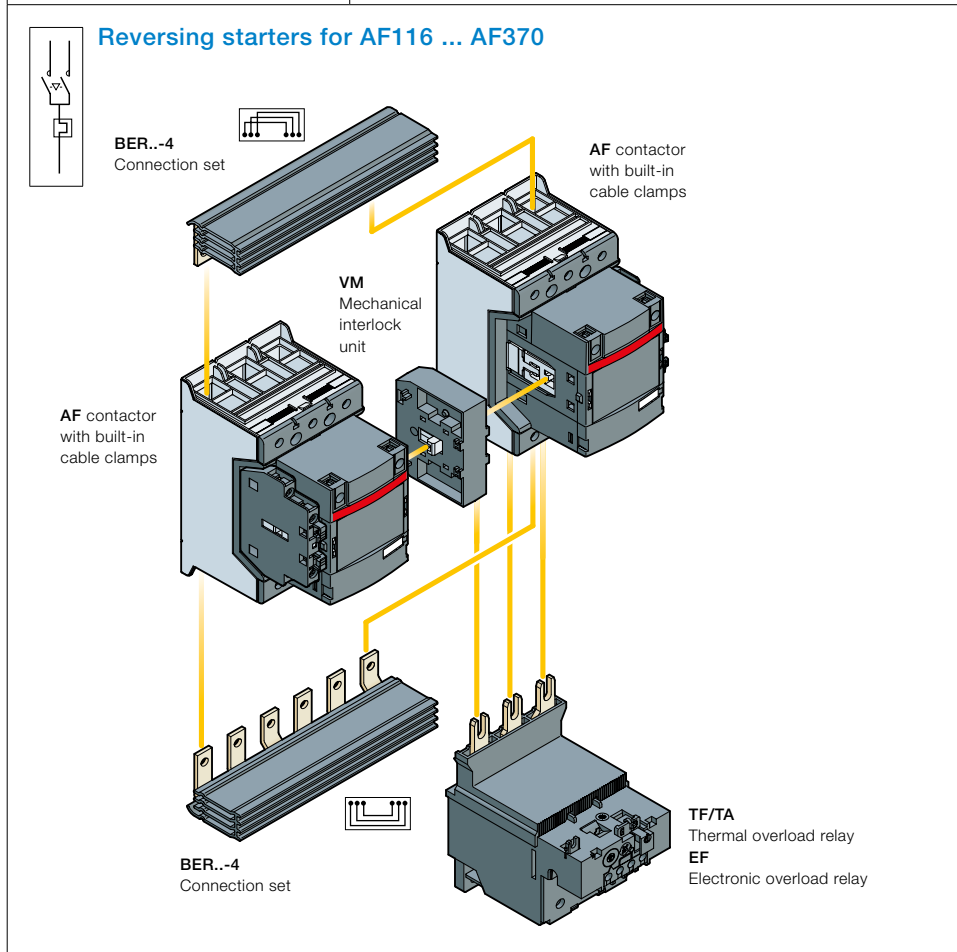

Direct-on-line starters protected by thermal overload relays

With AF contactors - Open type version in kit form

| IEC | | Control voltage Uc min. ... Uc max. (1) | | | | Type | Order code | Setting ranges | Type | Order code |
|-------------|---------------|-----------------------------------------------|---------|-----------|-----------|----------------|-----------------|------------------|-------------|-----------------|
| Rated power | Rated current | V 50/60 Hz | | V DC | | | | A | | |
| 4 | 8.5 | 24...60 | 20...60 | 100...250 | 100...250 | AF09Z-30-10-21 | 1SBL136001R2110 | 7.60...10.0 | TF42-10 | 1SAZ721201R1043 |
| | | | | | | AF09-30-10-13 | 1SBL137001R1310 | | | |
| 5.5 | 11.5 | 24...60 | 20...60 | 100...250 | 100...250 | AF12Z-30-10-21 | 1SBL156001R2110 | 10.0...13.0 | TF42-13 | 1SAZ721201R1045 |
| | | | | | | AF12-30-10-13 | 1SBL157001R1310 | | | |
| 7.5 | 15.5 | 24...60 | 20...60 | 100...250 | 100...250 | AF16Z-30-10-21 | 1SBL176001R2110 | 13.0...16.0 | TF42-16 | 1SAZ721201R1047 |
| | | | | | | AF16-30-10-13 | 1SBL177001R1310 | | | |
| 11 | 22 | 24...60 | 20...60 | 100...250 | 100...250 | AF26Z-30-00-21 | 1SBL236001R2100 | 20.0...24.0 | TF42-24 | 1SAZ721201R1051 |
| | | | | | | AF26-30-00-13 | 1SBL237001R1300 | | | |
| 15 | 29 | 24...60 | 20...60 | 100...250 | 100...250 | AF30Z-30-00-21 | 1SBL276001R2100 | 29.0...35.0 | TF42-35 | 1SAZ721201R1053 |
| | | | | | | AF30-30-00-13 | 1SBL277001R1300 | | | |
| 18.5 | 35 | 24...60 | 20...60 | 100...250 | 100...250 | AF38Z-30-00-21 | 1SBL296001R2100 | 35.0...38.0/40.0 | TF42-38 | 1SAZ721201R1055 |
| | | | | | | AF38-30-00-13 | 1SBL297001R1300 | | | |
| 18.5 | 35 | 24...60 | 20...60 | 100...250 | 100...250 | AF40-30-00-11 | 1SBL347001R1100 | 30.0...40.0 | TF65-40 | 1SAZ811201R1003 |
| | | | | | | AF40-30-00-13 | 1SBL347001R1300 | | | |
| 22 | 41 | 24...60 | 20...60 | 100-250 | 100-250 | AF52-30-00-11 | 1SBL367001R1100 | 36.00...47.0 | TF65-47 | 1SAZ811201R1004 |
| | | | | | | AF52-30-00-13 | 1SBL367001R1300 | | | |
| 30 | 55 | 24...60 | 20...60 | 100-250 | 100-250 | AF65-30-00-11 | 1SBL387001R1100 | 50.0...60.0 | TF65-60 | 1SAZ811201R1006 |
| | | | | | | AF65-30-00-13 | 1SBL387001R1300 | | | |
| 37 | 66 | 24...60 | 20...60 | 100-250 | 100-250 | AF80-30-00-11 | 1SBL397001R1100 | 57.0...68.0 | TF96-68 | 1SAZ911201R1003 |
| | | | | | | AF80-30-00-13 | 1SBL397001R1300 | | | |
| 45 | 80 | 24...60 | 20...60 | 100-250 | 100-250 | AF96-30-00-11 | 1SBL407001R1100 | 75.0...87.0 | TF96-87 | 1SAZ911201R1005 |
| | | | | | | AF96-30-00-13 | 1SBL407001R1300 | | | |
| 55 | 97 | 24...60 | 20...60 | 100-250 | 100-250 | AF116-30-11-11 | 1SFL427001R1111 | 80...110 | TF140DU-110 | 1SAZ431201R1002 |
| | | | | | | AF116-30-11-13 | 1SFL427001R1311 | | | |
| 75 | 132 | 24...60 | 20...60 | 100-250 | 100-250 | AF140-30-11-11 | 1SFL447001R1111 | 100...135 | TF140DU-135 | 1SAZ431201R1003 |
| | | | | | | AF140-30-11-13 | 1SFL447001R1311 | | | |
| 90 | 160 | 24...60 | 20...60 | 100-250 | 100-250 | AF190-30-11-11 | 1SFL487002R1111 | 130...175 | TA200DU-175 | 1SAZ421201R1005 |
| | | | | | | AF190-30-11-13 | 1SFL487002R1311 | | | |
| 110 | 195 | 24...60 | 20...60 | 100-250 | 100-250 | AF205-30-11-11 | 1SFL527002R1111 | 150...200 | TA200DU-200 | 1SAZ421201R1006 |
| | | | | | | AF205-30-11-13 | 1SFL527002R1311 | | | |

(1) For other control voltages, see "Voltage code table".

Note : for rated power above 110 kW, refer to "Starters protected by electronic overload relays".

Reversing starters protected by thermal overload relays

With AF contactors - Open type version in kit form




| IEC | | Control voltage | | | | Type | | Order code | | Setting ranges | | Type | | Order code | | Type | | Order code | | | | | | | | | | | | | | | |
|-------------|-------------------|--------------------|----------------------------|-----------|------------|-----------|----------------|---------------|-----------------|------------------|-------------|-----------------|--|------------|--|------|------|-------------------|------------------------------------|----------------|---------------|----------------|---------------|----------------|---------------|----------------|---------------|----------------|---------------|---------------|---------------|---------------|---------------|
| AC-3, 400 V | Rated power kW | Rated current A | Uc min. ... Uc max. (1) | | V 50/60 Hz | | V DC | | | A | | | | | | | | | | | | | | | | | | | | | | | |
| | | | 24...60 | 100...250 | 20...60 | 100...250 | AF09Z-30-10-21 | AF09-30-10-13 | | | | | | | | | | | | AF16Z-30-10-21 | AF12-30-10-13 | AF16Z-30-10-21 | AF16-30-10-13 | AF26Z-30-00-21 | AF26-30-00-13 | AF30Z-30-00-21 | AF30-30-00-13 | AF38Z-30-00-21 | AF38-30-00-13 | AF40-30-00-11 | AF40-30-00-13 | AF52-30-00-11 | AF52-30-00-13 |
| 4 | 8.5 | 8.5 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL136001R2110 | 7.60...10.0 | TF42-10 | 1SAZ721201R1043 | | | | | + | BER16-4 VEM4 | 1SBN081311R1000 1SBN030111R1000 | | | | | | | | | | | | | | |
| 5.5 | 11.5 | 11.5 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL156001R2110 | 10.0...13.0 | TF42-13 | 1SAZ721201R1045 | | | | | | | | | | | | | | | | | | | | | |
| 7.5 | 15.5 | 15.5 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL176001R2110 | 13.0...16.0 | TF42-16 | 1SAZ721201R1047 | | | | | | | | | | | | | | | | | | | | | |
| 11 | 22 | 22 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL236001R2100 | 20.0...24.0 | TF42-24 | 1SAZ721201R1051 | | | | | + | BER38-4 VEM4 | 1SBN082311R1000 1SBN030111R1000 | | | | | | | | | | | | | | |
| 15 | 29 | 29 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL237001R1300 | 29.0...35.0 | TF42-35 | 1SAZ721201R1053 | | | | | + 2x | CA4-10 | 1SBN010110R1010 | | | | | | | | | | | | | | |
| 18.5 | 35 | 35 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL276001R2100 | 35.0...38.0/40.0 | TF42-38 | 1SAZ721201R1055 | | | | | | | | | | | | | | | | | | | | | |
| 18.5 | 35 | 35 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL296001R2100 | 30.0...40.0 | TF65-40 | 1SAZ811201R1003 | | | | | + | BER65-4 VM96-4 | 1SBN083411R1000 1SBN033405T1000 | | | | | | | | | | | | | | |
| 22 | 41 | 41 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL347001R1300 | 36.0...47.0 | TF65-47 | 1SAZ811201R1004 | | | | | + 2x | CA4-10 | 1SBN010110R1010 | | | | | | | | | | | | | | |
| 30 | 55 | 55 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL367001R1300 | 50.0...60.0 | TF65-60 | 1SAZ811201R1006 | | | | | + 2x | CA4-01 | 1SBN010110R1001 | | | | | | | | | | | | | | |
| 37 | 66 | 66 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL37001R1300 | 57.0...68.0 | TF96-68 | 1SAZ911201R1003 | | | | | + | BER96-4 VM96-4 | 1SBN083911R1000 1SBN033405T1000 | | | | | | | | | | | | | | |
| 45 | 80 | 80 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL397001R1300 | 75.0...87.0 | TF96-87 | 1SAZ911201R1005 | | | | | + 2x | CA4-10 | 1SBN010110R1010 | | | | | | | | | | | | | | |
| 55 | 97 | 97 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SBL407001R1300 | 80...110 | TF96-87 | 1SAZ911201R1005 | | | | | + 2x | CA4-01 | 1SBN010110R1001 | | | | | | | | | | | | | | |
| 75 | 132 | 132 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SFL427001R1111 | 80...110 | TF140DU-110 | 1SAZ431201R1002 | | | | | + | BER140-4 VM19 | 1SFN084211R1000 1SFN030300R1000 | | | | | | | | | | | | | | |
| 90 | 160 | 160 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SFL427001R1311 | 100...135 | TF140DU-135 | 1SAZ431201R1003 | | | | | | | | | | | | | | | | | | | | | |
| 110 | 195 | 195 | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SFL447001R1111 | 130...175 | TA200DU-175 | 1SAZ421201R1005 | | | | | + | BER205-4 VM19 | 1SFN084811R1000 1SFN030300R1000 | | | | | | | | | | | | | | |
| | | | 24...60 | 100...250 | 20...60 | 100...250 | | | 1SFL447001R1311 | 150...200 | TA200DU-200 | 1SAZ421201R1006 | | | | | | | | | | | | | | | | | | | | | |

(1) For other control voltages, see "Voltage code table".

Note : for rated power above 110 kW, refer to "Starters protected by electronic overload relays".

Direct-on-line starters protected by electronic overload relays

With AF contactors - Open type version in kit form

| | |  Contactors  | | | |  Electronic overload relays | | | Accessories |
|-------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|----------------|-----------------|---------------------------------------------------------------------------------------------------------------------|-----------|-----------------|--------------------|
| IEC | | Control voltage Uc min. ... Uc max. (1) | | Type | Order code | Setting ranges | Type | Order code | |
| AC-3, 400 V | Rated power | | | | | | | | |
| | kW | Rated current A | V 50/60 Hz | V DC | | | A | | |
| 4 | 8.5 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | 5.70...18.9 | EF19-18.9 | 1SAX121001R1105 | |
| | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | |
| 5.5 | 11.5 | 24...60 | 20...60 | AF12Z-30-10-21 | 1SBL156001R2110 | 5.70...18.9 | EF19-18.9 | 1SAX121001R1105 | |
| | | 100...250 | 100...250 | AF12-30-10-13 | 1SBL157001R1310 | | | | |
| 7.5 | 15.5 | 24...60 | 20...60 | AF16Z-30-10-21 | 1SBL176001R2110 | 5.70...18.9 | EF19-18.9 | 1SAX121001R1105 | |
| | | 100...250 | 100...250 | AF16-30-10-13 | 1SBL177001R1310 | | | | |
| 11 | 22 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | 9.00...30.0 | EF45-30 | 1SAX221001R1101 | |
| | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | | | |
| 15 | 29 | 24...60 | 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | 9.00...30.0 | EF45-30 | 1SAX221001R1101 | |
| | | 100...250 | 100...250 | AF30-30-00-13 | 1SBL277001R1300 | | | | |
| 18.5 | 35 | 24...60 | 20...60 | AF38Z-30-00-21 | 1SBL296001R2100 | 15.0...45.0 | EF45-45 | 1SAX221001R1102 | |
| | | 100...250 | 100...250 | AF38-30-00-13 | 1SBL297001R1300 | | | | |
| 18.5 | 35 | 24...60 | 20...60 | AF40-30-00-11 | 1SBL347001R1100 | 25.0...70.0 | EF65-70 | 1SAX331001R1101 | |
| | | 100...250 | 100...250 | AF40-30-00-13 | 1SBL347001R1300 | | | | |
| 22 | 41 | 24...60 | 20...60 | AF52-30-00-11 | 1SBL367001R1100 | 25.0...70.0 | EF65-70 | 1SAX331001R1101 | |
| | | 100-250 | 100-250 | AF52-30-00-13 | 1SBL367001R1300 | | | | |
| 30 | 55 | 24...60 | 20...60 | AF65-30-00-11 | 1SBL387001R1100 | 25.0...70.0 | EF65-70 | 1SAX331001R1101 | |
| | | 100-250 | 100-250 | AF65-30-00-13 | 1SBL387001R1300 | | | | |
| 37 | 66 | 24...60 | 20...60 | AF80-30-00-11 | 1SBL397001R1100 | 36...100 | EF96-100 | 1SAX341001R1101 | |
| | | 100-250 | 100-250 | AF80-30-00-13 | 1SBL397001R1300 | | | | |
| 45 | 80 | 24...60 | 20...60 | AF96-30-00-11 | 1SBL407001R1100 | 36...100 | EF96-100 | 1SAX341001R1101 | |
| | | 100-250 | 100-250 | AF96-30-00-13 | 1SBL407001R1300 | | | | |
| 55 | 97 | 24...60 | 20...60 | AF116-30-11-11 | 1SFL427001R1111 | 54...150 | EF146-150 | 1SAX351001R1101 | |
| | | 100-250 | 100-250 | AF116-30-11-13 | 1SFL427001R1311 | | | | |
| 75 | 132 | 24...60 | 20...60 | AF140-30-11-11 | 1SFL447001R1111 | 54...150 | EF146-150 | 1SAX351001R1101 | |
| | | 100-250 | 100-250 | AF140-30-11-13 | 1SFL447001R1311 | | | | |
| 90 | 160 | 24...60 | 20...60 | AF190-30-11-11 | 1SFL487002R1111 | 63...210 | EF205-210 | 1SAX531001R1101 | |
| | | 100-250 | 100-250 | AF190-30-11-13 | 1SFL487002R1311 | | | | |
| 110 | 195 | 24...60 | 20...60 | AF205-30-11-11 | 1SFL527002R1111 | 63...210 | EF205-210 | 1SAX531001R1101 | |
| | | 100-250 | 100-250 | AF205-30-11-13 | 1SFL527002R1311 | | | | |
| 132 | 230 | 24...60 | 20...60 | AF265-30-11-11 | 1SFL547002R1111 | 115...380 | EF370-380 | 1SAX611001R1101 | |
| | | 100-250 | 100-250 | AF265-30-11-13 | 1SFL547002R1311 | | | | |
| 160 | 280 | 24...60 | 20...60 | AF305-30-11-11 | 1SFL587002R1111 | 115...380 | EF370-380 | 1SAX611001R1101 | |
| | | 100-250 | 100-250 | AF305-30-11-13 | 1SFL587002R1311 | | | | |
| 200 | 350 | 24...60 | 20...60 | AF370-30-11-11 | 1SFL607002R1111 | 115...380 | EF370-380 | 1SAX611001R1101 | |
| | | 100-250 | 100-250 | AF370-30-11-13 | 1SFL607002R1311 | | | | |

(1) For other control voltages, see "Voltage code table".

Reversing starters protected by electronic overload relays


With AF contactors - Open type version in kit form

| IEC AC-3, 400 V Rated power kW | | Rated current A | | Control voltage Uc min. ... Uc max. (1) V 50/60 Hz : V DC | | Type | Order code | Electronic overload relays | | | Accessories | | |
|-----------------------------------------|------|--------------------|-----------|--------------------------------------------------------------------|-----------------|----------------|-----------------|----------------------------|-----------|-----------------|-------------|-------------------|------------------------------------|
| | | | | | | | | Setting ranges A | Type | Order code | Type | Order code | |
| 4 | 8.5 | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | AF09Z-30-10-21 | 1SBL136001R2110 | 5.70...18.9 | EF19-18.9 | 1SAX121001R1105 | + | BER16-4 VEM4 | 1SBN081311R1000 1SBN030111R1000 |
| | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | | | | | | | | |
| 5.5 | 11.5 | 24...60 | 20...60 | AF12Z-30-10-21 | 1SBL156001R2110 | AF12Z-30-10-21 | 1SBL156001R2110 | 5.70...18.9 | EF19-18.9 | 1SAX121001R1105 | | | |
| | | 100...250 | 100...250 | AF12-30-10-13 | 1SBL157001R1310 | | | | | | | | |
| 7.5 | 15.5 | 24...60 | 20...60 | AF16Z-30-10-21 | 1SBL176001R2110 | AF16Z-30-10-21 | 1SBL176001R2110 | 5.70...18.9 | EF19-18.9 | 1SAX121001R1105 | | | |
| | | 100...250 | 100...250 | AF16-30-10-13 | 1SBL177001R1310 | | | | | | | | |
| 11 | 22 | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | 9.00...30.0 | EF45-30 | 1SAX221001R1101 | + | BER38-4 VEM4 | 1SBN082311R1000 1SBN030111R1000 |
| | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | | | | | | | | |
| 15 | 29 | 24...60 | 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | AF30Z-30-00-21 | 1SBL276001R2100 | 9.00...30.0 | EF45-30 | 1SAX221001R1101 | + 2x | CA4-10 | 1SBN010110R1010 |
| | | 100...250 | 100...250 | AF30-30-00-13 | 1SBL277001R1300 | | | | | | | | |
| 18.5 | 35 | 24...60 | 20...60 | AF38Z-30-00-21 | 1SBL296001R2100 | AF38Z-30-00-21 | 1SBL296001R2100 | 15.0...45.0 | EF45-45 | 1SAX221001R1102 | | | |
| | | 100...250 | 100...250 | AF38-30-00-13 | 1SBL297001R1300 | | | | | | | | |
| 18.5 | 35 | 24...60 | 20...60 | AF40-30-00-11 | 1SBL347001R1100 | AF40-30-00-11 | 1SBL347001R1100 | 25.0...70.0 | EF65-70 | 1SAX331001R1101 | + | BER65-4 VM96-4 | 1SBN083411R1000 1SBN033405T1000 |
| | | 100...250 | 100...250 | AF40-30-00-13 | 1SBL347001R1300 | | | | | | | | |
| 22 | 41 | 24...60 | 20...60 | AF52-30-00-11 | 1SBL367001R1100 | AF52-30-00-11 | 1SBL367001R1100 | 25.0...70.0 | EF65-70 | 1SAX331001R1101 | + 2x | CA4-10 | 1SBN010110R1010 |
| | | 100...250 | 100...250 | AF52-30-00-13 | 1SBL367001R1300 | | | | | | | | |
| 30 | 55 | 24...60 | 20...60 | AF65-30-00-11 | 1SBL387001R1100 | AF65-30-00-11 | 1SBL387001R1100 | 25.0...70.0 | EF65-70 | 1SAX331001R1101 | + 2x | CA4-01 | 1SBN010110R1001 |
| | | 100...250 | 100...250 | AF65-30-00-13 | 1SBL387001R1300 | | | | | | | | |
| 37 | 66 | 24...60 | 20...60 | AF80-30-00-11 | 1SBL397001R1100 | AF80-30-00-11 | 1SBL397001R1100 | 36...100 | EF96-100 | 1SAX341001R1101 | + | BER96-4 VM96-4 | 1SBN083911R1000 1SBN033405T1000 |
| | | 100...250 | 100...250 | AF80-30-00-13 | 1SBL397001R1300 | | | | | | | | |
| 45 | 80 | 24...60 | 20...60 | AF96-30-00-11 | 1SBL407001R1100 | AF96-30-00-11 | 1SBL407001R1100 | 36...100 | EF96-100 | 1SAX341001R1101 | + 2x | CA4-10 CA4-01 | 1SBN010110R1010 1SBN010110R1001 |
| | | 100...250 | 100...250 | AF96-30-00-13 | 1SBL407001R1300 | | | | | | | | |
| 55 | 97 | 24...60 | 20...60 | AF116-30-11-11 | 1SFL427001R1111 | AF116-30-11-11 | 1SFL427001R1111 | 54...150 | EF146-150 | 1SAX351001R1101 | + | BER140-4 VM19 | 1SBN084211R1000 1SBN030300R1000 |
| | | 100...250 | 100...250 | AF116-30-11-13 | 1SFL427001R1311 | | | | | | | | |
| 75 | 132 | 24...60 | 20...60 | AF140-30-11-11 | 1SFL447001R1111 | AF140-30-11-11 | 1SFL447001R1111 | 54...150 | EF146-150 | 1SAX351001R1101 | | | |
| | | 100...250 | 100...250 | AF140-30-11-13 | 1SFL447001R1311 | | | | | | | | |
| 90 | 160 | 24...60 | 20...60 | AF190-30-11-11 | 1SFL487002R1111 | AF190-30-11-11 | 1SFL487002R1111 | 63...210 | EF205-210 | 1SAX531001R1101 | + | BER205-4 VM19 | 1SBN084811R1000 1SBN030300R1000 |
| | | 100...250 | 100...250 | AF190-30-11-13 | 1SFL487002R1311 | | | | | | | | |
| 110 | 195 | 24...60 | 20...60 | AF205-30-11-11 | 1SFL527002R1111 | AF205-30-11-11 | 1SFL527002R1111 | 63...210 | EF205-210 | 1SAX531001R1101 | | | |
| | | 100...250 | 100...250 | AF205-30-11-13 | 1SFL527002R1311 | | | | | | | | |
| 132 | 230 | 24...60 | 20...60 | AF265-30-11-11 | 1SFL547002R1111 | AF265-30-11-11 | 1SFL547002R1111 | 115...380 | EF370-380 | 1SAX611001R1101 | + | BER370-4 VM19 | 1SBN085411R1000 1SBN030300R1000 |
| | | 100...250 | 100...250 | AF265-30-11-13 | 1SFL547002R1311 | | | | | | | | |
| 160 | 280 | 24...60 | 20...60 | AF305-30-11-11 | 1SFL587002R1111 | AF305-30-11-11 | 1SFL587002R1111 | 115...380 | EF370-380 | 1SAX611001R1101 | | | |
| | | 100...250 | 100...250 | AF305-30-11-13 | 1SFL587002R1311 | | | | | | | | |
| 200 | 350 | 24...60 | 20...60 | AF370-30-11-11 | 1SFL607002R1111 | AF370-30-11-11 | 1SFL607002R1111 | 115...380 | EF370-380 | 1SAX611001R1101 | | | |
| | | 100...250 | 100...250 | AF370-30-11-13 | 1SFL607002R1311 | | | | | | | | |

(1) For other control voltages, see "Voltage code table".

Star-delta starters protected by overload relays


With AF contactors - Open type version in kit form



Application

Star-delta starting is the most common method to reduce the starting current of a motor.

This system can be used on all the squirrel cage motors, which are normally used in delta connection. In this type of starting, it is recommended to choose motors having high starting torque i.e. much higher than the resistive torque in order to reach sufficient high speed when the motor is connected in star.

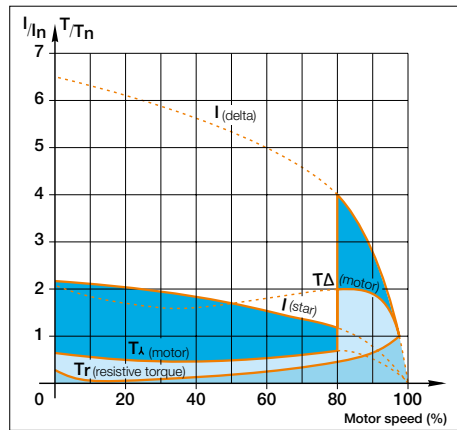

When starting:

- Inrush current is reduced to a third of direct starting current
- Motor torque is reduced to a third or even less of direct starting torque.

Transient current is generated when switching from star to delta connection.

During the initial starting phase ("star" connection), the resistive torque of the driven load must remain, irrespective of speed, less than the "star" motor torque until "star-delta" switching occurs.

This starting mode is therefore ideal for machines having low starting torque such as pumps, centrifugal compressors, wood-working machines...

I = current
T = torque
In = nominal current
Tn = nominal torque

Precaution

- Motor nominal voltage in delta connection must be equal to that of the mains. Example: a motor for 400 V star-delta starting must be designed for 400 V in "delta" connection. Its usual designation is "400 V / 690 V motor". The motor must be constructed with 6 terminal windings
- In order to prevent a high current peak, at least 85 % of nominal speed must be reached before switching from star to delta

Sequence

Starting is a three-stage process:

1st stage: "Star" connection - Press the "On" button on the control circuit to close the KM2 "Star" contactor. The KM1 "line" contactor then closes and the motor starts. Countdown of programmed starting time (6 to 10 s) then begins.

2nd stage: "Star" to "Delta" switching - when programmed starting time is over, the KM2 "Star" contactor opens.



3rd stage: "Delta" connection - Thanks to AF contactors, a transition time (or dwelling time) of 50 ms is already integrated between the opening of the "star" contactor and closing of the "delta" contactor.

Conclusion: An on-delay timer without dwelling time (e.g.: CT-ERS.21S or TEF4-ON) is enough to count-down the programmed starting time (6 to 10 s) during "Star connection". The use of a star-delta timer including a dwelling time is not permitted.

Main Technical Data



| | |
|-----------------------------------|----------------------------------------------|
| Standards | IEC 60947-4-1 / EN 60947-4-1 |
| Rated operational voltage Ue max. | 690 V - 50/60 Hz |
| Rated insulation voltage Ui | |
| acc. to IEC 60947-4-1 | 690 V |
| acc. to UL / CSA | 600 V |
| Ambient air temperature | |
| Close to the device | ≤ 60 °C (TF42: 38 A above ≤ 50 °C) |
| Degree of protection | IP20 |
| Switching frequency | Refer to "Switching frequency diagrams" page |

Mounting positions

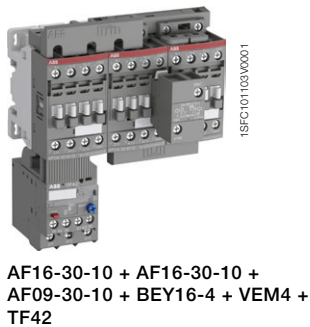

Star-delta starters protected by overload relays

With AF contactors - Open type version in kit form

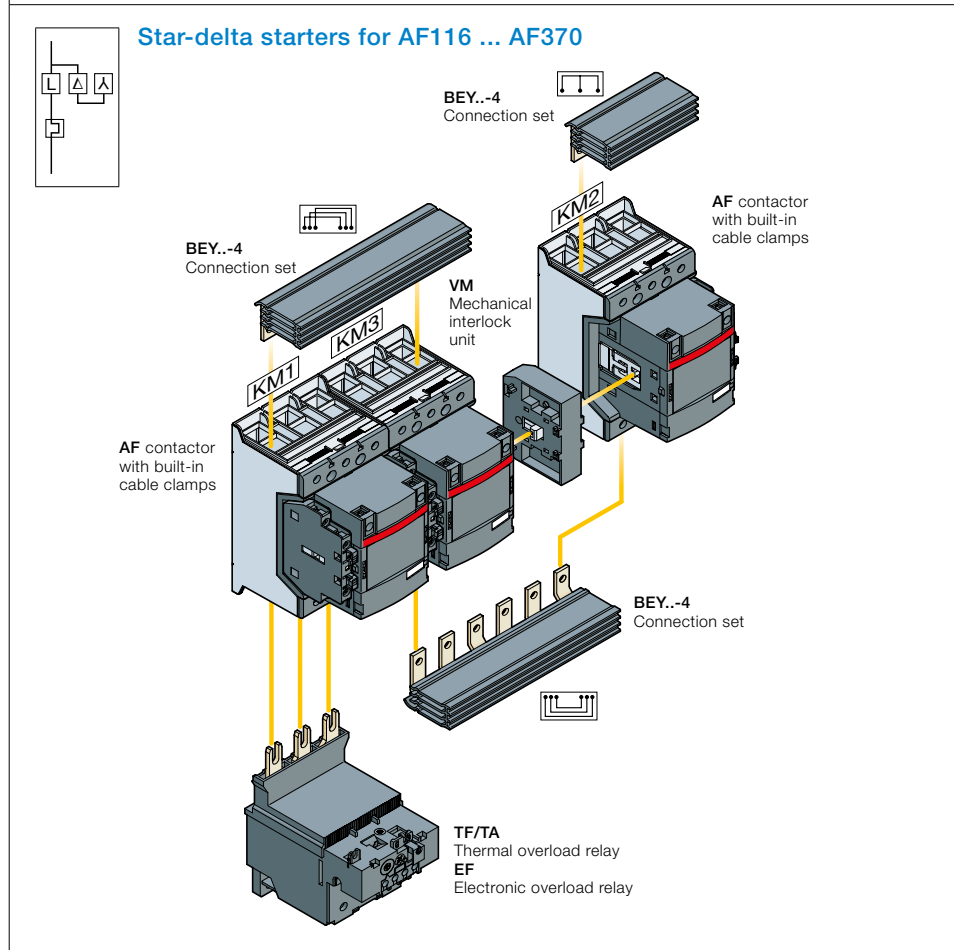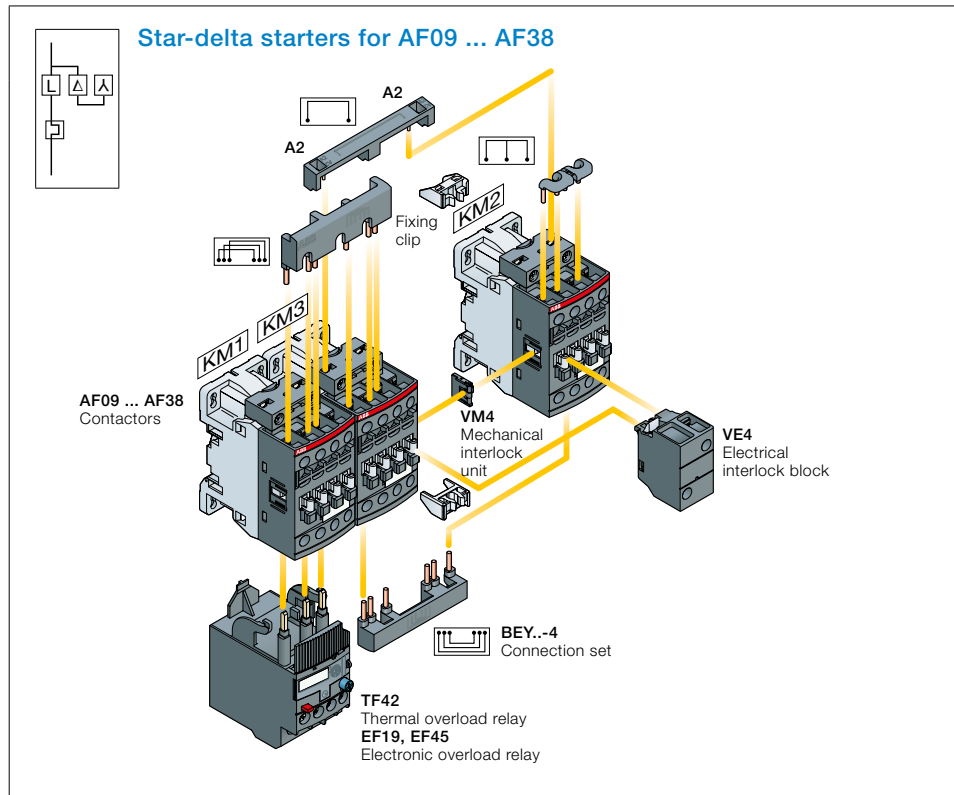

Description


You can easily assemble star-delta starter thanks to our complete range of accessories:

- For AF09 ... AF38, use VEM4 mechanical and electrical interlock set without increasing starter width. It includes:
 - VM4 mechanical interlock unit and 2 fixing clips
 - VE4 electrical interlock block with A2-A2 connection.
- For AF40 ... AF370, use VM mechanical interlock unit and additional auxiliary contact blocks for electrical interlocking.
- BEY...-4 connection set: it assures a safe and simple connection between both contactor main terminals.


Select now easily and quickly your starter in the following pages at 400 V, up to 200 kW.

For the full coordination tables: www.abb.com/lowvoltage then go to the right menu: "Support", select: "Online Product Selection Tools" then select "Coordination Tables for motor protection"


Star-delta starters protected by thermal overload relays With AF contactors - Open type version in kit form




Line contactor KM1



Delta contactor KM3



Star contactor KM2



| IEC AC-3 Rated power | | | | | | | | | | | Control voltage Uc min. ... Uc max. (1) | | Type | Order code | Type | Order code | Type | Order code |
|----------------------|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|------------|--------------------|------------|-----------------------------------------------|----------------|-----------------|----------------|-----------------|--------------------|-----------------|------------|
| 220 V kW | 230/240 V kW | 380 V kW | 400 V kW | 415 V kW | 440 V kW | 500 V kW | 690 V kW | 400 V A | Rated current A | V 50/60 Hz | V DC | | | | | | | |
| 4 | 4 | 7.5 | 7.5 | 7.5 | 7.5 | 9 | 9 | 15.5 | 24...60 | 20...60 | 24...60 | AF09Z-30-10-21 | 1SBL136001R2110 | AF09Z-30-10-21 | 1SBL136001R2110 | AF09Z-30-10-21 | 1SBL136001R2110 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | AF09-30-10-13 | 1SBL137001R1310 | AF09-30-10-13 | 1SBL137001R1310 | |
| 5.5 | 5.5 | 9 | 11 | 11 | 11 | 11 | 11 | 22 | 24...60 | 20...60 | 24...60 | AF12Z-30-10-21 | 1SBL156001R2110 | AF12Z-30-10-21 | 1SBL156001R2110 | AF09Z-30-10-21 | 1SBL136001R2110 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF12-30-10-13 | 1SBL157001R1310 | AF12-30-10-13 | 1SBL157001R1310 | AF09-30-10-13 | 1SBL137001R1310 | |
| 7.5 | 9 | 15 | 15 | 15 | 15 | 15 | 15 | 29 | 24...60 | 20...60 | 24...60 | AF16Z-30-10-21 | 1SBL176001R2110 | AF16Z-30-10-21 | 1SBL176001R2110 | AF09Z-30-10-21 | 1SBL136001R2110 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF16-30-10-13 | 1SBL177001R1310 | AF16-30-10-13 | 1SBL177001R1310 | AF09-30-10-13 | 1SBL137001R1310 | |
| 11 | 11 | 18.5 | 18.5 | 25 | 25 | 25 | 25 | 35 | 24...60 | 20...60 | 24...60 | AF26Z-30-00-21 | 1SBL236001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | AF26-30-00-13 | 1SBL237001R1300 | AF26-30-00-13 | 1SBL237001R1300 | |
| 11 | 11 | 22 | 22 | 25 | 25 | 25 | 25 | 41 | 24...60 | 20...60 | 24...60 | AF26Z-30-00-21 | 1SBL236001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | AF26-30-00-13 | 1SBL237001R1300 | AF26-30-00-13 | 1SBL237001R1300 | |
| 11 | 15 | 25 | 25 | 25 | 25 | 30 | 30 | 47 | 24...60 | 20...60 | 24...60 | AF30Z-30-00-21 | 1SBL276001R2100 | AF30Z-30-00-21 | 1SBL276001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF30-30-00-13 | 1SBL277001R1300 | AF30-30-00-13 | 1SBL277001R1300 | AF26-30-00-13 | 1SBL237001R1300 | |
| 18.5 | 18.5 | 37 | 37 | 37 | 37 | 37 | 37 | 66 | 24...60 | 20...60 | 24...60 | AF40-30-00-11 | 1SBL347001R1100 | AF40-30-00-11 | 1SBL347001R1100 | AF40-30-00-11 | 1SBL347001R1100 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF40-30-00-13 | 1SBL347001R1300 | AF40-30-00-13 | 1SBL347001R1300 | AF40-30-00-13 | 1SBL347001R1300 | |
| 25 | 25 | 45 | 45 | 45 | 45 | 45 | 45 | 80 | 24...60 | 20...60 | 24...60 | AF52-30-00-11 | 1SBL367001R1100 | AF52-30-00-11 | 1SBL367001R1100 | AF40-30-00-11 | 1SBL347001R1100 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF52-30-00-13 | 1SBL367001R1300 | AF52-30-00-13 | 1SBL367001R1300 | AF40-30-00-13 | 1SBL347001R1300 | |
| 30 | 30 | 55 | 55 | 55 | 55 | 55 | 55 | 97 | 24...60 | 20...60 | 24...60 | AF65-30-00-11 | 1SBL387001R1100 | AF65-30-00-11 | 1SBL387001R1100 | AF40-30-00-11 | 1SBL347001R1100 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF65-30-00-13 | 1SBL387001R1300 | AF65-30-00-13 | 1SBL387001R1300 | AF40-30-00-13 | 1SBL347001R1300 | |
| 37 | 37 | 75 | 75 | 75 | 75 | 75 | 75 | 132 | 24...60 | 20...60 | 24...60 | AF80-30-00-11 | 1SBL397001R1100 | AF80-30-00-11 | 1SBL397001R1100 | AF52-30-00-11 | 1SBL367001R1100 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF80-30-00-13 | 1SBL397001R1300 | AF80-30-00-13 | 1SBL397001R1300 | AF52-30-00-13 | 1SBL367001R1300 | |
| 45 | 45 | 90 | 90 | 90 | 90 | 90 | 90 | 160 | 24...60 | 20...60 | 24...60 | AF96-30-00-11 | 1SBL407001R1100 | AF96-30-00-11 | 1SBL407001R1100 | AF65-30-00-11 | 1SBL387001R1100 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF96-30-00-13 | 1SBL407001R1300 | AF96-30-00-13 | 1SBL407001R1300 | AF65-30-00-13 | 1SBL387001R1300 | |
| 55 | 55 | 90 | 110 | 110 | 132 | 132 | 110 | 195 | 24...60 | 20...60 | 24...60 | AF116-30-11-11 | 1SFL427001R1111 | AF116-30-11-11 | 1SFL427001R1111 | AF116-30-11-11 (4) | 1SFL427001R1111 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF116-30-11-13 | 1SFL427001R1311 | AF116-30-11-13 | 1SFL427001R1311 | AF116-30-11-13 | 1SFL427001R1311 | |
| 75 | 75 | 132 | 132 | 132 | 132 | 160 | 132 | 230 | 24...60 | 20...60 | 24...60 | AF140-30-11-11 | 1SFL447001R1111 | AF140-30-11-11 | 1SFL447001R1111 | AF116-30-11-11 | 1SFL427001R1111 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF140-30-11-13 | 1SFL447001R1311 | AF140-30-11-13 | 1SFL447001R1311 | AF116-30-11-13 | 1SFL427001R1311 | |
| 90 | 90 | 160 | 160 | 160 | 160 | 200 | 200 | 280 | 24...60 | 20...60 | 24...60 | AF190-30-11-11 | 1SFL487002R1111 | AF190-30-11-11 | 1SFL487002R1111 | AF140-30-11-11 | 1SFL447001R1111 | |
| | | | | | | | | | 100...250 | 100...250 | 100...250 | AF190-30-11-13 | 1SFL487002R1311 | AF190-30-11-13 | 1SFL487002R1311 | AF140-30-11-13 | 1SFL447001R1311 | |

(1) AF09 ... AF190: ambient temperature ≤ 60 °C.







(2) The setting current value is: nominal motor current x 0.58. Overload relay type given for 400 V - AC-3.

For other voltage, select overload relay type according to required nominal motor current x 0.58.


(3) On-delay timer without dwelling-time (e.g.: side-mounted CT-ERS.21S or front-mounted TEF4-ON) is enough to countdown the programmed starting time during "Star connection".

In case of use of front-mounted TEF4-ON on-delay timer, mount on KM1 contactor AF26 ... AF96 a side-mounted CAL4-11 auxiliary contact block instead of CA4-10 auxiliary contact block.


(4) AF80 can also be used, but no connection set and mechanical interlock is available for this combination.

| Thermal overload relays (2) | | | Electronic timers (3) | | | Accessories | | | Auxiliary contact blocks | | |
|-----------------------------------------------------------------------------------|-------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------|--|
|  | | |  CT-ERS  TEF4-ON Uc = 24...240 V 50/60 Hz or DC | | |  BEY..-4  VEM4 | | |  CA4 | | |
| Setting ranges | Type | Order code | Type | Order code | Type | Order code | Type | Order code | Type | Order code | |
| A | | | | | | | | | | | |
| 7.60...10.0 | TF42-10 | 1SAZ721201R1043 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY16-4 + VEM4 | 1SBN081313R2000 1SBN030111R1000 | - | - | - | - | |
| 10.0...13.0 | TF42-13 | 1SAZ721201R1045 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY16-4 + VEM4 | 1SBN081313R2000 1SBN030111R1000 | - | - | - | - | |
| 16.0...20.0 | TF42-20 | 1SAZ721201R1049 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY16-4 + VEM4 | 1SBN081313R2000 1SBN030111R1000 | - | - | - | - | |
| 20.0...24.0 | TF42-24 | 1SAZ721201R1051 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY38-4 + VEM4 | 1SBN082713R2000 1SBN030111R1000 | KM1 : 1 x CA4-10 KM2 : 1 x CA4-10 | 1SBN010110R1010 1SBN010110R1010 | | | |
| 20.0...24.0 | TF42-24 | 1SAZ721201R1051 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY38-4 + VEM4 | 1SBN082713R2000 1SBN030111R1000 | KM1 : 1 x CA4-10 KM2 : 1 x CA4-10 | 1SBN010110R1010 1SBN010110R1010 | | | |
| 24.0...29.0 | TF42-29 | 1SAZ721201R1052 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY38-4 + VEM4 | 1SBN082713R2000 1SBN030111R1000 | KM1 : 1 x CA4-10 KM2 : 1 x CA4-10 | 1SBN010110R1010 1SBN010110R1010 | | | |
| 30.0...40.0 | TF65-40 | 1SAZ811201R1003 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY65-4 + VM96-4 | 1SBN083413R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | |
| 36.0...47.0 | TF65-47 | 1SAZ811201R1004 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY65-4 + VM96-4 | 1SBN083413R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | |
| 50.0...60.0 | TF65-60 | 1SAZ811201R1006 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY65-4 + VM96-4 | 1SBN083413R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | |
| 65.0...78.0 | TF96-78 | 1SAZ911201R1004 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY96-4 + VM96-4 | 1SBN083913R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | |
| 84.0...96.0 | TF96-96 | 1SAZ911201R1006 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY96-4 + VM96-4 | 1SBN083913R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | |
| 100...135 | TF140DU-135 | 1SAZ431201R1003 | CT-ERS.21S | 1SVR730100R0300 | BEY140-4 + VM19 | 1SBN084413R1000 1SBN030300R1000 | - | - | - | - | |
| 100...135 | TF140DU-135 | 1SAZ431201R1003 | CT-ERS.21S | 1SVR730100R0300 | BEY140-4 + VM19 | 1SBN084413R1000 1SBN030300R1000 | - | - | - | - | |
| 130...175 | TA200DU-175 | 1SAZ421201R1005 | CT-ERS.21S | 1SVR730100R0300 | BEY190-4 + VM140/190 | 1SBN084813R1000 1SBN034403R1000 | - | - | - | - | |


Star-delta starters protected by electronic overload relays With AF contactors - Open type version in kit form




Line contactor KM1



Delta contactor KM3



Star contactor KM2



| IEC AC-3 Rated power | | | | | | | | | | | Control voltage Uc min. ... Uc max. (1) | | Type | Order code | Type | Order code | Type | Order code |
|----------------------|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|------------|---------------|------------|-----------------------------------------------|----------------|-----------------|----------------|-----------------|--------------------|-----------------|------------|
| 220 V kW | 230/240 V kW | 380 V kW | 400 V kW | 415 V kW | 440 V kW | 500 V kW | 690 V kW | 400 V A | Rated current | V 50/60 Hz | V DC | | | | | | | |
| 4 | 4 | 7.5 | 7.5 | 7.5 | 7.5 | 9 | 9 | 15.5 | | 24...60 | 20...60 | AF09Z-30-10-21 | 1SBL136001R2110 | AF09Z-30-10-21 | 1SBL136001R2110 | AF09Z-30-10-21 | 1SBL136001R2110 | |
| | | | | | | | | | | 100...250 | 100...250 | AF09-30-10-13 | 1SBL137001R1310 | AF09-30-10-13 | 1SBL137001R1310 | AF09-30-10-13 | 1SBL137001R1310 | |
| 5.5 | 5.5 | 9 | 11 | 11 | 11 | 11 | 11 | 22 | | 24...60 | 20...60 | AF12Z-30-10-21 | 1SBL156001R2110 | AF12Z-30-10-21 | 1SBL156001R2110 | AF09Z-30-10-21 | 1SBL136001R2110 | |
| | | | | | | | | | | 100...250 | 100...250 | AF12-30-10-13 | 1SBL157001R1310 | AF12-30-10-13 | 1SBL157001R1310 | AF09-30-10-13 | 1SBL137001R1310 | |
| 7.5 | 9 | 15 | 15 | 15 | 15 | 15 | 15 | 29 | | 24...60 | 20...60 | AF16Z-30-10-21 | 1SBL176001R2110 | AF16Z-30-10-21 | 1SBL176001R2110 | AF09Z-30-10-21 | 1SBL136001R2110 | |
| | | | | | | | | | | 100...250 | 100...250 | AF16-30-10-13 | 1SBL177001R1310 | AF16-30-10-13 | 1SBL177001R1310 | AF09-30-10-13 | 1SBL137001R1310 | |
| 11 | 11 | 18.5 | 18.5 | 25 | 25 | 25 | 25 | 35 | | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | |
| | | | | | | | | | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | AF26-30-00-13 | 1SBL237001R1300 | AF26-30-00-13 | 1SBL237001R1300 | |
| 11 | 11 | 22 | 22 | 25 | 25 | 25 | 25 | 41 | | 24...60 | 20...60 | AF26Z-30-00-21 | 1SBL236001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | AF26-30-00-21 | 1SBL236001R2100 | |
| | | | | | | | | | | 100...250 | 100...250 | AF26-30-00-13 | 1SBL237001R1300 | AF26-30-00-13 | 1SBL237001R1300 | AF26-30-00-13 | 1SBL237001R1300 | |
| 11 | 15 | 25 | 25 | 25 | 25 | 30 | 30 | 47 | | 24...60 | 20...60 | AF30Z-30-00-21 | 1SBL276001R2100 | AF30Z-30-00-21 | 1SBL276001R2100 | AF26Z-30-00-21 | 1SBL236001R2100 | |
| | | | | | | | | | | 100...250 | 100...250 | AF30-30-00-13 | 1SBL277001R1300 | AF30-30-00-13 | 1SBL277001R1300 | AF26-30-00-13 | 1SBL237001R1300 | |
| 18.5 | 18.5 | 37 | 37 | 37 | 37 | 37 | 37 | 66 | | 24...60 | 20...60 | AF40-30-00-11 | 1SBL347001R1100 | AF40-30-00-11 | 1SBL347001R1100 | AF40-30-00-11 | 1SBL347001R1100 | |
| | | | | | | | | | | 100...250 | 100...250 | AF40-30-00-13 | 1SBL347001R1300 | AF40-30-00-13 | 1SBL347001R1300 | AF40-30-00-13 | 1SBL347001R1300 | |
| 25 | 25 | 45 | 45 | 45 | 45 | 45 | 45 | 80 | | 24...60 | 20...60 | AF52-30-00-11 | 1SBL367001R1100 | AF52-30-00-11 | 1SBL367001R1100 | AF40-30-00-11 | 1SBL347001R1100 | |
| | | | | | | | | | | 100...250 | 100...250 | AF52-30-00-13 | 1SBL367001R1300 | AF52-30-00-13 | 1SBL367001R1300 | AF40-30-00-13 | 1SBL347001R1300 | |
| 30 | 30 | 55 | 55 | 55 | 55 | 55 | 55 | 97 | | 24...60 | 20...60 | AF65-30-00-11 | 1SBL387001R1100 | AF65-30-00-11 | 1SBL387001R1100 | AF40-30-00-11 | 1SBL347001R1100 | |
| | | | | | | | | | | 100...250 | 100...250 | AF65-30-00-13 | 1SBL387001R1300 | AF65-30-00-13 | 1SBL387001R1300 | AF40-30-00-13 | 1SBL347001R1300 | |
| 37 | 37 | 75 | 75 | 75 | 75 | 75 | 75 | 132 | | 24...60 | 20...60 | AF80-30-00-11 | 1SBL397001R1100 | AF80-30-00-11 | 1SBL397001R1100 | AF52-30-00-11 | 1SBL367001R1100 | |
| | | | | | | | | | | 100...250 | 100...250 | AF80-30-00-13 | 1SBL397001R1300 | AF80-30-00-13 | 1SBL397001R1300 | AF52-30-00-13 | 1SBL367001R1300 | |
| 45 | 45 | 90 | 90 | 90 | 90 | 90 | 90 | 160 | | 24...60 | 20...60 | AF96-30-00-11 | 1SBL407001R1100 | AF96-30-00-11 | 1SBL407001R1100 | AF65-30-00-11 | 1SBL387001R1100 | |
| | | | | | | | | | | 100...250 | 100...250 | AF96-30-00-13 | 1SBL407001R1300 | AF96-30-00-13 | 1SBL407001R1300 | AF65-30-00-13 | 1SBL387001R1300 | |
| 55 | 55 | 90 | 110 | 110 | 132 | 132 | 110 | 195 | | 24...60 | 20...60 | AF116-30-11-11 | 1SFL427001R1111 | AF116-30-11-11 | 1SFL427001R1111 | AF116-30-11-11 (4) | 1SFL427001R1111 | |
| | | | | | | | | | | 100...250 | 100...250 | AF116-30-11-13 | 1SFL427001R1311 | AF116-30-11-13 | 1SFL427001R1311 | AF116-30-11-13 | 1SFL427001R1311 | |
| 75 | 75 | 132 | 132 | 132 | 132 | 160 | 132 | 230 | | 24...60 | 20...60 | AF140-30-11-11 | 1SFL447001R1111 | AF140-30-11-11 | 1SFL447001R1111 | AF116-30-11-11 | 1SFL427001R1111 | |
| | | | | | | | | | | 100...250 | 100...250 | AF140-30-11-13 | 1SFL447001R1311 | AF140-30-11-13 | 1SFL447001R1311 | AF116-30-11-13 | 1SFL427001R1311 | |
| 90 | 90 | 160 | 160 | 160 | 160 | 200 | 200 | 280 | | 24...60 | 20...60 | AF190-30-11-11 | 1SFL487002R1111 | AF190-30-11-11 | 1SFL487002R1111 | AF140-30-11-11 | 1SFL447001R1111 | |
| | | | | | | | | | | 100...250 | 100...250 | AF190-30-11-13 | 1SFL487002R1311 | AF190-30-11-13 | 1SFL487002R1311 | AF140-30-11-13 | 1SFL447001R1311 | |
| 110 | 110 | 160 | 200 | 200 | 200 | 250 | 250 | 350 | | 24...60 | 20...60 | AF205-30-11-11 | 1SFL527002R1111 | AF205-30-11-11 | 1SFL527002R1111 | AF190-30-11-11 | 1SFL487002R1111 | |
| | | | | | | | | | | 100...250 | 100...250 | AF205-30-11-13 | 1SFL527002R1311 | AF205-30-11-13 | 1SFL527002R1311 | AF190-30-11-13 | 1SFL487002R1311 | |
| 132 | 132 | 250 | 250 | 250 | 250 | 315 | 355 | 430 | | 24...60 | 20...60 | AF265-30-11-11 | 1SFL547002R1111 | AF265-30-11-11 | 1SFL547002R1111 | AF205-30-11-11 | 1SFL527002R1111 | |
| | | | | | | | | | | 100...250 | 100...250 | AF265-30-11-13 | 1SFL547002R1311 | AF265-30-11-13 | 1SFL547002R1311 | AF205-30-11-13 | 1SFL527002R1311 | |
| 160 | 160 | 315 | 315 | 315 | 355 | 400 | 400 | 540 | | 24...60 | 20...60 | AF370-30-11-11 | 1SFL607002R1111 | AF370-30-11-11 | 1SFL607002R1111 | AF265-30-11-11 | 1SFL547002R1111 | |
| | | | | | | | | | | 100...250 | 100...250 | AF370-30-11-13 | 1SFL607002R1311 | AF370-30-11-13 | 1SFL607002R1311 | AF265-30-11-13 | 1SFL547002R1311 | |
| 200 | 200 | 315 | 355 | 355 | 400 | 400 | 500 | 610 | | 24...60 | 20...60 | AF370-30-11-11 | 1SFL607002R1111 | AF370-30-11-11 | 1SFL607002R1111 | AF305-30-11-11 | 1SFL587002R1111 | |
| | | | | | | | | | | 100...250 | 100...250 | AF370-30-11-13 | 1SFL607002R1311 | AF370-30-11-13 | 1SFL607002R1311 | AF305-30-11-13 | 1SFL587002R1311 | |

(1) AF09 ... AF370: ambient temperature ≤ 60 °C.






(2) The setting current value is: nominal motor current x 0.58. Overload relay type given for 400 V - AC-3.

For other voltage, select overload relay type according to required nominal motor current x 0.58.

(3) On-delay timer without dwelling-time (e.g.: side-mounted CT-ERS.21S or front-mounted TEF4-ON) is enough to countdown the programmed starting time during "Star connection".

In case of use of front-mounted TEF4-ON on-delay timer, mount on KM1 contactor AF26 ... AF96 a side-mounted CAL4-11 auxiliary contact block instead of CA4-10 auxiliary contact block.

(4) AF80 can also be used, but no connection set and mechanical interlock is available for this combination.

| Electronic overload relays (2) | | | Electronic timers (3) | | | Accessories | | | | | | | | |
|-----------------------------------------------------------------------------------|-----------|-----------------|----------------------------------------------------------------------------------------------------|------------------------------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------|--|-------------------------------------------------------------------------------------------------------------------------------|--|--|
|  | | |  CT-ERS | | |  TEF4-ON Uc = 24...240 V 50/60 Hz or DC | | |  Connection sets BEY..4 | | |  Auxiliary contact blocks CA4 | | |
| Setting ranges | Type | Order code | Type | Order code | Type | Order code | Type | Order code | Type | Order code | | | | |
| A | | | | | | | | | | | | | | |
| 5.70...18.9 | EF19-18.9 | 1SAX121001R1105 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY16-4 + VEM4 | 1SBN081313R2000 1SBN030111R1000 | - | - | - | - | | | | |
| 5.70...18.9 | EF19-18.9 | 1SAX121001R1105 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY16-4 + VEM4 | 1SBN081313R2000 1SBN030111R1000 | - | - | - | - | | | | |
| 5.70...18.9 | EF19-18.9 | 1SAX121001R1105 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY16-4 + VEM4 | 1SBN081313R2000 1SBN030111R1000 | - | - | - | - | | | | |
| 9.00...30.0 | EF45-30 | 1SAX221001R1101 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY38-4 + VEM4 | 1SBN082713R2000 1SBN030111R1000 | KM1 : 1 x CA4-10 KM2 : 1 x CA4-10 | 1SBN010110R1010 1SBN010110R1010 | | | | | | |
| 9.00...30.0 | EF45-30 | 1SAX221001R1101 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY38-4 + VEM4 | 1SBN082713R2000 1SBN030111R1000 | KM1 : 1 x CA4-10 KM2 : 1 x CA4-10 | 1SBN010110R1010 1SBN010110R1010 | | | | | | |
| 9.00...30.0 | EF45-30 | 1SAX221001R1101 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY38-4 + VEM4 | 1SBN082713R2000 1SBN030111R1000 | KM1 : 1 x CA4-10 KM2 : 1 x CA4-10 | 1SBN010110R1010 1SBN010110R1010 | | | | | | |
| 25...70 | EF65-70 | 1SAX331001R1101 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY65-4 + VM96-4 | 1SBN083413R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | | | | |
| 25...70 | EF65-70 | 1SAX331001R1101 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY65-4 + VM96-4 | 1SBN083413R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | | | | |
| 25...70 | EF65-70 | 1SAX331001R1101 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY65-4 + VM96-4 | 1SBN083413R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | | | | |
| 36...100 | EF96-100 | 1SAX341001R1101 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY96-4 + VM96-4 | 1SBN083913R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | | | | |
| 36...100 | EF96-100 | 1SAX341001R1101 | CT-ERS.21S or TEF4-ON | 1SVR730100R0300 1SBN020112R1000 | BEY96-4 + VM96-4 | 1SBN083913R2000 1SBN033405T1000 | KM1 : 1 x CA4-10 (3) KM2 : 1 x CA4-10 1 x CA4-01 KM3 : 1 x CA4-01 | 1SBN010110R1010 1SBN010110R1010 1SBN010110R1001 1SBN010110R1001 | | | | | | |
| 54...150 | EF146-150 | 1SAX351001R1101 | CT-ERS.21S | 1SVR730100R0300 | BEY140-4 + VM19 | 1SFN084413R1000 1SFN030300R1000 | - | - | - | - | | | | |
| 54...150 | EF146-150 | 1SAX351001R1101 | CT-ERS.21S | 1SVR730100R0300 | BEY140-4 + VM19 | 1SFN084413R1000 1SFN030300R1000 | - | - | - | - | | | | |
| 63...210 | EF205-210 | 1SAX531001R1101 | CT-ERS.21S | 1SVR730100R0300 | BEY190-4 + VM140/190 | 1SFN084813R1000 1SFN034403R1000 | - | - | - | - | | | | |
| 63...210 | EF205-210 | 1SAX531001R1101 | CT-ERS.21S | 1SVR730100R0300 | BEY205-4 + VM19 | 1SFN085213R1000 1SFN030300R1000 | - | - | - | - | | | | |
| 115...380 | EF370-380 | 1SAX611001R1101 | CT-ERS.21S | 1SVR730100R0300 | BEY265-4 + VM205/265 | 1SFN085413R1000 1SFN035203R1000 | - | - | - | - | | | | |
| 115...380 | EF370-380 | 1SAX611001R1101 | CT-ERS.21S | 1SVR730100R0300 | BEY370-4 + VM19 | 1SFN085813R1000 1SFN030300R1000 | - | - | - | - | | | | |
| 115...380 | EF370-380 | 1SAX611001R1101 | CT-ERS.21S | 1SVR730100R0300 | BEY370-4 + VM19 | 1SFN085813R1000 1SFN030300R1000 | - | - | - | - | | | | |

3-pole contactors, for motor control and power switching



| AC / DC Control supply | | | Type | AF09 | AF12 | AF16 | AF26 | AF30 | AF38 | AF40 | AF52 | AF65 | AF80 | AF96 | |
|------------------------|---------------------------|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------|-----------|------------|------------|-----------|-----------|-------------|-------------|------------|------------|------------|------------|
| IEC | AC-3 | Rated operational power $\theta \leq 60^\circ\text{C}$ for AF09 ... AF370 $\theta \leq 55^\circ\text{C}$ for AF400 ... AF2650 | 220 - 230 - 240 V | kW | 2.2 | 3 | 4 | 6.5 | 9 | 11 | 11 | 15 | 18.5 | 22 | 25 |
| | | | 380 - 400 V | kW | 4 | 5.5 | 7.5 | 11 | 15 | 18.5 | 18.5 | 22 | 30 | 37 | 45 |
| | | | 415 V | kW | 4 | 5.5 | 9 | 11 | 15 | 18.5 | 22 | 30 | 37 | 45 | 55 |
| | | | 440 V | kW | 4 | 5.5 | 9 | 15 | 18.5 | 22 | 22 | 30 | 37 | 45 | 55 |
| | | | 500 V | kW | 5.5 | 7.5 | 9 | 15 | 18.5 | 22 | 22 | 30 | 37 | 45 | 55 |
| | | | 690 V | kW | 5.5 | 7.5 | 9 | 15 | 18.5 | 22 | 22 | 30 | 37 | 45 | 55 |
| | | | 1000 V | kW | — | — | — | — | — | — | — | — | — | — | 35 |
| | Rated operational current | 380 - 400 V | A | 9 | 12 | 18 | 26 | 32 | 38 | 40 | 53 | 65 | 80 | 96 | |
| | AC-1 | Rated operational current | $\theta \leq 40^\circ\text{C}$, 690 V | A | 25 | 28 | 30 | 45 | 50 | 50 | 70 | 100 | 105 | 125 | 130 |

| | | | | | | | | | | | | | | | |
|----------|----------------------|--------------------|-----------|-----------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|------------|------------|----|
| UL / CSA | 1-phase motor rating | 120 V | hp | 0.75 | 1 | 1.5 | 2 | 2 | 2 | 3 | 3 | 5 | 7.5 | 7.5 | |
| | | 240 V | hp | 1.5 | 2 | 3 | 3 | 5 | 5 | 7.5 | 10 | 15 | 15 | 20 | 20 |
| | 3-phase motor rating | 200 - 208 V | hp | 2 | 3 | 5 | 7.5 | 10 | 10 | 10 | 15 | 20 | 25 | 30 | 30 |
| | | 220 - 240 V | hp | 2 | 3 | 5 | 7.5 | 10 | 10 | 15 | 20 | 25 | 30 | 30 | |
| | | 440 - 480 V | hp | 5 | 7.5 | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 60 | |
| | 550 - 600 V | hp | 7.5 | 10 | 15 | 20 | 25 | 30 | 40 | 50 | 60 | 75 | 75 | | |
| | General use rating | 600 V | A | 25 | 28 | 30 | 45 | 50 | 50 | 60 | 80 | 90 | 105 | 115 | |
| NEMA | NEMA Size | | | 00 | 0 | — | 1 | — | — | 2 | — | — | 3 | — | |

Main accessories

| | | |
|--------------------------|--------------------------|------------------------------------------------------|
| Auxiliary contact blocks | Front mounting | CA4-10 (1 x N.O.) CA4-01 (1 x N.C.) |
| | Side mounting | CAL4-11 (1 x N.O. + 1 x N.C.) |
| Timers | Electronic | TEF4-ON TEF4-OFF |
| | Mechanical | VM4 |
| Interlocking units | Mechanical / Electrical | VM96-4 |
| | For reversing contactors | VEM4 |
| Connection sets | | BER16-4 |
| Surge suppressors | | BER38-4 |
| | | BER65-4 |
| | | BER96-4 |
| | | Built-in surge protection |

Overload relays

| | | | | |
|-------------------|--------------------------------------------|-----------------------------|-------------------------------------------------------|--------------------------|
| Thermal relays | Class 10 (Class 10A for TF140, TA200DU) | TF42 (0.10...38 A) | TF65 (22...67 A) | TF96 (40...96 A) |
| Electronic relays | Class 10E, 20E, 30E | EF19 (0.10...18.9 A) | EF19 (0.10...18.9 A) EF45 (9...45 A) | EF65 (20...70 A) |
| | | | | EF96 (36...100 A) |

Manual motor starters

| | | | | |
|-------------------------------------------|--------------------------------------------------------------|--------------------------------------------------|-----------------------------------------------|--------------------|
| Thermal / magnetic protection Class 10 | MS116 (0.10...32 A) lcs up to 50 kA for class 10 A | MS165 (10...65 A) lcs up to 100 kA (1) | MS5100 (40...100 A) lcs up to 50 kA | |
| | MS132 (0.10...32 A) lcs up to 100 kA | MS495 (45...100 A) lcs up to 50 kA | | |
| Magnetic only types | MO132 (0.16...32 A) lcs up to 100 kA | MS497 (22...100 A) lcs up to 100 kA | MO5100 (70...100 A) lcs up to 36 kA | |
| | | MO165 (16...65 A) lcs up to 100 kA (1) | | |
| | | MO496 (32...100 A) lcs up to 100 kA | | |
| | | | MO495 (63...100 A) lcs up to 50 kA | |
| Accessories | For contactor mounting | BEA16-4 | BEA38-4 | BEA65-4 (2) |

(1) MS165/MO165 are suitable for use with AF09 ... AF30 for North American applications.
(2) BEA65-4 suitable for MS165 and MO165 only.



| AF116 | AF140 | AF146 | AF190 | AF205 | AF265 | AF305 | AF370 | AF400 | AF460 | AF580 | AF750 | AF1250 | AF1350 | AF1650 | AF2050 | AF2650 |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|
| 30 | 37 | 45 | 55 | 55 | 75 | 90 | 110 | 110 | 132 | 160 | 220 | — | 257 | 315 | — | — |
| 55 | 75 | 75 | 90 | 110 | 132 | 160 | 200 | 200 | 250 | 315 | 400 | — | 475 | 560 | — | — |
| 55 | 75 | 75 | 90 | 110 | 132 | 160 | 200 | 220 | 250 | 355 | 425 | — | 500 | 630 | — | — |
| 75 | 90 | 90 | 110 | 132 | 160 | 160 | 200 | 220 | 250 | 355 | 450 | — | 560 | 710 | — | — |
| 75 | 90 | 90 | 110 | 132 | 160 | 200 | 250 | 250 | 315 | 400 | 520 | — | 560 | 710 | — | — |
| 55 | 75 | 90 | 132 | 160 | 200 | 250 | 315 | 315 | 355 | 500 | 600 | — | 800 | 1000 | — | — |
| — | — | 75 | 110 | 132 | 132 | 132 | 132 | 220 | 280 | 355 | 400 | — | — | — | — | — |
| 116 | 140 | 146 | 190 | 205 | 265 | 305 | 370 | 400 | 460 | 580 | 750 | — | 860 | 1060 | — | — |
| 160 | 200 | 225 | 275 | 350 | 400 | 500 | 600 | 600 | 700 | 800 | 1050 | 1260 | 1350 | 1650 | 2050 | 2650 |

| | | | | | | | | | | | | | | | | |
|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|------------|-------------|-------------|-------------|-------------|-------------|
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — | — |
| 30 | 40 | 40 | 50 | 60 | 75 | 100 | 125 | 125 | 150 | 200 | 250 | — | — | — | — | — |
| 40 | 50 | 50 | 60 | 75 | 100 | 125 | 150 | 150 | 200 | 250 | 300 | — | 400 | 450 | — | — |
| 75 | 100 | 100 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 500 | 600 | — | 800 | 900 | — | — |
| 100 | 125 | 125 | 150 | 200 | 250 | 300 | 350 | 400 | 500 | 600 | 700 | — | 1000 | 1150 | — | — |
| 160 | 200 | 200 | 250 | 300 | 350 | 400 | 520 | 550 | 650 | 750 | 900 | 1210 | 1350 | 1650 | 2100 | 2700 |
| — | 4 | — | — | — | 5 | — | — | — | 6 | — | 7 | — | — | 8 | — | — |

| | | | | | | | | | | | | | | | | | |
|--------------------------------------------------------|--|--|--------------------------------------------------------|--|--|---------------------|--|--------------------------------|---------------------|--|--|---------------------|--|--|------------------------|--|--|
| CAL19-11 (1 x N.O. + 1 x N.C.) | | | | | | | | CAL18-11 (1 x N.O. + 1 x N.C.) | | | | | | | | | |
| VM19 (for same size contactors) | | | | | | | | VM750H VM750V | | | | VM1650H | | | | | |
| BER140-4 | | | BER205-4 | | | BER370-4 | | | BEM460-30 | | | BEM750-30 | | | | | |
| TF140DU (66...142 A) $\theta \leq 55^\circ\text{C}$ | | | TA200DU (66...200 A) $\theta \leq 55^\circ\text{C}$ | | | EF370 (115...380 A) | | | EF460 (150...500 A) | | | EF750 (250...800 A) | | | E1250DU (375...1250 A) | | |
| EF146 (54...150 A) | | | EF205 (63...210 A) | | | EF370 (115...380 A) | | | EF460 (150...500 A) | | | EF750 (250...800 A) | | | E1250DU (375...1250 A) | | |

Short-circuit protection devices

MCCB and switch-fuses



AF09 ... AF38 3-pole contactors

4 to 18.5 kW

AC / DC operated



AF09-30-10



AF26-30-00

Description

AF09 ... AF38 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC and 220 V DC. These contactors are of the block type design with 3 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 control voltage ranges covering 24...500V 50/60 Hz and 20...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening.
- built-in surge suppression
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.


Ordering details

| IEC | | UL/CSA | | Rated control circuit voltage | | Auxiliary contacts fitted | | Type (1) | Order code | Weight | | | | |
|-------------------------|--------------------------------|----------------------|--------------------|-------------------------------|-----------|---------------------------|---------------|-----------------|-----------------|-------------|---------------|-----------------|-----------------|-------|
| Rated operational power | current | 3-phase motor rating | General use rating | Uc min. ... Uc max. | | | | | | Pkg (1 pce) | | | | |
| 400 V AC-3 | $\theta \leq 40^\circ\text{C}$ | 480 V | 600 V AC | V 50/60 Hz | V DC | | | | | kg | | | | |
| kW | A | hp | A | | | | | | | | | | | |
| 4 | 25 | 5 | 25 | 24...60 | - | (2) | 1 0 | AF09-30-10-41 | 1SBL137001R4110 | 0.270 | | | | |
| | | | | | | | 0 1 | AF09-30-01-41 | 1SBL137001R4101 | 0.270 | | | | |
| | | | | 48...130 | 48...130 | 1 0 | AF09-30-10-12 | 1SBL137001R1210 | 0.270 | | | | | |
| | | | | | | 0 1 | AF09-30-01-12 | 1SBL137001R1201 | 0.270 | | | | | |
| | | | | 100...250 | 100...250 | 1 0 | AF09-30-10-13 | 1SBL137001R1310 | 0.270 | | | | | |
| | | | | | | 0 1 | AF09-30-01-13 | 1SBL137001R1301 | 0.270 | | | | | |
| | | | | 250...500 | 250...500 | 1 0 | AF09-30-10-14 | 1SBL137001R1410 | 0.310 | | | | | |
| | | | | | | 0 1 | AF09-30-01-14 | 1SBL137001R1401 | 0.310 | | | | | |
| | | | | 5.5 | 28 | 7.5 | 28 | 24...60 | - | (2) | 1 0 | AF12-30-10-41 | 1SBL157001R4110 | 0.270 |
| | | | | | | | | | | | 0 1 | AF12-30-01-41 | 1SBL157001R4101 | 0.270 |
| 48...130 | 48...130 | 1 0 | AF12-30-10-12 | | | | | 1SBL157001R1210 | 0.270 | | | | | |
| | | 0 1 | AF12-30-01-12 | | | | | 1SBL157001R1201 | 0.270 | | | | | |
| 100...250 | 100...250 | 1 0 | AF12-30-10-13 | | | | | 1SBL157001R1310 | 0.270 | | | | | |
| | | 0 1 | AF12-30-01-13 | | | | | 1SBL157001R1301 | 0.270 | | | | | |
| 250...500 | 250...500 | 1 0 | AF12-30-10-14 | | | | | 1SBL157001R1410 | 0.310 | | | | | |
| | | 0 1 | AF12-30-01-14 | | | | | 1SBL157001R1401 | 0.310 | | | | | |
| 7.5 | 30 | 10 | 30 | | | | | 24...60 | - | (2) | 1 0 | AF16-30-10-41 | 1SBL177001R4110 | 0.270 |
| | | | | | | | | | | | 0 1 | AF16-30-01-41 | 1SBL177001R4101 | 0.270 |
| | | | | 48...130 | 48...130 | 1 0 | AF16-30-10-12 | 1SBL177001R1210 | 0.270 | | | | | |
| | | | | | | 0 1 | AF16-30-01-12 | 1SBL177001R1201 | 0.270 | | | | | |
| | | | | 100...250 | 100...250 | 1 0 | AF16-30-10-13 | 1SBL177001R1310 | 0.270 | | | | | |
| | | | | | | 0 1 | AF16-30-01-13 | 1SBL177001R1301 | 0.270 | | | | | |
| | | | | 250...500 | 250...500 | 1 0 | AF16-30-10-14 | 1SBL177001R1410 | 0.310 | | | | | |
| | | | | | | 0 1 | AF16-30-01-14 | 1SBL177001R1401 | 0.310 | | | | | |
| | | | | 11 | 45 | 15 | 45 | 24...60 | - | (2) | 0 0 | AF26-30-00-41 | 1SBL237001R4100 | 0.310 |
| | | | | | | | | 48...130 | 48...130 | 0 0 | AF26-30-00-12 | 1SBL237001R1200 | 0.310 | |
| 100...250 | 100...250 | 0 0 | AF26-30-00-13 | | | | | 1SBL237001R1300 | 0.310 | | | | | |
| 250...500 | 250...500 | 0 0 | AF26-30-00-14 | | | | | 1SBL237001R1400 | 0.350 | | | | | |
| 15 | 50 | 20 | 50 | 24...60 | - | (2) | 0 0 | AF30-30-00-41 | 1SBL277001R4100 | 0.310 | | | | |
| | | | | 48...130 | 48...130 | 0 0 | AF30-30-00-12 | 1SBL277001R1200 | 0.310 | | | | | |
| | | | | 100...250 | 100...250 | 0 0 | AF30-30-00-13 | 1SBL277001R1300 | 0.310 | | | | | |
| | | | | 250...500 | 250...500 | 0 0 | AF30-30-00-14 | 1SBL277001R1400 | 0.350 | | | | | |
| 18.5 | 50 | 25 | 50 | 24...60 | - | (2) | 0 0 | AF38-30-00-41 | 1SBL297001R4100 | 0.310 | | | | |
| | | | | 48...130 | 48...130 | 0 0 | AF38-30-00-12 | 1SBL297001R1200 | 0.310 | | | | | |
| | | | | 100...250 | 100...250 | 0 0 | AF38-30-00-13 | 1SBL297001R1300 | 0.310 | | | | | |
| | | | | 250...500 | 250...500 | 0 0 | AF38-30-00-14 | 1SBL297001R1400 | 0.350 | | | | | |

(1) For other auxiliary contacts arrangements, please contact your ABB local sales organization.

(2) For 24...60 V 50/60 Hz - 20...60 V DC, use AF.Z-30...-21.

Main dimensions mm, inches

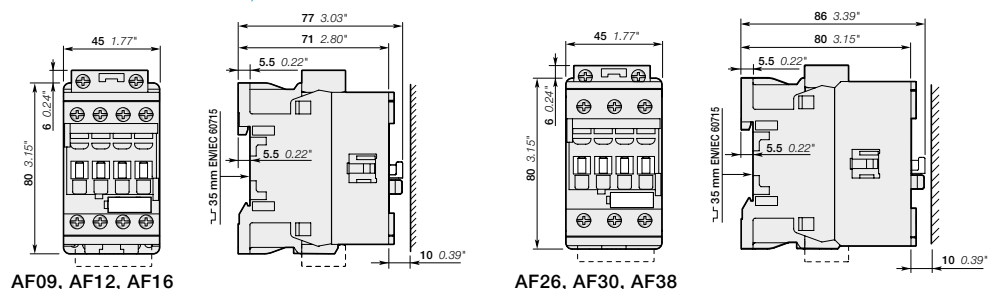

AF09Z ... AF38Z 3-pole contactors

4 to 18.5 kW

AC / DC operated - low consumption



AF09Z-30-10



AF26Z-30-00

Description

AF09Z ... AF38Z contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC and 220 V DC. These contactors are of the block type design with 3 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 control voltage ranges covering 24...250 V 50/60 Hz and 12...250 V DC
- can manage large control voltage variations
- allow direct control by PLC-output ≥ 24 V DC 500 mA
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltage sags (SEMI F47-0706 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.


Ordering details

| IEC Rated power kW | operational current $\theta \leq 40^\circ\text{C}$ A | UL/CSA 3-phase motor rating 480 V hp | General use rating 600 V AC A | Rated control circuit voltage Uc min. ... Uc max. | | Auxiliary contacts fitted | Type (1) | Order code | Weight Pkg (1 pce) kg |
|--------------------------|---------------------------------------------------------------|-----------------------------------------------------|-------------------------------------------|---------------------------------------------------------|---------|---------------------------------|----------------|-----------------|--------------------------------|
| | | | | V 50/60 Hz | V DC | | | | |
| 4 | 25 | 5 | 25 | - | 12...20 | 1 0 | AF09Z-30-10-20 | 1SBL136001R2010 | 0.310 |
| | | | | | | 0 1 | AF09Z-30-01-20 | 1SBL136001R2001 | 0.310 |
| | | | | | | 1 0 | AF09Z-30-10-21 | 1SBL136001R2110 | 0.310 |
| | | | | | | 0 1 | AF09Z-30-01-21 | 1SBL136001R2101 | 0.310 |
| | | | | | | 1 0 | AF09Z-30-10-22 | 1SBL136001R2210 | 0.310 |
| | | | | | | 0 1 | AF09Z-30-01-22 | 1SBL136001R2201 | 0.310 |
| | | | | | | 1 0 | AF09Z-30-10-23 | 1SBL136001R2310 | 0.310 |
| | | | | | | 0 1 | AF09Z-30-01-23 | 1SBL136001R2301 | 0.310 |
| 5.5 | 28 | 7.5 | 28 | - | 12...20 | 1 0 | AF12Z-30-10-20 | 1SBL156001R2010 | 0.310 |
| | | | | | | 0 1 | AF12Z-30-01-20 | 1SBL156001R2001 | 0.310 |
| | | | | | | 1 0 | AF12Z-30-10-21 | 1SBL156001R2110 | 0.310 |
| | | | | | | 0 1 | AF12Z-30-01-21 | 1SBL156001R2101 | 0.310 |
| | | | | | | 1 0 | AF12Z-30-10-22 | 1SBL156001R2210 | 0.310 |
| | | | | | | 0 1 | AF12Z-30-01-22 | 1SBL156001R2201 | 0.310 |
| | | | | | | 1 0 | AF12Z-30-10-23 | 1SBL156001R2310 | 0.310 |
| | | | | | | 0 1 | AF12Z-30-01-23 | 1SBL156001R2301 | 0.310 |
| 7.5 | 30 | 10 | 30 | - | 12...20 | 1 0 | AF16Z-30-10-20 | 1SBL176001R2010 | 0.310 |
| | | | | | | 0 1 | AF16Z-30-01-20 | 1SBL176001R2001 | 0.310 |
| | | | | | | 1 0 | AF16Z-30-10-21 | 1SBL176001R2110 | 0.310 |
| | | | | | | 0 1 | AF16Z-30-01-21 | 1SBL176001R2101 | 0.310 |
| | | | | | | 1 0 | AF16Z-30-10-22 | 1SBL176001R2210 | 0.310 |
| | | | | | | 0 1 | AF16Z-30-01-22 | 1SBL176001R2201 | 0.310 |
| | | | | | | 1 0 | AF16Z-30-10-23 | 1SBL176001R2310 | 0.310 |
| | | | | | | 0 1 | AF16Z-30-01-23 | 1SBL176001R2301 | 0.310 |
| 11 | 45 | 15 | 45 | - | 12...20 | 0 0 | AF26Z-30-00-20 | 1SBL236001R2000 | 0.350 |
| | | | | | | 0 0 | AF26Z-30-00-21 | 1SBL236001R2100 | 0.350 |
| | | | | | | 0 0 | AF26Z-30-00-22 | 1SBL236001R2200 | 0.350 |
| | | | | | | 0 0 | AF26Z-30-00-23 | 1SBL236001R2300 | 0.350 |
| 15 | 50 | 20 | 50 | - | 12...20 | 0 0 | AF30Z-30-00-20 | 1SBL276001R2000 | 0.350 |
| | | | | | | 0 0 | AF30Z-30-00-21 | 1SBL276001R2100 | 0.350 |
| | | | | | | 0 0 | AF30Z-30-00-22 | 1SBL276001R2200 | 0.350 |
| | | | | | | 0 0 | AF30Z-30-00-23 | 1SBL276001R2300 | 0.350 |
| 18.5 | 50 | 25 | 50 | - | 12...20 | 0 0 | AF38Z-30-00-20 | 1SBL296001R2000 | 0.350 |
| | | | | | | 0 0 | AF38Z-30-00-21 | 1SBL296001R2100 | 0.350 |
| | | | | | | 0 0 | AF38Z-30-00-22 | 1SBL296001R2200 | 0.350 |
| | | | | | | 0 0 | AF38Z-30-00-23 | 1SBL296001R2300 | 0.350 |

(1) For other auxiliary contacts arrangements, please contact your ABB local sales organization.

Note: Only AF.Z contactors with DC control voltage 12...20 V DC need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole.

Main dimensions mm, inches

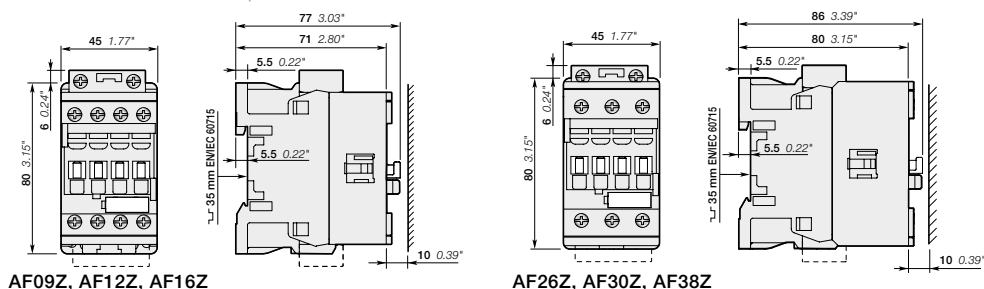

AF09Z, AF12Z, AF16Z

AF26Z, AF30Z, AF38Z

AF40 ... AF96 3-pole contactors

18.5 to 45 kW

AC / DC operated



AF40-30-00



AF80-30-00

Description

AF40 ... AF96 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC and 220 V DC. These contactors are of the block type design with 3 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 control voltage ranges covering 24...500 V 50/60 Hz and 20...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening.
- built-in surge suppression
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.


Ordering details

| IEC Rated operational power 400 V AC-3 kW | UL / CSA 3-phase motor rating 480 V AC-1 A | General use rating 600 V AC hp | General use rating 600 V AC A | Rated control circuit voltage Uc min. ... Uc max. | | Auxiliary contacts fitted | Type (1) | Order code | Weight Pkg (1 pce) kg |
|----------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------|-------------------------------------------|---------------------------------------------------------|-------------|---------------------------------|---------------|-----------------|--------------------------------|
| | | | | V 50/60 Hz | V DC | | | | |
| 18.5 | 70 | 30 | 60 | 24...60 | - | 0 0 | AF40-30-00-41 | 1SBL347001R4100 | 0.970 |
| | | | | 24...60 | 20...60 (2) | 0 0 | AF40-30-00-11 | 1SBL347001R1100 | 0.970 |
| | | | | 48...130 | 48...130 | 0 0 | AF40-30-00-12 | 1SBL347001R1200 | 0.970 |
| | | | | 100...250 | 100...250 | 0 0 | AF40-30-00-13 | 1SBL347001R1300 | 0.950 |
| 22 | 100 | 40 | 80 | 250...500 | 250...500 | 0 0 | AF40-30-00-14 | 1SBL347001R1400 | 0.950 |
| | | | | 24...60 | - | 0 0 | AF52-30-00-41 | 1SBL367001R4100 | 0.970 |
| | | | | 24...60 | 20...60 (2) | 0 0 | AF52-30-00-11 | 1SBL367001R1100 | 0.970 |
| | | | | 48...130 | 48...130 | 0 0 | AF52-30-00-12 | 1SBL367001R1200 | 0.970 |
| 30 | 105 | 50 | 90 | 100...250 | 100...250 | 0 0 | AF52-30-00-13 | 1SBL367001R1300 | 0.950 |
| | | | | 250...500 | 250...500 | 0 0 | AF52-30-00-14 | 1SBL367001R1400 | 0.950 |
| | | | | 24...60 | - | 0 0 | AF65-30-00-41 | 1SBL387001R4100 | 0.970 |
| | | | | 24...60 | 20...60 (2) | 0 0 | AF65-30-00-11 | 1SBL387001R1100 | 0.970 |
| 37 | 125 | 60 | 105 | 48...130 | 48...130 | 0 0 | AF65-30-00-12 | 1SBL387001R1200 | 0.970 |
| | | | | 100...250 | 100...250 | 0 0 | AF65-30-00-13 | 1SBL387001R1300 | 0.950 |
| | | | | 250...500 | 250...500 | 0 0 | AF65-30-00-14 | 1SBL387001R1400 | 0.950 |
| | | | | 24...60 | - | 0 0 | AF80-30-00-41 | 1SBL397001R4100 | 1.220 |
| 45 | 130 | 60 | 115 | 24...60 | 20...60 (2) | 0 0 | AF80-30-00-11 | 1SBL397001R1100 | 1.220 |
| | | | | 48...130 | 48...130 | 0 0 | AF80-30-00-12 | 1SBL397001R1200 | 1.220 |
| | | | | 100...250 | 100...250 | 0 0 | AF80-30-00-13 | 1SBL397001R1300 | 1.170 |
| | | | | 250...500 | 250...500 | 0 0 | AF80-30-00-14 | 1SBL397001R1400 | 1.170 |
| | | | | 24...60 | - | 0 0 | AF96-30-00-41 | 1SBL407001R4100 | 1.220 |
| | | | | 24...60 | 20...60 (2) | 0 0 | AF96-30-00-11 | 1SBL407001R1100 | 1.220 |
| | | | | 48...130 | 48...130 | 0 0 | AF96-30-00-12 | 1SBL407001R1200 | 1.220 |
| | | | | 100...250 | 100...250 | 0 0 | AF96-30-00-13 | 1SBL407001R1300 | 1.170 |
| | | | | 250...500 | 250...500 | 0 0 | AF96-30-00-14 | 1SBL407001R1400 | 1.170 |

(1) For other auxiliary contacts arrangements, please contact your ABB local sales organization.


(2) AF...-30...-11 not suitable for direct control by PLC-output.

Main dimensions mm, inches

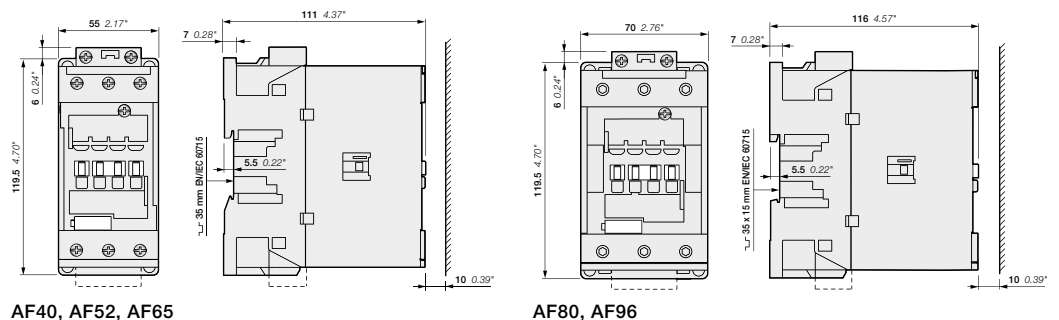

AF40, AF52, AF65


AF80, AF96

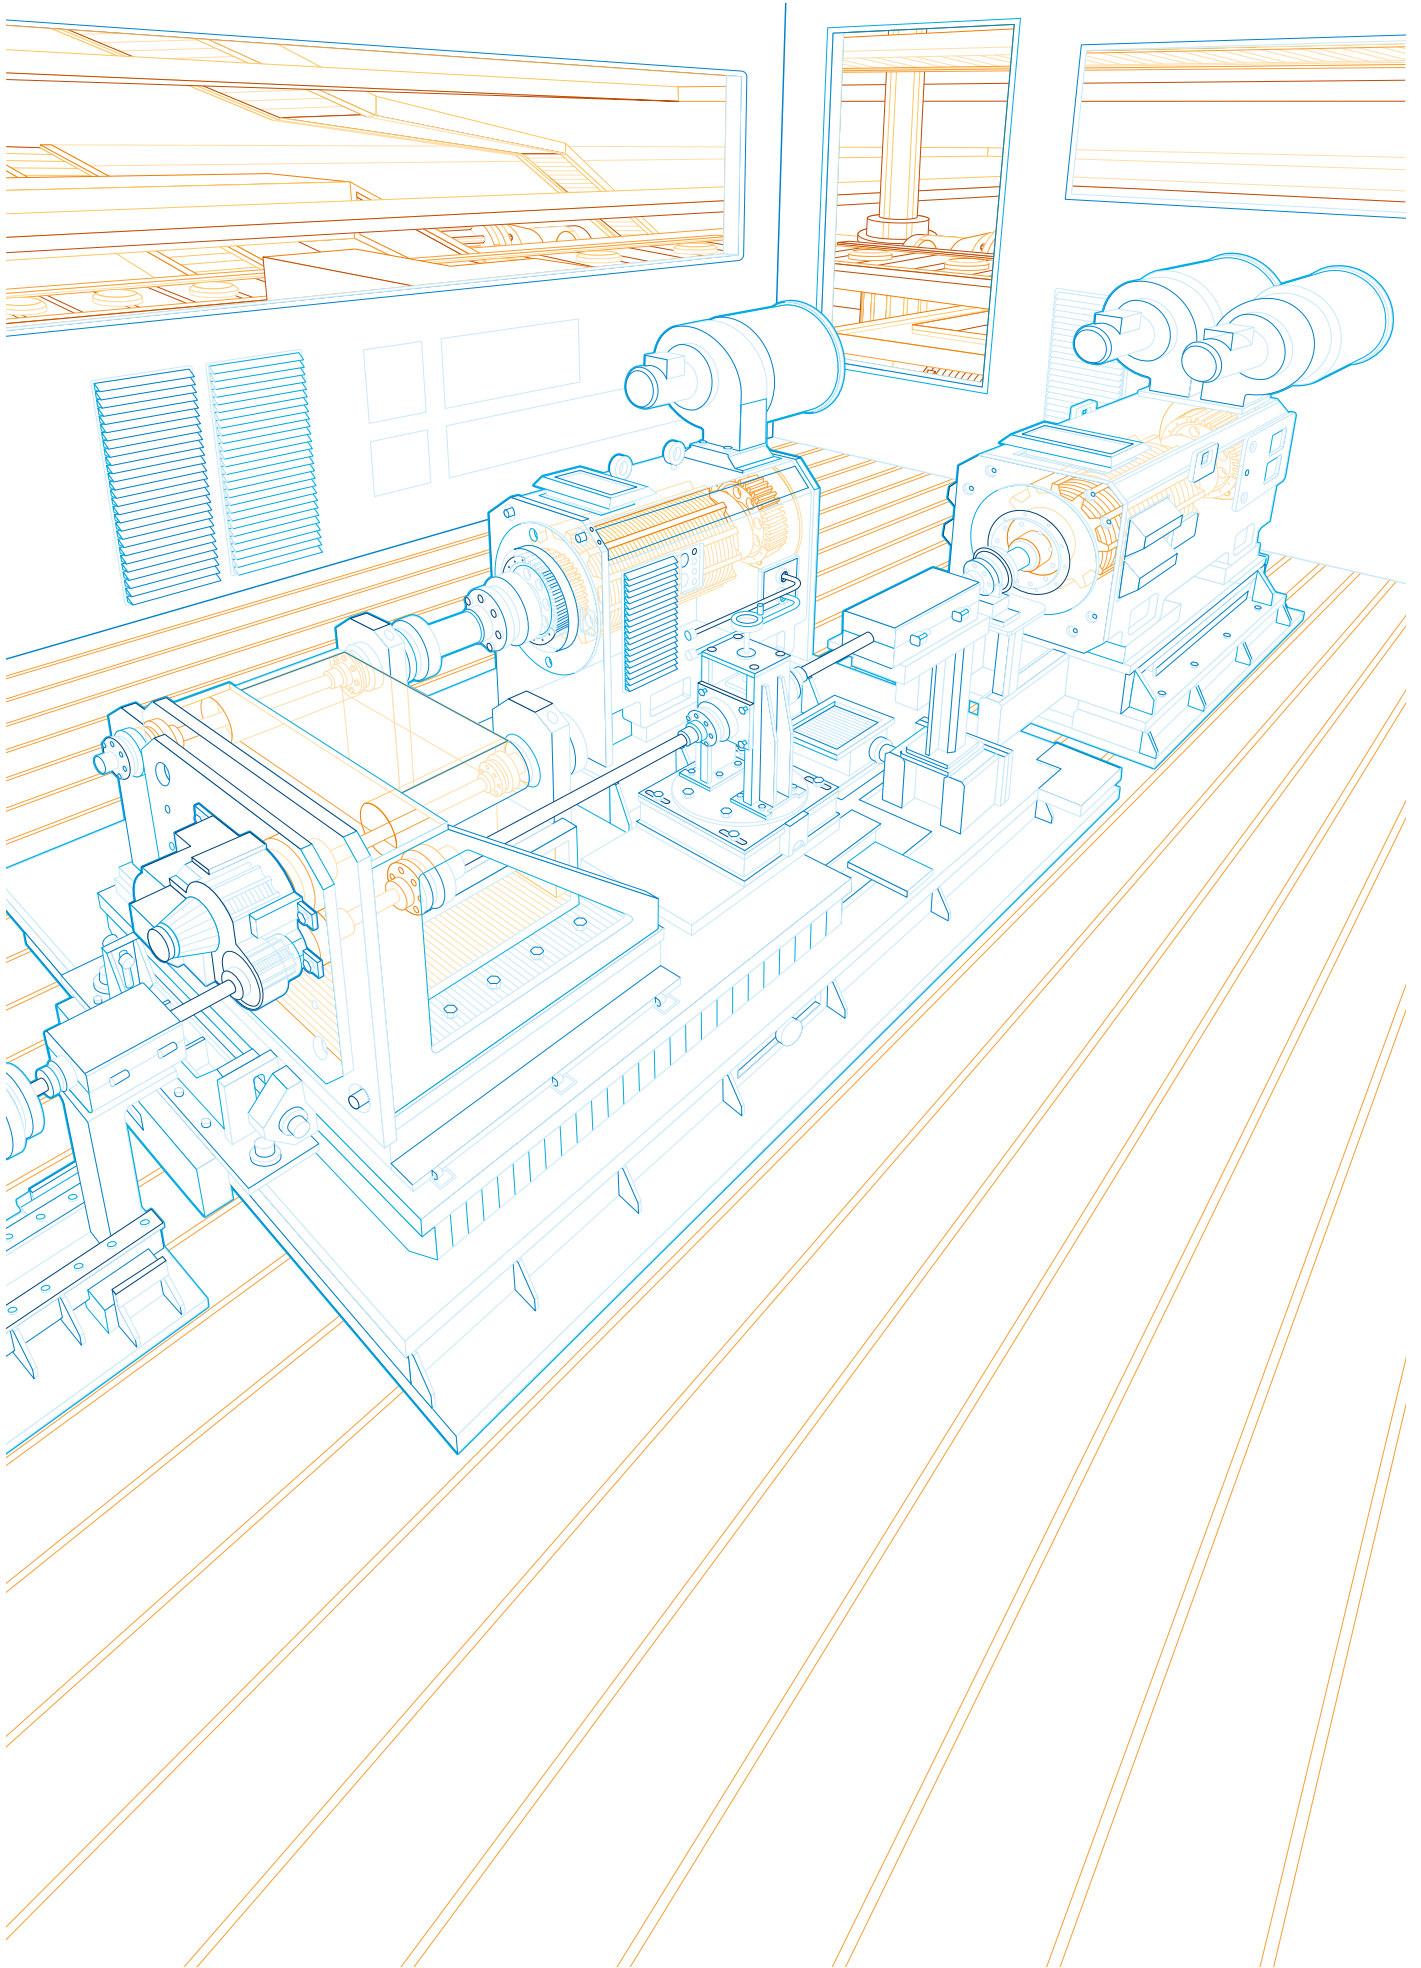

AF09 ... AF96 3-pole contactors

Main accessories

Contactor and main accessories (other accessories available)

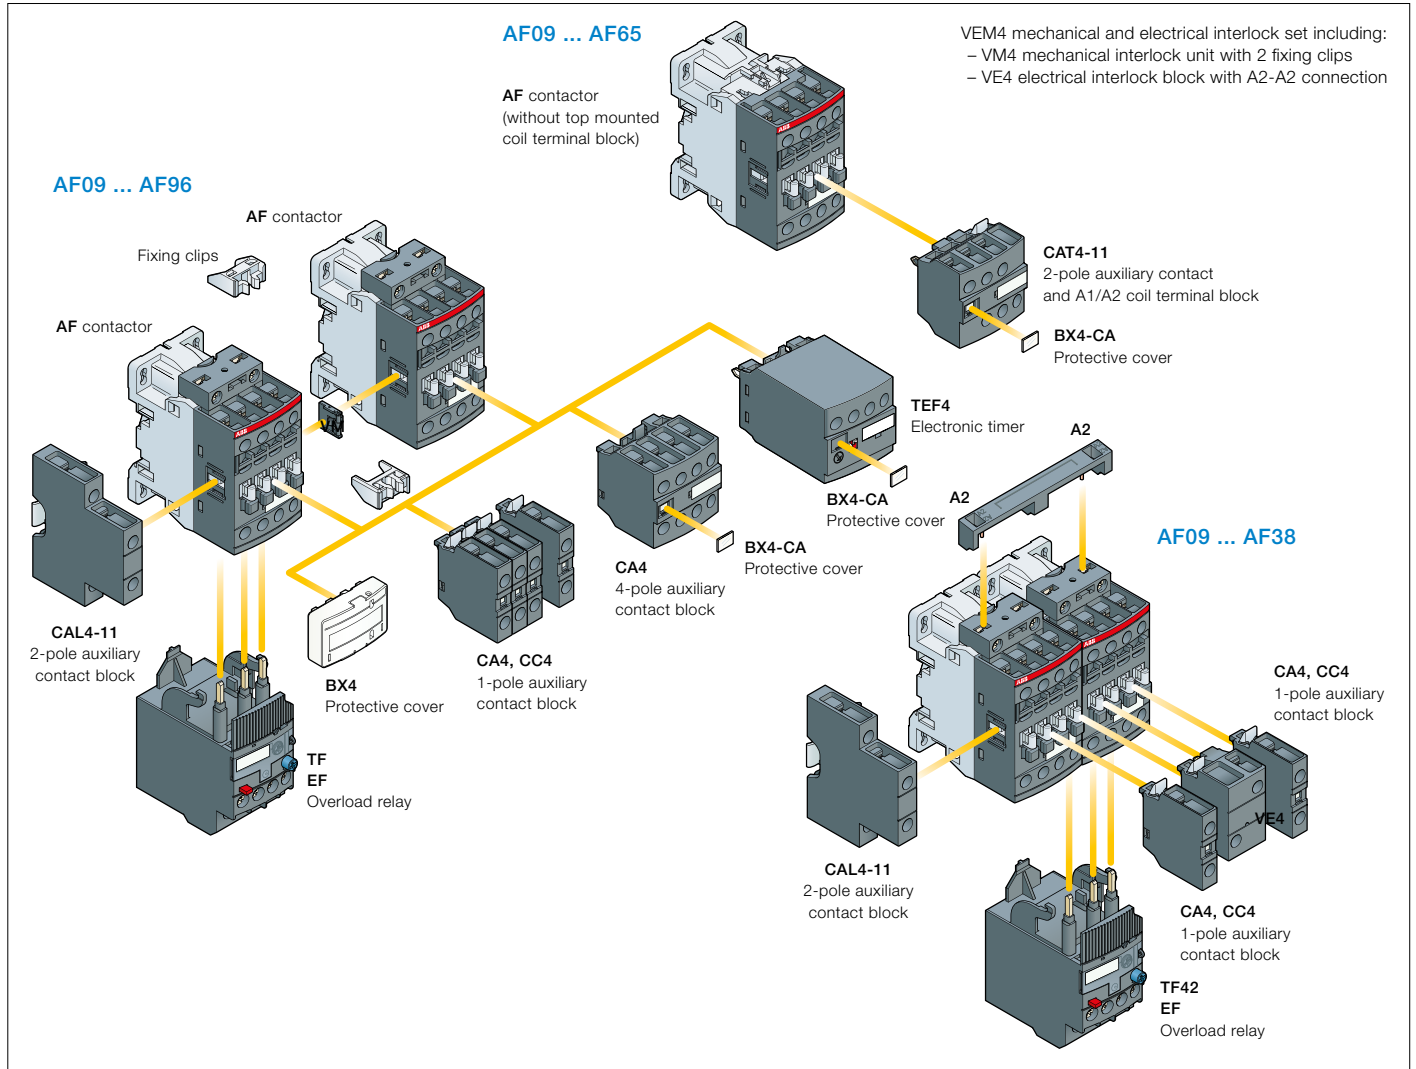

Main accessory fitting details

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.

| Contactor types | Main poles | Built-in auxiliary contacts | Front-mounted accessories | | | | | Side-mounted accessories | | | |
|-----------------|------------|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------|----------------|------------|------------------|----------------------------------------------------------------|--------------------------|------------|-----|------|
| | | | Auxiliary contact blocks | | | Electronic timer | Electrical and mechanical interlock set (between 2 contactors) | Auxiliary contact blocks | | | |
| | | | 1-pole CA4 | | | TEF4 | VEM4 | Left side | Right side | | |
| | | | 1-pole CC4 | 2-pole CAT4-11 | 4-pole CA4 | | | 2-pole CAL4-11 | | | |
| | | | Max. N.C. built-in and add-on N.C. auxiliary contacts: 4 N.C. max. on positions 1, 2, 3, 4 and 3 N.C. max. on positions 1 ±30°, 5 | | | | | | | | |
| AF09 ... AF16 | 3 | 0 | 0 | 1 | 4 max. | or 1 | or 1 | or 1 | - | + 1 | - |
| AF09 ... AF16 | 3 | 0 | 1 | 0 | 2 max. | or 1 | - | or 1 | - | + 1 | + 1 |
| AF26 ... AF38 | 3 | 0 | 0 | 0 | 3 max. | - | - | - | + 1 | + 1 | or 1 |
| | | | Max. add-on N.C. auxiliary contacts: 6 N.C. max. on positions 1, 1 ±30°, 2, 3, 4, 5 | | | | | | | | |
| AF40 ... AF65 | 3 | 0 | 0 | 0 | 4 max. | or 1 | or 1 | or 1 | - | + 1 | + 1 |
| AF80, AF96 | 3 | 0 | 0 | 0 | 4 max. | - | or 1 | or 1 | - | + 1 | + 1 |

Overload relays fitting details (1)

| Contactor types | Thermal overload relays | Electronic overload relays |
|-----------------|-------------------------|----------------------------|
| AF09 ... AF38 | TF42 (0.10...38 A) | EF19 (0.10...19 A) |
| AF26 ... AF38 | TF42 (0.10...38 A) | EF45 (9...45 A) |
| AF40 ... AF65 | TF65 (22...67 A) | EF65 (20...70 A) |
| AF80, AF96 | TF96 (40...96 A) | EF96 (36...100 A) |

The addition of an overload relay on the contactor does not prevent fitting of many other accessories as shown above.

(1) Direct mounting - No kit required.

AF09 ... AF96 3-pole contactors

Main accessories



CA4-10




CAL4-11




CA4-22E




CAT4-11E

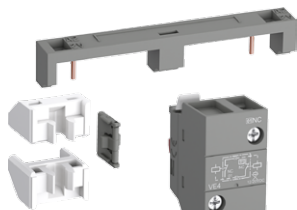


VEM4

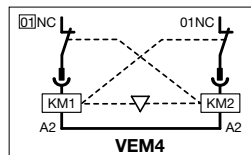

TEF4-ON



BEA16-4



BER16-4

Ordering details (1)

| For contactors | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|--------------------|------|------------|---------|----------------|
| | | | | | kg |

Front-mounted instantaneous auxiliary contact blocks

| | | | | | | |
|------------------------|-----|----|----------|-----------------|----|-------|
| AF09 ... AF96 | 1 0 | -- | CA4-10 | 1SBN010110R1010 | 1 | 0.014 |
| | 1 0 | -- | CA4-10-T | 1SBN010110T1010 | 10 | 0.014 |
| | 0 1 | -- | CA4-01 | 1SBN010110R1001 | 1 | 0.014 |
| | 0 1 | -- | CA4-01-T | 1SBN010110T1001 | 10 | 0.014 |
| AF09 ... AF16...-30-10 | 2 2 | -- | CA4-22M | 1SBN010140R1122 | 1 | 0.055 |
| AF26 ... AF96...-30-00 | 2 2 | -- | CA4-22E | 1SBN010140R1022 | 1 | 0.055 |
| AF09 ... AF16...-30-01 | 2 2 | -- | CA4-22U | 1SBN010140R1322 | 1 | 0.055 |

Front-mounted auxiliary contact blocks with N.O. leading contact and N.C. lagging contact

| | | | | | | |
|---------------|----|-----|--------|-----------------|---|-------|
| AF09 ... AF96 | -- | 1 0 | CC4-10 | 1SBN010111R1010 | 1 | 0.014 |
| | -- | 0 1 | CC4-01 | 1SBN010111R1001 | 1 | 0.014 |

Side-mounted instantaneous auxiliary contact blocks

| | | | | | | |
|---------------|-----|----|-----------|-----------------|----|-------|
| AF09 ... AF96 | 1 1 | -- | CAL4-11 | 1SBN010120R1011 | 1 | 0.040 |
| | 1 1 | -- | CAL4-11-T | 1SBN010120T1011 | 10 | 0.040 |

Front-mounted instantaneous auxiliary contact and A1/A2 coil terminal blocks

| | | | | | | |
|------------------------|-----|----|----------|-----------------|---|-------|
| AF09 ... AF16...-30-10 | 1 1 | -- | CAT4-11M | 1SBN010151R1111 | 1 | 0.040 |
| AF26 ... AF65...-30-00 | 1 1 | -- | CAT4-11E | 1SBN010151R1011 | 1 | 0.040 |
| AF09 ... AF16...-30-01 | 1 1 | -- | CAT4-11U | 1SBN010151R1311 | 1 | 0.040 |

Note: CAT4 not suitable for AF..Z contactors with DC control voltage 12...20 V DC.

Mechanical interlock unit

| | | | | | | |
|---------------|--|--|--------|-----------------|----|-------|
| AF09 ... AF38 | | | VM4 | 1SBN030105T1000 | 10 | 0.005 |
| AF40 ... AF96 | | | VM96-4 | 1SBN033405T1000 | 10 | 0.006 |

Note: VM4 and VM96-4 include 2 fixing clips (BB4) to maintain together both contactors.

Mechanical and electrical interlock set

| | | | | | | |
|---------------|-----|----|------|-----------------|---|-------|
| AF09 ... AF16 | 0 2 | -- | VEM4 | 1SBN030111R1000 | 1 | 0.035 |
| AF26 ... AF38 | | | | | | |

Note: - VEM4 includes a VM4 mechanical interlock unit with 2 fixing clips (BB4), a VE4 electrical interlock block. VE4 block must be used with A2-A2 connection to respect the electrical connection diagram.
- VEM4 not suitable for AF..Z contactors with DC control voltage 12...20 V DC.

| For contactors | Time delay range | Delay type | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|--------------------|------------|--------------------|------|------------|---------|----------------|
| | selected by switch | | | | | | kg |

Electronic timers

| | | | | | | | |
|---------------|------------|-----------|-----|----------|-----------------|---|-------|
| AF09 ... AF96 | 0.1...1 s | ON-delay | 1 1 | TEF4-ON | 1SBN020112R1000 | 1 | 0.065 |
| | 1...10 s | | | | | | |
| | 10...100 s | OFF-delay | 1 1 | TEF4-OFF | 1SBN020114R1000 | 1 | 0.065 |

Note: Rated control circuit voltage Uc 24...240 V 50/60 Hz or DC.

Connecting links with manual motor starters

| | | | | | | | |
|---------------|------|-----------------------------------------------------|--|---------|-----------------|----|-------|
| AF09 ... AF16 | with | MS116-0.16 ... MS116-25, MS132-0.16 ... MS132-25 | | BEA16-4 | 1SBN081306T1000 | 10 | 0.025 |
| AF26 ... AF38 | with | MS116-0.16 ... MS116-16, MS132-0.16 ... MS132-10 | | BEA26-4 | 1SBN082306T1000 | 10 | 0.025 |
| | with | MS116-20 ... MS116-32, MS132-12 ... MS132-32 | | BEA38-4 | 1SBN082306T2000 | 10 | 0.030 |
| AF40 ... AF65 | with | MS165-16 ... MS165-65 | | BEA65-4 | 1SBN083406R1000 | 1 | 0.090 |

Connection sets for reversing contactors

| | | | | | | | |
|---------------|--|--|--|---------|-----------------|---|-------|
| AF09 ... AF16 | | | | BER16-4 | 1SBN081311R1000 | 1 | 0.045 |
| AF26 ... AF38 | | | | BER38-4 | 1SBN082311R1000 | 1 | 0.100 |
| AF40 ... AF65 | | | | BER65-4 | 1SBN083411R1000 | 1 | 0.175 |
| AF80 ... AF96 | | | | BER96-4 | 1SBN083911R1000 | 1 | 0.250 |

Connection sets for star-delta starting

| | | | | | | | |
|---------------|------------------------|--|--|---------|-----------------|---|-------|
| AF09 ... AF16 | With or without VM4 | | | BEY16-4 | 1SBN081313R2000 | 1 | 0.050 |
| AF26 ... AF38 | With or without VM4 | | | BEY38-4 | 1SBN082713R2000 | 1 | 0.110 |
| AF40 ... AF65 | With or without VM96-4 | | | BEY65-4 | 1SBN083413R2000 | 1 | 0.200 |
| AF80 ... AF96 | With or without VM96-4 | | | BEY96-4 | 1SBN083913R2000 | 1 | 0.250 |

(1) For more information, refer to main catalog "Accessories" section.

AF116 ... AF146 3-pole contactors

55 to 75 kW

AC / DC operated with 1 N.O. + 1 N.C. auxiliary contacts



AF146-30-11

1SFC101001V0001



AF146-30-11B

1SFC101008V0001

Description

AF116 ... AF146 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC, AF146 up to 1000 V AC and AF116 ... AF146 up to 260 V DC. These contactors are of the block type design with 3 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 coils to cover control voltages between 24...500 V 50/60 Hz and 20...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltage sags (SEMI F47 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.

Ordering details

| IEC | UL / CSA | | Rated control circuit voltage | Auxiliary contacts fitted | Type (1) | Order code | Weight |
|-------------------------|----------|----------------------|-------------------------------|---------------------------|----------|------------|-------------|
| Rated operational power | current | 3-phase motor rating | Uc min. ... Uc max. | | | | Pkg (1 pce) |
| 400 V AC-3 | AC-1 | 480 V | V 50/60 Hz; V DC | | | | kg |
| kW | A | hp | A | | | | |

For connection with built-in cable clamps


| Rated power (kW) | Rated current (A) | 3-phase motor rating (hp) | General use rating (A) | Uc min. (V) | Uc max. (V) | Auxiliary contacts | Type | Order code | Weight (kg) |
|------------------|-------------------|---------------------------|------------------------|-------------|-------------|--------------------|----------------|-----------------|-------------|
| 55 | 160 | 75 | 160 | 24...60 | 20...60 | 1 1 | AF116-30-11-11 | 1SFL427001R1111 | 1.750 |
| | | | | 48...130 | 48...130 | 1 1 | AF116-30-11-12 | 1SFL427001R1211 | 1.750 |
| | | | | 100...250 | 100...250 | 1 1 | AF116-30-11-13 | 1SFL427001R1311 | 1.750 |
| | | | | 250...500 | 250...500 | 1 1 | AF116-30-11-14 | 1SFL427001R1411 | 1.750 |
| 75 | 200 | 100 | 200 | 24...60 | 20...60 | 1 1 | AF140-30-11-11 | 1SFL447001R1111 | 1.750 |
| | | | | 48...130 | 48...130 | 1 1 | AF140-30-11-12 | 1SFL447001R1211 | 1.750 |
| | | | | 100...250 | 100...250 | 1 1 | AF140-30-11-13 | 1SFL447001R1311 | 1.750 |
| | | | | 250...500 | 250...500 | 1 1 | AF140-30-11-14 | 1SFL447001R1411 | 1.750 |
| 75 | 225 | 100 | 200 | 24...60 | 20...60 | 1 1 | AF146-30-11-11 | 1SFL467001R1111 | 1.750 |
| | | | | 48...130 | 48...130 | 1 1 | AF146-30-11-12 | 1SFL467001R1211 | 1.750 |
| | | | | 100...250 | 100...250 | 1 1 | AF146-30-11-13 | 1SFL467001R1311 | 1.750 |
| | | | | 250...500 | 250...500 | 1 1 | AF146-30-11-14 | 1SFL467001R1411 | 1.750 |

With bar connections

| Rated power (kW) | Rated current (A) | 3-phase motor rating (hp) | General use rating (A) | Uc min. (V) | Uc max. (V) | Auxiliary contacts | Type | Order code | Weight (kg) |
|------------------|-------------------|---------------------------|------------------------|-------------|-------------|--------------------|-----------------|-----------------|-------------|
| 55 | 160 | 75 | 160 | 24...60 | 20...60 | 1 1 | AF116-30-11B-11 | 1SFL427002R1111 | 1.500 |
| | | | | 48...130 | 48...130 | 1 1 | AF116-30-11B-12 | 1SFL427002R1211 | 1.500 |
| | | | | 100...250 | 100...250 | 1 1 | AF116-30-11B-13 | 1SFL427002R1311 | 1.500 |
| | | | | 250...500 | 250...500 | 1 1 | AF116-30-11B-14 | 1SFL427002R1411 | 1.500 |
| 75 | 200 | 100 | 200 | 24...60 | 20...60 | 1 1 | AF140-30-11B-11 | 1SFL447002R1111 | 1.500 |
| | | | | 48...130 | 48...130 | 1 1 | AF140-30-11B-12 | 1SFL447002R1211 | 1.500 |
| | | | | 100...250 | 100...250 | 1 1 | AF140-30-11B-13 | 1SFL447002R1311 | 1.500 |
| | | | | 250...500 | 250...500 | 1 1 | AF140-30-11B-14 | 1SFL447002R1411 | 1.500 |
| 75 | 225 | 100 | 200 | 24...60 | 20...60 | 1 1 | AF146-30-11B-11 | 1SFL467002R1111 | 1.500 |
| | | | | 48...130 | 48...130 | 1 1 | AF146-30-11B-12 | 1SFL467002R1211 | 1.500 |
| | | | | 100...250 | 100...250 | 1 1 | AF146-30-11B-13 | 1SFL467002R1311 | 1.500 |
| | | | | 250...500 | 250...500 | 1 1 | AF146-30-11B-14 | 1SFL467002R1411 | 1.500 |

(1) For other auxiliary contacts arrangements, please contact your ABB local sales organization.

Main dimensions mm, inches

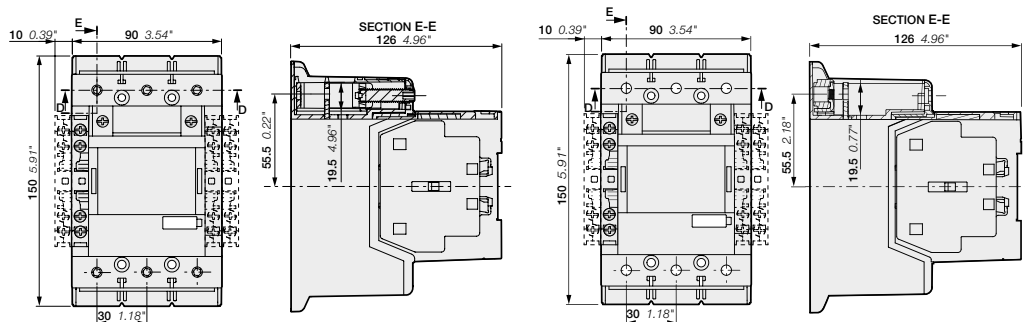

AF116, AF140, AF146-30-11

AF116, AF140, AF146-30-11B


AF116 ... AF146 3-pole contactors with built-in PLC interface

55 to 75 kW

AC / DC operated with 1 N.O. + 1 N.C. auxiliary contacts



AF146-30-11

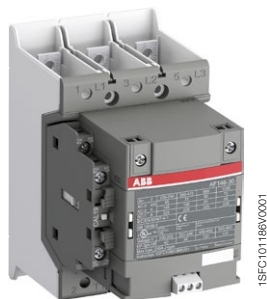

AF146-30-11B

Description

AF116 ... AF146 contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC, AF146 up to 1000 V AC and AF116 ... AF146 up to 260 V DC. These contactors are of the block type design with 3 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 2 coils to cover control voltages between 100...500 V 50/60 Hz and 100...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltage sags (SEMI F47 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.

Ordering details

| IEC | | UL / CSA | | Rated control circuit voltage | | Auxiliary contacts fitted | Type (1) | Order code | Weight |
|-------------|----------------------------------------------------|----------------------|--------------------|-------------------------------|---------|---------------------------|----------|------------|-------------|
| Rated power | operational current $\theta \leq 40^\circ\text{C}$ | 3-phase motor rating | General use rating | Uc min. ... | Uc max. | | | | Pkg (1 pce) |
| kW | A | hp | A | V 50/60 Hz | V DC | | | | kg |
| 400 V AC-3 | AC-1 | 480 V | 600 V AC | | | | | | |

For connection with built-in cable clamps

| | | | | | | | | | | |
|----|-----|-----|-----|-----------|-----------|---|---|----------------|-----------------|-------|
| 55 | 160 | 75 | 160 | 100...250 | 100...250 | 1 | 1 | AF116-30-11-33 | 1SFL427001R3311 | 1.750 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF116-30-11-34 | 1SFL427001R3411 | 1.750 |
| 75 | 200 | 100 | 200 | 100...250 | 100...250 | 1 | 1 | AF140-30-11-33 | 1SFL447001R3311 | 1.750 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF140-30-11-34 | 1SFL447001R3411 | 1.750 |
| 75 | 225 | 100 | 200 | 100...250 | 100...250 | 1 | 1 | AF146-30-11-33 | 1SFL467001R3311 | 1.750 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF146-30-11-34 | 1SFL467001R3411 | 1.750 |


With bar connections

| | | | | | | | | | | |
|----|-----|-----|-----|-----------|-----------|---|---|-----------------|-----------------|-------|
| 55 | 160 | 75 | 160 | 100...250 | 100...250 | 1 | 1 | AF116-30-11B-33 | 1SFL427002R3311 | 1.500 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF116-30-11B-34 | 1SFL427002R3411 | 1.500 |
| 75 | 200 | 100 | 200 | 100...250 | 100...250 | 1 | 1 | AF140-30-11B-33 | 1SFL447002R3311 | 1.500 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF140-30-11B-34 | 1SFL447002R3411 | 1.500 |
| 75 | 225 | 100 | 200 | 100...250 | 100...250 | 1 | 1 | AF146-30-11B-33 | 1SFL467002R3311 | 1.500 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF146-30-11B-34 | 1SFL467002R3411 | 1.500 |


(1) For other auxiliary contacts arrangements, please contact your ABB local sales organization.

AF116 ... AF146 are equipped with low voltage inputs for control, for example by a PLC.

Control inputs

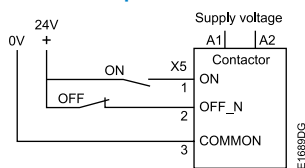

Main dimensions mm, inches

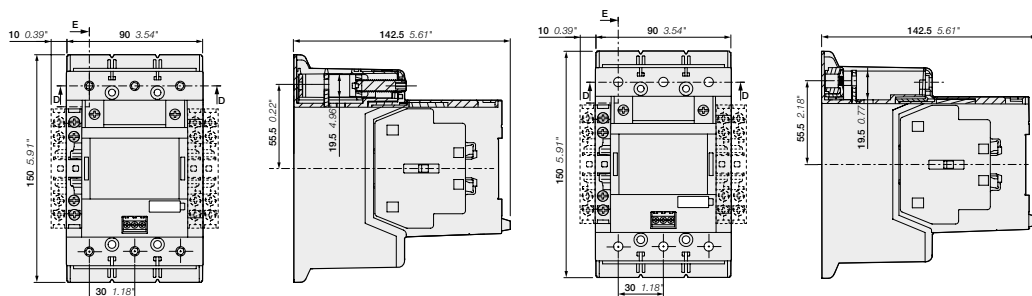

AF116, AF140, AF146-30-11

AF116, AF140, AF146-30-11B


AF190 ... AF370 3-pole contactors

90 to 200 kW

AC / DC operated with 1 N.O. + 1 N.C. auxiliary contacts



AF205-30-11

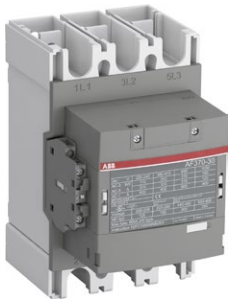

AF370-30-11

Description

AF190 ... AF370 contactors are mainly used for controlling 3-phase motors and power circuits up to 1000 V AC and up to 340 V DC. These contactors are of the block type design with 3 main poles.


- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 coils to cover control voltages between 24...500 V 50/60 Hz and 20...500 V DC
 - can manage large control voltage variations
 - reduced panel energy consumption
 - very distinct closing and opening
 - can withstand short voltage dips and voltage sags (SEMI F47 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.

Ordering details

| IEC | UL / CSA | Rated control circuit voltage | Auxiliary contacts fitted | Type (1) | Order code | Weight | | | |
|-------------------------|----------------------|-------------------------------|---------------------------|-----------|------------|-------------|----------------|-----------------|-------|
| Rated operational power | 3-phase motor rating | Uc min. ... Uc max. | | | | Pkg (1 pce) | | | |
| 400 V AC-3 | 480 V | V 50/60 Hz: V DC | | | | kg | | | |
| kW | hp | A | A | | | | | | |
| 90 | 125 | 275 | 250 | 24...60 | 20...60 | 1 1 | AF190-30-11-11 | 1SFL487002R1111 | 3,000 |
| | | | | 48...130 | 48...130 | 1 1 | AF190-30-11-12 | 1SFL487002R1211 | 3,000 |
| | | | | 100...250 | 100...250 | 1 1 | AF190-30-11-13 | 1SFL487002R1311 | 3,000 |
| | | | | 250...500 | 250...500 | 1 1 | AF190-30-11-14 | 1SFL487002R1411 | 3,000 |
| 110 | 150 | 350 | 300 | 24...60 | 20...60 | 1 1 | AF205-30-11-11 | 1SFL527002R1111 | 3,000 |
| | | | | 48...130 | 48...130 | 1 1 | AF205-30-11-12 | 1SFL527002R1211 | 3,000 |
| | | | | 100...250 | 100...250 | 1 1 | AF205-30-11-13 | 1SFL527002R1311 | 3,000 |
| | | | | 250...500 | 250...500 | 1 1 | AF205-30-11-14 | 1SFL527002R1411 | 3,000 |
| 132 | 200 | 400 | 350 | 24...60 | 20...60 | 1 1 | AF265-30-11-11 | 1SFL547002R1111 | 4,640 |
| | | | | 48...130 | 48...130 | 1 1 | AF265-30-11-12 | 1SFL547002R1211 | 4,640 |
| | | | | 100...250 | 100...250 | 1 1 | AF265-30-11-13 | 1SFL547002R1311 | 4,640 |
| | | | | 250...500 | 250...500 | 1 1 | AF265-30-11-14 | 1SFL547002R1411 | 4,640 |
| 160 | 250 | 500 | 400 | 24...60 | 20...60 | 1 1 | AF305-30-11-11 | 1SFL587002R1111 | 4,640 |
| | | | | 48...130 | 48...130 | 1 1 | AF305-30-11-12 | 1SFL587002R1211 | 4,640 |
| | | | | 100...250 | 100...250 | 1 1 | AF305-30-11-13 | 1SFL587002R1311 | 4,640 |
| | | | | 250...500 | 250...500 | 1 1 | AF305-30-11-14 | 1SFL587002R1411 | 4,640 |
| 200 | 300 | 600 | 520 | 24...60 | 20...60 | 1 1 | AF370-30-11-11 | 1SFL607002R1111 | 4,640 |
| | | | | 48...130 | 48...130 | 1 1 | AF370-30-11-12 | 1SFL607002R1211 | 4,640 |
| | | | | 100...250 | 100...250 | 1 1 | AF370-30-11-13 | 1SFL607002R1311 | 4,640 |
| | | | | 250...500 | 250...500 | 1 1 | AF370-30-11-14 | 1SFL607002R1411 | 4,640 |

(1) For other auxiliary contacts arrangements, please contact your ABB local sales organization.

Main dimensions mm, inches

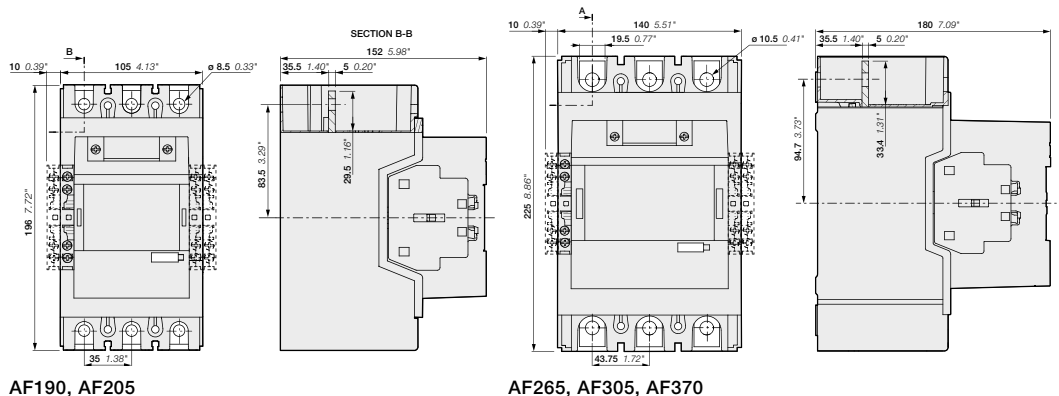

AF190, AF205


AF265, AF305, AF370

1SFC101091C0201 - Rev. E

AF190 ... AF370 3-pole contactors with built-in PLC interface


90 to 200 kW

AC / DC operated with 1 N.O. + 1 N.C. auxiliary contacts

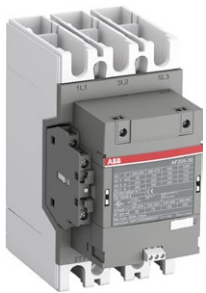

1SFC101163W0001

AF205-30-11

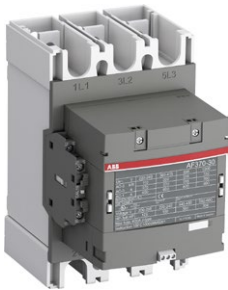

1SFC101163W0001


AF370-30-11

Description

AF190 ... AF370 contactors are mainly used for controlling 3-phase motors and power circuits up to 1000 V AC and up to 340 V DC. These contactors are of the block type design with 3 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 2 coils to cover control voltages between 100...500 V 50/60 Hz and 100...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltage sags (SEMI F47 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.


Ordering details

| IEC | | UL / CSA | | Rated control circuit voltage | | Auxiliary contacts fitted | | Type (1) | Order code | Weight |
|-------------------------|-------------------------------------------|-------------------------------|--------------------------------|-------------------------------|-----------|------------------------------------------------------------------------------------|---|----------------|-----------------|-------------|
| Rated operational power | current $\theta \leq 40^\circ\text{C}$ | 3-phase motor rating 480 V | General use rating 600 V AC | Uc min. ... | Uc max. |  | | | | Pkg (1 pce) |
| 400 V AC-3 | AC-1 | | | V 50/60 Hz | V DC | | | | | kg |
| 90 | 275 | 125 | 250 | 100...250 | 100...250 | 1 | 1 | AF190-30-11-33 | 1SFL487002R3311 | 3.000 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF190-30-11-34 | 1SFL487002R3411 | 3.000 |
| 110 | 350 | 150 | 300 | 100...250 | 100...250 | 1 | 1 | AF205-30-11-33 | 1SFL527002R3311 | 3.000 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF205-30-11-34 | 1SFL527002R3411 | 3.000 |
| 132 | 400 | 200 | 350 | 100...250 | 100...250 | 1 | 1 | AF265-30-11-33 | 1SFL547002R3311 | 4.640 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF265-30-11-34 | 1SFL547002R3411 | 4.640 |
| 160 | 500 | 250 | 400 | 100...250 | 100...250 | 1 | 1 | AF305-30-11-33 | 1SFL587002R3311 | 4.640 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF305-30-11-34 | 1SFL587002R3411 | 4.640 |
| 200 | 600 | 300 | 520 | 100...250 | 100...250 | 1 | 1 | AF370-30-11-33 | 1SFL607002R3311 | 4.640 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF370-30-11-34 | 1SFL607002R3411 | 4.640 |


(1) For other auxiliary contacts arrangements, please contact your ABB local sales organization.

AF190 ... AF370 are equipped with low voltage inputs for control, for example by a PLC.

Control inputs

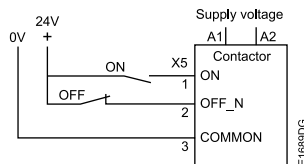

Main dimensions mm, inches

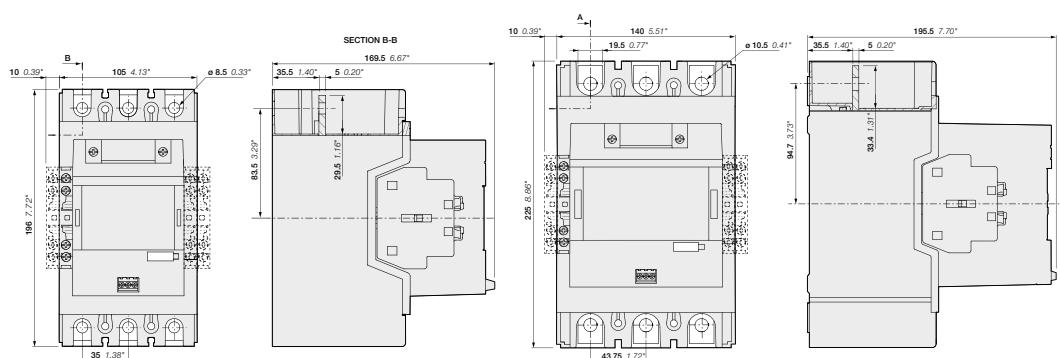


AF190, AF205

AF265, AF305, AF370

AF116 ... AF370 3-pole contactors with 1 N.O. + 1 N.C. auxiliary contacts Main accessories

Main accessories (other accessories available)

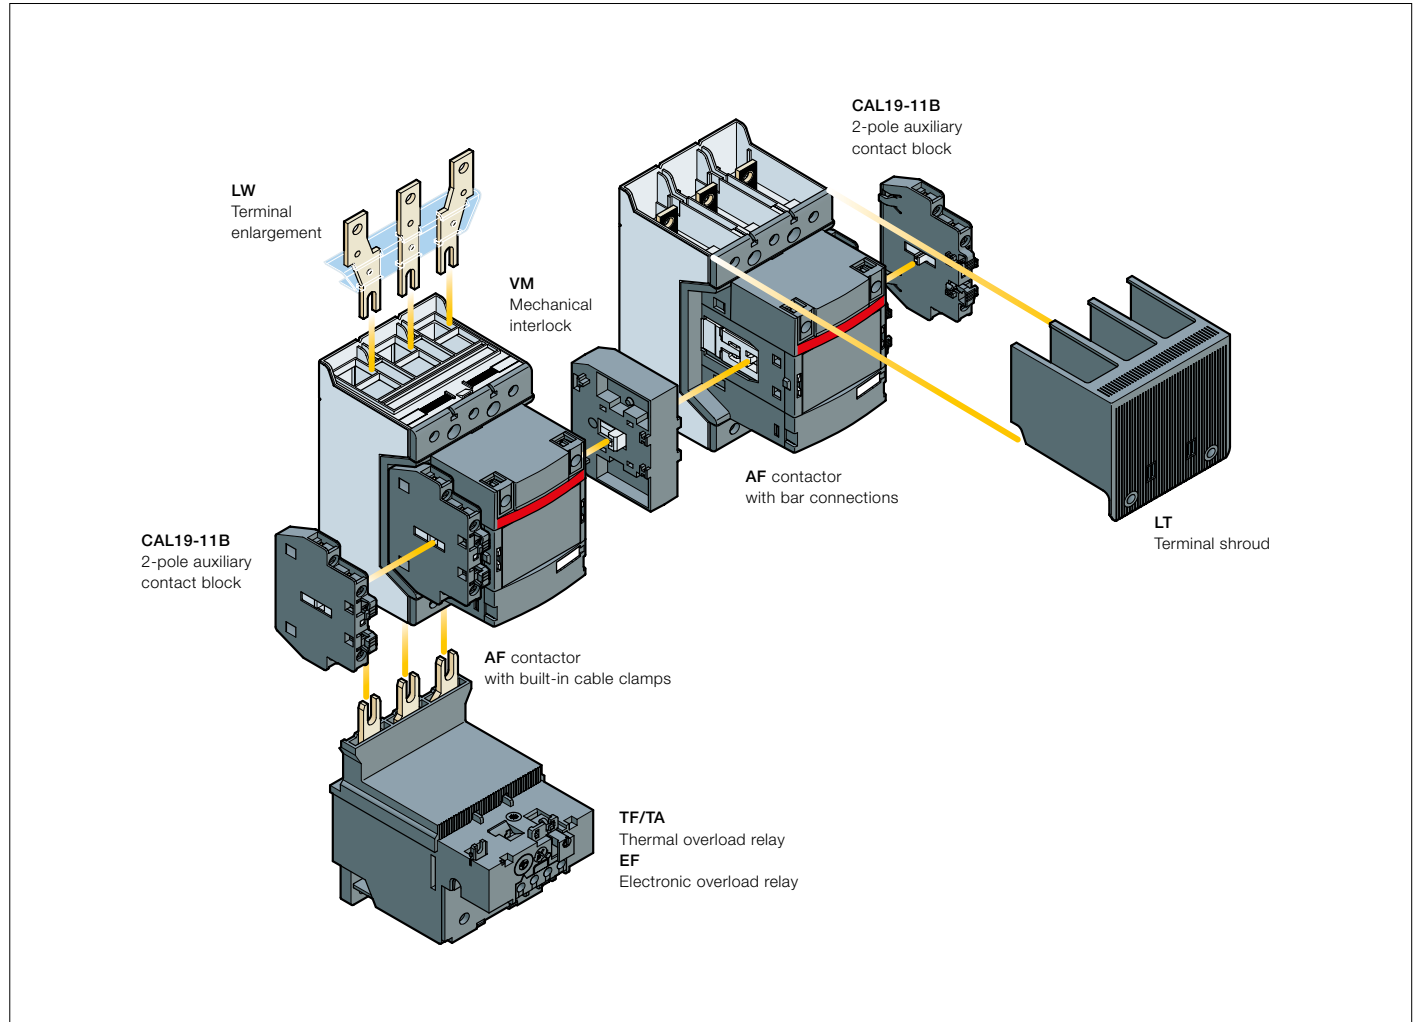

Main accessory fitting details

| Contactor types | Main poles | Available auxiliary contacts | Side-mounted accessories | | |
|-----------------|------------|------------------------------|--------------------------|---------------------|--------------------------------------------------------|
| | | | Auxiliary contact blocks | | Mechanical interlock units (between two contactors) |
| | | | CAL19-11 | CAL19-11B | |
| AF116 ... AF370 | 3 | 0 1 1 | 1 x CAL19-11 | + 2 x CAL19-11B | - |
| AF116 ... AF370 | 3 | 0 1 1 | - | + 2 x CAL19-11B (1) | + VM... (2) |

(1) Total number of auxiliary contact blocks for the two contactors.

(2) Interlock type, according to the contactor ratings (see "Accessories").

Overload relays fitting details (1)

| Contactor types | Thermal overload relays | Electronic overload relays |
|-----------------|-------------------------|----------------------------|
| | AF116 ... AF140 | TF140DU (66...142 A) |
| AF146 | - | EF146 (54...150 A) |
| AF190, AF205 | TA200DU (66...200 A) | EF205 (63...210 A) |
| AF265 ... AF370 | - | EF370 (115...380 A) |

The addition of a thermal or electronic overload relay on the contactor does not prevent fitting of many other accessories as shown in "Main accessory fitting details" table.


(1) Direct mounting - No kit required.

AF116 ... AF370 3-pole contactors with 1 N.O. + 1 N.C. auxiliary contacts Main accessories



1SFC101071V0001

CAL19-11



1SFC101035V0001

VM19



1SFC101041V0001

LT370-30C



1SFC101049V0001

LX140

Ordering details (1)

| For contactors | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|--------------------|------|------------|---------|----------------|
| | | | | | kg |

Side-mounted instantaneous auxiliary contact blocks

| | | | | | | |
|-----------------|---|---|-----------|-----------------|---|-------|
| AF116 ... AF370 | 1 | 1 | CAL19-11 | 1SFN010820R1011 | 2 | 0.050 |
| | 1 | 1 | CAL19-11B | 1SFN010820R3311 | 2 | 0.050 |

Mechanical interlock unit

| | | | | | |
|----------------------------------|--|-----------|-----------------|---|-------|
| AF116 ... AF370 | | VM19 | 1SFN030300R1000 | 1 | 0.054 |
| AF116 ... AF146 and AF190, AF205 | | VM140/190 | 1SFN034403R1000 | 1 | 0.088 |
| AF190, AF205 and AF265 ... AF370 | | VM205/265 | 1SFN035203R1000 | 1 | 0.090 |

Terminal shrouds

| | | | | | |
|-------------------------------------------------------------------------------------|--|-----------|-----------------|---|-------|
| AF116 ... AF146, with compression lugs | | LT140-30L | 1SFN124203R1000 | 2 | 0.070 |
| AF190, AF205, with cable clamps | | LT205-30C | 1SFN124801R1000 | 2 | 0.050 |
| AF190, AF205, with compression lugs | | LT205-30L | 1SFN124803R1000 | 2 | 0.220 |
| AF190, AF205, with shorting bar or between contactor and TOL/EOL in DOL-starters | | LT205-30Y | 1SFN124804R1000 | 1 | 0.050 |
| AF265 ... AF370, with cable clamps | | LT370-30C | 1SFN125401R1000 | 2 | 0.035 |
| AF265 ... AF370, with compression lugs | | LT370-30L | 1SFN125403R1000 | 2 | 0.280 |
| AF265 ... AF370, with shorting bar or between contactor and TOL/EOL in DOL-starters | | LT370-30Y | 1SFN125404R1000 | 1 | 0.075 |
| AF265 ... AF370, for use with extending cable clamps, ATK300/2 and OZXB4 | | LT370-30D | 1SFN125406R1000 | 1 | 0.150 |

| For contactors | Dimensions | | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|------------|--------|------|------------|---------|----------------|
| | hole Ø mm | bar mm | | | | kg |

Terminal enlargements

| | | | | | | |
|---------------|------|----------|-------|-----------------|---|-------|
| AF116...AF146 | 6.5 | 13 x 3 | LW140 | 1SFN074207R1000 | 1 | 0.115 |
| AF190...AF205 | 10.5 | 17.5 x 5 | LW205 | 1SFN074807R1000 | 1 | 0.260 |
| AF265...AF370 | 10.5 | 20 x 5 | LW370 | 1SFN075407R1000 | 1 | 0.340 |

Terminal extension

| | | | | | | |
|---------------|------|----------|-------|-----------------|---|-------|
| AF116...AF146 | 6.5 | 13 x 3 | LX140 | 1SFN074210R1000 | 1 | 0.072 |
| AF190...AF250 | 8.5 | 17.5 x 5 | LX205 | 1SFN074810R1000 | 1 | 0.180 |
| AF265...AF370 | 10.5 | 20 x 5 | LX370 | 1SFN075410R1000 | 1 | 0.234 |

(1) For more information, refer to main catalog "Accessories" section.

AF400 ... AF750 3-pole contactors

200 to 400 kW

AC / DC operated with 1 N.O. + 1 N.C. auxiliary contacts



AF460-30-11

1SFC101025V0001



AF750-30-11

1SFC101025V0001

Description

AF400 ... AF750 contactors are mainly used for controlling 3-phase motors and power circuits up to 1000 V AC or 600 V DC (2). These contactors are of the block type design with 3 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 coils to cover control voltages between 48...500 V 50/60 Hz and 24...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltages sags (SEMI F47 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.


Ordering details

| IEC Rated operational power 400 V AC-3 kW | UL/CSA 3-phase General use rating 600 V AC 690 V AC-1 480 V hp | 3-phase motor rating hp | General use rating A | Rated control circuit voltage Uc min. ... Uc max. | | Auxiliary contacts fitted | Type | Order code | Weight Pkg (1 pce) kg |
|----------------------------------------------------------|-------------------------------------------------------------------------------------------|----------------------------------|-------------------------------|---------------------------------------------------------|-----------|---------------------------------|-------------|---------------------|--------------------------------|
| | | | | V 50/60 Hz | V DC | | | | |
| 200 | 600 | 350 | 550 | - | 24...60 | 1 1 | AF400-30-11 | 1SFL577001R6811 (1) | 12.000 |
| | | | | 48...130 | 48...130 | 1 1 | AF400-30-11 | 1SFL577001R6911 | 12.000 |
| | | | | 100...250 | 100...250 | 1 1 | AF400-30-11 | 1SFL577001R7011 | 12.000 |
| | | | | 250...500 | 250...500 | 1 1 | AF400-30-11 | 1SFL577001R7111 | 12.000 |
| 250 | 700 | 400 | 650 | - | 24...60 | 1 1 | AF460-30-11 | 1SFL597001R6811 (1) | 12.000 |
| | | | | 48...130 | 48...130 | 1 1 | AF460-30-11 | 1SFL597001R6911 | 12.000 |
| | | | | 100...250 | 100...250 | 1 1 | AF460-30-11 | 1SFL597001R7011 | 12.000 |
| | | | | 250...500 | 250...500 | 1 1 | AF460-30-11 | 1SFL597001R7111 | 12.000 |
| 315 | 800 | 500 | 750 | - | 24...60 | 1 1 | AF580-30-11 | 1SFL617001R6811 (1) | 15.000 |
| | | | | 48...130 | 48...130 | 1 1 | AF580-30-11 | 1SFL617001R6911 | 15.000 |
| | | | | 100...250 | 100...250 | 1 1 | AF580-30-11 | 1SFL617001R7011 | 15.000 |
| | | | | 250...500 | 250...500 | 1 1 | AF580-30-11 | 1SFL617001R7111 | 15.000 |
| 400 | 1050 | 600 | 900 | - | 24...60 | 1 1 | AF750-30-11 | 1SFL637001R6811 (1) | 15.000 |
| | | | | 48...130 | 48...130 | 1 1 | AF750-30-11 | 1SFL637001R6911 | 15.000 |
| | | | | 100...250 | 100...250 | 1 1 | AF750-30-11 | 1SFL637001R7011 | 15.000 |
| | | | | 250...500 | 250...500 | 1 1 | AF750-30-11 | 1SFL637001R7111 | 15.000 |


(1) The connection polarities indicated close to the coil terminals must be respected: A1 for the positive pole and A2 for the negative pole.
 (2) Up to 850 V DC for AF580, AF750.

AF400 ... AF750 are equipped with low voltage inputs for control, for example by a PLC.


Control inputs

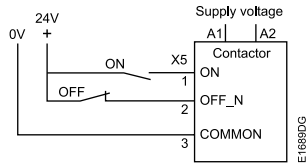



Main dimensions mm, inches

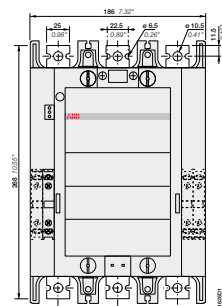

AF400, AF460

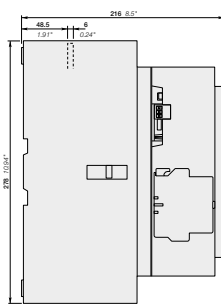

AF580, AF750

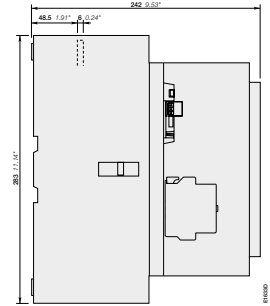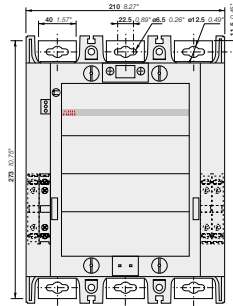

1SFC101013C0201 - Rev. A

AF1250 ... AF2650 3-pole contactors

475 to 560 kW and 1260 to 2650 A AC-1

AC / DC operated with 1 N.O. + 1 N.C. auxiliary contacts



AF1250-30-11

Description

AF1250 ... AF2050 contactors are mainly used for controlling power circuits up to 1000 V AC or 850 V DC, AF2650 for controlling power up to 1000 V AC. These contactors are of the block type design with 3 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC)
- only 4 coils for AF1250 to cover control voltages between 48...500 V 50/60 Hz and 24...500 V DC
- only 1 coil for AF1350 ... AF2650 to cover control voltages between 100...250 V 50/60 Hz and 100...250 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltages sags (SEMI F47 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.

Ordering details

| IEC | | UL/CSA | | Rated control circuit voltage U _c | | Auxiliary contacts fitted | | Type | Order code | Weight |
|-------------------------|---------------------------------|----------------------|--------------------|----------------------------------------------|-----------|---------------------------|---|--------------|---------------------|-------------|
| Rated operational power | 3-phase motor current θ ≤ 40 °C | 3-phase motor rating | General use rating | (1) | | 1 1 | | | | Pkg (1 pce) |
| kW | A | hp | A | V 50/60 Hz | V DC | 1 1 | | | | kg |
| - | 1260 | - | 1210 | - | 24...60 | 1 | 1 | AF1250-30-11 | 1SFL647001R6811 (1) | 16.000 |
| | | | | 48...130 | 48...130 | 1 | 1 | AF1250-30-11 | 1SFL647001R6911 | 16.000 |
| | | | | 100...250 | 100...250 | 1 | 1 | AF1250-30-11 | 1SFL647001R7011 | 16.000 |
| | | | | 250...500 | 250...500 | 1 | 1 | AF1250-30-11 | 1SFL647001R7111 | 16.000 |
| 475 | 1350 | 800 | 1350 | 100...250 | 100...250 | 1 | 1 | AF1350-30-11 | 1SFL657001R7011 | 34.000 |
| 560 | 1650 | 900 | 1650 | 100...250 | 100...250 | 1 | 1 | AF1650-30-11 | 1SFL677001R7011 | 35.000 |
| - | 2050 | - | 2100 | 100...250 | 100...250 | 1 | 1 | AF2050-30-11 | 1SFL707001R7011 | 35.000 |
| - | 2650 | - | 2700 | 100...250 | 100...250 | 1 | 1 | AF2650-30-11 | 1SFL667001R7011 | 45.000 |


(1) The connection polarities indicated close to the coil terminals must be respected: A1 for the positive pole and A2 for the negative pole.
 (2) AF2650: Maximum operational voltage = 1000 V according to UL / CSA.



AF2650-30-11


AF1250 ... AF2650 are equipped with low voltage inputs for control, for example by a PLC

Control inputs

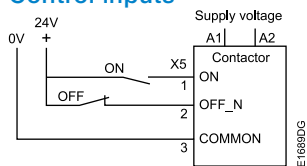

| | AF1350, AF1650, AF2050 | AF2650 |
|---|------------------------|-----------------|
| A | 392 mm / 15.43" | 422 mm / 16.61" |
| B | 47 mm / 1.85" | 53 mm / 2.09" |
| C | 10 mm / 0.39" | 25 mm / 0.98" |

Main dimensions mm, inches

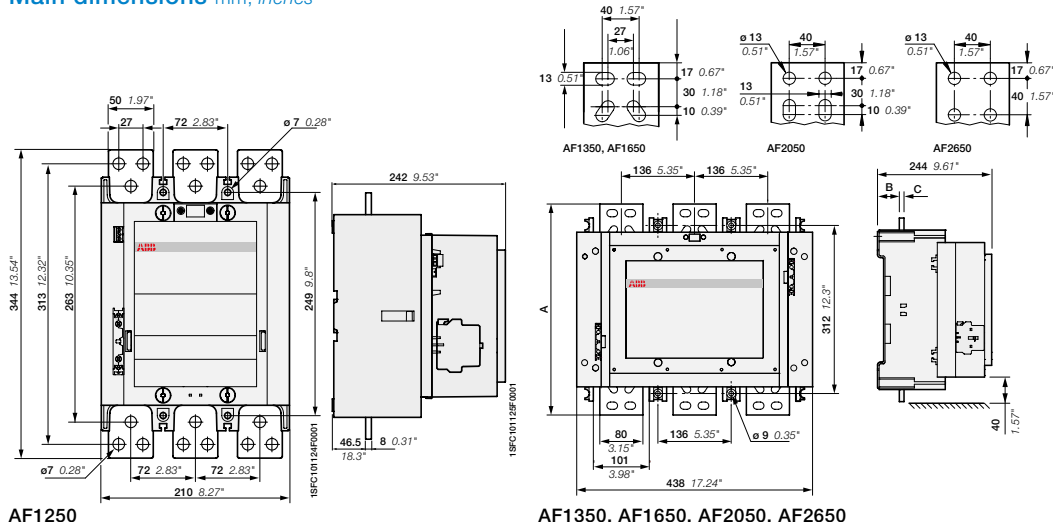


AF1250

AF1350, AF1650, AF2050, AF2650

AF400 ... AF2650 3-pole contactors with 1 N.O. + 1 N.C. auxiliary contacts

Main accessories

Main accessories (other accessories available)

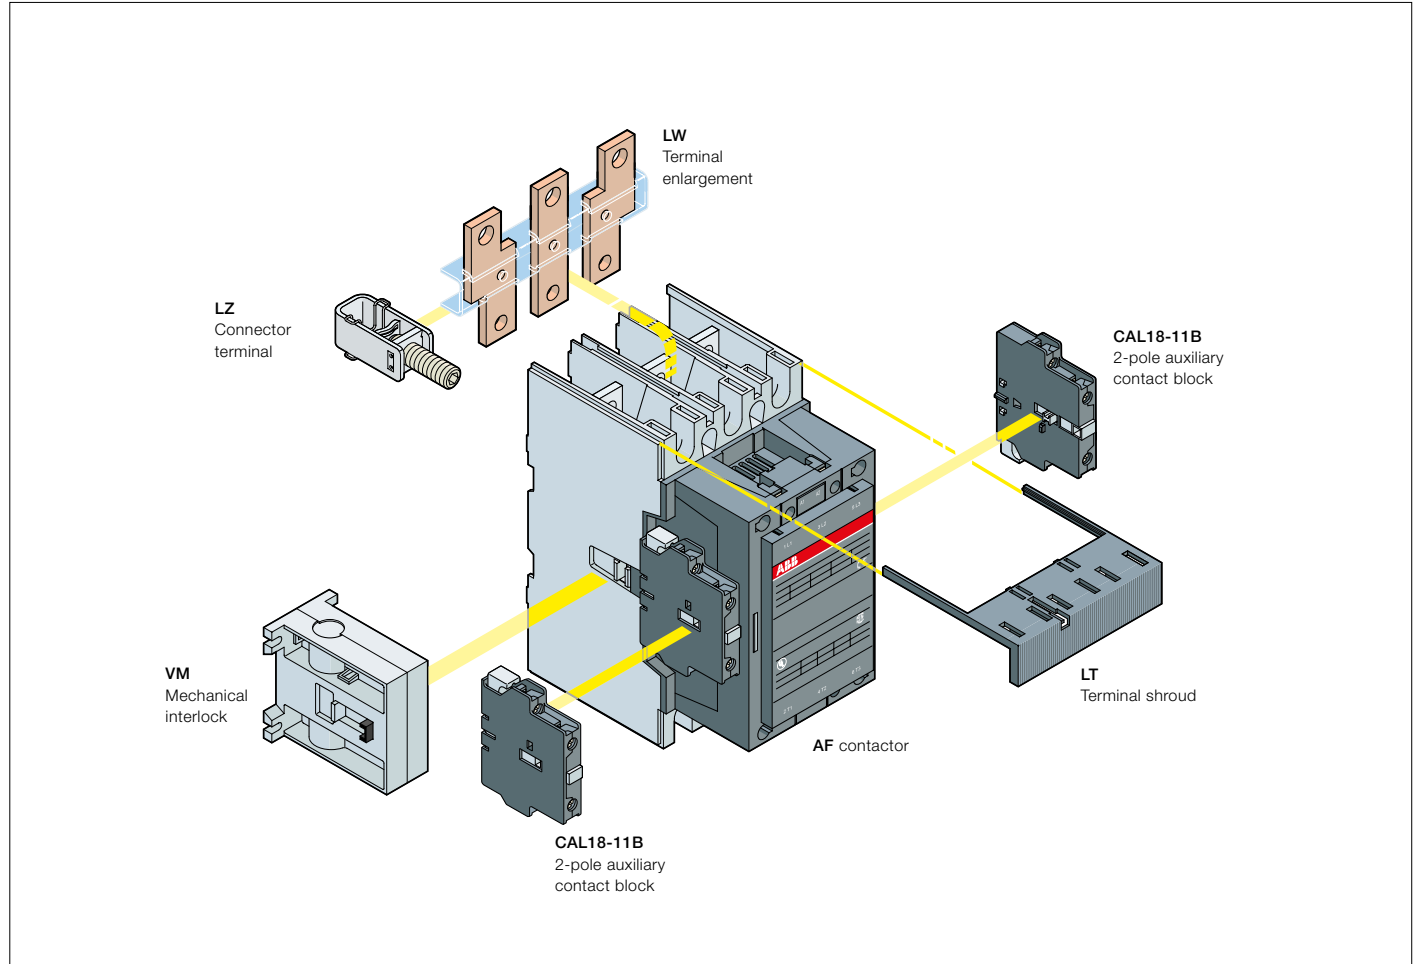

Main accessory fitting details

| Contactor types | Main poles | Available auxiliary contacts | Side-mounted accessories | | Mechanical interlock units (between two contactors) |
|-----------------|------------|------------------------------|--------------------------|---------------|--------------------------------------------------------|
| | | | Auxiliary contact blocks | | |
| | | | CAL18-11 | CAL18-11B (3) | |

Contactors + auxiliary contact blocks

| | | | | | | | | |
|------------------|---|---|---|---|--------------|---|---------------|---|
| AF400 ... AF2650 | 3 | 0 | 1 | 1 | 1 x CAL18-11 | + | 2 x CAL18-11B | - |
|------------------|---|---|---|---|--------------|---|---------------|---|

Contactors with mechanical interlocking + auxiliary contact blocks

| | | | | | | | | | |
|------------------|---|---|---|---|------------------|---|-------------------|---|------------|
| AF400 ... AF2650 | 3 | 0 | 1 | 1 | 2 x CAL18-11 (1) | + | 4 x CAL18-11B (1) | + | VM...H (2) |
|------------------|---|---|---|---|------------------|---|-------------------|---|------------|

(1) Total number of auxiliary contact blocks for the two contactors.

(2) Interlock type, according to the contactor ratings (see "Accessories").

(3) The CEL18-.. auxiliary contact blocks can replace the CAL18-11 and CAL18-11B. Though, no auxiliary contact block can be mounted outside the CEL18-..

Overload relays fitting details

| Contactor types | Thermal overload relays | Electronic overload relays |
|-----------------|-------------------------|----------------------------|
| | AF400, AF460 | - |
| AF580, AF750 | - | EF750 (250...800 A) (4) |
| AF1350, AF1650 | - | E1250DU (375...1250 A) (4) |

The addition of a thermal or electronic overload relay on the contactor does not prevent fitting of many other accessories as shown in "Main accessory fitting details" table.

(4) Mounting kit required (see "Motor protection").

AF400 ... AF2650 3-pole contactors with 1 N.O. + 1 N.C. auxiliary contacts Main accessories



CAL18-11



VM750H



LT460-AC

Ordering details (1)

| For contactors | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|--------------------|------|------------|---------|----------------|
| | | | | | kg |

Side-mounted instantaneous auxiliary contact blocks

| | | | | | | |
|------------------|---|---|-----------|-----------------|---|-------|
| AF400 ... AF2650 | 1 | 1 | CAL18-11 | 1SFN010720R1011 | 2 | 0.050 |
| | 1 | 1 | CAL18-11B | 1SFN010720R3311 | 2 | 0.050 |

Mechanical interlock unit

| | | | | | | |
|-------------------|--|--|---------|-----------------|---|-------|
| AF400 ... AF1250 | | | VM750H | 1SFN035700R1000 | 1 | 0.200 |
| AF1350 ... AF2650 | | | VM1650H | 1SFN036503R1000 | 1 | 6.000 |

Terminal shrouds

| | | | | | | |
|---------------------------------|--|--|----------|-----------------|---|-------|
| AF400, AF460 with connectors | | | LT460-AC | 1SFN125701R1000 | 2 | 0.100 |
| AF400, AF460 with lugs | | | LT460-AL | 1SFN125703R1000 | 2 | 0.800 |
| AF580 ... AF750 with connectors | | | LT750-AC | 1SFN126101R1000 | 2 | 0.120 |
| AF580 ... AF750 with lugs | | | LT750-AL | 1SFN126103R1000 | 2 | 0.825 |

| For contactors | Dimensions | | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|------------|-----|------|------------|---------|----------------|
| | hole Ø | bar | | | | kg |
| | mm | mm | | | | |

Terminal enlargements

| | | | | | | |
|--------------|------|---------|--------|-----------------|---|-------|
| AF400, AF460 | 10.5 | 25 x 5 | LW460 | 1SFN075707R1000 | 1 | 0.730 |
| AF580, AF750 | 13 | 40 x 6 | LW750 | 1SFN076107R1000 | 1 | 1.230 |
| AF1250 | 13 | 50 x 10 | LW1250 | 1SFN076407R1000 | 1 | 2.000 |




Terminal extension

| | | | | | | |
|--------------|------|--------|-------|-----------------|---|-------|
| AF400, AF460 | 10.5 | 25 x 5 | LX460 | 1SFN075710R1000 | 1 | 0.500 |
| AF580, AF750 | 13 | 40 x 6 | LX750 | 1SFN076110R1000 | 1 | 0.850 |

(1) For more information, refer to main catalog "Accessories" section.

4-pole contactors



| | | | | | | | | | | | |
|------------------------|-----------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------|-----------------|------|------|------|------|------|------|-----|
| IEC | AC-1 Rated operational current | $\theta \leq 40\text{ }^{\circ}\text{C}$, 690 V | A | 25 | 30 | 45 | 55 | 70 | 100 | 125 | |
| UL/CSA | General use rating | 600 V | A | 25 | 30 | 45 | 55 | 60 | 80 | 105 | |
| AC / DC Control supply | |  | Type | AF09 | AF16 | AF26 | AF38 | AF40 | AF52 | AF80 | |
| AC Control supply | |  | Type | AF09 | AF16 | AF26 | AF38 | AF40 | AF52 | AF80 | |
| DC Control supply | |  | Type | AF09 | AF16 | AF26 | AF38 | AF40 | AF52 | AF80 | |
| IEC | AC-1 Rated operational current | $\theta \leq 40\text{ }^{\circ}\text{C}$ | A | 25 | 30 | 45 | 55 | 70 | 100 | 125 | |
| | | 690 V | $\theta \leq 60\text{ }^{\circ}\text{C}$ (1) | A | 25 | 30 | 40 | 45 | 60 | 80 | 105 |
| | | | $\theta \leq 70\text{ }^{\circ}\text{C}$ | A | 22 | 26 | 32 | 37 | 50 | 70 | 90 |
| | | With conductor cross sectional area | | mm ² | 4 | 6 | 10 | 16 | 35 | 35 | 50 |
| | Rated operational voltage Ue max. | | V | 690 | 690 | 690 | 690 | 690 | 690 | 690 | |

(1) $\theta \leq 55\text{ }^{\circ}\text{C}$ for EK550, EK1000 contactors

Main accessories

| | | |
|--------------------------|-------------------------|--------------------------------------|
| Auxiliary contact blocks | Front mounting | CA4-10 (1 x N.O.), CA4-01 (1 x N.C.) |
| | Side mounting | CAL4-11 (1 x N.O. + 1 x N.C.) |
| Timers | Electronic | TEF4-ON |
| | | TEF4-OFF |
| Interlocking units | Mechanical | VM4 |
| | Mechanical / Electrical | VEM4 |
| Surge suppressors | Varistor + RC (AC / DC) | Built-in surge protection |
| | | VM96-4 |



| | | | | | | | | |
|-------|-------|-------|-------|-------|-------|---------|---------|---------|
| 160 | 200 | 275 | 350 | 400 | 500 | 525 | 800 | 1000 |
| 160 | 175 | 230 | 250 | 300 | 350 | 420 | 540 | — |
| AF116 | AF140 | AF190 | AF205 | AF265 | AF305 | AF370 | — | — |
| AF116 | AF140 | AF190 | AF205 | AF265 | AF305 | AF370 | EK550 | EK1000 |
| AF116 | AF140 | AF190 | AF205 | AF265 | AF305 | AF370 | EK550 | EK1000 |
| 160 | 200 | 275 | 350 | 400 | 500 | 525 | 800 | 1000 |
| 145 | 175 | 250 | 300 | 350 | 400 | 425 | 650 | 800 |
| 130 | 160 | 200 | 240 | 290 | 325 | 350 | 575 | 720 |
| 70 | 95 | 150 | 240 | 240 | 300 | 2 x 185 | 2 x 240 | 2 x 300 |
| 690 | 690 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 | 1000 |

| | |
|---------------------------------|--------------------------------|
| CAL19-11 (1 x N.O. + 1 x N.C.) | CAL16-11 (1 x N.O. + 1 x N.C.) |
| VM19 (for same size contactors) | VH800 |
| | RC-EH800 |

AF09 ... AF38 4-pole contactors

25 to 55 A AC-1

AC / DC operated



AF09-40-00

1SBC101096FF014

Description

AF09 ... AF38 4-pole contactors are mainly used for controlling non-inductive or slightly inductive loads (i.e. resistance furnaces...) and generally for controlling power circuits up to 690 V AC and 440 V DC. These contactors are of the block type design with 4 main poles.


- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 control voltage ranges covering 24...500 V 50/60 Hz and 20...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening.
- built-in surge suppression
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

Ordering details

| IEC Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 | UL/CSA General use rating 600 V AC | Rated control circuit voltage Uc min. ... Uc max. | | Auxiliary contacts fitted | | Type | Order code | Weight Pkg (1 pce) | |
|-------------------------------------------------------------------------------|---------------------------------------------|---------------------------------------------------------|-----------|---------------------------------|---|------|---------------|--------------------------|-------|
| A | A | V 50/60 Hz | V DC | | | | | kg | |
| 4 N.O. main poles | | | | | | | | | |
| 25 | 25 | 24...60 | - | (1) | 0 | 0 | AF09-40-00-41 | 1SBL137201R4100 | 0.270 |
| | | 48...130 | 48...130 | 0 | 0 | 0 | AF09-40-00-12 | 1SBL137201R1200 | 0.270 |
| | | 100...250 | 100...250 | 0 | 0 | 0 | AF09-40-00-13 | 1SBL137201R1300 | 0.270 |
| | | 250...500 | 250...500 | 0 | 0 | 0 | AF09-40-00-14 | 1SBL137201R1400 | 0.310 |
| 30 | 30 | 24...60 | - | (1) | 0 | 0 | AF16-40-00-41 | 1SBL177201R4100 | 0.270 |
| | | 48...130 | 48...130 | 0 | 0 | 0 | AF16-40-00-12 | 1SBL177201R1200 | 0.270 |
| | | 100...250 | 100...250 | 0 | 0 | 0 | AF16-40-00-13 | 1SBL177201R1300 | 0.270 |
| | | 250...500 | 250...500 | 0 | 0 | 0 | AF16-40-00-14 | 1SBL177201R1400 | 0.310 |
| 45 | 45 | 24...60 | - | (1) | 0 | 0 | AF26-40-00-41 | 1SBL237201R4100 | 0.360 |
| | | 48...130 | 48...130 | 0 | 0 | 0 | AF26-40-00-12 | 1SBL237201R1200 | 0.360 |
| | | 100...250 | 100...250 | 0 | 0 | 0 | AF26-40-00-13 | 1SBL237201R1300 | 0.360 |
| | | 250...500 | 250...500 | 0 | 0 | 0 | AF26-40-00-14 | 1SBL237201R1400 | 0.400 |
| 55 | 55 | 24...60 | - | (1) | 0 | 0 | AF38-40-00-41 | 1SBL297201R4100 | 0.360 |
| | | 48...130 | 48...130 | 0 | 0 | 0 | AF38-40-00-12 | 1SBL297201R1200 | 0.360 |
| | | 100...250 | 100...250 | 0 | 0 | 0 | AF38-40-00-13 | 1SBL297201R1300 | 0.360 |
| | | 250...500 | 250...500 | 0 | 0 | 0 | AF38-40-00-14 | 1SBL297201R1400 | 0.400 |
| 2 N.O. + 2 N.C. main poles | | | | | | | | | |
| 25 | 25 | 24...60 | - | (1) | 0 | 0 | AF09-22-00-41 | 1SBL137501R4100 | 0.270 |
| | | 48...130 | 48...130 | 0 | 0 | 0 | AF09-22-00-12 | 1SBL137501R1200 | 0.270 |
| | | 100...250 | 100...250 | 0 | 0 | 0 | AF09-22-00-13 | 1SBL137501R1300 | 0.270 |
| | | 250...500 | 250...500 | 0 | 0 | 0 | AF09-22-00-14 | 1SBL137501R1400 | 0.310 |
| 30 | 30 | 24...60 | - | (1) | 0 | 0 | AF16-22-00-41 | 1SBL177501R4100 | 0.270 |
| | | 48...130 | 48...130 | 0 | 0 | 0 | AF16-22-00-12 | 1SBL177501R1200 | 0.270 |
| | | 100...250 | 100...250 | 0 | 0 | 0 | AF16-22-00-13 | 1SBL177501R1300 | 0.270 |
| | | 250...500 | 250...500 | 0 | 0 | 0 | AF16-22-00-14 | 1SBL177501R1400 | 0.310 |
| 45 | 45 | 24...60 | - | (1) | 0 | 0 | AF26-22-00-41 | 1SBL237501R4100 | 0.360 |
| | | 48...130 | 48...130 | 0 | 0 | 0 | AF26-22-00-12 | 1SBL237501R1200 | 0.360 |
| | | 100...250 | 100...250 | 0 | 0 | 0 | AF26-22-00-13 | 1SBL237501R1300 | 0.360 |
| | | 250...500 | 250...500 | 0 | 0 | 0 | AF26-22-00-14 | 1SBL237501R1400 | 0.400 |
| 55 | 55 | 24...60 | - | (1) | 0 | 0 | AF38-22-00-41 | 1SBL297501R4100 | 0.360 |
| | | 48...130 | 48...130 | 0 | 0 | 0 | AF38-22-00-12 | 1SBL297501R1200 | 0.360 |
| | | 100...250 | 100...250 | 0 | 0 | 0 | AF38-22-00-13 | 1SBL297501R1300 | 0.360 |
| | | 250...500 | 250...500 | 0 | 0 | 0 | AF38-22-00-14 | 1SBL297501R1400 | 0.400 |

(1) For 24...60 V 50/60 Hz - 20...60 V DC, use AF..Z...00-21.

Main dimensions mm, inches

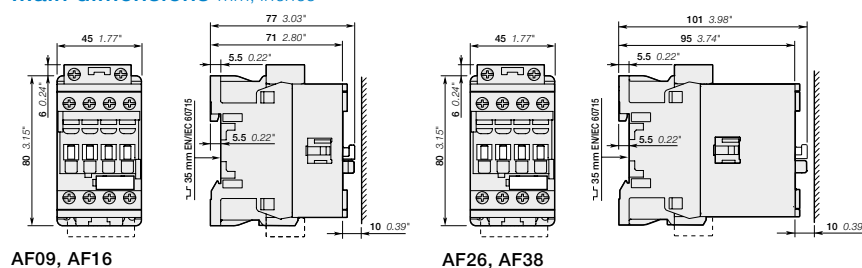

AF09, AF16

AF26, AF38

AF09Z ... AF38Z 4-pole contactors

25 to 55 A AC-1

AC / DC operated - low consumption



AF09Z-40-00





AF26Z-40-00

Description

AF09Z ... AF38Z 4-pole contactors are mainly used for controlling non-inductive or slightly inductive loads (i.e. resistance furnaces...) and generally for controlling power circuits up to 690 V AC and 440 V DC. These contactors are of the block type design with 4 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 control voltage ranges covering 24...250 V 50/60 Hz and 12...250 V DC
- can manage large control voltage variations
- allow direct control by PLC-output ≥ 24 V DC 500 mA
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltage sags (SEMI F47-0706 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

Ordering details

| IEC | UL/CSA | Rated control circuit voltage | | Auxiliary contacts fitted | Type | Order code | Weight |
|----------------------------------------------------------|--------------------------------|-------------------------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------|-------------|
| Rated operational current $\theta \leq 40$ °C AC-1 | General use rating 600 V AC | Uc min. ... Uc max. | | | | | Pkg (1 pce) |
| A | A | V 50/60 Hz | V DC |   | | | kg |

4 N.O. main poles


| Rated current | General use rating | Uc min. ... Uc max. | V 50/60 Hz | V DC | Auxiliary contacts | Type | Order code | Weight |
|---------------|--------------------|---------------------|------------|------|--------------------|----------------|-----------------|--------|
| 25 | 25 | - | 12...20 | 0 0 | 0 0 | AF09Z-40-00-20 | 1SBL136201R2000 | 0.310 |
| | | 24...60 | 20...60 | 0 0 | 0 0 | AF09Z-40-00-21 | 1SBL136201R2100 | 0.310 |
| | | 48...130 | 48...130 | 0 0 | 0 0 | AF09Z-40-00-22 | 1SBL136201R2200 | 0.310 |
| | | 100...250 | 100...250 | 0 0 | 0 0 | AF09Z-40-00-23 | 1SBL136201R2300 | 0.310 |
| 30 | 30 | - | 12...20 | 0 0 | 0 0 | AF16Z-40-00-20 | 1SBL176201R2000 | 0.310 |
| | | 24...60 | 20...60 | 0 0 | 0 0 | AF16Z-40-00-21 | 1SBL176201R2100 | 0.310 |
| | | 48...130 | 48...130 | 0 0 | 0 0 | AF16Z-40-00-22 | 1SBL176201R2200 | 0.310 |
| | | 100...250 | 100...250 | 0 0 | 0 0 | AF16Z-40-00-23 | 1SBL176201R2300 | 0.310 |
| 45 | 45 | - | 12...20 | 0 0 | 0 0 | AF26Z-40-00-20 | 1SBL236201R2000 | 0.400 |
| | | 24...60 | 20...60 | 0 0 | 0 0 | AF26Z-40-00-21 | 1SBL236201R2100 | 0.400 |
| | | 48...130 | 48...130 | 0 0 | 0 0 | AF26Z-40-00-22 | 1SBL236201R2200 | 0.400 |
| | | 100...250 | 100...250 | 0 0 | 0 0 | AF26Z-40-00-23 | 1SBL236201R2300 | 0.400 |
| 55 | 55 | - | 12...20 | 0 0 | 0 0 | AF38Z-40-00-20 | 1SBL296201R2000 | 0.400 |
| | | 24...60 | 20...60 | 0 0 | 0 0 | AF38Z-40-00-21 | 1SBL296201R2100 | 0.400 |
| | | 48...130 | 48...130 | 0 0 | 0 0 | AF38Z-40-00-22 | 1SBL296201R2200 | 0.400 |
| | | 100...250 | 100...250 | 0 0 | 0 0 | AF38Z-40-00-23 | 1SBL296201R2300 | 0.400 |

2 N.O. + 2 N.C. main poles

| Rated current | General use rating | Uc min. ... Uc max. | V 50/60 Hz | V DC | Auxiliary contacts | Type | Order code | Weight |
|---------------|--------------------|---------------------|------------|------|--------------------|----------------|-----------------|--------|
| 25 | 25 | - | 12...20 | 0 0 | 0 0 | AF09Z-22-00-20 | 1SBL136501R2000 | 0.310 |
| | | 24...60 | 20...60 | 0 0 | 0 0 | AF09Z-22-00-21 | 1SBL136501R2100 | 0.310 |
| | | 48...130 | 48...130 | 0 0 | 0 0 | AF09Z-22-00-22 | 1SBL136501R2200 | 0.310 |
| | | 100...250 | 100...250 | 0 0 | 0 0 | AF09Z-22-00-23 | 1SBL136501R2300 | 0.310 |
| 30 | 30 | - | 12...20 | 0 0 | 0 0 | AF16Z-22-00-20 | 1SBL176501R2000 | 0.310 |
| | | 24...60 | 20...60 | 0 0 | 0 0 | AF16Z-22-00-21 | 1SBL176501R2100 | 0.310 |
| | | 48...130 | 48...130 | 0 0 | 0 0 | AF16Z-22-00-22 | 1SBL176501R2200 | 0.310 |
| | | 100...250 | 100...250 | 0 0 | 0 0 | AF16Z-22-00-23 | 1SBL176501R2300 | 0.310 |
| 45 | 45 | - | 12...20 | 0 0 | 0 0 | AF26Z-22-00-20 | 1SBL236501R2000 | 0.400 |
| | | 24...60 | 20...60 | 0 0 | 0 0 | AF26Z-22-00-21 | 1SBL236501R2100 | 0.400 |
| | | 48...130 | 48...130 | 0 0 | 0 0 | AF26Z-22-00-22 | 1SBL236501R2200 | 0.400 |
| | | 100...250 | 100...250 | 0 0 | 0 0 | AF26Z-22-00-23 | 1SBL236501R2300 | 0.400 |
| 55 | 55 | - | 12...20 | 0 0 | 0 0 | AF38Z-22-00-20 | 1SBL296501R2000 | 0.400 |
| | | 24...60 | 20...60 | 0 0 | 0 0 | AF38Z-22-00-21 | 1SBL296501R2100 | 0.400 |
| | | 48...130 | 48...130 | 0 0 | 0 0 | AF38Z-22-00-22 | 1SBL296501R2200 | 0.400 |
| | | 100...250 | 100...250 | 0 0 | 0 0 | AF38Z-22-00-23 | 1SBL296501R2300 | 0.400 |

Note: Only AF.Z contactors with DC control voltage 12...20 V DC need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole.

Main dimensions mm, inches

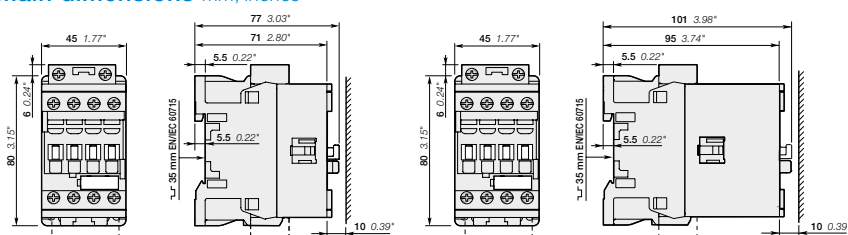

AF09Z, AF16Z

AF26Z, AF38Z

AF40 ... AF80 4-pole contactors

70 to 125 A AC-1

AC / DC operated



AF40-40-00



AF80-40-00

Description

AF40 ... AF80 4-pole contactors are mainly used for controlling non-inductive or slightly inductive loads (i.e. resistance furnaces...) and generally for controlling power circuits up to 690 V AC and 440 V DC. These contactors are of the block type design with 4 main poles.


- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 control voltages ranges covering 24...500 V 50/60 Hz and 20...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening.
- built-in surge suppression
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

Ordering details

| IEC Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 | UL/CSA General use rating 600 V AC | Rated control circuit voltage Uc min. ... Uc max. | | Auxiliary contacts fitted | Type (1) | Order code | Weight Pkg (1 pce) kg |
|----------------------------------------------------------------------------|------------------------------------------|------------------------------------------------------|-------------|---------------------------|---------------|-----------------|-----------------------------|
| | | V 50/60 Hz | V DC | | | | |
| 4 N.O. Main Poles | | | | | | | |
| 70 | 60 | 24...60 | - | 0 0 | AF40-40-00-41 | 1SBL347201R4100 | 1.210 |
| | | 24...60 | 20...60 (1) | 0 0 | AF40-40-00-11 | 1SBL347201R1100 | 1.210 |
| | | 48...130 | 48...130 | 0 0 | AF40-40-00-12 | 1SBL347201R1200 | 1.210 |
| | | 100...250 | 100...250 | 0 0 | AF40-40-00-13 | 1SBL347201R1300 | 1.160 |
| | | 250...500 | 250...500 | 0 0 | AF40-40-00-14 | 1SBL347201R1400 | 1.160 |
| 100 | 80 | 24...60 | - | 0 0 | AF52-40-00-41 | 1SBL367201R4100 | 1.210 |
| | | 24...60 | 20...60 (1) | 0 0 | AF52-40-00-11 | 1SBL367201R1100 | 1.210 |
| | | 48...130 | 48...130 | 0 0 | AF52-40-00-12 | 1SBL367201R1200 | 1.210 |
| | | 100...250 | 100...250 | 0 0 | AF52-40-00-13 | 1SBL367201R1300 | 1.160 |
| | | 250...500 | 250...500 | 0 0 | AF52-40-00-14 | 1SBL367201R1400 | 1.160 |
| 125 | 105 | 24...60 | - | 0 0 | AF80-40-00-41 | 1SBL397201R4100 | 1.490 |
| | | 24...60 | 20...60 (1) | 0 0 | AF80-40-00-11 | 1SBL397201R1100 | 1.490 |
| | | 48...130 | 48...130 | 0 0 | AF80-40-00-12 | 1SBL397201R1200 | 1.490 |
| | | 100...250 | 100...250 | 0 0 | AF80-40-00-13 | 1SBL397201R1300 | 1.440 |
| | | 250...500 | 250...500 | 0 0 | AF80-40-00-14 | 1SBL397201R1400 | 1.440 |
| 2 N.O. + 2 N.C. Main Poles | | | | | | | |
| 70 | 60 | 24...60 | - | 0 0 | AF40-22-00-41 | 1SBL347501R4100 | 1.210 |
| | | 24...60 | 20...60 (1) | 0 0 | AF40-22-00-11 | 1SBL347501R1100 | 1.210 |
| | | 48...130 | 48...130 | 0 0 | AF40-22-00-12 | 1SBL347501R1200 | 1.210 |
| | | 100...250 | 100...250 | 0 0 | AF40-22-00-13 | 1SBL347501R1300 | 1.160 |
| | | 250...500 | 250...500 | 0 0 | AF40-22-00-14 | 1SBL347501R1400 | 1.160 |
| 125 | 105 | 24...60 | - | 0 0 | AF80-22-00-41 | 1SBL397501R4100 | 1.490 |
| | | 24...60 | 20...60 (1) | 0 0 | AF80-22-00-11 | 1SBL397501R1100 | 1.490 |
| | | 48...130 | 48...130 | 0 0 | AF80-22-00-12 | 1SBL397501R1200 | 1.490 |
| | | 100...250 | 100...250 | 0 0 | AF80-22-00-13 | 1SBL397501R1300 | 1.440 |
| | | 250...500 | 250...500 | 0 0 | AF80-22-00-14 | 1SBL397501R1400 | 1.440 |

(1) AF.....-11 not suitable for direct control by PLC-output.


Main dimensions mm, inches

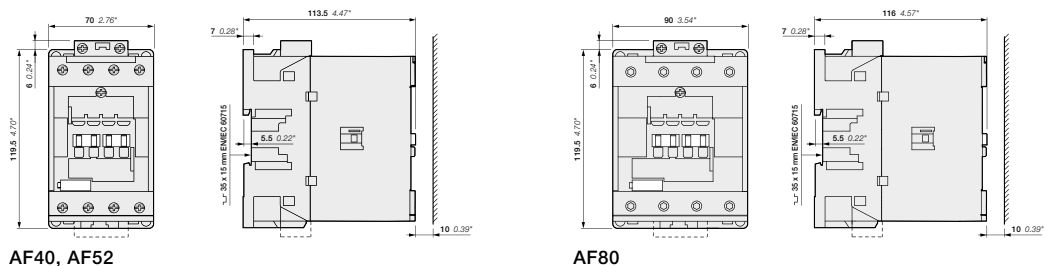

AF40, AF52

AF80


1SBC101967S0201 - Rev. B

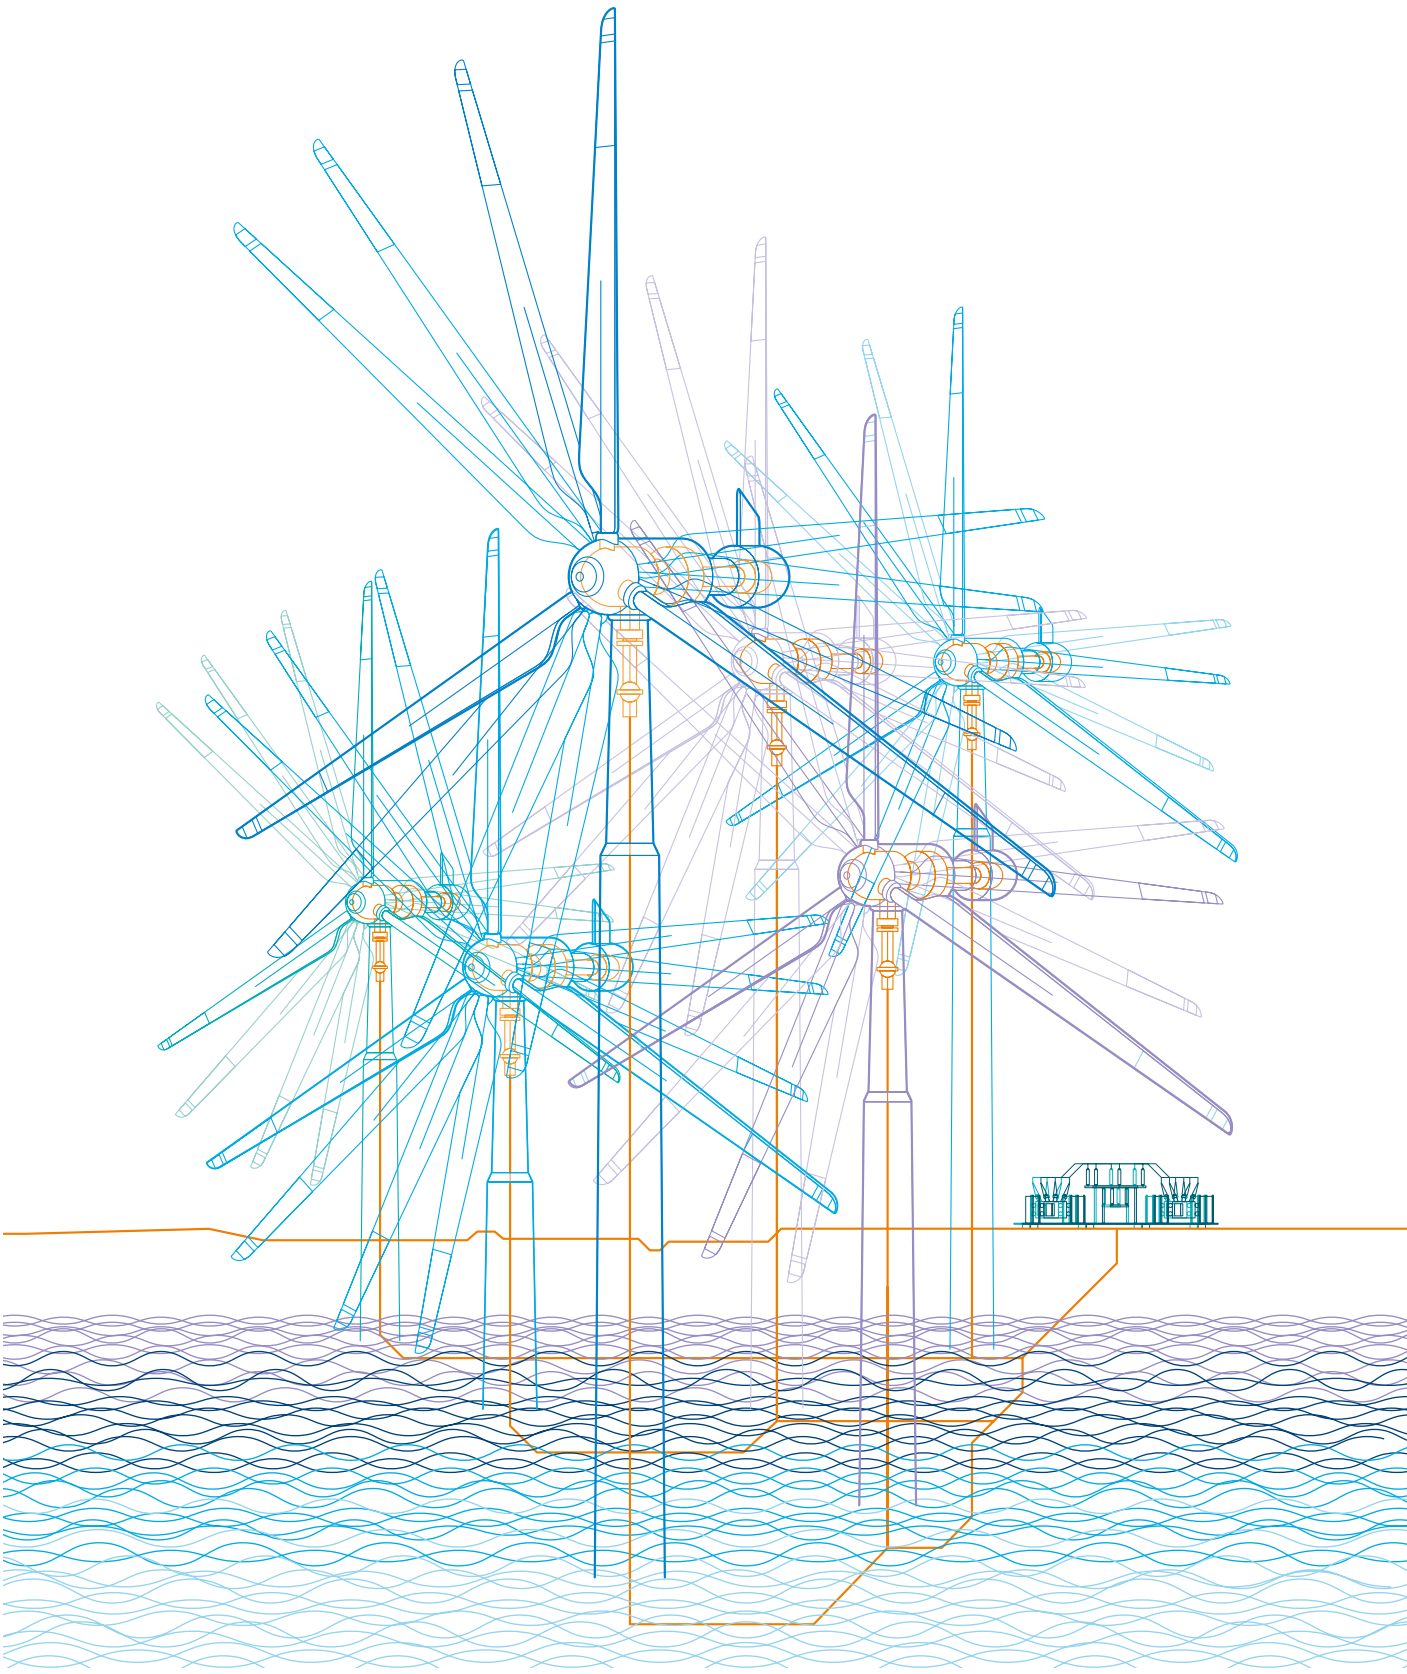

AF09 ... AF80 4-pole contactors

Main accessories

Contactor and main accessories (other accessories available)

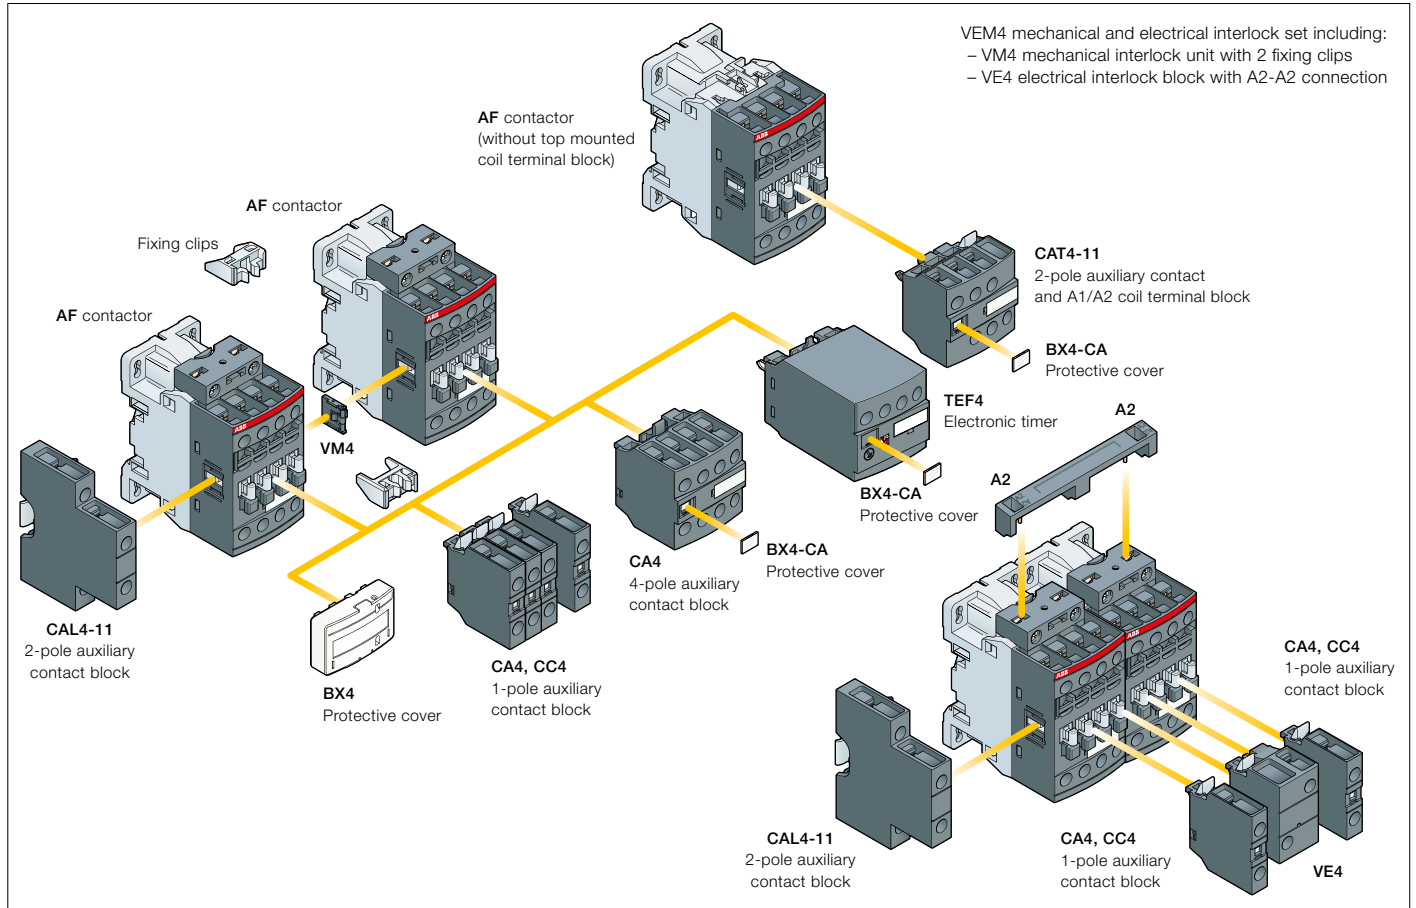

Main accessory fitting details

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.

| Contactor types | Main poles | Built-in auxiliary contacts | Front-mounted accessories | | | | | Side-mounted accessories | |
|-----------------------------------------------------------------------------------------------------------------|------------|-----------------------------|---------------------------|----------------|-------------|------------------|----------------------------------------------------------------|-----------------------------|------------|
| | | | Auxiliary contact blocks | | | Electronic timer | Electrical and mechanical interlock set (between 2 contactors) | Auxiliary contact blocks | |
| | | | 1-pole CA4 1-pole CC4 | 2-pole CAT4-11 | 4-pole CA4 | TEF4 | VEM4 | Left side 2-pole CAL4-11 | Right side |
| Max. add-on N.C. auxiliary contacts: 4 N.C. max. on positions 1, 2, 3, 4 and 3 N.C. max. on positions 1 ±30°, 5 | | | | | | | | | |
| AF09 ... AF16 | 4 | 0 | 0 | 0 | 4 max. or 1 | or 1 | or 1 | + | 1 |
| | | | | | 2 max. or 1 | - | or 1 | + | 1 |
| | | | | | 3 max. - | - | - | + | 1 |
| Max. add-on N.C. auxiliary contacts: 3 N.C. max. on positions 1, 2, 3, 4 and 2 N.C. max. on positions 1 ±30°, 5 | | | | | | | | | |
| AF26 ... AF38 | 4 | 0 | 0 | 0 | 4 max. or 1 | or 1 | or 1 | + | 1 |
| | | | | | 2 max. or 1 | - | or 1 | + | 1 |
| | | | | | 3 max. - | - | - | + | 1 |
| Max. add-on N.C. auxiliary contacts: 6 N.C. max. on positions 1, 1 ±30°, 2, 3, 4, 5 | | | | | | | | | |
| AF40 ... AF52 | 4 | 0 | 0 | 0 | 4 max. or 1 | or 1 | or 1 | + | 1 |
| AF80 | 4 | 0 | 0 | 0 | 4 max. - | or 1 | or 1 | + | 1 |
| Max. add-on N.C. auxiliary contacts: 3 N.C. max. on positions 1, 2, 3, 4 and 2 N.C. max. on positions 1 ±30°, 5 | | | | | | | | | |
| AF09 ... AF16 | 2 | 2 | 0 | 0 | 4 max. or 1 | or 1 | or 1 | + | 1 |
| AF26 ... AF38 | 2 | 2 | 0 | 0 | 2 max. or 1 | - | or 1 | + | 1 |
| Max. add-on N.C. auxiliary contacts: 2 N.C. max. on positions 1, 1 ±30°, 2, 3, 4, 5 | | | | | | | | | |
| AF40 | 2 | 2 | 0 | 0 | 4 max. or 1 | or 1 | or 1 | + | 1 |
| | 2 | 2 | 0 | 0 | 4 max. - | or 1 | or 1 | + | 1 |
| AF80 | 2 | 2 | 0 | 0 | 4 max. - | or 1 | or 1 | + | 1 |

AF09 ... AF80 4-pole contactors

Main accessories



CA4-10



CAL4-11




CA4-22E



CAT4-11E



VEM4

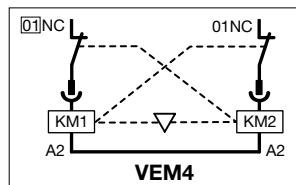

TEF4-ON

Ordering details (1)

| For contactors | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|--------------------|------|------------|---------|----------------|
| | | | | | kg |

Front-mounted instantaneous auxiliary contact blocks

| | | | | | | |
|------------------------|-----|-----|----------|-----------------|----|-------|
| AF09 ... AF80-40-00 | 1 0 | - - | CA4-10 | 1SBN010110R1010 | 1 | 0.014 |
| AF09 ... AF80-22-00 | 1 0 | - - | CA4-10-T | 1SBN010110T1010 | 10 | 0.014 |
| | 0 1 | - - | CA4-01 | 1SBN010110R1001 | 1 | 0.014 |
| | 0 1 | - - | CA4-01-T | 1SBN010110T1001 | 10 | 0.014 |
| | 2 2 | - - | CA4-22E | 1SBN010140R1022 | 1 | 0.055 |
| | 3 1 | - - | CA4-31E | 1SBN010140R1031 | 1 | 0.055 |
| | 4 0 | - - | CA4-40E | 1SBN010140R1040 | 1 | 0.055 |
| AF09 ... AF16...-40-00 | 0 4 | - - | CA4-04E | 1SBN010140R1004 | 1 | 0.055 |

Front-mounted auxiliary contact blocks with N.O. leading contact and N.C. lagging contact

| | | | | | | |
|---------------------|-----|-----|--------|-----------------|---|-------|
| AF09 ... AF80-40-00 | - - | 1 0 | CC4-10 | 1SBN010111R1010 | 1 | 0.014 |
| AF09 ... AF80-22-00 | - - | 0 1 | CC4-01 | 1SBN010111R1001 | 1 | 0.014 |

Side-mounted instantaneous auxiliary contact blocks

| | | | | | | |
|---------------------|-----|-----|-----------|-----------------|----|-------|
| AF09 ... AF80-40-00 | 1 1 | - - | CAL4-11 | 1SBN010120R1011 | 1 | 0.040 |
| AF09 ... AF80-22-00 | 1 1 | - - | CAL4-11-T | 1SBN010120T1011 | 10 | 0.040 |

Front-mounted instantaneous auxiliary contact and A1/A2 coil terminal blocks

| | | | | | | |
|------------------------|-----|-----|----------|-----------------|---|-------|
| AF09 ... AF52...-40-00 | 1 1 | - - | CAT4-11E | 1SBN010151R1011 | 1 | 0.040 |
| AF09 ... AF40...-22-00 | | | | | | |

Note: CAT4 not suitable for AF..Z contactors with DC control voltage 12...20 V DC.

Mechanical interlock unit

| | | | | | | |
|------------------------|--|--|--------|-----------------|----|-------|
| AF09 ... AF38...-40-00 | | | VM4 | 1SBN030105T1000 | 10 | 0.005 |
| AF40 ... AF80...-40-00 | | | VM96-4 | 1SBN033405T1000 | 10 | 0.006 |

Note: VM4 includes 2 fixing clips (BB4) to maintain together both contactors.

Mechanical and electrical interlock set

| | | | | | | |
|---------------------|-----|-----|------|-----------------|---|-------|
| AF09, AF16...-40-00 | 0 2 | - - | VEM4 | 1SBN030111R1000 | 1 | 0.035 |
| AF26, AF38...-40-00 | | | | | | |

Note: - VEM4 includes a VM4 mechanical interlock unit with 2 fixing clips (BB4), a VE4 electrical interlock block. VE4 block must be used with A2-A2 connection to respect the electrical connection diagram.

- VEM4 not suitable for AF..Z contactors with DC control voltage 12...20 V DC.

| For contactors | Time delay range selected by switch | Delay type | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|-------------------------------------|------------|--------------------|------|------------|---------|----------------|
| | | | | | | | kg |

Electronic timers

| | | | | | | | |
|---------------|------------|-----------|-----|----------|-----------------|---|-------|
| AF09 ... AF80 | 0.1...1 s | ON-delay | 1 1 | TEF4-ON | 1SBN020112R1000 | 1 | 0.065 |
| | 1...10 s | | | | | | |
| | 10...100 s | OFF-delay | 1 1 | TEF4-OFF | 1SBN020114R1000 | 1 | 0.065 |

Note: Rated control circuit voltage U_c 24...240 V 50/60 Hz or DC.

(1) For more information, refer to main catalog "Accessories" section.

AF116 ... AF140 4-pole contactors

160 to 200 A AC-1

AC / DC operated with 1 N.O. + 1 N.C. auxiliary contacts



AF140-40-11

1SFC101154V0001



AF140-40-11B


1SFC101192V0001

Description

AF116 ... AF140 4-pole contactors are mainly used for controlling non-inductive or slightly inductive loads (i.e. resistance furnaces...) and generally for controlling power circuits up to 690 V AC and 350 V DC. These contactors are of the block type design with 4 main poles.

- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 coils to cover control voltages between 24...500 V 50/60 Hz and 20...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltage sags (SEMI F47 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.

Ordering details

| IEC Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 A | UL / CSA General use rating 600 V AC A | Rated control circuit voltage Uc min. ... Uc max. V 50/60 Hz V DC | | Auxiliary contacts fitted  | Type (1) | Order code | Weight Pkg (1 pce) kg |
|------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------|-------------|------------|--------------------------------|
|------------------------------------------------------------------------------------|----------------------------------------------------|-------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------|-------------|------------|--------------------------------|

4 N.O. main poles

For connection with built-in cable clamps


| Rated current (A) | UL/CSA rating (A) | Uc min. (V) | Uc max. (V) | N.O. (1) | N.C. (1) | Type | Order code | Weight (kg) |
|-------------------|-------------------|-------------|-------------|----------|----------|----------------|-----------------|-------------|
| 160 | 160 | 24...60 | 20...60 | 1 | 1 | AF116-40-11-11 | 1SFL427101R1111 | 2.270 |
| | | 48...130 | 48...130 | 1 | 1 | AF116-40-11-12 | 1SFL427101R1211 | 2.270 |
| | | 100...250 | 100...250 | 1 | 1 | AF116-40-11-13 | 1SFL427101R1311 | 2.270 |
| | | 250...500 | 250...500 | 1 | 1 | AF116-40-11-14 | 1SFL427101R1411 | 2.270 |
| 200 | 175 | 24...60 | 20...60 | 1 | 1 | AF140-40-11-11 | 1SFL447101R1111 | 2.270 |
| | | 48...130 | 48...130 | 1 | 1 | AF140-40-11-12 | 1SFL447101R1211 | 2.270 |
| | | 100...250 | 100...250 | 1 | 1 | AF140-40-11-13 | 1SFL447101R1311 | 2.270 |
| | | 250...500 | 250...500 | 1 | 1 | AF140-40-11-14 | 1SFL447101R1411 | 2.270 |

With bar connections

| Rated current (A) | UL/CSA rating (A) | Uc min. (V) | Uc max. (V) | N.O. (1) | N.C. (1) | Type | Order code | Weight (kg) |
|-------------------|-------------------|-------------|-------------|----------|----------|-----------------|-----------------|-------------|
| 160 | 160 | 24...60 | 20...60 | 1 | 1 | AF116-40-11B-11 | 1SFL427102R1111 | 2.170 |
| | | 48...130 | 48...130 | 1 | 1 | AF116-40-11B-12 | 1SFL427102R1211 | 2.170 |
| | | 100...250 | 100...250 | 1 | 1 | AF116-40-11B-13 | 1SFL427102R1311 | 2.170 |
| | | 250...500 | 250...500 | 1 | 1 | AF116-40-11B-14 | 1SFL427102R1411 | 2.170 |
| 200 | 175 | 24...60 | 20...60 | 1 | 1 | AF140-40-11B-11 | 1SFL447102R1111 | 2.170 |
| | | 48...130 | 48...130 | 1 | 1 | AF140-40-11B-12 | 1SFL447102R1211 | 2.170 |
| | | 100...250 | 100...250 | 1 | 1 | AF140-40-11B-13 | 1SFL447102R1311 | 2.170 |
| | | 250...500 | 250...500 | 1 | 1 | AF140-40-11B-14 | 1SFL447102R1411 | 2.170 |

(1) For other auxiliary contacts arrangements, please contact your ABB local organization.

Main dimensions mm, inches

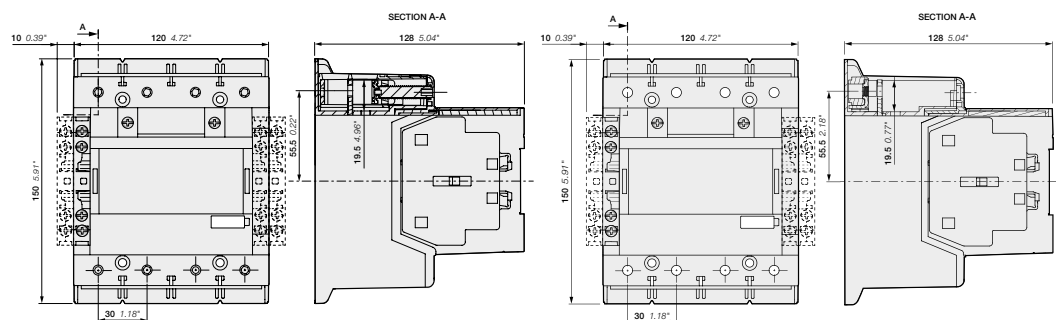

AF116, AF140-40-11


AF116, AF140-40-11B

1SFC101198C0201 - Rev. B

AF190 ... AF370 4-pole contactors

275 to 525 A AC-1

AC / DC operated with 1 N.O. + 1 N.C. auxiliary contacts

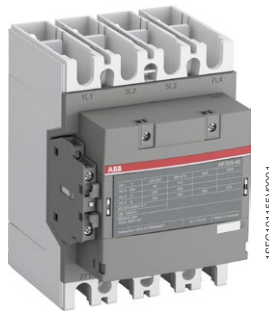

AF205-40-11





AF370-40-11

Description

AF190 ... AF370 4-pole contactors are mainly used for controlling non-inductive or slightly inductive loads (i.e. resistance furnaces...) and generally for controlling power circuits up to 1000 V AC and 440 V DC. These contactors are of the block type design with 4 main poles.


- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC), only 4 coils to cover control voltages between 24...500 V 50/60 Hz and 20...500 V DC
- can manage large control voltage variations
- reduced panel energy consumption
- very distinct closing and opening
- can withstand short voltage dips and voltage sags (SEMI F47 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.

Ordering details

| IEC Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 | UL / CSA General use rating 600 V AC | Rated control circuit voltage Uc min. ... Uc max. | | Auxiliary contacts fitted | Type (1) | Order code | Weight Pkg (1 pce) kg |
|-------------------------------------------------------------------------------|-----------------------------------------------|---------------------------------------------------------|-----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|----------------------------------------|
| A | A | V 50/60 Hz | V DC |   | | | |
| 4 N.O. main poles | | | | | | | |
| 275 | 230 | 24...60 | 20...60 | 1 1 | AF190-40-11-11 | 1SFL487102R1111 | 3.920 |
| | | 48...130 | 48...130 | 1 1 | AF190-40-11-12 | 1SFL487102R1211 | 3.920 |
| | | 100...250 | 100...250 | 1 1 | AF190-40-11-13 | 1SFL487102R1311 | 3.920 |
| | | 250...500 | 250...500 | 1 1 | AF190-40-11-14 | 1SFL487102R1411 | 3.920 |
| 350 | 250 | 24...60 | 20...60 | 1 1 | AF205-40-11-11 | 1SFL527102R1111 | 3.920 |
| | | 48...130 | 48...130 | 1 1 | AF205-40-11-12 | 1SFL527102R1211 | 3.920 |
| | | 100...250 | 100...250 | 1 1 | AF205-40-11-13 | 1SFL527102R1311 | 3.920 |
| | | 250...500 | 250...500 | 1 1 | AF205-40-11-14 | 1SFL527102R1411 | 3.920 |
| 400 | 300 | 24...60 | 20...60 | 1 1 | AF265-40-11-11 | 1SFL547102R1111 | 6.380 |
| | | 48...130 | 48...130 | 1 1 | AF265-40-11-12 | 1SFL547102R1211 | 6.380 |
| | | 100...250 | 100...250 | 1 1 | AF265-40-11-13 | 1SFL547102R1311 | 6.380 |
| | | 250...500 | 250...500 | 1 1 | AF265-40-11-14 | 1SFL547102R1411 | 6.380 |
| 500 | 350 | 24...60 | 20...60 | 1 1 | AF305-40-11-11 | 1SFL587102R1111 | 6.380 |
| | | 48...130 | 48...130 | 1 1 | AF305-40-11-12 | 1SFL587102R1211 | 6.380 |
| | | 100...250 | 100...250 | 1 1 | AF305-40-11-13 | 1SFL587102R1311 | 6.380 |
| | | 250...500 | 250...500 | 1 1 | AF305-40-11-14 | 1SFL587102R1411 | 6.380 |
| 525 | 420 | 24...60 | 20...60 | 1 1 | AF370-40-11-11 | 1SFL607102R1111 | 6.380 |
| | | 48...130 | 48...130 | 1 1 | AF370-40-11-12 | 1SFL607102R1211 | 6.380 |
| | | 100...250 | 100...250 | 1 1 | AF370-40-11-13 | 1SFL607102R1311 | 6.380 |
| | | 250...500 | 250...500 | 1 1 | AF370-40-11-14 | 1SFL607102R1411 | 6.380 |

(1) For other auxiliary contacts arrangements, please contact your ABB local organization.

Main dimensions mm, inches

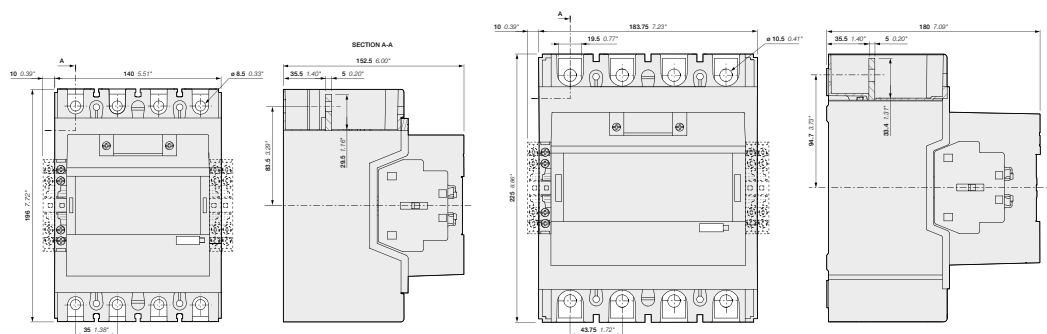


AF190, AF205

AF265, AF305, AF370

AF116 ... AF370 4-pole contactors with 1 N.O. + 1 N.C. auxiliary contacts Main accessories

Main accessories (other accessories available)

5

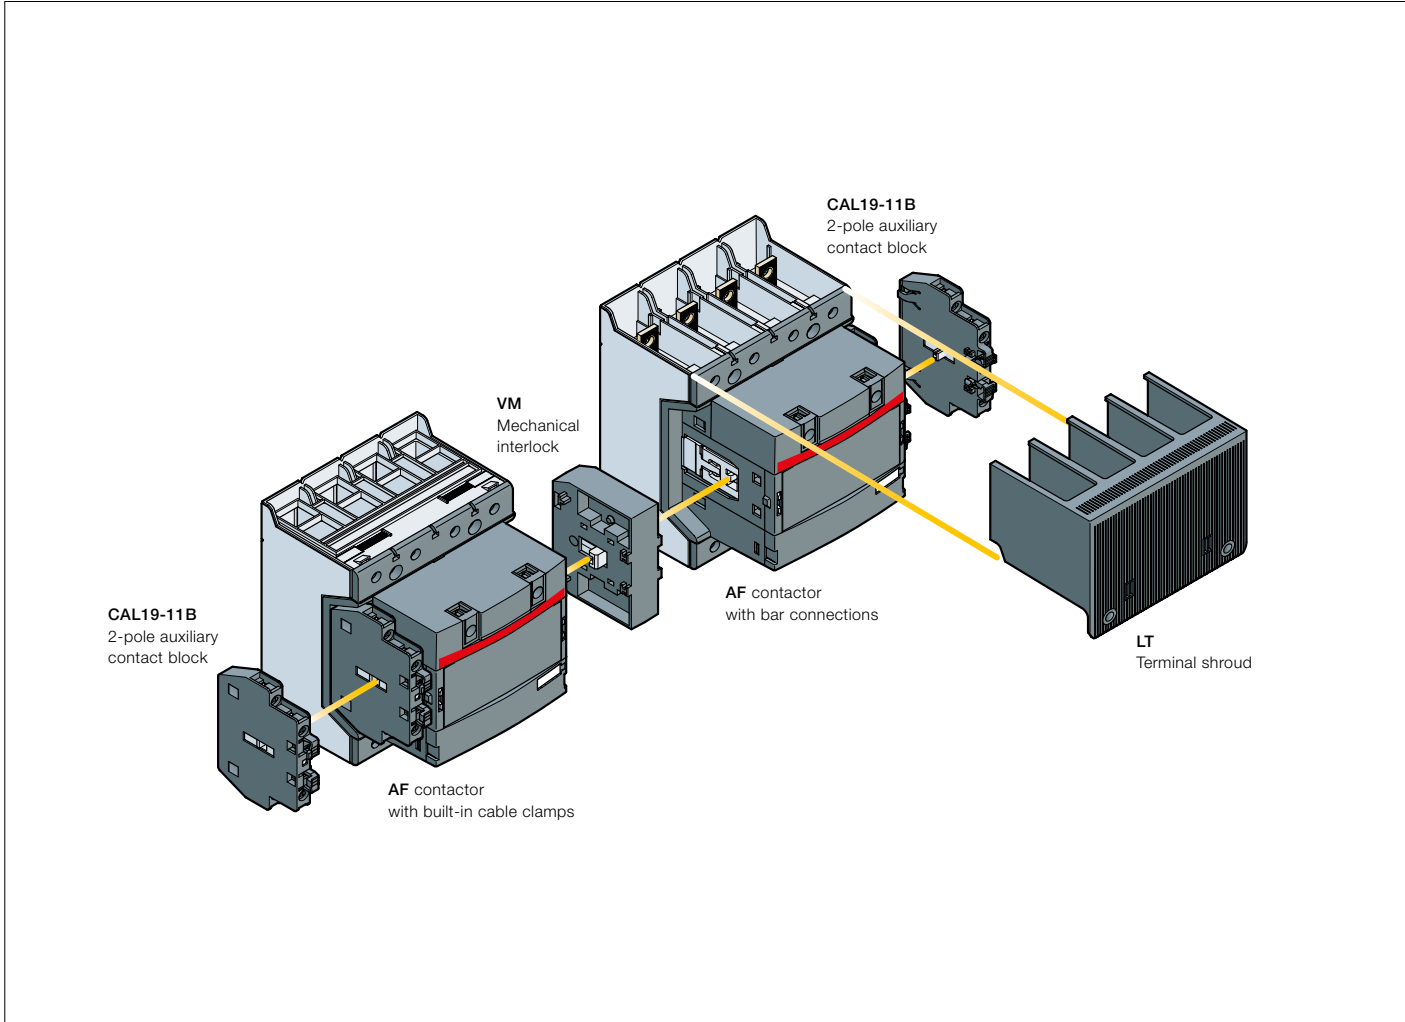

Main accessory fitting details

| Contactor types | Main poles | Available auxiliary contacts | Side-mounted accessories | | |
|-----------------|------------|------------------------------|--------------------------|---------------------|-----------------------------------------------------|
| | | | Auxiliary contact blocks | | Mechanical interlock units (between two contactors) |
| | | | CAL19-11 | CAL19-11B | |
| AF116 ... AF370 | 4 | 0 1 1 | 1 x CAL19-11 | + 2 x CAL19-11B | - |
| AF116 ... AF370 | 4 | 0 1 1 | - | + 2 x CAL19-11B (1) | + VM... (2) |

(1) Total number of auxiliary contact blocks for the two contactors.


(2) Interlock type, according to the contactor ratings (see "Accessories").

AF116 ... AF370 4-pole contactors with 1 N.O. + 1 N.C. auxiliary contacts Main accessories



CAL19-11



1SFC101071V0001



VM19

1SFC101033V0001

Ordering details (1)

| For contactors | Auxiliary contacts | | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|------------|---------|----------------|
| |  |  | | | | kg |

Side-mounted instantaneous auxiliary contact blocks

| | | | | | | |
|-----------------|---|---|-----------|-----------------|---|-------|
| AF116 ... AF370 | 1 | 1 | CAL19-11 | 1SFN010820R1011 | 2 | 0.050 |
| | 1 | 1 | CAL19-11B | 1SFN010820R3311 | 2 | 0.050 |

Mechanical interlock unit

| | | | | |
|----------------------------------|-----------|-----------------|---|-------|
| AF116 ... AF370 | VM19 | 1SFN030300R1000 | 1 | 0.054 |
| AF116 ... AF146 and AF190, AF205 | VM140/190 | 1SFN034403R1000 | 1 | 0.088 |
| AF190, AF205 and AF265 ... AF370 | VM205/265 | 1SFN035203R1000 | 1 | 0.090 |

Terminal shrouds

| | | | | |
|----------------------------------------|-----------|-----------------|---|-------|
| AF116 ... AF140, with compression lugs | LT140-40L | 1SFN124203R2000 | 2 | 0.090 |
| AF190 ... AF205, with cable clamps | LT205-40C | 1SFN124801R2000 | 2 | 0.060 |
| AF190 ... AF205, with compression lugs | LT205-40L | 1SFN124803R2000 | 2 | 0.290 |
| AF265 ... AF370, with cable clamps | LT370-40C | 1SFN125401R2000 | 2 | 0.040 |
| AF265 ... AF370, with compression lugs | LT370-40L | 1SFN125403R2000 | 2 | 0.370 |

5

| For contactors | Dimensions | | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|------------|--------|------|------------|---------|----------------|
| | hole Ø mm | bar mm | | | | |

Terminal enlargements

| | | | | | | |
|-----------------|------|--------|----------|-----------------|---|-------|
| AF190 ... AF205 | 10.5 | 20 x 5 | LW205-40 | 1SFN074807R2000 | 1 | 0.306 |
| AF265 ... AF370 | 10.5 | 25 x 5 | LW370-40 | 1SFN075407R2000 | 1 | 0.540 |

(1) For more information, refer to "Accessories" section.

EK550, EK1000 4-pole contactors

800 to 1000 A AC-1

AC operated - with 1 N.O. + 1 N.C. auxiliary contacts



1SFC381039-000

EK1000-40-11



Description

EK550 4-pole contactors are mainly used for controlling non-inductive or slightly inductive loads (i.e. resistance furnaces...) and generally for controlling power circuits up to 1000 V AC and 600 V DC, EK1000 up to 1000 V AC.

These contactors are of the block type design with:


- 4 main poles
- control circuit: AC operated
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.

Ordering details

| IEC Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 | UL/CSA General use rating 600 V AC | Rated control circuit voltage U_c (1) | | Auxiliary contacts fitted | | Type | Order code | Weight Pkg (1 pce) kg |
|-------------------------------------------------------------------------------|---------------------------------------------|--------------------------------------------------|-----------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------------|-------------|----------------------------------------|
| | | V 50 Hz | V 60 Hz |  |  | | | |
| 800 | 540 | 48 | - | 1 | 1 | EK550-40-11 | SK827041-AD | 17.200 |
| | | 110 | 110...120 | 1 | 1 | EK550-40-11 | SK827041-EF | 17.200 |
| | | 110...115 | 115...127 | 1 | 1 | EK550-40-11 | SK827041-EG | 17.200 |
| | | 220 | 220...240 | 1 | 1 | EK550-40-11 | SK827041-EL | 17.200 |
| | | 220...230 | 230...255 | 1 | 1 | EK550-40-11 | SK827041-EM | 17.200 |
| | | 380 | 380...415 | 1 | 1 | EK550-40-11 | SK827041-EP | 17.200 |
| | | 380...400 | 400...440 | 1 | 1 | EK550-40-11 | SK827041-ER | 17.200 |
| | | 400...415 | - | 1 | 1 | EK550-40-11 | SK827041-AR | 17.200 |
| 1000 | - | 48 | - | 1 | 1 | EK1000-40-11 | SK827044-AD | 17.500 |
| | | 110 | 110...120 | 1 | 1 | EK1000-40-11 | SK827044-EF | 17.500 |
| | | 110...115 | 115...127 | 1 | 1 | EK1000-40-11 | SK827044-EG | 17.500 |
| | | 220 | 220...240 | 1 | 1 | EK1000-40-11 | SK827044-EL | 17.500 |
| | | 220...230 | 230...255 | 1 | 1 | EK1000-40-11 | SK827044-EM | 17.500 |
| | | 380 | 380...415 | 1 | 1 | EK1000-40-11 | SK827044-EP | 17.500 |
| | | 380...400 | 400...440 | 1 | 1 | EK1000-40-11 | SK827044-ER | 17.500 |
| | | 400...415 | - | 1 | 1 | EK1000-40-11 | SK827044-AR | 17.500 |

(1) Other control voltages see voltage code table.

Main dimensions mm, inches

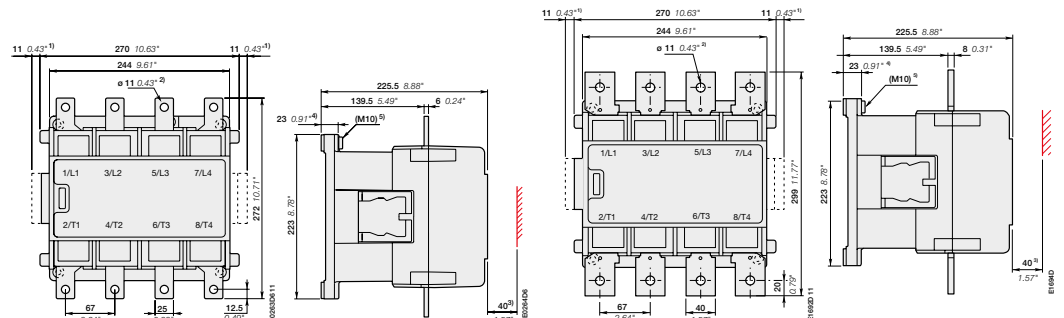

EK550

- 1) Dimension for extra auxiliary contact block.
- 2) Screw, nut and washer by-packed.
- 3) Min. distance to uninsulated wall.
- 4) Damping elements are included.
- 5) Earthing screw.

EK1000

EK550, EK1000 4-pole contactors

800 to 1000 A AC-1

DC operated - with 2 N.O. + 1 N.C. auxiliary contacts



EK1000-40-21

Description

EK550 4-pole contactors are mainly used for controlling non-inductive or slightly inductive loads (i.e. resistance furnaces...) and generally for controlling power circuits up to 1000 V AC and 600 V DC, EK1000 up to 1000 V AC.


These contactors are of the block type design with:

- 4 main poles
- control circuit: DC operated
- add-on auxiliary contact blocks for side mounting and a wide range of accessories.

Ordering details

| IEC | UL / CSA | Rated control circuit voltage Uc | Auxiliary contacts fitted | Type | Order code | Weight |
|---------------------------------------------------------------------|--------------------------------|-------------------------------------|---------------------------|--------------|-------------|-------------------|
| Rated operational current $\theta \leq 40^\circ\text{C}$ AC-1 | General use rating 600 V AC | | | | | Pkg (1 pce) kg |
| A | A | V DC | | | | |
| 800 | 540 | 24 | 2 1 | EK550-40-21 | SK827041-DB | 17.200 |
| | | 36 | 2 1 | EK550-40-21 | SK827041-DC | 17.200 |
| | | 48 | 2 1 | EK550-40-21 | SK827041-DD | 17.200 |
| | | 60 | 2 1 | EK550-40-21 | SK827041-DT | 17.200 |
| | | 75 | 2 1 | EK550-40-21 | SK827041-DG | 17.200 |
| | | 110 | 2 1 | EK550-40-21 | SK827041-DE | 17.200 |
| | | 125 | 2 1 | EK550-40-21 | SK827041-DU | 17.200 |
| | | 220 | 2 1 | EK550-40-21 | SK827041-DF | 17.200 |
| 1000 | - | 24 | 2 1 | EK1000-40-21 | SK827044-DB | 17.500 |
| | | 36 | 2 1 | EK1000-40-21 | SK827044-DC | 17.500 |
| | | 48 | 2 1 | EK1000-40-21 | SK827044-DD | 17.500 |
| | | 60 | 2 1 | EK1000-40-21 | SK827044-DT | 17.500 |
| | | 75 | 2 1 | EK1000-40-21 | SK827044-DG | 17.500 |
| | | 110 | 2 1 | EK1000-40-21 | SK827044-DE | 17.500 |
| | | 125 | 2 1 | EK1000-40-21 | SK827044-DU | 17.500 |
| | | 220 | 2 1 | EK1000-40-21 | SK827044-DF | 17.500 |

Main dimensions mm, inches

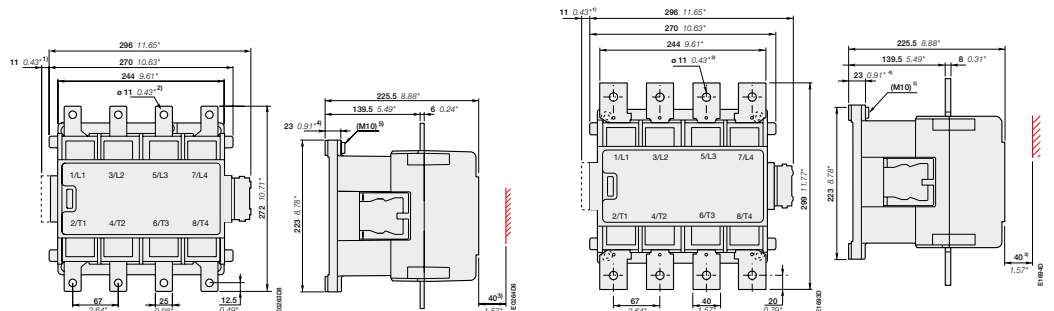

EK550

- 1) Dimension for extra auxiliary contact block.
- 2) Screw, nut and washer by-packed.
- 3) Min. distance to uninsulated wall.
- 4) Damping elements are included.
- 5) Earthing screw.

EK1000

EK550, EK1000 4-pole contactors with 1 N.O. + 1 N.C. auxiliary contacts and 2 N.O. + 1 N.C. auxiliary contacts

Main accessory fitting details

| Mounting positions of the auxiliary contact | Auxiliary contact types and connecting diagrams |
|---------------------------------------------|------------------------------------------------------------------|
| | <p>(1) Contact 35-36 used for some types of EK... contactors</p> |


EK 4-pole contactors

| Contactor types | Main poles | Available auxiliary contacts | Add-on auxiliary contact blocks | Mounting and positioning |
|----------------------------------------------|------------|------------------------------|-------------------------------------------------------|--------------------------|
| | | | 2-pole CAL16-11 ... | |
| AC operated, 50 Hz, 60 Hz or 50/60 Hz | | | | |
| EK550, EK1000 | 4 | 0 1 1 | + 1 x CAL16-11B + 1 x CAL16-11C + 1 x CAL16-11D | |
| DC operated | | | | |
| EK550, EK1000 | 4 | 0 2 1 | + 1 x CAL16-11C | |

EK 4-pole reversing contactors with VH800 mechanical and electrical interlock units

| "Left hand" contactors | Interlocking | "Right hand" contactors | Add-on auxiliary contact blocks | Mounting and positioning |
|----------------------------------------------|--------------|-------------------------|------------------------------------|--------------------------|
| | | | 2-pole CAL16-11 ... | |
| AC operated, 50 Hz, 60 Hz or 50/60 Hz | | | | |
| EK550, EK1000 | VH800 | EK550, EK1000 | + 1 x CAL16-11C + 1 x CAL16-11D | |
| DC operated | | | | |
| EK550, EK1000 | VH800 | EK550, EK1000 | — | |

EK550, EK1000 4-pole contactors with 1 N.O. + 1 N.C. auxiliary contacts and 2 N.O. + 1 N.C. auxiliary contacts

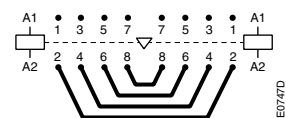



BSS550 ... BSS1000



RC-EH

Ordering details (1)

| For contactors | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------------|---------|----------------|
| |   | | | | kg |

Side-mounted auxiliary contact blocks

| | | | | | | |
|----|---|---|---------------|------------|---|-------|
| EK | 1 | 1 | CAL16-11B | SK829002-B | 1 | 0.050 |
| | 1 | 1 | CAL16-11C | SK829002-C | 1 | 0.050 |
| | 1 | 1 | CAL16-11D | SK829002-D | 1 | 0.050 |
| | 1 | 1 | CCL16-11E (2) | SK829002-E | 1 | 0.050 |

Mechanical interlock unit for two horizontal mounted contactors

| | | | | |
|---------------|-------|------------|---|-------|
| EK550, EK1000 | VH800 | SK829070-F | 1 | 6.000 |
|---------------|-------|------------|---|-------|

Connecting sets

| | | | | |
|--------|---------|------------|---|-------|
| EK550 | BSS550 | SK829090-E | 1 | 3.300 |
| EK1000 | BSS1000 | SK829090-H | 1 | 5.500 |

Surge suppressors

| For contactors | Rated control circuit voltage U _c | | Type | Order code | Pkg qty | Weight (1 pce) | |
|----------------|----------------------------------------------|----|------|--------------|------------|----------------|-------|
| | V | AC | | | | | DC |
| EK550, EK1000 | 48...110 | ● | - | RC-EH800/110 | SK829007-C | 1 | 0.015 |
| EK550, EK1000 | 24...125 | - | ● | RC-EH800/110 | SK829007-C | 1 | 0.015 |
| EK550, EK1000 | 220...600 | ● | - | RC-EH800/600 | SK829007-D | 1 | 0.015 |

(1) See "Main accessory fitting details" table.

(2) Mounting of CCL16-11E blocks does not allow an additional second block to be added on top of it. All DC operated EK contactors are equipped with one CCL16-11E on the right side.

NF 4-pole contactor relays

AC / DC operated



NF22E

1SBCT10104R0014

Description

NF contactor relays are used for switching auxiliary and control circuits.

These contactor relays are of the block type design with:


- 4 poles. Contactor relays have mechanically linked auxiliary contact elements (side-marked symbol)
- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC)
 - can manage large control voltage variations
 - only 4 control voltage ranges covering 24...500 V 50/60 Hz and 20...500 V DC
 - reduced panel energy consumption
 - very distinct closing and opening.
- built-in surge suppression
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

Ordering details

| Number of contacts | Rated control circuit voltage | | Type | Order code | Weight |
|--------------------|-------------------------------|-----------|--------------|-----------------|--------|
| | Uc min. ... Uc max. | | | | |
| | V 50/60 Hz | V DC | | | kg |
| | 24...60 | - | (1) NF22E-41 | 1SBH137001R4122 | 0.270 |
| | 48...130 | 48...130 | NF22E-12 | 1SBH137001R1222 | 0.270 |
| | 100...250 | 100...250 | NF22E-13 | 1SBH137001R1322 | 0.270 |
| | 250...500 | 250...500 | NF22E-14 | 1SBH137001R1422 | 0.310 |
| | 24...60 | - | (1) NF31E-41 | 1SBH137001R4131 | 0.270 |
| | 48...130 | 48...130 | NF31E-12 | 1SBH137001R1231 | 0.270 |
| | 100...250 | 100...250 | NF31E-13 | 1SBH137001R1331 | 0.270 |
| | 250...500 | 250...500 | NF31E-14 | 1SBH137001R1431 | 0.310 |
| | 24...60 | - | (1) NF40E-41 | 1SBH137001R4140 | 0.270 |
| | 48...130 | 48...130 | NF40E-12 | 1SBH137001R1240 | 0.270 |
| | 100...250 | 100...250 | NF40E-13 | 1SBH137001R1340 | 0.270 |
| | 250...500 | 250...500 | NF40E-14 | 1SBH137001R1440 | 0.310 |

(1) For 24...60 V 50/60 Hz - 20...60 V DC, use NF..E-21.

Main dimensions mm, inches

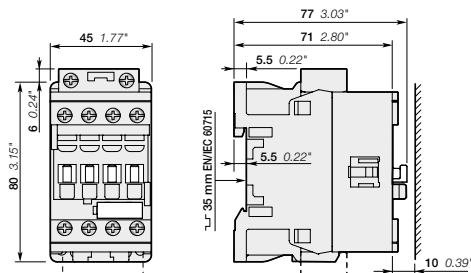

NF22E, NF31E, NF40E

1SBCT101568S0201a - Rev. B

NFZ 4-pole contactor relays

AC / DC operated - low consumption



NFZ22E

Description

NFZ contactor relays are used for switching auxiliary and control circuits.

These contactor relays are of the block type design with:


- 4 poles. Contactor relays have mechanically linked auxiliary contact elements (side-marked symbol)
- control circuit: AC or DC operated with electronic coil interface accepting a wide control voltage range (e.g. 100...250 V AC and DC)
 - can manage large control voltage variations
 - only 4 control voltage ranges covering 24...250 V 50/60 Hz and 12...250 V DC
 - allow direct control by PLC-output ≥ 24 V DC 500 mA
 - reduced panel energy consumption
 - very distinct closing and opening
 - can withstand short voltage dips and voltage sags (SEMI F47-0706 conditions of use on request).
- built-in surge suppression
- add-on auxiliary contact blocks for front or side mounting and a wide range of accessories.

Ordering details

| Number of contacts | Rated control circuit voltage Uc min. ... Uc max. | | Type | Order code | Weight Pkg (1 pce) kg |
|--------------------|------------------------------------------------------|-----------|-----------|-----------------|--------------------------------|
| | V 50/60 Hz | V DC | | | |
| | - | 12...20 | NFZ22E-20 | 1SBH136001R2022 | 0.310 |
| | 24...60 | 20...60 | NFZ22E-21 | 1SBH136001R2122 | 0.310 |
| | 48...130 | 48...130 | NFZ22E-22 | 1SBH136001R2222 | 0.310 |
| | 100...250 | 100...250 | NFZ22E-23 | 1SBH136001R2322 | 0.310 |
| | - | 12...20 | NFZ31E-20 | 1SBH136001R2031 | 0.310 |
| | 24...60 | 20...60 | NFZ31E-21 | 1SBH136001R2131 | 0.310 |
| | 48...130 | 48...130 | NFZ31E-22 | 1SBH136001R2231 | 0.310 |
| | 100...250 | 100...250 | NFZ31E-23 | 1SBH136001R2331 | 0.310 |
| | - | 12...20 | NFZ40E-20 | 1SBH136001R2040 | 0.310 |
| | 24...60 | 20...60 | NFZ40E-21 | 1SBH136001R2140 | 0.310 |
| | 48...130 | 48...130 | NFZ40E-22 | 1SBH136001R2240 | 0.310 |
| | 100...250 | 100...250 | NFZ40E-23 | 1SBH136001R2340 | 0.310 |

Note: Only NFZ contactor relays with DC control voltage 12...20 V DC need to respect the connection polarities indicated close to the coil terminals: A1+ for the positive pole and A2- for the negative pole.

Main dimensions mm, inches

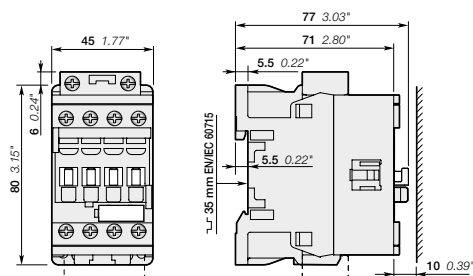


NFZ22E, NFZ31E, NFZ40E

NF 4-pole contactor relays

Main accessories

Contactor relays and main accessories (other accessories available)

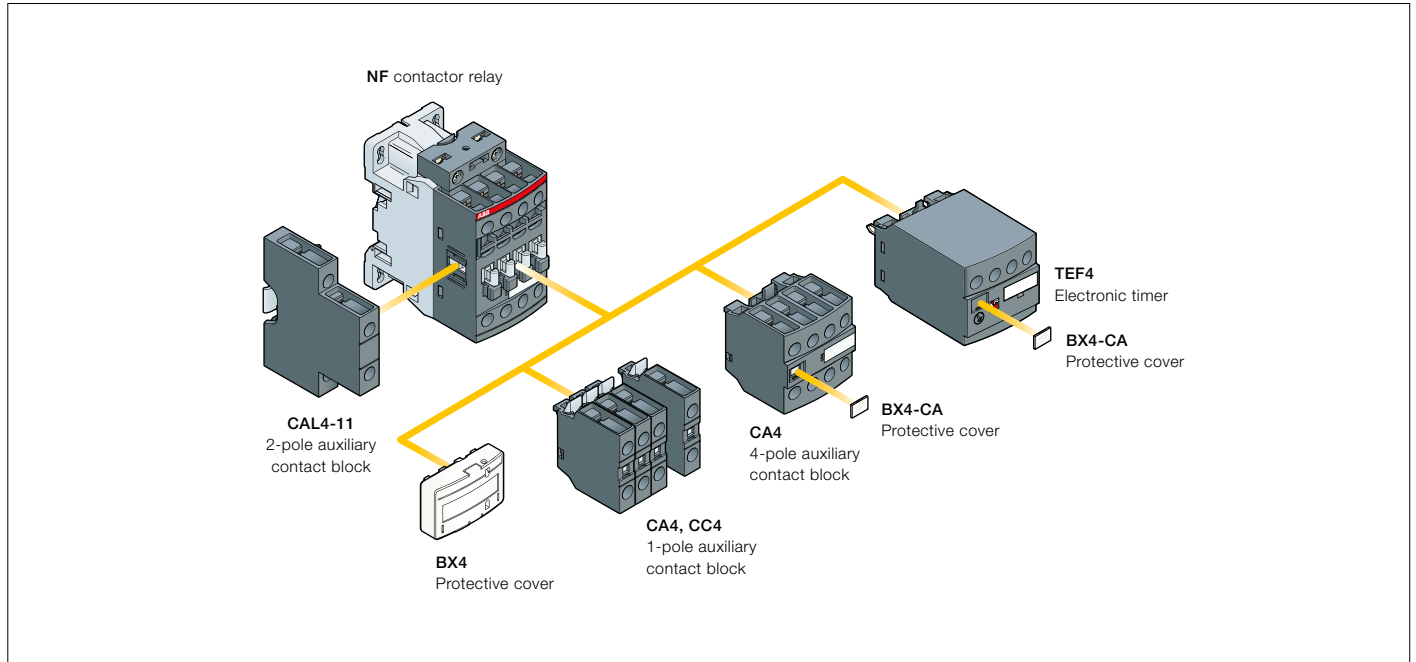

Main accessory fitting details

Many configurations of accessories are possible depending on whether these are front-mounted or side-mounted.

| Contactor relay types | Main poles | Front-mounted accessories | | | Side-mounted accessories | |
|-----------------------------------------------------------------------------------------------------------------|------------|---------------------------|------------|------------------|-----------------------------|------------|
| | | Auxiliary contact blocks | | Electronic timer | Auxiliary contact blocks | |
| | | 1-pole CA4 1-pole CC4 | 4-pole CA4 | TEF4 | Left side 2-pole CAL4-11 | Right side |
| Max. add-on N.C. auxiliary contacts: 3 N.C. max. on positions 1, 2, 3, 4 and 2 N.C. max. on positions 1 ±30°, 5 | | | | | | |
| NF | 2 2 E | 4 max. | or 1 | or 1 | + 1 | - |
| | 3 1 E | 2 max. | - | or 1 | + 1 | + 1 |
| Max. add-on N.C. auxiliary contacts: 4 N.C. max. on positions 1, 2, 3, 4 and 3 N.C. max. on positions 1 ±30°, 5 | | | | | | |
| NF | 4 0 E | 4 max. | or 1 | or 1 | + 1 | - |
| | | 2 max. | - | or 1 | + 1 | + 1 |

NF 4-pole contactor relays

Main accessories



CA4-10



CA4-22N



CAL4-11



TEF4-ON



LDC4



BX4



BX4-CA

Ordering details (1)

| For contactor relays | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------------|--------------------|------|------------|---------|----------------|
| | | | | | kg |

Front-mounted instantaneous auxiliary contact blocks

| 4-pole NF | NO | NC | Type | Order code | Pkg qty | Weight (1 pce) |
|-----------|----|----|----------|-----------------|---------|----------------|
| | 1 | 0 | CA4-10 | 1SBN010110R1010 | 1 | 0.014 |
| | 1 | 0 | CA4-10-T | 1SBN010110T1010 | 10 | 0.014 |
| | 0 | 1 | CA4-01 | 1SBN010110R1001 | 1 | 0.014 |
| | 0 | 1 | CA4-01-T | 1SBN010110T1001 | 10 | 0.014 |
| | 4 | 0 | CA4-40N | 1SBN010140R1240 | 1 | 0.055 |
| | 3 | 1 | CA4-31N | 1SBN010140R1231 | 1 | 0.055 |
| | 2 | 2 | CA4-22N | 1SBN010140R1222 | 1 | 0.055 |
| | 1 | 3 | CA4-13N | 1SBN010140R1213 | 1 | 0.055 |
| NF..40E | 0 | 4 | CA4-04N | 1SBN010140R1204 | 1 | 0.055 |

Front-mounted auxiliary contact blocks with N.O. leading contact and N.C. lagging contact

| 4-pole NF | NO | NC | Type | Order code | Pkg qty | Weight (1 pce) |
|-----------|----|----|--------|-----------------|---------|----------------|
| | - | - | CC4-10 | 1SBN010111R1010 | 1 | 0.014 |
| | - | 0 | CC4-01 | 1SBN010111R1001 | 1 | 0.014 |

Side-mounted instantaneous auxiliary contact blocks

| NF | NO | NC | Type | Order code | Pkg qty | Weight (1 pce) |
|----|----|----|-----------|-----------------|---------|----------------|
| | 1 | 1 | CAL4-11 | 1SBN010120R1011 | 1 | 0.040 |
| | 1 | 1 | CAL4-11-T | 1SBN010120T1011 | 10 | 0.040 |

| For contactors | Time delay range selected by switch | Delay type | Auxiliary contacts | Type | Order code | Pkg qty | Weight (1 pce) |
|----------------|-------------------------------------|------------|--------------------|------|------------|---------|----------------|
| | | | | | | | kg |

Electronic timers

| NF | Time delay range | Delay type | NO | NC | Type | Order code | Pkg qty | Weight (1 pce) |
|----|------------------|------------|----|----|----------|-----------------|---------|----------------|
| | 0.1...1 s | ON-delay | 1 | 1 | TEF4-ON | 1SBN020112R1000 | 1 | 0.065 |
| | 1...10 s | OFF-delay | 1 | 1 | TEF4-OFF | 1SBN020114R1000 | 1 | 0.065 |
| | 10...100 s | | | | | | | |

Note: Rated control circuit voltage U_c 24...240 V 50/60 Hz or DC.

Additional coil terminal block

| NF | Type | Order code | Pkg qty | Weight (1 pce) |
|----|------|-----------------|---------|----------------|
| | LDC4 | 1SBN070156T1000 | 10 | 0.010 |

Protective covers


| All 1-stack contactor relays | Type | Order code | Pkg qty | Weight (1 pce) |
|---------------------------------------------------------------|--------|-----------------|---------|----------------|
| | BX4 | 1SBN110108T1000 | 10 | 0.006 |
| 4-pole CA4 auxiliary contact blocks and TEF4 electronic timer | Type | Order code | Pkg qty | Weight (1 pce) |
| | BX4-CA | 1SBN110109W1000 | 50 | 0.001 |

(1) For more information, refer to main catalog "Accessories" section.

Voltage code table

The below tables indicate the available coil voltages and corresponding digits for order codes. When placing an order, please give the order code. Select a standard contactor from ordering detail pages. Change the **coil voltage code** in the order code according to the table below. Example: for contactor AF400-30-11 and coil 100...250 V 50/60 Hz, the order code is 1SFL577001R7011.


AF09 ... AF370 3-pole contactors AF09 ... AF370 4-pole contactors

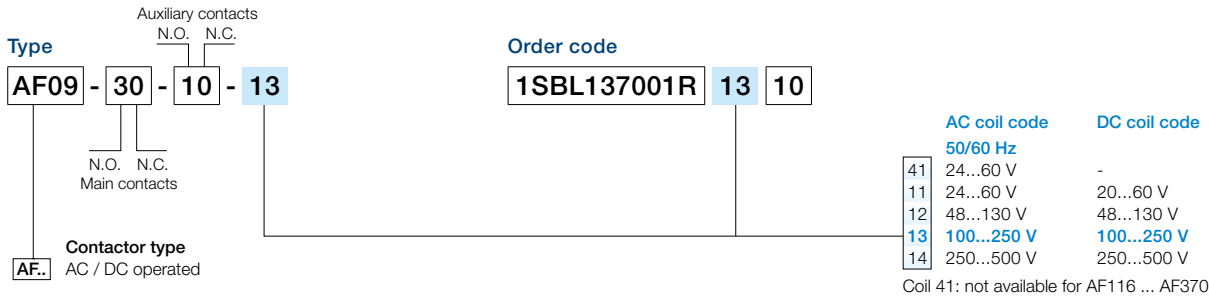


AF116 ... AF370 3-pole contactors with built-in PLC interface

| | AC coil code 50/60 Hz | DC coil code |
|----|--------------------------|--------------|
| 33 | 100...250 V | 100...250 V |
| 34 | 250...500 V | 250...500 V |

AF400 ... AF2650 3-pole contactors

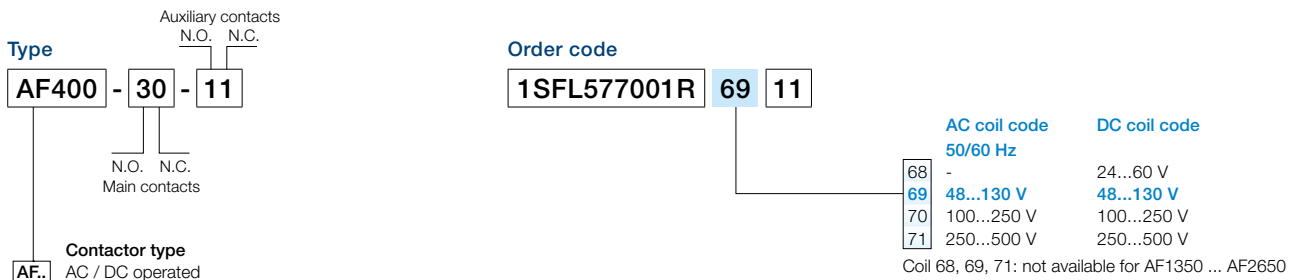

AF09 ... AF38 3- and 4-pole contactors - low consumption

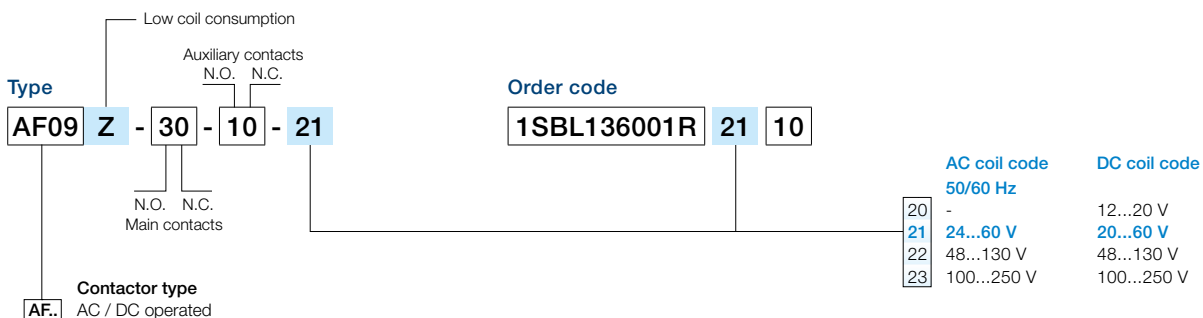


Voltage code table


NF contactor relays




NF contactor relays with overlapping of lagging / leading contacts

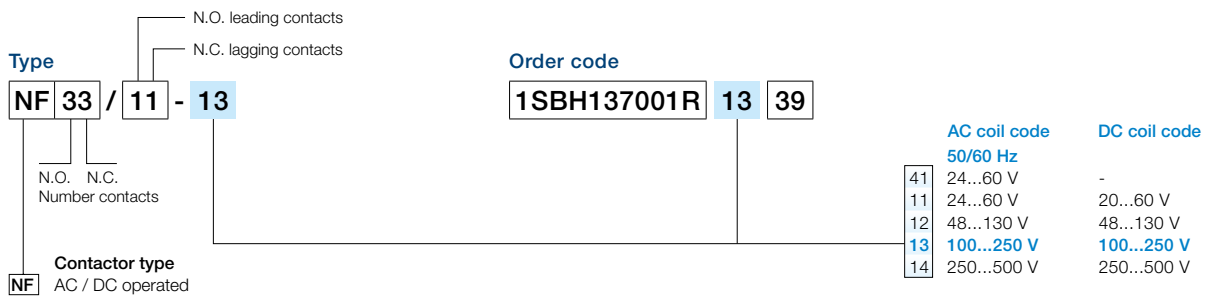

NF contactor relays - low consumption

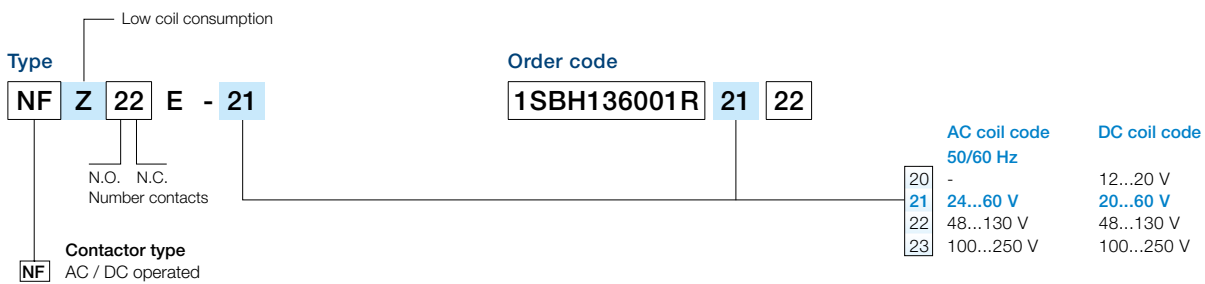


NF contactor relays with overlapping of lagging / leading contacts - low consumption

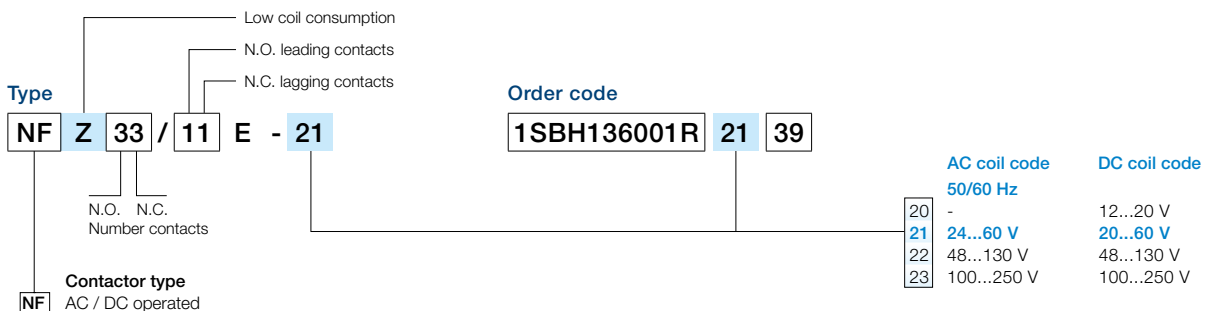

Voltage code table

UA, UA..RA contactors GA contactors

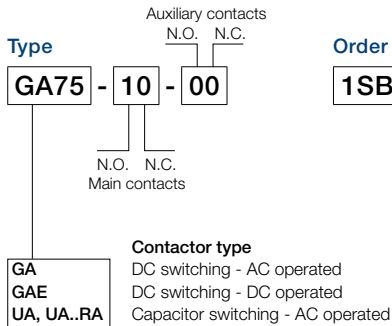

Order code
1SBL411025R **82** **00**

Contactors: UA, UA..RA, GA
AC coil code


| | 50 Hz | 60 Hz |
|-----------|--------------------|--------------------|
| 81 | 24 V | 24 V |
| 16 | 26 V | 28 V |
| 17 | 28 V | 32 V |
| 82 | 42 V | 42 V |
| 20 | 42 V | 48 V |
| 83 | 48 V | 48 V |
| 73 | 60 V | 60 V |
| 74 | 100 V | 100...110 V |
| 26 | 105 V | 110...127 V |
| 84 | 110 V | 110...120 V |
| 89 | 110...115 V | 115...127 V |
| 29 | 120 V | 140 V |
| 30 | 125...127 V | 150 V |
| 34 | 175 V | 208 V |
| 36 | 190 V | 220 V |
| 40 | 210 V | 240 V |
| 80 | 220...230 V | 230...240 V |
| 88 | 230...240 V | 240...260 V |
| 42 | 230...240 V | 277 V |
| 85 | 380...400 V | 400...415 V |
| 86 | 400...415 V | 415...440 V |
| 50 | 400 V | 440 V |
| 51 | 400...415 V | 480 V |
| 87 | 415...440 V | 440...460 V |
| 53 | 440 V | 500 V |
| 55 | 500 V | 600 V |
| 56 | 550 V | - |
| 58 | 660...690 V | - |
| 59 | - | 690 V |

Contactors: GAE
DC coil code

| | |
|-----------|-------|
| 80 | 12 V |
| 81 | 24 V |
| 82 | 42 V |
| 83 | 48 V |
| 21 | 50 V |
| 84 | 60 V |
| 85 | 75 V |
| 86 | 110 V |
| 87 | 125 V |
| 88 | 220 V |
| 89 | 240 V |
| 38 | 250 V |

Codes in bold for dual frequency coils.

EK550, EK1000 contactors

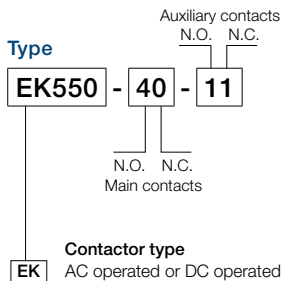

Order code
SK827041 - **AD**

AC coil code

| | 50 Hz | 60 Hz |
|-----------|-------------|-------|
| AD | 48 V | - |
| AE | - | 110 V |
| AF | 110 V | 120 V |
| AG | 127 V | - |
| AZ | - | 208 V |
| AH | 190 V | 220 V |
| AK | - | 240 V |
| AL | 220...230 V | 240 V |
| AM | 230...240 V | - |
| AN | - | 380 V |
| AP | 380...400 V | 440 V |
| AR | 400...415 V | - |
| AS | - | 480 V |
| AT | 440 V | - |
| AU | 500 V | - |
| AV | - | 600 V |

Dual frequency coil code

| | 50 Hz | 60 Hz |
|----|-------------|-------------|
| EF | 110 V | 110...120 V |
| EG | 110...115 V | 115...127 V |
| EL | 220 V | 220...240 V |
| EM | 220...230 V | 230...255 V |
| EP | 380 V | 380...415 V |
| ER | 380...400 V | 400...440 V |


2 auxiliary contact blocks maximum per contactor, ambient temperature ≤ 55 °C and mounting positions 2 and 6 excluded.

DC coil code


| | |
|----|-------|
| DB | 24 V |
| DC | 36 V |
| DD | 48 V |
| DT | 60 V |
| DG | 75 V |
| DE | 110 V |
| DU | 125 V |
| DF | 220 V |

Voltage code table


GAF185 ... GAF300 contactors

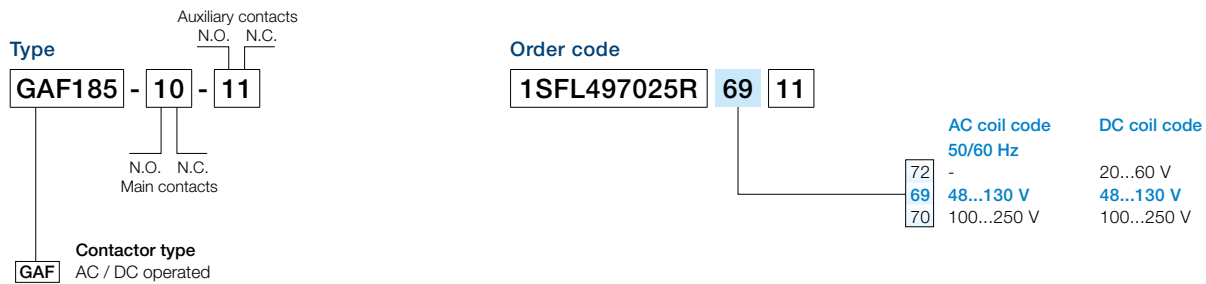

GAF460 ... GAF1250 contactors

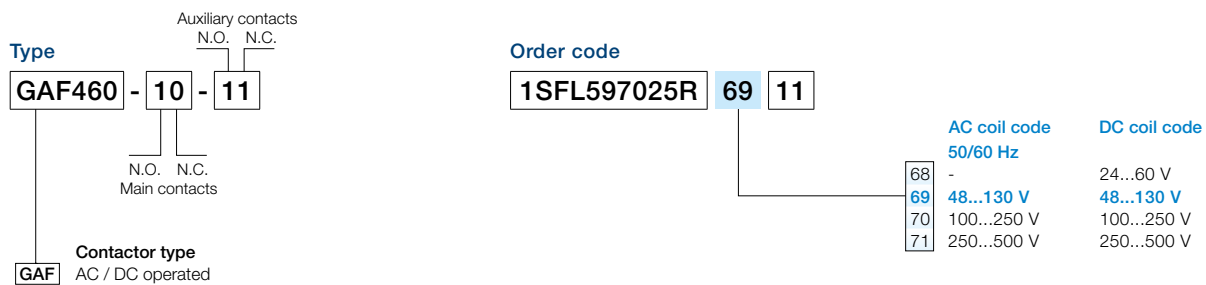

GAF1650, GAF2050 contactors

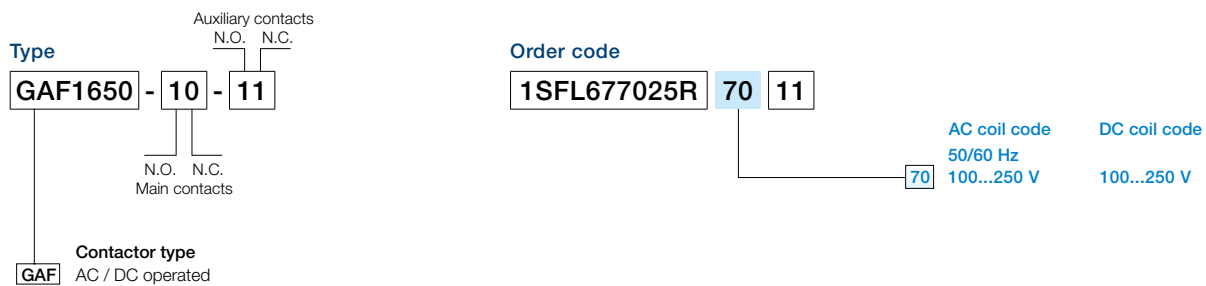



Overload relays

Overview 6/2

Thermal overload relays

| | |
|-----------------------|-----|
| T16 – 0.10 to 16.0 A | 6/4 |
| TF42 – 0.10 to 38.0 A | 6/5 |
| TF65 – 22.0 to 67.0 A | 6/6 |
| TF96 – 40.0 to 96.0 A | 6/7 |
| TF140DU – 66 to 142 A | 6/8 |
| TA200DU – 66 to 200 A | 6/9 |

Electronic overload relays


| | |
|------------------------------------|------|
| E16DU, EF19, EF45 – 0.10 to 45.0 A | 6/10 |
| EF65, EF96, EF146 – 20 to 150 A | 6/11 |
| EF205, EF370 – 63 to 380 A | 6/12 |
| EF460, EF750 – 150 to 800 A | 6/13 |
| E1250DU – 375 to 1250 A | 6/14 |

General accessories 6/15

For direct product details information, use product type or order code, ex:
www.abb.com/productdetails/AF09-30-10-13 or www.abb.com/productdetails/1SBL137001R1310

Thermal and electronic overload relays


Thermal overload relays

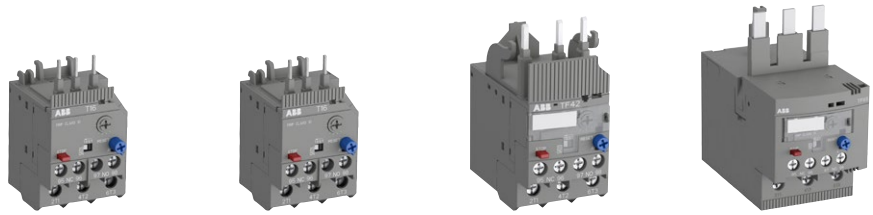

| | | | | | |
|-----------------------------------|-------|-----------------|-----------------|-----------------|------------------|
| IEC: rated operational power AC-3 | 400 V | 0.03 ... 4.0 kW | 0.03 ... 4.0 kW | 4.0 ... 18.5 kW | 18.5 ... 30 kW |
| UL/CSA: 3-phase hp-ratings | 480 V | 1/2 ... 5 hp | 1/2 ... 10 hp | 5 ... 20 hp | 30 ... 60 hp |
| Fitting to contactors | | B6, B7 | AS09 ... AS16 | AF09 ... AF38 | AF40, AF52, AF65 |
| Type | | T16 | T16 | TF42 | TF65 |
| Current range | | 0.10 ... 16 A | 0.10 ... 16 A | 0.10 ... 38 A | 22 ... 67 A |
| Trip class | | 10 | 10 | 10 | 10 |
| Single mounting kit | | DB16 | DB16 | DB42 | - |


6

Electronic overload relays with integrated CT

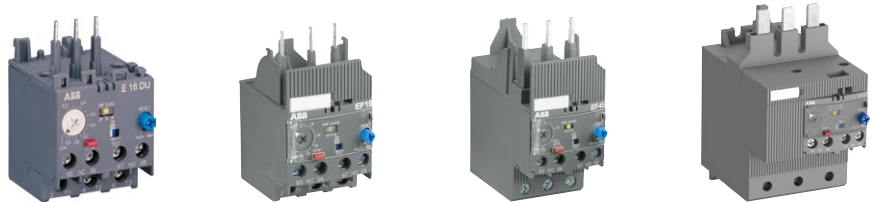


| | | | | | |
|-----------------------------------|-------|--------------------------------------------------------------------|-----------------|-----------------|------------------|
| IEC: rated operational power AC-3 | 400 V | 4 ... 7.5 kW | 4 ... 7.5 kW | 4.0 ... 18.5 kW | 18.5 ... 30 kW |
| UL/CSA: 3-phase hp-ratings | 480 V | 5 ... 10 hp | 5 ... 10 hp | 5 ... 20 hp | 30 ... 60 hp |
| Fitting to contactors | | B6, B7, BC6, BC7, A09 ... A16, AL09 ... AL16, VB6, VB7, VBC6, VBC7 | AF09 ... AF16 | AF26 ... AF38 | AF40, AF52, AF65 |
| Type | | E16DU | EF19 | EF45 | EF65 |
| Current range | | 0.10 ... 18.9 A | 0.10 ... 18.9 A | 9 ... 45 A | 20 ... 70 A |
| Trip class | | 10E, 20E, 30E selectable | | | |
| Single mounting kit | | DB16E | DB19EF | - | - |

Electronic overload relays with external separate CT

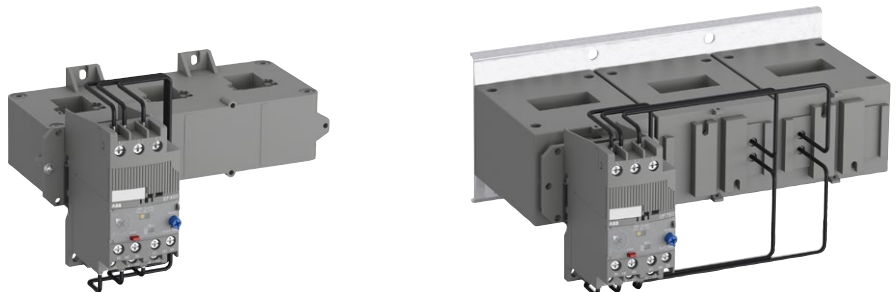

| | | | |
|-----------------------------------|-------|--------------------------|----------------------|
| IEC: rated operational power AC-3 | 400 V | 200 ... 250 kW | 315 ... 400 kW |
| UL/CSA: 3-phase hp-ratings | 480 V | 350 ... 400 hp | 500 ... 600 hp |
| Fitting to contactors | | AF400, AF460 | AF580, AF750, AF1250 |
| Type | | EF460 | EF750 |
| Current range | | 150 ... 500 A | 250 ... 800 A |
| Trip class | | 10E, 20E, 30E selectable | |

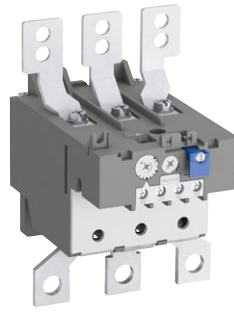

37 ... 45 kW

60 hp

AF80, AF96

TF96

40 ... 96 A

10

-

55 ... 75 kW

75 ... 100 hp

AF116, AF140

TF140DU

66 ... 142 A

10A

-

90 ... 110 kW

125 ... 150 hp

AF190, AF205

TA200DU

66 ... 200 A

10A

DB200



37 ... 45 kW

60 hp

AF80, AF96

EF96

36 ... 100 A

10E, 20E, 30E selectable

-

55 ... 75 kW

75 ... 100 hp

AF116, AF140, AF146

EF146

54 ... 150 A

-

90 ... 110 kW

125 ... 150 hp

AF190, AF205

EF205

63 ... 210 A

-

132 ... 200 kW


200 ... 350 hp

AF265, AF305, AF370

EF370

115 ... 380 A

-

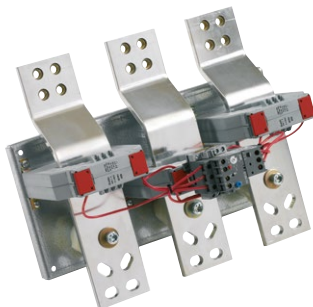

475 ... 560 kW

800 ... 900 hp

AF1350, AF1650

E1250DU

375 ... 1250 A

10E, 20E, 30E selectable

T16 thermal overload relays – 0.10 to 16.0 A

Ordering details



2CDC231009F0013

T16



2CDC231029F0013

T16 + DB16



1SFC151224F0002

KPR-101L



2CDC231002F0011

DB16

Description

The T16 thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications

Ordering details


| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|---------------|---------------------------------|------------|----------|-----------------|------------------|
| A | | | | | |
| 0.10 ... 0.13 | 0.5 A, fuse type T | 10 | T16-0.13 | 1SAZ711201R1005 | 0.100 |
| 0.13 ... 0.17 | 1.0 A, fuse type T | 10 | T16-0.17 | 1SAZ711201R1008 | 0.100 |
| 0.17 ... 0.23 | 1.0 A, fuse type T | 10 | T16-0.23 | 1SAZ711201R1009 | 0.100 |
| 0.23 ... 0.31 | 1.0 A, fuse type T | 10 | T16-0.31 | 1SAZ711201R1013 | 0.100 |
| 0.31 ... 0.41 | 2.0 A, fuse type gG | 10 | T16-0.41 | 1SAZ711201R1014 | 0.100 |
| 0.41 ... 0.55 | 2.0 A, fuse type gG | 10 | T16-0.55 | 1SAZ711201R1017 | 0.100 |
| 0.55 ... 0.74 | 4.0 A, fuse type gG | 10 | T16-0.74 | 1SAZ711201R1021 | 0.100 |
| 0.74 ... 1.00 | 6.0 A, fuse type gG | 10 | T16-1.0 | 1SAZ711201R1023 | 0.100 |
| 1.00 ... 1.30 | 6.0 A, fuse type gG | 10 | T16-1.3 | 1SAZ711201R1025 | 0.100 |
| 1.30 ... 1.70 | 10.0 A, fuse type gG | 10 | T16-1.7 | 1SAZ711201R1028 | 0.100 |
| 1.70 ... 2.30 | 10.0 A, fuse type gG | 10 | T16-2.3 | 1SAZ711201R1031 | 0.100 |
| 2.30 ... 3.10 | 10.0 A, fuse type gG | 10 | T16-3.1 | 1SAZ711201R1033 | 0.100 |
| 3.10 ... 4.20 | 20.0 A, fuse type gG | 10 | T16-4.2 | 1SAZ711201R1035 | 0.100 |
| 4.20 ... 5.70 | 20.0 A, fuse type gG | 10 | T16-5.7 | 1SAZ711201R1038 | 0.100 |
| 5.70 ... 7.60 | 35.0 A, fuse type gG | 10 | T16-7.6 | 1SAZ711201R1040 | 0.100 |
| 7.60 ... 10.0 | 35.0 A, fuse type gG | 10 | T16-10 | 1SAZ711201R1043 | 0.104 |
| 10.0 ... 13.0 | 40.0 A, fuse type gG | 10 | T16-13 | 1SAZ711201R1045 | 0.104 |
| 13.0 ... 16.0 | 40.0 A, fuse type gG | 10 | T16-16 | 1SAZ711201R1047 | 0.104 |

Ordering details accessories

| Suitable for | Description | Type | Order code | Weight (1 pc) kg |
|--------------|---------------------|----------|-----------------|------------------|
| T16 | Single mounting kit | DB16 | 1SAZ701901R0001 | 0.032 |
| T16 | Reset push button* | KPR-101L | 1SFA616162R1014 | 0.027 |

*Note: for more information see catalog 1SFC151004C0201

Main dimensions mm, inches

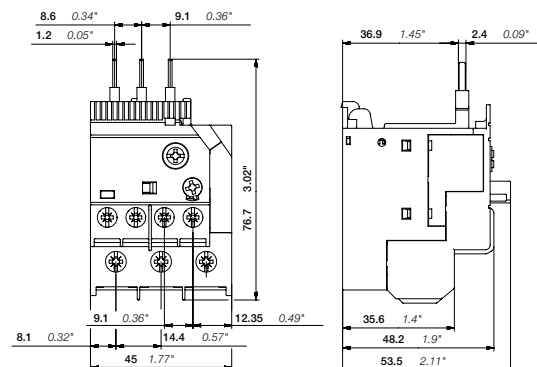

T16

2CDC232009F0008

2CDC106036C0201a

TF42 thermal overload relays – 0.10 to 38.0 A

Ordering details



2CDC231009F0013

TF42



2CDC231009F0011

DB42



2CDC231026F0013

TF42 + DB42



1SFC151224F0002

KPR-101L

Description

The TF42 thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications
- With ATEX certification

Ordering details


| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|--------------------|---------------------------------|------------|-----------|-----------------|------------------|
| 0.10 ... 0.13 | 0.5 A, fuse type T | 10 | TF42-0.13 | 1SAZ721201R1005 | 0.130 |
| 0.13 ... 0.17 | 1.0 A, fuse type T | 10 | TF42-0.17 | 1SAZ721201R1008 | 0.130 |
| 0.17 ... 0.23 | 1.0 A, fuse type T | 10 | TF42-0.23 | 1SAZ721201R1009 | 0.130 |
| 0.23 ... 0.31 | 1.0 A, fuse type T | 10 | TF42-0.31 | 1SAZ721201R1013 | 0.130 |
| 0.31 ... 0.41 | 2.0 A, fuse type gG | 10 | TF42-0.41 | 1SAZ721201R1014 | 0.130 |
| 0.41 ... 0.55 | 2.0 A, fuse type gG | 10 | TF42-0.55 | 1SAZ721201R1017 | 0.130 |
| 0.55 ... 0.74 | 4.0 A, fuse type gG | 10 | TF42-0.74 | 1SAZ721201R1021 | 0.130 |
| 0.74 ... 1.00 | 6.0 A, fuse type gG | 10 | TF42-1.0 | 1SAZ721201R1023 | 0.130 |
| 1.00 ... 1.30 | 6.0 A, fuse type gG | 10 | TF42-1.3 | 1SAZ721201R1025 | 0.130 |
| 1.30 ... 1.70 | 10.0 A, fuse type gG | 10 | TF42-1.7 | 1SAZ721201R1028 | 0.130 |
| 1.70 ... 2.30 | 10.0 A, fuse type gG | 10 | TF42-2.3 | 1SAZ721201R1031 | 0.130 |
| 2.30 ... 3.10 | 10.0 A, fuse type gG | 10 | TF42-3.1 | 1SAZ721201R1033 | 0.130 |
| 3.10 ... 4.20 | 20.0 A, fuse type gG | 10 | TF42-4.2 | 1SAZ721201R1035 | 0.130 |
| 4.20 ... 5.70 | 20.0 A, fuse type gG | 10 | TF42-5.7 | 1SAZ721201R1038 | 0.130 |
| 5.70 ... 7.60 | 35.0 A, fuse type gG | 10 | TF42-7.6 | 1SAZ721201R1040 | 0.130 |
| 7.60 ... 10.0 | 35.0 A, fuse type gG | 10 | TF42-10 | 1SAZ721201R1043 | 0.130 |
| 10.0 ... 13.0 | 40.0 A, fuse type gG | 10 | TF42-13 | 1SAZ721201R1045 | 0.130 |
| 13.0 ... 16.0 | 40.0 A, fuse type gG | 10 | TF42-16 | 1SAZ721201R1047 | 0.130 |
| 16.0 ... 20.0 | 63.0 A, fuse type gG | 10 | TF42-20 | 1SAZ721201R1049 | 0.145 |
| 20.0 ... 24.0 | 63.0 A, fuse type gG | 10 | TF42-24 | 1SAZ721201R1051 | 0.145 |
| 24.0 ... 29.0 | 63.0 A, fuse type gG | 10 | TF42-29 | 1SAZ721201R1052 | 0.145 |
| 29.0 ... 35.0 | 80.0 A, fuse type gG | 10 | TF42-35 | 1SAZ721201R1053 | 0.145 |
| 35.0 ... 38.0/40.0 | 80.0 A, fuse type gG | 10 | TF42-38 | 1SAZ721201R1055 | 0.145 |

Ordering details accessories

| Suitable for | Description | Type | Order code | Weight (1 pc) kg |
|--------------|---------------------|----------|-----------------|------------------|
| TF42 | Single mounting kit | DB42 | 1SAZ701902R0001 | 0.087 |
| TF42 | Reset push button* | KPR-101L | 1SFA616162R1014 | 0.027 |

*Note: for more information see catalog 1SFC151004C0201

Main dimensions mm, inches

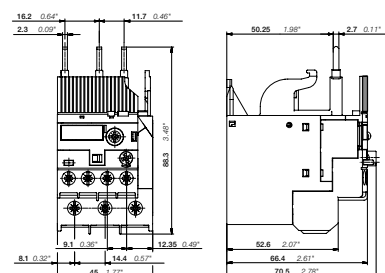

TF42

2CDC232005F0009

2CDC106046C0201a

TF65 thermal overload relays – 22.0 to 67.0 A

Ordering details



2CDC231004F0013

TF65



2CDC231003V0015

DB65



2CDC231004W0015

DB65 + TF65



1SFC151224F0002

KPR-101L

Description

The TF65 thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications
- With ATEX certification ¹⁾

Ordering details

| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|---------------|---------------------------------|------------|---------|-----------------|------------------|
| A | | | | | |
| 22.0 ... 28.0 | 80 A, gG Type Fuses | 10 | TF65-28 | 1SAZ811201R1001 | 0.456 |
| 25.0 ... 33.0 | 80 A, gG Type Fuses | 10 | TF65-33 | 1SAZ811201R1002 | 0.456 |
| 30.0 ... 40.0 | 100 A, gG Type Fuses | 10 | TF65-40 | 1SAZ811201R1003 | 0.456 |
| 36.0 ... 47.0 | 125 A, gG Type Fuses | 10 | TF65-47 | 1SAZ811201R1004 | 0.456 |
| 44.0 ... 53.0 | 125 A, gG Type Fuses | 10 | TF65-53 | 1SAZ811201R1005 | 0.456 |
| 50.0 ... 60.0 | 125 A, gG Type Fuses | 10 | TF65-60 | 1SAZ811201R1006 | 0.466 |
| 57.0 ... 67.0 | 160 A, gG Type Fuses | 10 | TF65-67 | 1SAZ811201R1007 | 0.466 |


Ordering details accessories

| Suitable for | Description | Type | Order code | Weight (1 pc) kg |
|--------------|---------------------------------|----------|-----------------|------------------|
| TF65 | Single mounting kit | DB65 | 1SAZ801901R1001 | 0.132 |
| TF65 | Reset push button ²⁾ | KPR-101L | 1SFA616162R1014 | 0.027 |

¹⁾ ATEX is valid for products, produced from week 26, 2015

²⁾ Note: for more information see catalog 1SFC151004C0201

Main dimensions mm, inches

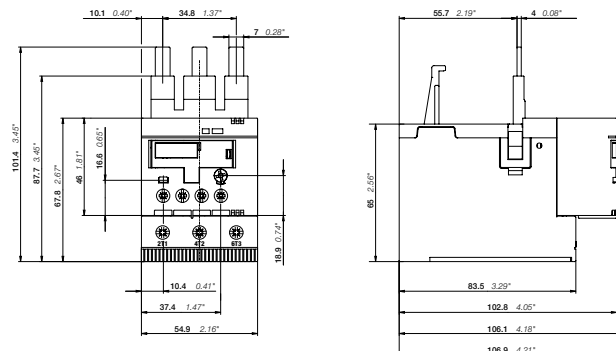

TF65

TF96 thermal overload relays – 40.0 to 96.0 A

Ordering details



TF96

2CDC231005F0013



DB96

2CDC231001V0015



DB96 + TF96

2CDC231005V0015



KPR-101L

1SFC151224FV002

Description

The TF96 thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications
- With ATEX certification ¹⁾

Ordering details

| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|---------------|---------------------------------|------------|---------|-----------------|------------------|
| A | | | | | |
| 40.0 ... 51.0 | 125 A, gG Type Fuses | 10 | TF96-51 | 1SAZ911201R1001 | 0.620 |
| 48.0 ... 60.0 | 160 A, gG Type Fuses | 10 | TF96-60 | 1SAZ911201R1002 | 0.620 |
| 57.0 ... 68.0 | 160 A, gG Type Fuses | 10 | TF96-68 | 1SAZ911201R1003 | 0.620 |
| 65.0 ... 78.0 | 200 A, gG Type Fuses | 10 | TF96-78 | 1SAZ911201R1004 | 0.620 |
| 75.0 ... 87.0 | 200 A, gG Type Fuses | 10 | TF96-87 | 1SAZ911201R1005 | 0.620 |
| 84.0 ... 96.0 | 250 A, gG Type Fuses | 10 | TF96-96 | 1SAZ911201R1006 | 0.630 |


Ordering details accessories

| Suitable for | Description | Type | Order code | Weight (1 pc) kg |
|--------------|---------------------------------|----------|-----------------|------------------|
| TF96, EF96 | Single mounting kit | DB96 | 1SAZ901901R1001 | 0.190 |
| TF96 | Reset push button ²⁾ | KPR-101L | 1SFA616162R1014 | 0.027 |

¹⁾ ATEX is valid for products, produced from week 26, 2015

²⁾ Note: for more information see catalog 1SFC151004C0201a

Main dimensions mm, inches

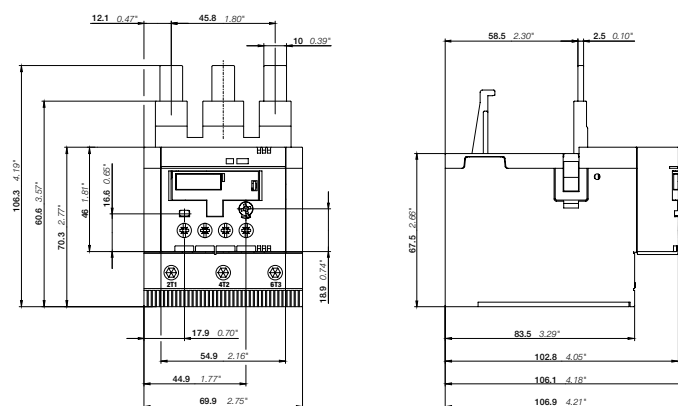

TF96

2CDC232005F0009

2CDC106064C0201a

TF140DU thermal overload relays – 66 to 142 A

Ordering details



2CDC231012P0012

TF140DU



1SFC151224F0002

KPR-101L

6

Description

The TF140DU thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10A.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications
- ATEX variants available

Ordering details

| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|---------------|---------------------------------|------------|--------------------|-----------------|------------------|
| A | | | | | |
| 66 ... 90 | 200 A, fuse type gG | 10A | TF140DU-90 | 1SAZ431201R1001 | 0.820 |
| 80 ... 110 | 224 A, fuse type gG | 10A | TF140DU-110 | 1SAZ431201R1002 | 0.820 |
| 100 ... 135 | 224 A, fuse type gG | 10A | TF140DU-135 | 1SAZ431201R1003 | 0.820 |
| 110 ... 142 | 250 A, fuse type gG | 10A | TF140DU-142 | 1SAZ431201R1004 | 0.820 |
| 66 ... 90 | 200 A, fuse type gG | 10A | TF140DU-90-V1000* | 1SAZ431301R1001 | 0.820 |
| 80 ... 110 | 224 A, fuse type gG | 10A | TF140DU-110-V1000* | 1SAZ431301R1002 | 0.820 |
| 100 ... 135 | 224 A, fuse type gG | 10A | TF140DU-135-V1000* | 1SAZ431301R1003 | 0.820 |
| 110 ... 142 | 250 A, fuse type gG | 10A | TF140DU-142-V1000* | 1SAZ431301R1004 | 0.820 |


*Note: ATEX variant

Ordering details accessories

| Suitable for | Description | Type | Order code | Weight (1 pc) kg |
|--------------|--------------------|----------|-----------------|------------------|
| TF140DU | Reset push button* | KPR-101L | 1SFA616162R1014 | 0.027 |

*Note: for more information see catalog 1SFC151004C0201

Main dimensions mm, inches

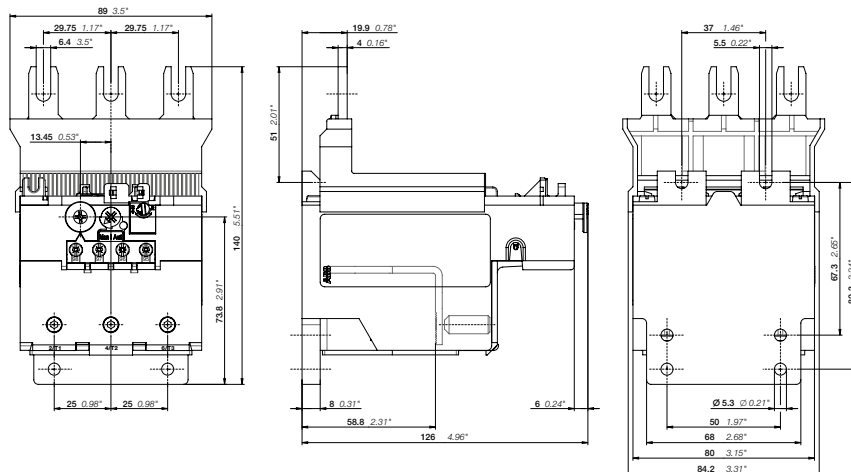


TF140DU

2CDC232008F0012

2CDC106054C0201a

TA200DU thermal overload relays – 66 to 200 A

Ordering details

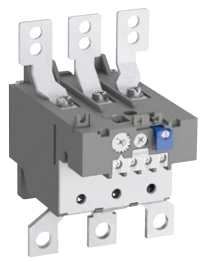

2CDC23016F0013

TA200DU



1SFC151224F0002

KPR-101L

Description

The TA200DU thermal overload relays are economic electromechanical protection devices for the main circuit. They offer reliable protection for motors in the event of overload or phase failure. The devices have trip class 10A.

The thermal overload relays are three pole relays with bimetal tripping elements. The motor current flows through the bimetal tripping elements and heats them directly and indirectly. In case of an overload (over current), the bimetal elements bent as a result of the heating. This leads to a release of the relay and a change of the contacts switching position (95-96 / 97-98).

- Manual or automatic reset selectable
- Phase loss sensitive acc. to IEC/EN 60947-4-1
- TEST and STOP function – Trip indication on the front
- Temperature compensation
- Suitable for three- and single-phase applications

Ordering details


| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|---------------|---------------------------------|------------|-------------|-----------------|------------------|
| A | | | | | |
| 66 ... 90 | 200 A, fuse type gG / 125 A aM | 10A | TA200DU-90 | 1SAZ421201R1001 | 0.755 |
| 80 ... 110 | 224 A, fuse type gG / 160 A aM | 10A | TA200DU-110 | 1SAZ421201R1002 | 0.760 |
| 100 ... 135 | 224 A, fuse type gG / 200 A aM | 10A | TA200DU-135 | 1SAZ421201R1003 | 0.760 |
| 110 ... 150 | 250 A, fuse type gG / 200 A aM | 10A | TA200DU-150 | 1SAZ421201R1004 | 0.760 |
| 130 ... 175 | 315 A, fuse type gG / 250 A aM | 10A | TA200DU-175 | 1SAZ421201R1005 | 0.770 |
| 150 ... 200 | 315 A, fuse type gG / 250 A aM | 10A | TA200DU-200 | 1SAZ421201R1006 | 0.785 |

Ordering details accessories

| Suitable for | Description | Type | Order code | Weight (1 pc) kg |
|--------------|---------------------|----------|-----------------|------------------|
| TA200DU | Terminal shroud | LT200/A | 1SAZ401901R1001 | 0.090 |
| TA200DU | Single mounting kit | DB200 | 1SAZ401110R0001 | 0.225 |
| TA200DU | Reset push button* | KPR-101L | 1SFA616162R1014 | 0.027 |

*Note: for more information see catalog 1SFC151004C0201

Main dimensions mm, inches

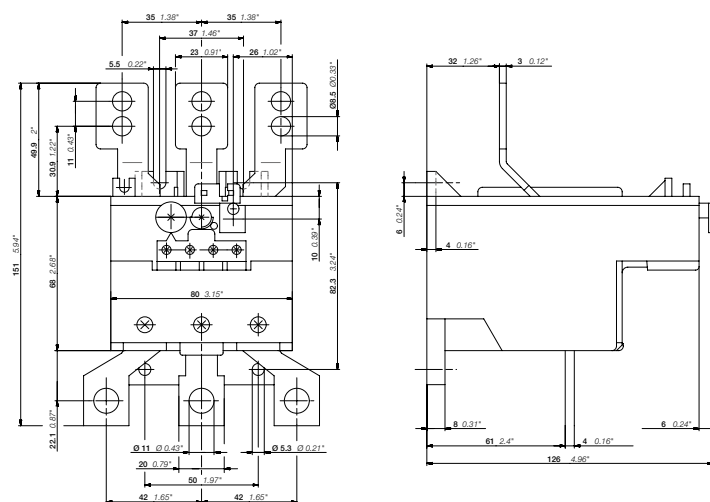

TA200DU

2CDC23021 F0011

2CDC106038C0201a

E16DU, EF19, EF45 electronic overload relays – 0.10 to 45.0 A

Ordering details



2CDC231001R0007

E16DU-1.0




1SFC101147FC010

EF19-18.9



1SBC101148P0010

EF45-30

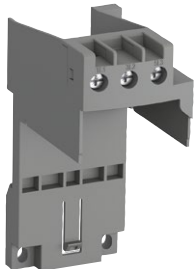

2CDC231024V0013

DB19EF



2CDC231002V0014

DB45EF



1SFC151224F0002

KPR-101L

Description

The E16DU, EF19 and EF45 are self-supplied electronic overload relays, which means no extra external supply is needed. It offers reliable protection for motors in the event of overload or phase failure. Easy to use like a thermal overload relay and compatible with standard motor applications, the electronic overload relay is convincing, above all, due to its wide setting range, high accuracy, high operational temperature range and the possibility to select a trip class (10E, 20E, 30E). Further features are the temperature compensation, trip contact (N.C.), signal contact (N.O.), automatic or manual reset selectable, trip-free mechanism, STOP and TEST function and a trip indication. The overload relays are connected directly to the contactors.

Ordering details

| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|---------------|---------------------------------|------------|------|------------|------------------|
|---------------|---------------------------------|------------|------|------------|------------------|

E16DU electronic overload relays

| | | | | | |
|---------------|--------------------|---------------|------------|-----------------|-------|
| 0.10 ... 0.32 | 1 A, fuse type gG | 10E, 20E, 30E | E16DU-0.32 | 1SAX111001R1101 | 0.150 |
| 0.30 ... 1.00 | 4 A, fuse type gG | 10E, 20E, 30E | E16DU-1.0 | 1SAX111001R1102 | 0.150 |
| 0.80 ... 2.70 | 10 A, fuse type gG | 10E, 20E, 30E | E16DU-2.7 | 1SAX111001R1103 | 0.150 |
| 2.00 ... 6.30 | 20 A, fuse type gG | 10E, 20E, 30E | E16DU-6.3 | 1SAX111001R1104 | 0.150 |
| 5.70 ... 18.9 | 50 A, fuse type gG | 10E, 20E, 30E | E16DU-18.9 | 1SAX111001R1105 | 0.150 |

EF19 electronic overload relays

| | | | | | |
|---------------|--------------------|---------------|-----------|-----------------|-------|
| 0.10 ... 0.32 | 1 A, fuse type gG | 10E, 20E, 30E | EF19-0.32 | 1SAX121001R1101 | 0.158 |
| 0.30 ... 1.00 | 4 A, fuse type gG | 10E, 20E, 30E | EF19-1.0 | 1SAX121001R1102 | 0.158 |
| 0.80 ... 2.70 | 10 A, fuse type gG | 10E, 20E, 30E | EF19-2.7 | 1SAX121001R1103 | 0.158 |
| 1.90 ... 6.30 | 20 A, fuse type gG | 10E, 20E, 30E | EF19-6.3 | 1SAX121001R1104 | 0.158 |
| 5.70 ... 18.9 | 50 A, fuse type gG | 10E, 20E, 30E | EF19-18.9 | 1SAX121001R1105 | 0.158 |

EF45 electronic overload relays


| | | | | | |
|---------------|---------------------|---------------|---------|-----------------|-------|
| 9.00 ... 30.0 | 160 A, fuse type gG | 10E, 20E, 30E | EF45-30 | 1SAX221001R1101 | 0.362 |
| 15.0 ... 45.0 | 160 A, fuse type gG | 10E, 20E, 30E | EF45-45 | 1SAX221001R1102 | 0.362 |

Ordering details accessories


| Suitable for | Description | Type | Order code | Weight (1 pc) kg |
|-------------------|---------------------|----------|-----------------|------------------|
| E16DU | Single mounting kit | DB16E | 1SAX101110R0001 | 0.035 |
| EF19 | Single mounting kit | DB19EF | 1SAX101910R1001 | 0.046 |
| EF45 | Single mounting kit | DB45EF | 1SAX201910R0001 | 0.100 |
| E16DU, EF19, EF45 | Reset push button* | KPR-101L | 1SFA616162R1014 | 0.019 |

*Note: for more information see catalog 1SFC151004C0201

Main dimensions mm, inches

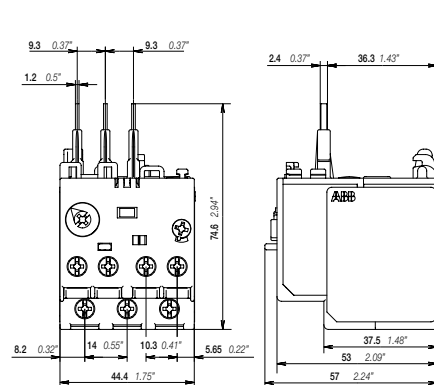

E16DU

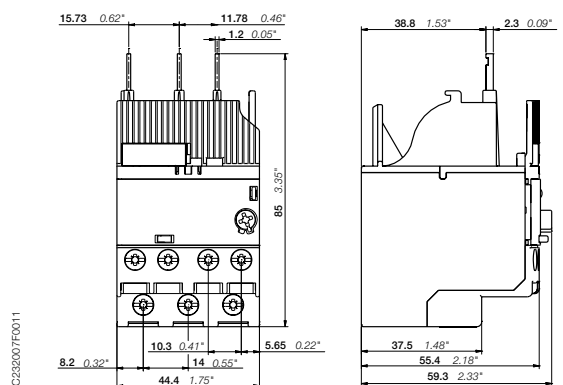

EF19

EF65, EF96, EF146 electronic overload relays – 20 to 150 A

Ordering details



EF65-70

2CDC231001F0012



EF96-100

2CDC231002F0012



EF146-150

2CDC231003F0012



DB96

2CDC231001V0015



DB96 + EF96

2CDC231002V0015



KPR-101L

1SFC15124F0002

Description

The EF65, EF96 and EF146 are self-supplied electronic overload relays, which means no extra external supply is needed. It offers reliable protection for motors in the event of overload or phase failure. Easy to use like a thermal overload relay and compatible with standard motor applications, the electronic overload relay is convincing, above all, due to its wide setting range, high accuracy, high operational temperature range and the possibility to select a trip class (10E, 20E, 30E). Further features are the temperature compensation, trip contact (N.C.), signal contact (N.O.), automatic or manual reset selectable, trip-free mechanism, STOP and TEST function and a trip indication. The overload relays are connected directly to the contactors.

Ordering details


| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|---------------|---------------------------------|---------------|-----------|-----------------|------------------|
| A | | | | | |
| 20 ... 56 | 160 A, fuse type gG | 10E, 20E, 30E | EF65-56 | 1SAX331001R1102 | 0.821 |
| 25 ... 70 | 160 A, fuse type gG | 10E, 20E, 30E | EF65-70 | 1SAX331001R1101 | 0.821 |
| 36 ... 100 | 200 A, fuse type gG | 10E, 20E, 30E | EF96-100 | 1SAX341001R1101 | 0.802 |
| 54 ... 150 | 315 A, fuse type gG | 10E, 20E, 30E | EF146-150 | 1SAX351001R1101 | 0.879 |

Ordering details accessories



| Suitable for | Description | Type | Order code | Weight (1 pc) kg |
|-------------------|---------------------|----------|-----------------|------------------|
| EF96, TF96 | Single mounting kit | DB96 | 1SAZ901901R1001 | 0.190 |
| EF65, EF96, EF146 | Reset push button* | KPR-101L | 1SFA616162R1014 | 0.019 |

*Note: for more information see catalog 1SFC151004C0201


Main dimensions mm, inches

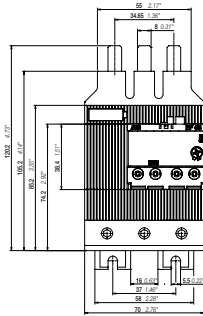


EF65-56 / EF65-70

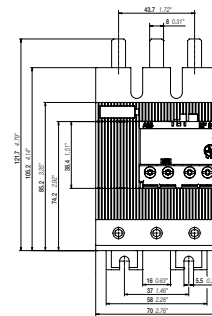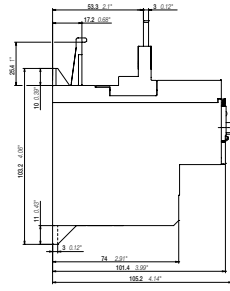

EF96-100

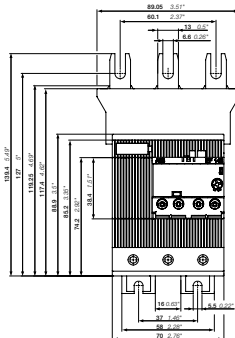

EF146-150

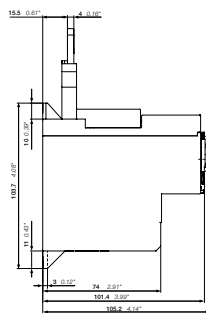

EF460, EF750 electronic overload relays – 150 to 800 A

Ordering details



2CDC231014R0013

EF460-500



2CDC231014R0013

EF750-800



1SFC151224R0002

KPR-101L

Description

The EF460 and EF750 are self-supplied electronic overload relays, which means no extra external supply is needed. It offers reliable protection for motors in the event of overload or phase failure. Easy to use like a thermal overload relay and compatible with standard motor applications, the electronic overload relay is convincing, above all, due to its wide setting range, high accuracy, high operational temperature range and the possibility to select a trip class (10E, 20E, 30E). Further features are the temperature compensation, trip contact (N.C.), signal contact (N.O.), automatic or manual reset selectable, trip-free mechanism, STOP and TEST function and a trip indication. Busbar kits are available as accessory for contactor mounting.

Ordering details


| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|----------------------------------------|--------------------------------------------------|---------------|-----------|-----------------|------------------|
| A | | | | | |
| EF460 electronic overload relay | | | | | |
| 150 ... 500 | 690 V: 630 A, Type gG 1000 V: 1600 A, Type gG | 10E, 20E, 30E | EF460-500 | 1SAX721001R1101 | 1.170 |
| EF750 electronic overload relay | | | | | |
| 250 ... 800 | 690 V: 800 A, Type gG 1000 V: 1600 A, Type gG | 10E, 20E, 30E | EF750-800 | 1SAX821001R1101 | 3.905 |

Ordering details accessories


| Suitable for | Description | Type | Order code | Weight (1 pc) kg |
|--------------|--------------------|----------|-----------------|------------------|
| EF460, EF750 | Reset push button* | KPR-101L | 1SFA616162R1014 | 0.027 |

*Note: for more information see catalog 1SFC151004C0201

Main dimensions mm, inches

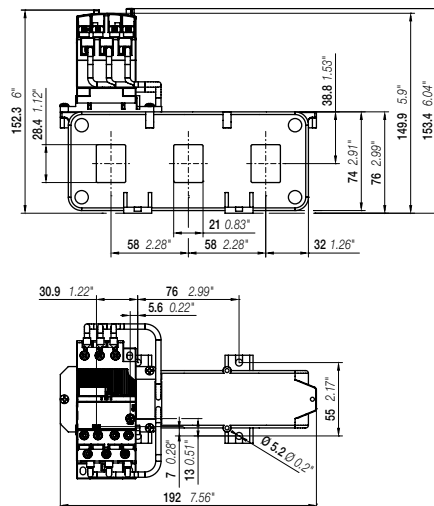


EF460-500

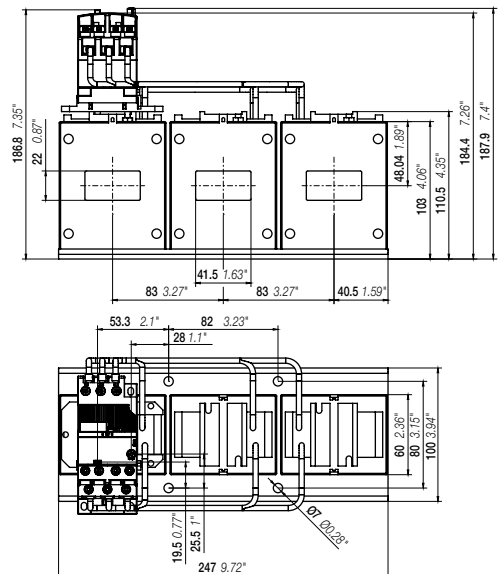

EF750-800

E1250DU electronic overload relays – 375 to 1250 A

Ordering details

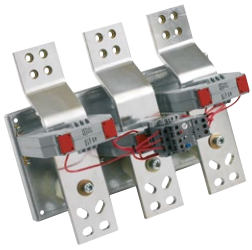

1SFA739001R1000

E1250DU-1250

Description

The E1250DU are self-supplied electronic overload relays, which means no extra external supply is needed. It offers reliable protection for motors in the event of overload or phase failure. Easy to use like a thermal overload relay and compatible with standard motor applications, the electronic overload relay is convincing, above all, due to its wide setting range, high accuracy, high operational temperature range and the possibility to select a trip class (10E, 20E, 30E). Further features are the temperature compensation, trip contact (N.C.), signal contact (N.O.), automatic or manual reset selectable, trip-free mechanism, STOP and TEST function and a trip indication. Busbar kits are available as accessory for contactor mounting.

Ordering details

| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pc) kg |
|------------------------------------------|---------------------------------|---------------|--------------|-----------------|------------------|
| A | | | | | |
| E1250DU electronic overload relay | | | | | |
| 375 ... 1250 | - | 10E, 20E, 30E | E1250DU-1250 | 1SFA739001R1000 | 12.181 |

Thermal and electronic overload relays

General accessories



WRB-400

2CDC231102BF0013



WRH-F

2CDC2311027F0013

Description

The wire reset is a general accessory for thermal and electronic overload relays. In installations which are difficult to access, like a motor control centre or compact cubical, the accessory allows the user to remotely reset the overload relays.


The wire reset consists of two parts, the bowden wire with actuator and the holder. The actuator should be mounted into a door of a panel. The holder will be mounted on the overload relay. The actuator and holder are connected via the bowden wire.

Ordering details

| Suitable for | Description | Length mm | Type | Order code | Weight (1 pc) kg |
|-----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|--------------|----------|-----------------|------------------------|
| Holder | | | | | |
| TF42, TF65, TF96, EF19, EF45, EF65, EF96, EF146, EF205, EF370, EF460, EF750 | Holder for tool less direct mounting | | WRH-F | 1SAZ701903R1001 | 0.006 |
| Bowden wire with actuator | | | | | |
| WRH-F | Bowden wire with actuator, hole diameter: 7.3 mm, maximum panel thickness: 12 mm | 400 | WRB-400 | 1SAZ701903R1011 | 0.030 |
| | | 600 | WRB-600 | 1SAZ701903R1012 | 0.040 |
| | | 1000 | WRB-1000 | 1SAZ701903R1013 | 0.060 |
| IP54 gasket | | | | | |
| WRB-400 WRB-600 WRB-1000 | IP54 Panel seal gasket | | WRBG | 1SAZ701903R1030 | 0.037 |

6

Overload relays with accessory wire reset (WRH, WRB)

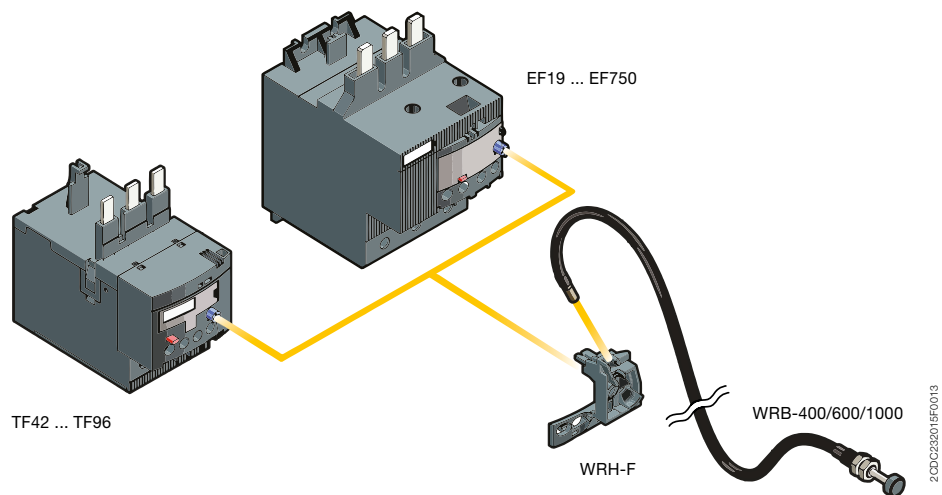

2CDC131059C0201



DRAS and DRAF enclosed starters

DRAS enclosed starter

| | |
|--------------------|-----|
| Ordering details | 7/2 |
| Voltage code table | 7/3 |

DRAF enclosed starter

| | |
|------------------|-----|
| Overview | 7/4 |
| Ordering details | 7/6 |

For direct product details information, use product type or order code, ex:
www.abb.com/productdetails/AF09-30-10-13 or www.abb.com/productdetails/1SBL137001R1310

DRAS09 ... DRAS16 enclosed direct-on-line starters

4 to 7.5 kW, protected by thermal overload relays

AC or DC operated



1SBC133003V0014

DRAS
+ T16 to be ordered separately

Description

Enclosed direct-on-line (DOL) starters are used for controlling 3-phase asynchronous motors up to 690 V AC.

Each starter is delivered assembled and wired. It contains:

- IP65 compact plastic enclosure with double insulation, equipped with:
 - 1 green flush "I" ON button and 1 red protruding "O" OFF/RESET button
 - 2 quarter-turn, quick fastening screws and a base with 6 cable inlets and outlets via knockouts.
- 1 AS or ASL 3-pole contactor with holding contact
- 1 PE and 1 neutral terminal.

3 versions of control supply wiring are available: phase-to-phase, separate supply or phase-to-neutral.

T16 thermal overload relay has to be ordered separately and chosen according to motor's nominal current (see table below).

DRAS, DRASL enclosed DOL starters

| IEC - AC-3 | | | | Rated control circuit voltage | Control supply wiring | Type | Order code | Weight |
|-------------------------|-------|-------|--------------------------------|--------------------------------------------------|-----------------------|------|------------|-------------|
| Rated operational power | | | | Uc | | | | Pkg (1 pce) |
| 220 V | 400 V | 500 V | max. current | Other control voltages see AS voltage code table | | | | kg |
| 230 V | | | $\theta \leq 40^\circ\text{C}$ | V 50/60 Hz | V DC | | | |
| 240 V | | | Ue=400 V | | | | | |
| kW | kW | kW | A | | | | | |

AC operated with AS 3-pole contactors

| 2.2 | 4 | 4 | 9 | 24 | - | Separate supply | DRAS09-20S | 1SBK104235R2000 | 0.650 |
|-----|-----|-----|------|-----|---|------------------|------------|-----------------|-------|
| | | | | 230 | - | Phase-to-neutral | DRAS09-26N | 1SBK104135R2600 | 0.650 |
| | | | | 240 | - | Phase-to-neutral | DRAS09-27N | 1SBK104135R2700 | 0.650 |
| | | | | 400 | - | Phase-to-phase | DRAS09-28P | 1SBK104035R2800 | 0.650 |
| | | | | 415 | - | Phase-to-phase | DRAS09-29P | 1SBK104035R2900 | 0.650 |
| 3 | 5.5 | 5.5 | 12 | 24 | - | Separate supply | DRAS12-20S | 1SBK114235R2000 | 0.650 |
| | | | | 230 | - | Phase-to-neutral | DRAS12-26N | 1SBK114135R2600 | 0.650 |
| | | | | 240 | - | Phase-to-neutral | DRAS12-27N | 1SBK114135R2700 | 0.650 |
| | | | | 400 | - | Phase-to-phase | DRAS12-28P | 1SBK114035R2800 | 0.650 |
| | | | | 415 | - | Phase-to-phase | DRAS12-29P | 1SBK114035R2900 | 0.650 |
| 4 | 7.5 | 7.5 | 15.5 | 24 | - | Separate supply | DRAS16-20S | 1SBK124235R2000 | 0.650 |
| | | | | 230 | - | Phase-to-neutral | DRAS16-26N | 1SBK124135R2600 | 0.650 |
| | | | | 240 | - | Phase-to-neutral | DRAS16-27N | 1SBK124135R2700 | 0.650 |
| | | | | 400 | - | Phase-to-phase | DRAS16-28P | 1SBK124035R2800 | 0.650 |
| | | | | 415 | - | Phase-to-phase | DRAS16-29P | 1SBK124035R2900 | 0.650 |

DC operated with ASL 3-pole contactors

| | | | | | | | | | |
|-----|-----|-----|------|---|----|-----------------|-------------|-----------------|-------|
| 2.2 | 4 | 4 | 9 | - | 24 | Separate supply | DRASL09-81S | 1SBK104335R8100 | 0.700 |
| | | | | | 48 | | DRASL09-83S | 1SBK104335R8300 | 0.700 |
| 3 | 5.5 | 5.5 | 12 | - | 24 | Separate supply | DRASL12-81S | 1SBK114335R8100 | 0.700 |
| | | | | | 48 | | DRASL12-83S | 1SBK114335R8300 | 0.700 |
| 4 | 7.5 | 7.5 | 15.5 | - | 24 | Separate supply | DRASL16-81S | 1SBK124335R8100 | 0.700 |
| | | | | | 48 | | DRASL16-83S | 1SBK124335R8300 | 0.700 |

T16 thermal overload relays to be ordered separately

| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pce) |
|---------------|---------------------------------|------------|----------|-----------------|----------------|
| A | | | | | kg |
| 0.10...0.13 | 0.5 A, Fuse type T | 10 | T16-0.13 | 1SAZ711201R1005 | 0.100 |
| 0.13...0.17 | 1.0 A, Fuse type T | | T16-0.17 | 1SAZ711201R1008 | 0.100 |
| 0.17...0.23 | | | T16-0.23 | 1SAZ711201R1009 | 0.100 |
| 0.23...0.31 | | | T16-0.31 | 1SAZ711201R1013 | 0.100 |
| 0.31...0.41 | 2.0 A, Fuse type gG | | T16-0.41 | 1SAZ711201R1014 | 0.100 |
| 0.41...0.55 | | | T16-0.55 | 1SAZ711201R1017 | 0.100 |
| 0.55...0.74 | 4.0 A, Fuse type gG | | T16-0.74 | 1SAZ711201R1021 | 0.100 |
| 0.74...1.00 | 6.0 A, Fuse type gG | | T16-1.0 | 1SAZ711201R1023 | 0.100 |
| 1.00...1.30 | | | T16-1.3 | 1SAZ711201R1025 | 0.100 |
| 1.30...1.70 | 10.0 A, Fuse type gG | | T16-1.7 | 1SAZ711201R1028 | 0.100 |
| 1.70...2.30 | | | T16-2.3 | 1SAZ711201R1031 | 0.100 |
| 2.30...3.10 | | | T16-3.1 | 1SAZ711201R1033 | 0.100 |
| 3.10...4.20 | 20.0 A, Fuse type gG | | T16-4.2 | 1SAZ711201R1035 | 0.100 |
| 4.20...5.70 | | | T16-5.7 | 1SAZ711201R1038 | 0.100 |
| 5.70...7.60 | 35.0 A, Fuse type gG | | T16-7.6 | 1SAZ711201R1040 | 0.100 |
| 7.60...10.0 | | | T16-10 | 1SAZ711201R1043 | 0.104 |
| 10.0...13.0 | 40.0 A, Fuse type gG | | T16-13 | 1SAZ711201R1045 | 0.104 |
| 13.0...16.0 | | | T16-16 | 1SAZ711201R1047 | 0.104 |

Empty enclosure with push-button

| | | | | | |
|---|---|---|---------------|-----------------|-------|
| - | - | - | FR16AS-12VARS | 1SBN101035R1000 | 0.394 |
|---|---|---|---------------|-----------------|-------|

To be completed with AS or ASL contactor, T16 thermal overload relay and MCB-10B (1SFA611610R2001) contact block.



T16

2CDC31003V0013




1SBC133001V0014

Empty enclosure
with push-button

Voltage code table

DRAS09 ... DRAS16 and DRASL09 ... DRASL16 enclosed DOL starters

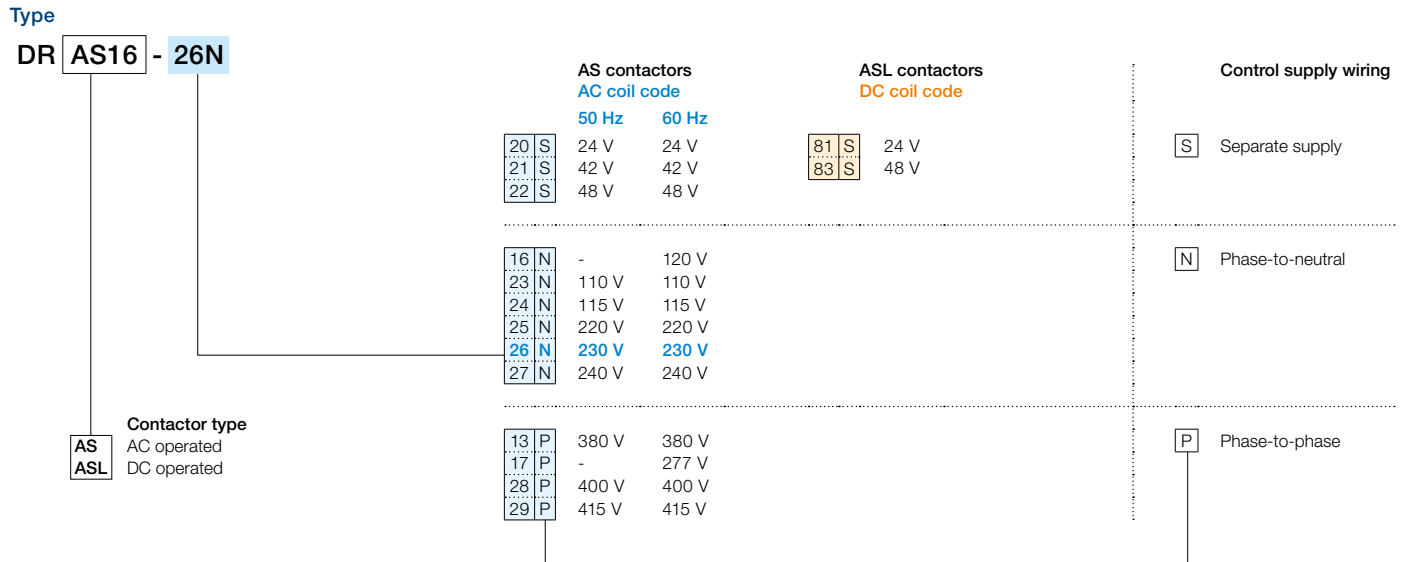

DRAF enclosed direct-on-line starters

Experience reliable and easy to install motor starting



Improve installation efficiency

- Easy to connect and to operate
- Pre-wired control circuit and easy to follow wiring instructions
- Coil energy consumption down by 80%.



Reliable in harsh condition

- High number of electrical and mechanical operations
- Robust IP66 and type 4X enclosure
- Double electrical insulation.

7



Continuous operation

- AF contactors manage voltage fluctuation, chattering free
- Protected motor with thermal overload relay
- Safety through coordinated product.




For machine or wall mounting

Main applications

Control of stand alone motors like for heat pumps, air conditioning units, small machine tools, compressors, pumping, irrigation...



Motor starting solutions up to 7.5 kW and 10 hp

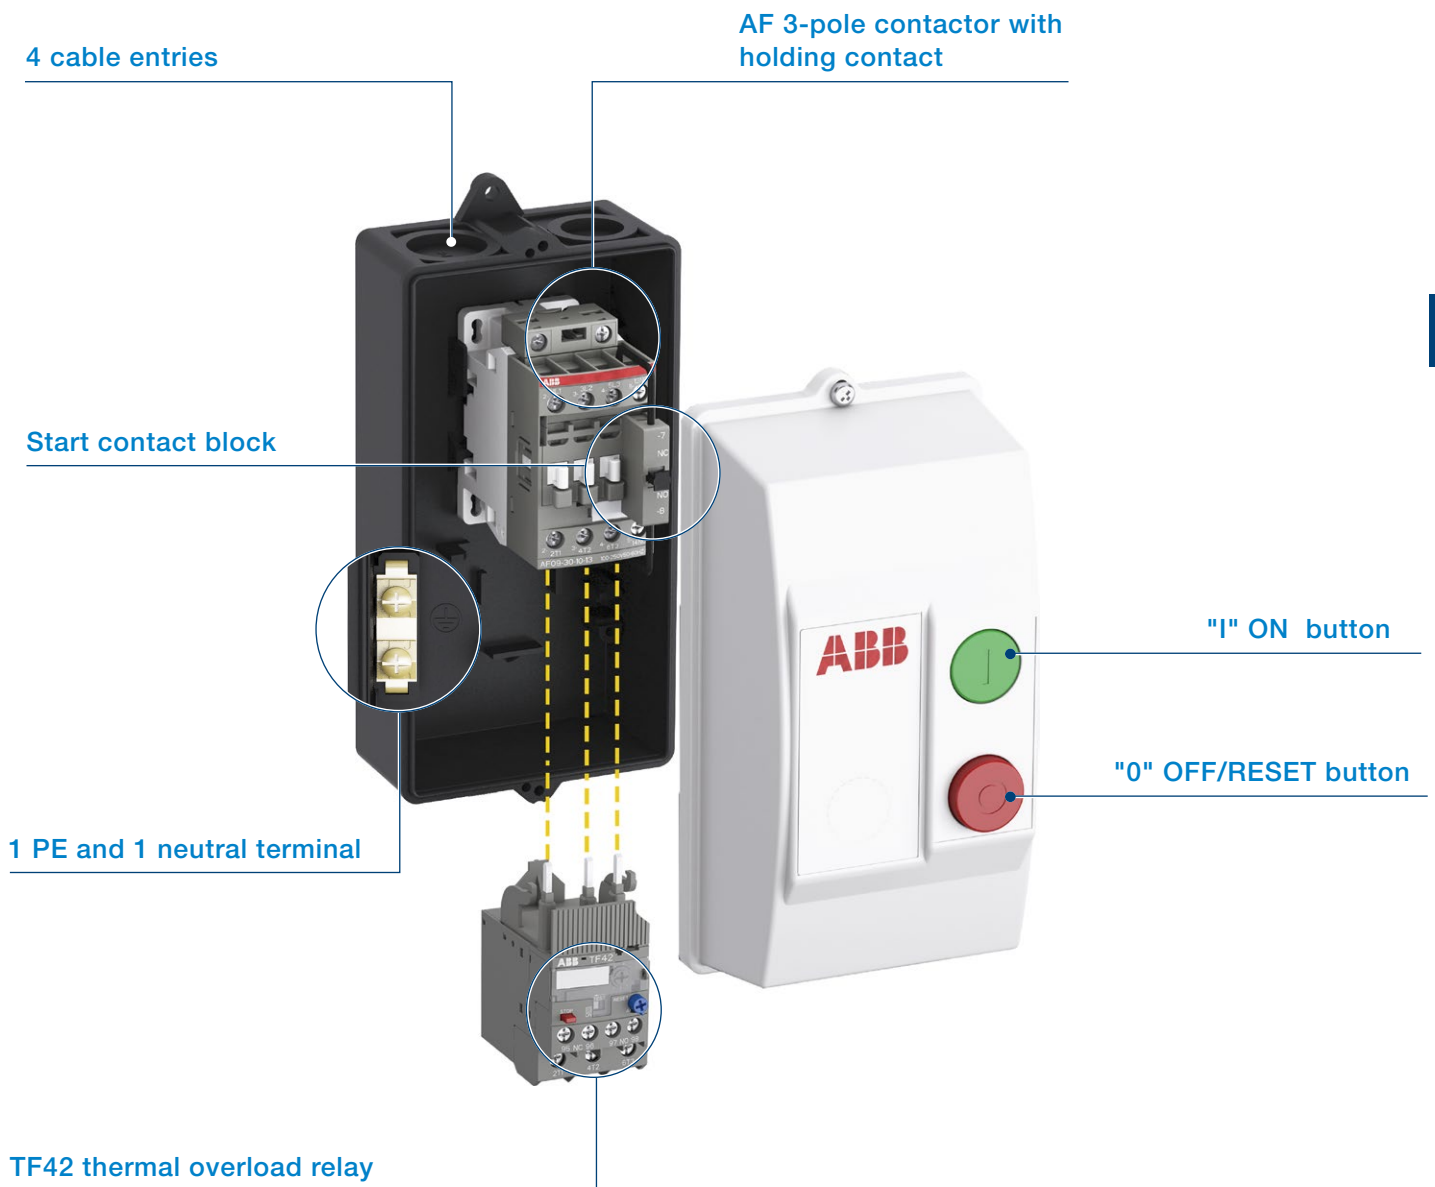

DRAF09 ... DRAF16 enclosed direct-on-line starters

Up to 7.5 kW and 10 hp, protected by thermal overload relays AC operated



DRAF
+ TF42 to be ordered separately

Description

Enclosed direct-on-line (DOL) starters are used for controlling 3-phase asynchronous motors up to 690 V AC.

Each starter is delivered assembled and wired. It contains:

- IP66 and type 4X plastic enclosure with double insulation, equipped with:
 - 1 green flush "I" ON button and 1 red protruding "O" OFF/RESET button
 - 4 cable inlets and outlets via knockouts.
- 1 AF 3-pole contactor with holding contact
- 1 CB5-10 start contact block
- 1 PE and 1 neutral terminal.

Control supply wiring:

IEC starters type: phase-to-phase, separate supply or phase-to-neutral.

UL starters type: separate supply.

TF42 thermal overload relay to be ordered separately and chosen according to motor's nominal current (see table in the next page).

DRAF enclosed DOL starters

| IEC - AC-3 | | | | | Control supply wiring | Rated control circuit voltage Uc min ... Uc max (1) | Type | Order code | Weight Pkg (1 pce) kg |
|--------------------------|-------|-------|-------|------------------------------------------------------------|-----------------------|-----------------------------------------------------------|------------|-----------------|--------------------------------|
| Rated operational power | | | | max. current $\theta \leq 40^\circ\text{C}$ Ue=400 V | | | | | |
| 220 V | 380 V | 500 V | 690 V | | | | | | |
| 230 V | 400 V | | | | | | | | |
| 240 V | | | | | | | | | |
| kW | kW | kW | kW | A | | | | | |
| IEC starters type | | | | | | | | | |
| 2.2 | 4 | 5.5 | 5.5 | 9 | Separate supply | 24...60 | DRAF09-11S | 1SBK134237R1100 | 0.820 |
| | | | | | Phase-to-neutral | 100...250 | DRAF09-13N | 1SBK134137R1300 | 0.820 |
| | | | | | Phase-to-phase | 250...500 | DRAF09-14P | 1SBK134037R1400 | 0.820 |
| 3 | 5.5 | 7.5 | 7.5 | 12 | Separate supply | 24...60 | DRAF12-11S | 1SBK154237R1100 | 0.820 |
| | | | | | Phase-to-neutral | 100...250 | DRAF12-13N | 1SBK154137R1300 | 0.820 |
| | | | | | Phase-to-phase | 250...500 | DRAF12-14P | 1SBK154037R1400 | 0.820 |
| 4 | 7.5 | 9 | 9 | 18 | Separate supply | 24...60 | DRAF16-11S | 1SBK174237R1100 | 0.820 |
| | | | | | Phase-to-neutral | 100...250 | DRAF16-13N | 1SBK174137R1300 | 0.820 |
| | | | | | Phase-to-phase | 250...500 | DRAF16-14P | 1SBK174037R1400 | 0.820 |

(1) Select DRAF.S with separate supply for 24...60 V DC control circuit voltage (change A2 - Us wire to blue color acc. to IEC 60947-4-1).

UL starter type with separate control supply wiring

| UL / CSA | | | | | | Rated control circuit voltage Uc min ... Uc max | Type | Order code | Weight Pkg (1 pce) kg |
|-------------------------|-------|----|-------------------|-------|-------|----------------------------------------------------|------------|-----------------|--------------------------------|
| Horse power ratings | | | | | | | | | |
| Single phase motor | | | Three phase motor | | | | | | |
| 120 V | 240 V | | 200 V | 220 V | 440 V | | | | |
| | | | 208 V | 240 V | 480 V | | | | |
| 550 V | 600 V | | | | | | | | |
| hp | hp | hp | hp | hp | hp | | | | |
| UL starters type | | | | | | | | | |
| 0.75 | 1.5 | 2 | 2 | 5 | 7.5 | 24...60 | DRAF09-11U | 1SBK134238R1100 | 0.820 |
| | | | | | | 100...250 | DRAF09-13U | 1SBK134238R1300 | 0.820 |
| | | | | | | 250...500 | DRAF09-14U | 1SBK134238R1400 | 0.820 |
| 1 | 2 | 3 | 3 | 7.5 | 10 | 24...60 | DRAF12-11U | 1SBK154238R1100 | 0.820 |
| | | | | | | 100...250 | DRAF12-13U | 1SBK154238R1300 | 0.820 |
| | | | | | | 250...500 | DRAF12-14U | 1SBK154238R1400 | 0.820 |
| 1.5 | 3 | 5 | 5 | 10 | 15 | 24...60 | DRAF16-11U | 1SBK174238R1100 | 0.820 |
| | | | | | | 100...250 | DRAF16-13U | 1SBK174238R1300 | 0.820 |
| | | | | | | 250...500 | DRAF16-14U | 1SBK174238R1400 | 0.820 |

DRAF09 ... DRAF16 enclosed direct-on-line starters

Up to 7.5 kW and 10 hp, protected by thermal overload relays

AC operated



TF42



Empty enclosure with push-button



TF42 thermal overload relays to be ordered separately

| Setting range | Short-circuit protective device | Trip class | Type | Order code | Weight (1 pce) |
|---------------|---------------------------------|------------|-----------|-----------------|----------------|
| A | | | | | |
| 0.10 ... 0.13 | 0.5 A, Fuse type T | 10 | TF42-0.13 | 1SAZ721201R1005 | 0.130 |
| 0.13 ... 0.17 | 1.0 A, Fuse type T | 10 | TF42-0.17 | 1SAZ721201R1008 | 0.130 |
| 0.17 ... 0.23 | 1.0 A, Fuse type T | 10 | TF42-0.23 | 1SAZ721201R1009 | 0.130 |
| 0.23 ... 0.31 | 1.0 A, Fuse type T | 10 | TF42-0.31 | 1SAZ721201R1013 | 0.130 |
| 0.31 ... 0.41 | 2.0 A, Fuse type gG | 10 | TF42-0.41 | 1SAZ721201R1014 | 0.130 |
| 0.41 ... 0.55 | 2.0 A, Fuse type gG | 10 | TF42-0.55 | 1SAZ721201R1017 | 0.130 |
| 0.55 ... 0.74 | 4.0 A, Fuse type gG | 10 | TF42-0.74 | 1SAZ721201R1021 | 0.130 |
| 0.74 ... 1.00 | 6.0 A, Fuse type gG | 10 | TF42-1.0 | 1SAZ721201R1023 | 0.130 |
| 1.00 ... 1.30 | 6.0 A, Fuse type gG | 10 | TF42-1.3 | 1SAZ721201R1025 | 0.130 |
| 1.30 ... 1.70 | 10.0 A, Fuse type gG | 10 | TF42-1.7 | 1SAZ721201R1028 | 0.130 |
| 1.70 ... 2.30 | 10.0 A, Fuse type gG | 10 | TF42-2.3 | 1SAZ721201R1031 | 0.130 |
| 2.30 ... 3.10 | 10.0 A, Fuse type gG | 10 | TF42-3.1 | 1SAZ721201R1033 | 0.130 |
| 3.10 ... 4.20 | 20.0 A, Fuse type gG | 10 | TF42-4.2 | 1SAZ721201R1035 | 0.130 |
| 4.20 ... 5.70 | 20.0 A, Fuse type gG | 10 | TF42-5.7 | 1SAZ721201R1038 | 0.130 |
| 5.70 ... 7.60 | 35.0 A, Fuse type gG | 10 | TF42-7.6 | 1SAZ721201R1040 | 0.130 |
| 7.60 ... 10.0 | 35.0 A, Fuse type gG | 10 | TF42-10 | 1SAZ721201R1043 | 0.130 |
| 10.0 ... 13.0 | 40.0 A, Fuse type gG | 10 | TF42-13 | 1SAZ721201R1045 | 0.130 |
| 13.0 ... 16.0 | 40.0 A, Fuse type gG | 10 | TF42-16 | 1SAZ721201R1047 | 0.130 |
| 16.0 ... 20.0 | 63.0 A, Fuse type gG | 10 | TF42-20 | 1SAZ721201R1049 | 0.145 |

Empty enclosure with push-button

| | | | | |
|-------------------------------------------------------|---|------------|-----------------|------|
| mm cable inlet/outlet suitable for IEC starter types | - | FR16AF-12 | 1SBN101337R1000 | 0.53 |
| Inch cable inlet/outlet suitable for UL starter types | - | FR16AF-12U | 1SBN101338R1000 | 0.53 |

To be completed with AF contactor, TF42 thermal overload relay and CB5-10 (1SBN010013R1010) start contact block.

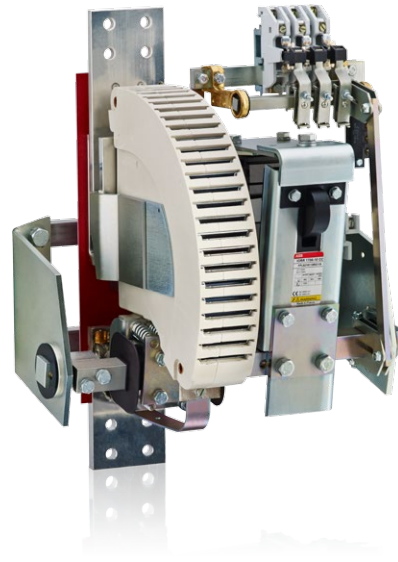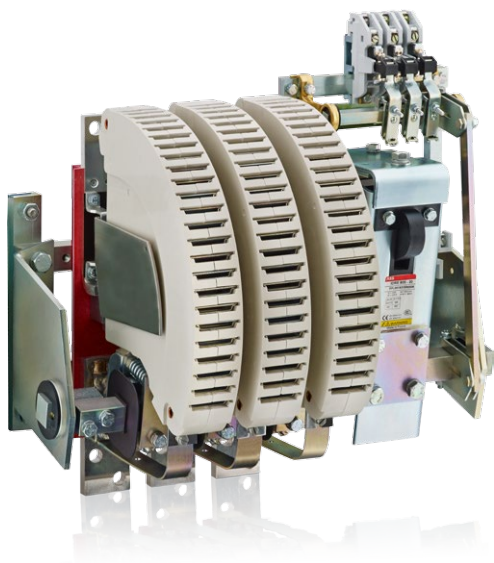

R contactors

Download



For additional information refer to our main catalog.

[Download main catalog](#)



Submit your request with the dedicated form. Our expert will define the right contactor for your application.

[Download the form](#)



R contactors

Tailored to your needs

With over 100 years of experience in control, ABB has designed its R contactors to meet the particular requirements of power applications from 63 A up to 5000 A in AC and DC.

With a variable number of poles and advanced features, these tailor-made bar mounted contactors remain the most flexible solution. Robustness and reliability bring our technology far beyond the limits of standard contactors. Our know-how enables us to offer R contactors perfectly suited to your applications whatever the environment.

Performance

- High making and breaking capacity
- Current up to 5000 A
- Voltage up to 1000 V AC or 1500 V DC.

Flexibility

- Variable number of poles
- Combination of N.O. and N.C. poles
- Adjustable number of auxiliary contacts.

Reliability

- Robust construction
- Durability up to 5 millions of operating cycles
- Experienced and proven for years.

... you can trust

Easy maintenance

- Direct access to all the contactor parts for inspection or replacement
- Complete and didactic instruction manual for installation, inspection or maintenance
- Dedicated R contactors service support available by ABB.

From standard to tailor-made solution

- Pre-sales support to identify and define customer requirements
- Customized support with development of solutions from specifications
- Specialists available to optimize your configuration.

Sustainability of control for a wide variety of applications

- | | | |
|-----------------------------|--------------------------------|----------------------|
| – Iron and steel industries | – Hydroelectric power stations | – Railway substation |
| – Mining | – Photovoltaic power plants | – Lighting equipment |
| – Cranes | – Power distribution | – Pump stations. |
| – Induction furnaces | – Energy storage | |



R contactors


Get the right product

Conventional applications

AC circuit switching

Up to 500 V AC
IOR contactors


From 500 up to 1000 V AC
IOR..MT contactors

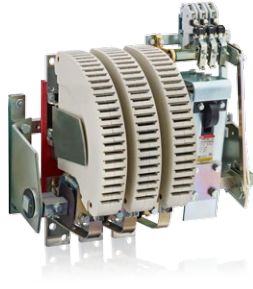

AC-1 Rated operational current up to 5000 A
AC-3 Rated power up to 1500 kW (1520 A - 440 V)

DC circuit switching

Up to 1500 V DC with poles in series
IOR..CC contactors

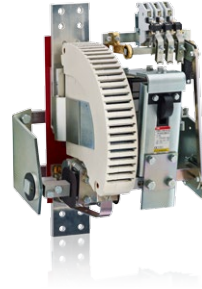

DC-1 Rated operational current up to 5000 A
DC-3 / DC-5 operational current up to 2000 A

Advanced applications

N.O./N.C. main poles combination

AC circuit switching
NOR..MT contactors

DC circuit switching
NOR..CC contactors



Power circuit coupling

Up to 1000 V AC / 1500 V DC
LOR couplers




Slip-ring motor control

Up to 5000 V AC
FOR contactors




Energy saving and safety requirements

Equipped with latching
..AMA, ..AME contactor types

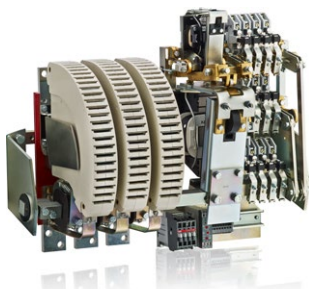

Alternator field discharge

U_{max} 2250 V DC
AM-CC-JORE contactors

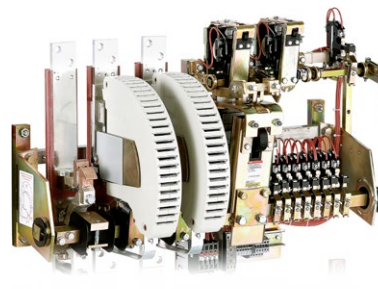

Certifications and approvals

[Certifications and approvals](#) 9/2

[Coordination with short-circuit protection devices](#) 9/8

Certifications and approvals

Designed according to the appropriate specifications, the devices in this catalogue have been built and tested. They can be used in most countries without any further certifications.

Some countries, however, require certification according to their own national standards. In other cases, the Marine for example, approvals ratifying that particular specifications have been met are necessary.

The table below shows the approvals and certifications for different devices.















The following documents may be obtained on request:

- Certificates of conformity
- Certificates of certification or approval.

The use of certified devices does not exonerate the equipment supplier from complying with the legal specifications of the country concerned.















Explanation of symbols:

■ **Standard design approved**, the company labels bear the certification mark when this is required.

| Mark | Certifications | | | | | Approvals: ship classification societies | | | | | | | | | |
|------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|
| |  |  |  |  |  |  |  |  |  |  |  |  |  |  | |
| Abbreviation | CSA | UL | cULus | CCC | GOST or EAC | | BV | GL | LR | DNV | RINa | ABS | RMRS | CCS | |
| Approved in | Canada | USA | North America | China | Russia | | France | Germany | Gr.Britain | Norway | Italy | USA | Russia | China shipping | |
| 3-pole contactors | | | | | | | | | | | | | | | |
| 4 to 7.5 kW | | | | | | | | | | | | | | | |
| AC operated AS09, AS12, AS16 | | | ■ E312527 | ■ | ■ | | | | | | | | | | |
| DC operated ASL09, ASL12, ASL16 | | | ■ E312527 | ■ | ■ | | | | | | | | | | |
| 4 to 45 kW | | | | | | | | | | | | | | | |
| AC / DC operated AF09, AF12, AF16, AF26, AF30, AF38 | | | ■ E312527 | ■ | ■ | | ■ | ■ (3) | ■ | ■ (3) | ■ | ■ (1) | ■ | | |
| AC / DC operated AF40, AF52, AF65, AF80, AF96 | | | ■ E312527 | ■ | ■ | | ■ | ■ (3) | ■ | ■ (3) | ■ | ■ (1) | ■ | | |
| 55 to 200 kW | | | | | | | | | | | | | | | |
| AC / DC operated (2) AF116, AF140, AF146 | | | ■ E36588 | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ (1) | ■ | |
| AC / DC operated (2) AF190, AF205, AF265, AF305, AF370 | | | ■ E36588 | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ (1) | ■ | |
| 200 to 560 kW | | | | | | | | | | | | | | | |
| AC / DC operated AF400, AF460, AF580, AF750 | | | ■ E36588 | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | |
| AC / DC operated AF1250 | | | ■ E73397 | ■ | ■ | | | | | | | | | ■ | |
| AC / DC operated AF1350, AF1650 | | | ■ E36588 | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ | ■ | ■ | |
| AC / DC operated AF2050 | | | ■ E73397 | ■ | ■ | | | | | | ■ | ■ | | ■ | |
| AC / DC operated AF2650 | | | ■ E73397 | ■ | ■ | | | | | | ■ | | | ■ | |
| 4-pole contactors | | | | | | | | | | | | | | | |
| 25 to 125 A, AC-1 | | | | | | | | | | | | | | | |
| AC / DC operated AF09, AF16, AF26, AF38 | | | ■ E312527 | ■ | ■ | | ■ | ■ (3) | ■ | ■ (3) | ■ | ■ | ■ | | |
| AC / DC operated AF40, AF52, AF80 | | | ■ E312527 | | ■ (1) | ■ | | | | | | | | | |
| 160 to 525 A, AC-1 | | | | | | | | | | | | | | | |
| AC / DC operated AF116, AF140, AF190, AF205, AF265, AF305, AF370 | | | ■ E73397 | | | ■ (1) | | | ■ (1) | | | | | | |
| 800 to 1000 A AC-1 | | | | | | | | | | | | | | | |
| AC operated EK550 | | | ■ E36588 | ■ | ■ | | | | | | | | | | |
| AC operated EK1000 | | | | ■ | ■ | | | | | | | | | | |
| DC operated EK550 | | | ■ E36588 | ■ | ■ | | | | | | | | | | |
| DC operated EK1000 | | | | ■ | ■ | | | | | | | | | | |

(1) in progress. (2) Marine approvals for AF116 ... AF370 with built-in PLC interface: only DNV is available. (3) DNV-GL certificate.

Certifications and approvals

| Mark | Certifications | | | | | Approvals: ship classification societies | | | | | | | | | |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|--|
| |  CSA Canada |  UL USA |  cULus North America |  CCC China |  PGT Russia |  EAC |  BV France |  GL Germany |  Lloyd's Register Gr. Britain |  DNV Norway |  RINA Italy |  ABS USA |  RMRS Russia |  CCS China shipping | |
| DC switching contactors | | | | | | | | | | | | | | | |
| AC operated GA75 | ■ | ■ E319322 | | ■ | | | | | | | | | | | |
| DC operated GAE75 | ■ | ■ E319322 | | ■ | | | | | | | | | | | |
| AC / DC operated GAF185 ... GAF300 | | | ■ E73397 | ■ | | | | | | | | | | | |
| AC / DC operated GAF460, GAF750, GAF1250, GAF1650, GAF2050 | | | ■ E73397 | ■ | | | | | | | | | | | |
| Capacitor switching contactors | | | | | | | | | | | | | | | |
| AC operated UA16 | | ■ E312527 | | ■ | ■ | | | | | | | | | | |
| AC operated UA26 ... UA75 | ■ | ■ E312527 | | ■ | ■ | | | | | | | | | | |
| AC operated UA95, UA110 | | | ■ E36588 | ■ | ■ | | | | | | | | | | |
| AC operated UA16..RA ... UA75..RA | | ■ E312527 | | ■ | ■ | | | | | | | | | | |
| AC operated UA95..RA, UA110..RA | | | ■ E36588 | ■ | ■ | | | | | | | | | | |
| Contactor relays | | | | | | | | | | | | | | | |
| AC operated 4-pole, 8-pole - NS.. | | | ■ E252354 | ■ | ■ | | | | | | | | | | |
| DC operated 4-pole, 8- pole - NSL.. | | | ■ E252354 | ■ | ■ | | | | | | | | | | |
| AC / DC operated 4-pole, 8-pole - NF.. | | | ■ E252354 | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | (1) | ■ | | |

(1) in progress.

Certifications and approvals

| | Certifications | | | | |
|--------------|----------------|-----|---------------|-------|-------------|
| Mark | | | | | |
| Abbreviation | CSA | UL | cULus | CCC | GOST or EAC |
| Approved in | Canada | USA | North America | China | Russia |

| Approvals: ship classification societies | | | | | | | |
|------------------------------------------|---------|------------|--------|-------|-----|--------|----------------|
| | | | | | | | |
| BV | GL | LR | DNV | RINa | ABS | RMRS | CCS |
| France | Germany | Gr.Britain | Norway | Italy | USA | Russia | China shipping |

Accessories for AS09 ... AS16 contactors

| Accessory | CSA | UL | cULus | CCC | GOST or EAC |
|----------------------------------|-----|----|--------------|-----|-------------|
| Auxiliary contacts | | | | | |
| CA3 | | | ■ E252354 | ■ | ■ |
| Mechanical interlock unit | | | | | |
| VM3 | | | ■ E312527 | | ■ |
| Connecting links | | | | | |
| BEA16-3 | | | ■ E312527 | | ■ |
| BEA16-3U | | | ■ E312527 | | |
| BER16C-3 | | | ■ E312527 | | ■ |
| BEY16C-3 | | | ■ E312527 | | ■ |
| Electronic timer | | | | | |
| TEF3 | | | ■ E252354 | | ■ |
| Surge suppressors | | | | | |
| RT5 | | | ■ E312527 | | ■ |
| RC5-1 | | | ■ E312527 | | ■ |
| RV5 | | | ■ E312527 | | ■ |

| Accessory | BV | GL | LR | DNV | RINa | ABS | RMRS | CCS |
|-----------|----|----|----|-----|------|-----|------|-----|
| CA3 | | | | | | | | |
| VM3 | □ | □ | □ | □ | □ | □ | □ | □ |
| BEA16-3 | □ | □ | □ | □ | □ | □ | □ | □ |
| BEA16-3U | □ | □ | □ | □ | □ | □ | □ | □ |
| BER16C-3 | □ | □ | □ | □ | □ | □ | □ | □ |
| BEY16C-3 | □ | □ | □ | □ | □ | □ | □ | □ |
| TEF3 | | | | | | | | |
| RT5 | | | | | | | | |
| RC5-1 | | | | | | | | |
| RV5 | | | | | | | | |














Accessories for AF09 ... AF2650 and EK contactors and NF contactor relays

| Accessory | CSA | UL | cULus | CCC | GOST or EAC |
|-----------------------------------------------|-----|--------------|--------------|-----|-------------|
| Auxiliary contacts | | | | | |
| CA4, CC4 | | | ■ E252354 | ■ | ■ |
| CAT4 | | | ■ E252354 | ■ | ■ |
| CAL4 | | | ■ E252354 | ■ | ■ |
| CAL19 | | | ■ E76003 | ■ | ■ |
| CAL18 | | | ■ E76003 | ■ | ■ |
| CAL16 | | | ■ E76003 | ■ | ■ |
| CE5...D0.1 | | ■ E319322 | | ■ | ■ |
| CE5...D2 | | ■ E319322 | | ■ | ■ |
| CE5...W0.1 | | ■ E319322 | | ■ | ■ |
| CE5...W2 | | ■ E319322 | | | ■ |
| CEL18 | | | ■ E76003 | | ■ |
| Electronic timer | | | | | |
| TEF4 | | | ■ E252354 | | ■ |
| Mechanical / electrical interlock unit | | | | | |
| VEM4 | | | ■ E312527 | ■ | ■ |
| Mechanical interlock units | | | | | |
| VM4, VM96-4 | | | ■ E312527 | | ■ |
| VM19 | | | ■ E36588 | | ■ |
| VM140/190 | | | ■ E36588 | | ■ |
| VM205/265 | | | ■ E36588 | | ■ |
| VM 750 | | | ■ E36588 | | ■ |
| VM1650H | | | ■ E36588 | | ■ |
| Latching unit | | | | | |
| WB75-A | | ■ E252354 | | | ■ |

| Accessory | BV | GL | LR | DNV | RINa | ABS | RMRS | CCS |
|-------------|------------|------------|----|------------|------|--------------|------|-----|
| CA4, CC4 | ■ (CA4) | ■ (CA4) | ■ | ■ (CA4) | ■ | (1) (CA4) | ■ | |
| CAT4 | ■ | ■ | ■ | ■ | ■ | | ■ | |
| CAL4 | ■ | ■ | ■ | ■ | ■ | | ■ | |
| CAL19 | ■ | ■ | ■ | ■ | ■ | ■ | | ■ |
| CAL18 | ■ | ■ | ■ | ■ | ■ | ■ | | ■ |
| CAL16 | | | | | | | | |
| CE5...D0.1 | | | | | | | | |
| CE5...D2 | | | | | | | | |
| CE5...W0.1 | | | | | | | | |
| CE5...W2 | | | | | | | | |
| CEL18 | | | | | | | | |
| TEF4 | | | | | | | | |
| VEM4 | | | | | | | | |
| VM4, VM96-4 | □ | □ | □ | □ | □ | □ | □ | □ |
| VM19 | □ | □ | □ | □ | □ | □ | □ | □ |
| VM140/190 | □ | □ | □ | □ | □ | □ | □ | □ |
| VM205/265 | □ | □ | □ | □ | □ | □ | □ | □ |
| VM 750 | □ | □ | □ | □ | □ | □ | □ | □ |
| VM1650H | □ | □ | □ | □ | □ | □ | □ | □ |
| WB75-A | | | | | | | | |














(1) in progress. □ Marine approvals not needed for this accessory.

Certifications and approvals

| Mark | Certifications | | | | | Approvals: ship classification societies | | | | | | | |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| |  CSA Canada |  UL USA |  cULus North America |  CCC China |  GOST or EAC Russia |  BV France |  GL Germany |  LR Gr.Britain |  DNV Norway |  RINa Italy |  ABS USA |  RMRS Russia |  CCS China shipping |
| Connecting links | | | | | | | | | | | | | |
| BEA16-4, BEA26-4, BEA38-4, BEA65-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| Connection sets for reversing contactors | | | | | | | | | | | | | |
| BER16-4, BER38-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| BER65-4, BER96-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| BER140-4, BER205-4, BER370-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| BEM460-30, BEM750-30 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| Connection sets for star-delta starters | | | | | | | | | | | | | |
| BEY16-4, BEY38-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| BEY65-4, BEY96-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| BEY190-4, BEY205-4, BEY265-4, BEY370-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| BED460, BED580, BED750 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| Phase to phase connections | | | | | | | | | | | | | |
| BEP140-30, BEP205-30, BEP370-30 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| BEP140-40, BEP205-40, BEP370-40 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| BES460, BES750 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| Terminal connecting strips and shorting bars | | | | | | | | | | | | | |
| LY16-4, LY38-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| LY110, LY185, LY300, LY460, LY750 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| LP185, LP300, LP460, LP750 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| LH38-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| LF16-4, LF38-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| LG16-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| LK96-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| Additional coil terminal blocks | | | | | | | | | | | | | |
| LD38-4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| Additional terminal blocks | | | | | | | | | | | | | |
| LDC4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |
| Protective covers | | | | | | | | | | | | | |
| BX4, BX4-CA | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E252354 | | | | | | | | | | |
| Terminal shrouds | | | | | | | | | | | | | |
| LT, LT.-30 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| LT.-40 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E73397 | | | | | | | | | | |
| Terminal enlargement | | | | | | | | | | | | | |
| LW | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| Terminal extension | | | | | | | | | | | | | |
| LX | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| Connection socket | | | | | | | | | | | | | |
| LL | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| Connection modules | | | | | | | | | | | | | |
| LD146-30, LD146-40 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E36588 | | | | | | | | | | |
| Function marker | | | | | | | | | | | | | |
| BA4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E252354 | | | | | | | | | | |
| Fixing clip | | | | | | | | | | | | | |
| BB4 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| | | | E312527 | | | | | | | | | | |














Marine approvals not needed for this accessory.

Certifications and approvals

| Mark | Certifications | | | | | | Approvals: ship classification societies | | | | | | |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| |  CSA Canada |  UL USA |  cULus North America |  CCC China |  GOST or EAC Russia |  EAC Russia |  BV France |  GL Germany |  LR Gr. Britain |  DNV Norway |  RINA Italy |  ABS USA |  RMRS Russia |
| Manual motor starters | | | | | | | | | | | | | |
| MS116 | | | E137861 | | | | (1) | | | | | | |
| MS132 | | | E137861 E345003 | | | | | | | | | | |
| MS165 | | | E137861 E345003 | | | | | | | | | | |
| MS495 | | E167205 E195536 | | | | | | | | | | | |
| MS497 | | E167205 E195536 | | | | | | | | | | | |
| Manual motor starters magnetic only | | | | | | | | | | | | | |
| MO132 | | | E137861 E345003 | | | | | | | | | | |
| MO165 | | | E137861 E345003 | | | | | | | | | | |
| MO495 | | E167205 | | | | | | | | | | | |
| MO496 | | E167205 | | | | | | | | | | | |
| Circuit breaker for transformer protection | | | | | | | | | | | | | |
| MS132-T | | | | | | | | | | | | | |
| Mini contactors | | | | | | | | | | | | | |
| 3-pole contactors | | | | | | | | | | | | | |
| AC operated B6, B7 | | | E191658 | | | | | | | | | | |
| DC operated BC6, BC7, B7D | | | E191658 | | | | | | | | | | |
| DC operated B6S, B7S | | | E191658 | | | | | | | | | | |
| 3-pole reversing contactors | | | | | | | | | | | | | |
| AC operated VB6, VB7 | | | E191658 | | | | | | | | | | |
| DC operated VBC6, VBC7 | | | E191658 | | | | | | | | | | |
| AC operated VB6A, VB7A | | | E191658 | | | | | | | | | | |
| DC operated VBC6A, VBC7A | | | E191658 | | | | | | | | | | |
| 3-pole interface contactors | | | | | | | | | | | | | |
| DC operated BC6, BC7 | | | E191658 | | | | | | | | | | |
| 3-pole contactor - large coil voltage range | | | | | | | | | | | | | |
| DC operated TBC7 | | | | | | | | | | | | | |
| 4-pole contactors | | | | | | | | | | | | | |
| AC operated B6, B7 | | | E191658 | | | | | | | | | | |
| DC operated BC6, B7D | | | E191658 | | | | | | | | | | |
| 4-pole contactor - large coil voltage range | | | | | | | | | | | | | |
| DC operated TBC7 | | | | | | | | | | | | | |

(1) MS116 up to 16 A only.
Contactor relays

Certifications and approvals

| Mark | Certifications | | | | | | Approvals: ship classification societies | | | | | | |
|----------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| |  CSA Canada |  UL USA |  cULus North America |  CCC China |  GOST or EAC Russia |  ATEX |  BV France |  GL Germany |  LR Gr.Britain |  DNV Norway |  RINA Italy |  ABS USA |  RMRS Russia |
| AC operated K6 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | <input checked="" type="checkbox"/> |
| DC operated KC6 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | <input checked="" type="checkbox"/> |
| Interface contactor relays | | | | | | | | | | | | | |
| DC operated KC6 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | <input checked="" type="checkbox"/> |
| DC operated K6S | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | <input checked="" type="checkbox"/> |
| Contactor relays - large coil voltage range | | | | | | | | | | | | | |
| DC operated TKC6 | | | | | | | | | | | | | |
| Thermal overload relays | | | | | | | | | | | | | |
| T16 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TF42 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TF65 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TF96 | | | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TF140DU | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TF140DU-V1000 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TA200DU | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| TA200DU-V1000 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| Electronic overload relays | | | | | | | | | | | | | |
| 0.10...45 A | | | | | | | | | | | | | |
| E16DU | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | | | | | | | | <input checked="" type="checkbox"/> |
| EF19 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| EF45 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 20...150 A | | | | | | | | | | | | | |
| EF65 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| EF96 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| EF146 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 63...380 A | | | | | | | | | | | | | |
| EF205 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| EF370 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 150...800 A | | | | | | | | | | | | | |
| EF460 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| EF750 | | | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 150...1250 A | | | | | | | | | | | | | |
| E1250DU | | | <input checked="" type="checkbox"/> | | | | | | | | | | <input checked="" type="checkbox"/> |

(2) EF65-56 has no RINA approval and no ATEX certification.
 (3) ATEX is valid for products produced from week 26, 2015.
 All electronic overload relays are  (C-Tick) marked.

Coordination with short-circuit protection devices

In compliance with standards IEC 60947-4-1 and EN 60947-4-1, we define for the contactors and starters the type, rating and characteristics of the short-circuit protection devices SCPD which allow selective protection against overloads and ensure protection against short circuits.

Basic functions

Any starter is designed to:

- start motors,
- ensure continuous functioning of motors,
- disconnect motors from the supply line,
- guarantee protection of motors against overloads.

The starter is typically made up of a switching device (contactor) and an overload protection device (thermal overload relay or electronic overload relay).

These two devices MUST be coordinated with equipment capable of providing protection against short circuit (SCPD: short circuit protective device): typically a circuit breaker with magnetic release only or a switch fuse. These are not necessarily part of the starter.

Applicable standards

IEC 60947-4-1 (EN 60947-4-1) precisely defines the different points to be considered in order to carry out correct coordination.

Complete coordination for a combination includes the following points:

- Selectivity test between the overload relay and the short-circuit protection device SCPD.
- Short-circuit condition tests:
 - at prospective "r" currents - These currents depend on the rated operational current of the starter (**I_e** AC-3) and are given by the standard (Table 13). For example:
 - r = 1kA for **I_e** AC-3 < 16 A
 - r = 3 kA for 16 A < **I_e** AC-3 < 63 A
 - r = 5 kA for 63 A < **I_e** AC-3 < 125 A etc.
 - at the rated conditional short-circuit current "**I_q**" - This is the maximum prospective current that the combination can withstand, for example 50 kA.

9

Types of coordination

IEC 60947-4-1 (EN 60947-4-1) defines two types of coordination according to the expected level of service continuity. Acceptable extreme damage for the switchgear is divided into two types.

Type 1: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will not be able to then operate without being repaired or having parts replaced.

Type 2: In short-circuit conditions, the contactor or starter does not endanger persons or installations and will be able to operate afterwards. The risk of contacts light welding is acceptable. In this case, the manufacturer must stipulate the measures to be taken with respect to maintenance of the equipment.

The complete ABB offer

ABB has acquired years of experience with respect to problems of coordination and is able to make a complete offer based on tests performed in its qualified laboratories. This offer includes 400 V, 500 V, 690 V networks.

A complete data base of coordination tables, according to IEC 60947-4-1 (EN 60947-4-1), is available on the ABB Website.

In the coordination tables the following short-circuit protection devices are recommended:

- Moulded case circuit-breakers (MCCBs)
- Miniature circuit-breakers (MCBs)
- Switch-disconnector-fuses (aM, gG and BS)
- Manual Motor Starters (MMS).

General remarks applicable to all tables

- Each table is defined for a maximum ambient temperature of 40 °C. For higher temperatures, apply a derating factor according to the following rules:
 - Fuses: factor of 0.8 applied to **I_n** for an ambient temperature of 70 °C
 - MCCBs and MCBs: factor of 0.8 applied to **I_n** for an ambient temperature of 60 °C
 - The starter derating factor depends on the operating conditions of thermal overload relays:
 - Factor of 0.9 applied to **I_n** for an ambient temperature of 70 °C.
- Each table is defined for motor currents: 3-phase motors, 4-pole
- **Normal starting** means a starting time < 2 s. - **Difficult starting** means an accelerating time 10 s < **t_s** < 30 s
- **Tripping classes** of thermal overload relays according to IEC 60947-4-1 (EN 60947-4-1): 10A and 10
- **Tripping classes** of electronic overload relays according to IEC 60947-4-1 (EN 60947-4-1): 10E, 20E, 30E selectable
- In the tables with MCCBs, these are fitted with the magnetic relay alone. Setting is always carried out at > 12.3 **I_e** AC-3 so that the transient current peak occurring during starting does not lead to tripping.

Coordination with short-circuit protection devices

A complete data base of coordination tables, according to **IEC 60947-4-1** (EN 60947-4-1) or **UL 508 / UL 60947-4-1**, is available on the ABB Website: see below.

Selection

Simple or multiple selections all from the same screen.

Short-circuit protection devices

- Air circuit breakers
- Fuses "gG" or "aM"
- Miniature circuit breaker
- Moulded case circuit breaker
- Manual motor starter

Starter type

- Direct-on-line normal start
- Direct-on-line heavy duty
- Star-delta normal start
- Soft starter normal start

Overload relay

- TOL : thermal overload relay
- EOL : electronic overload relay
- UMC : Universal motor controller

Coordination

- IEC type 1 or type 2
- UL type A to Type F

Results

- Search results displayed at the bottom of the selection page.
- Only the most appropriate solutions to your application, will be displayed at the bottom of the page.
- "Enable Smart Current Search" function featured for the short-circuit current where "near to" selected values also are included in the result.
- Possible to print the page to a pdf file or from your printer.
- "Clear selection" function to deselect all selected.

| Fuses, 400 Vac, 100 kA, DOL-NS, Coordination Type IEC Type 2, Overload Relay TOL, Motor efficiency class IE1 + IE2 | | | | | | | | | |
|--------------------------------------------------------------------------------------------------------------------|----------------------|------------------|------------------------|-------------------|----------------|-----------|---------------------------------|-------|----|
| Motor Rated Power [kW] | Rated Current [A] | Fuses IEC | | Contactor Type | Overload Relay | | Max allowed load current [A] | Table | |
| | | Switch-Fuse Type | Rating gG/aM [A] | | Type and Size | Type | | | |
| 0,25 | 0,85 | OS32GD_ | 2 | CFAF 000aM | AF09 | TF42-1,0 | 0,74 - 1,00 | 1,00 | >> |
| 0,12 | 0,44 | OS32GD_ | 2 | CFAF 000H | AF09 | TF42-0,55 | 0,42 - 0,55 | 0,55 | >> |

| Fuses, 400 Vac, 100 kA, DOL-NS, Coordination Type IEC Type 2, Overload Relay EOL, Motor efficiency class IE3 | | | | | | | | | |
|--------------------------------------------------------------------------------------------------------------|----------------------|------------------|------------------------|-------------------|----------------|--------------|---------------------------------|-------|----|
| Motor Rated Power [kW] | Rated Current [A] | Fuses IEC | | Contactor Type | Overload Relay | | Max allowed load current [A] | Table | |
| | | Switch-Fuse Type | Rating gG/aM [A] | | Type and Size | Type | | | |
| 0,18 | 0,60 | OS32GD_ | 2 | CFAF 000aM | AF09 | EF19-1,0 10* | 0,30 - 1,00 | | >> |
| 0,12 | 0,44 | OS32GD_ | 2 | CFAF 000H | AF09 | EF19-1,0 10* | 0,30 - 1,00 | | >> |
| 0,12 | 0,44 | OS32GD_ | 2 | CFAF 000H | AF09 | EF19-1,0 10* | 0,30 - 1,00 | 0,54 | >> |
| 0,18 | 0,60 | OS32GD_ | 2 | CFAF 000aM | AF09 | EF19-1,0 10* | 0,30 - 1,00 | 1,00 | >> |



Access

To find the coordination tables for motor protection, please see:
<http://applications.it.abb.com/SOC/Page/Selection.aspx>

Index

Order code classification

| Order code | Type | Page | Order code | Type | Page | Order code | Type | Page |
|-----------------|--------------------|------|-------------------|--------------------|------|-----------------|--------------------|------|
| 1SAM101923R0002 | MSMN | 2/24 | 1SAM301901R1001 | CK1-11 | 2/13 | 1SAM461000R1011 | MO165-16 | 2/10 |
| 1SAM101923R0012 | MSMNO | 2/24 | 1SAM301901R1002 | CK1-20 | 2/13 | 1SAM461000R1012 | MO165-20 | 2/10 |
| 1SAM201901R1001 | HKF1-11 | 2/13 | 1SAM301901R1003 | CK1-02 | 2/13 | 1SAM461000R1013 | MO165-25 | 2/10 |
| 1SAM201901R1002 | HKF1-20 | 2/13 | 1SAM340000R1001 | MS132-0.16T | 2/11 | 1SAM461000R1014 | MO165-32 | 2/10 |
| 1SAM201901R1003 | HKF1-10 | 2/13 | 1SAM340000R1002 | MS132-0.25T | 2/11 | 1SAM461000R1015 | MO165-42 | 2/10 |
| 1SAM201901R1004 | HKF1-01 | 2/13 | 1SAM340000R1003 | MS132-0.4T | 2/11 | 1SAM461000R1016 | MO165-54 | 2/10 |
| 1SAM201902R1001 | HK1-11 | 2/13 | 1SAM340000R1004 | MS132-0.63T | 2/11 | 1SAM461000R1017 | MO165-65 | 2/10 |
| 1SAM201902R1002 | HK1-20 | 2/13 | 1SAM50340000R1005 | MS132-1.0T | 2/11 | 1SAM501901R1001 | KA495 | 2/23 |
| 1SAM201902R1003 | HK1-02 | 2/13 | 1SAM340000R1006 | MS132-1.6T | 2/11 | 1SAM501902R1001 | KA495C | 2/23 |
| 1SAM201902R1004 | HK1-20L | 2/13 | 1SAM340000R1007 | MS132-2.5T | 2/11 | 1SAM550000R1007 | MS495-63 | 2/19 |
| 1SAM201903R1001 | SK1-11 | 2/13 | 1SAM340000R1008 | MS132-4.0T | 2/11 | 1SAM550000R1008 | MS495-75 | 2/19 |
| 1SAM201903R1002 | SK1-20 | 2/13 | 1SAM340000R1009 | MS132-6.3T | 2/11 | 1SAM550000R1009 | MS495-90 | 2/19 |
| 1SAM201903R1003 | SK1-02 | 2/13 | 1SAM340000R1010 | MS132-10T | 2/11 | 1SAM550000R1010 | MS495-100 | 2/19 |
| 1SAM201904R1001 | UA1-24 | 2/14 | 1SAM340000R1011 | MS132-16T | 2/11 | 1SAM560000R1007 | MO495-63 | 2/20 |
| 1SAM201904R1002 | UA1-48 | 2/14 | 1SAM340000R1012 | MS132-12T | 2/11 | 1SAM560000R1008 | MO495-75 | 2/20 |
| 1SAM201904R1003 | UA1-60 | 2/14 | 1SAM340000R1013 | MS132-20T | 2/11 | 1SAM560000R1009 | MO495-90 | 2/20 |
| 1SAM201904R1004 | UA1-110 | 2/14 | 1SAM340000R1014 | MS132-25T | 2/11 | 1SAM560000R1010 | MO495-100 | 2/20 |
| 1SAM201904R1005 | UA1-230 | 2/14 | 1SAM350000R1001 | MS132-0.16 | 2/7 | 1SAM580000R1004 | MS497-32 | 2/19 |
| 1SAM201904R1006 | UA1-400 | 2/14 | 1SAM350000R1002 | MS132-0.25 | 2/7 | 1SAM580000R1005 | MS497-40 | 2/19 |
| 1SAM201904R1007 | UA1-415 | 2/14 | 1SAM350000R1003 | MS132-0.4 | 2/7 | 1SAM580000R1006 | MS497-50 | 2/19 |
| 1SAM201904R1008 | UA1-208 | 2/14 | 1SAM350000R1004 | MS132-0.63 | 2/7 | 1SAM580000R1007 | MS497-63 | 2/19 |
| 1SAM201904R1009 | UA1-575 | 2/14 | 1SAM350000R1005 | MS132-1.0 | 2/7 | 1SAM580000R1008 | MS497-75 | 2/19 |
| 1SAM201904R1010 | UA1-20 | 2/14 | 1SAM350000R1006 | MS132-1.6 | 2/7 | 1SAM580000R1009 | MS497-90 | 2/19 |
| 1SAM201906R1102 | PS1-2-0-65 | 2/16 | 1SAM350000R1007 | MS132-2.5 | 2/7 | 1SAM580000R1010 | MS497-100 | 2/19 |
| 1SAM201906R1103 | PS1-3-0-65 | 2/16 | 1SAM350000R1008 | MS132-4.0 | 2/7 | 1SAM590000R1004 | MO496-32 | 2/20 |
| 1SAM201906R1104 | PS1-4-0-65 | 2/16 | 1SAM350000R1009 | MS132-6.3 | 2/7 | 1SAM590000R1005 | MO496-40 | 2/20 |
| 1SAM201906R1105 | PS1-5-0-65 | 2/16 | 1SAM350000R1010 | MS132-10 | 2/7 | 1SAM590000R1006 | MO496-50 | 2/20 |
| 1SAM201906R1112 | PS1-2-1-65 | 2/16 | 1SAM350000R1011 | MS132-16 | 2/7 | 1SAM590000R1007 | MO496-63 | 2/20 |
| 1SAM201906R1113 | PS1-3-1-65 | 2/16 | 1SAM350000R1012 | MS132-12 | 2/7 | 1SAM590000R1008 | MO496-75 | 2/20 |
| 1SAM201906R1114 | PS1-4-1-65 | 2/16 | 1SAM350000R1013 | MS132-20 | 2/7 | 1SAM590000R1009 | MO496-90 | 2/20 |
| 1SAM201906R1115 | PS1-5-1-65 | 2/16 | 1SAM350000R1014 | MS132-25 | 2/7 | 1SAM590000R1010 | MO496-100 | 2/20 |
| 1SAM201906R1122 | PS1-2-2-65 | 2/16 | 1SAM350000R1015 | MS132-32 | 2/7 | 1SAX101110R0001 | DB16E | 6/10 |
| 1SAM201906R1123 | PS1-3-2-65 | 2/16 | 1SAM350005R1001 | MS132-0.16-HKF1-11 | 2/7 | 1SAX101910R1001 | DB19EF | 6/10 |
| 1SAM201906R1124 | PS1-4-2-65 | 2/16 | 1SAM350005R1002 | MS132-0.25-HKF1-11 | 2/7 | 1SAX111001R1101 | E16DU-0.32 | 6/10 |
| 1SAM201906R1125 | PS1-5-2-65 | 2/16 | 1SAM350005R1003 | MS132-0.4-HKF1-11 | 2/7 | 1SAX111001R1102 | E16DU-1.0 | 6/10 |
| 1SAM201907R1101 | S1-M1-25 | 2/16 | 1SAM350005R1004 | MS132-0.63-HKF1-11 | 2/7 | 1SAX111001R1103 | E16DU-2.7 | 6/10 |
| 1SAM201907R1102 | S1-M2-25 | 2/16 | 1SAM350005R1005 | MS132-1.0-HKF1-11 | 2/7 | 1SAX111001R1104 | E16DU-6.3 | 6/10 |
| 1SAM201907R1103 | S1-M3-25 | 2/16 | 1SAM350005R1006 | MS132-1.6-HKF1-11 | 2/7 | 1SAX111001R1105 | E16DU-18.9 | 6/10 |
| 1SAM201908R1001 | BS1-3 | 2/16 | 1SAM350005R1007 | MS132-2.5-HKF1-11 | 2/7 | 1SAX121001R1101 | EF19-0.32 | 6/10 |
| 1SAM201909R1001 | FS116 | 2/16 | 1SAM350005R1008 | MS132-4.0-HKF1-11 | 2/7 | 1SAX121001R1102 | EF19-1.0 | 6/10 |
| 1SAM201909R1021 | MSAH1 | 2/24 | 1SAM350005R1009 | MS132-6.3-HKF1-11 | 2/7 | 1SAX121001R1103 | EF19-2.7 | 6/10 |
| 1SAM201910R1001 | AA1-24 | 2/14 | 1SAM350005R1010 | MS132-10.0-HKF1-11 | 2/7 | 1SAX121001R1104 | EF19-6.3 | 6/10 |
| 1SAM201910R1002 | AA1-110 | 2/14 | 1SAM350005R1011 | MS132-16.0-HKF1-11 | 2/7 | 1SAX121001R1105 | EF19-18.9 | 5/18 |
| 1SAM201910R1003 | AA1-230 | 2/14 | 1SAM350005R1012 | MS132-12.0-HKF1-11 | 2/7 | 1SAX201910R0001 | DB45EF | 6/10 |
| 1SAM201910R1004 | AA1-400 | 2/14 | 1SAM350005R1013 | MS132-20-HKF1-11 | 2/7 | 1SAX221001R1101 | EF45-30 | 5/18 |
| 1SAM201911R1010 | IB132-G | 2/18 | 1SAM350005R1014 | MS132-25-HKF1-11 | 2/7 | 1SAX221001R1102 | EF45-45 | 5/18 |
| 1SAM201911R1011 | IB132-Y | 1/18 | 1SAM350005R1015 | MS132-32-HKF1-11 | 2/7 | 1SAX331001R1101 | EF65-70 | 5/18 |
| 1SAM201912R1010 | DMS132-G | 2/18 | 1SAM360000R1001 | MO132-0.16 | 2/9 | 1SAX331001R1102 | EF65-56 | 6/11 |
| 1SAM201912R1011 | DMS132-Y | 2/18 | 1SAM360000R1002 | MO132-0.25 | 2/9 | 1SAX341001R1101 | EF96-100 | 5/18 |
| 1SAM201913R1103 | S1-M3-35 | 2/16 | 1SAM360000R1003 | MO132-0.4 | 2/9 | 1SAX351001R1101 | EF146-150 | 5/12 |
| 1SAM201914R1001 | PB1-1-32 | 2/16 | 1SAM360000R1004 | MO132-0.63 | 2/9 | 1SAX531001R1101 | EF205-210 | 5/12 |
| 1SAM201914R1002 | S1-PB1-25 | 2/16 | 1SAM360000R1005 | MO132-1.0 | 2/9 | 1SAX611001R1101 | EF370-380 | 5/12 |
| 1SAM201916R1103 | PS1-3-0-100 | 2/16 | 1SAM360000R1006 | MO132-1.6 | 2/9 | 1SAX721001R1101 | EF460-500 | 6/13 |
| 1SAM201916R1104 | PS1-4-0-100 | 2/16 | 1SAM360000R1007 | MO132-2.5 | 2/9 | 1SAX821001R1101 | EF750-800 | 6/13 |
| 1SAM201916R1105 | PS1-5-0-100 | 2/16 | 1SAM360000R1008 | MO132-4.0 | 2/9 | 1SAZ401110R0001 | DB200 | 6/9 |
| 1SAM201916R1113 | PS1-3-1-100 | 2/16 | 1SAM360000R1009 | MO132-6.3 | 2/9 | 1SAZ401901R1001 | LT200A | 6/9 |
| 1SAM201916R1114 | PS1-4-1-100 | 2/16 | 1SAM360000R1010 | MO132-10 | 2/9 | 1SAZ421201R1001 | TA200DU-90 | 6/9 |
| 1SAM201916R1115 | PS1-5-1-100 | 2/16 | 1SAM360000R1011 | MO132-16 | 2/9 | 1SAZ421201R1002 | TA200DU-110 | 6/9 |
| 1SAM201916R1123 | PS1-3-2-100 | 2/16 | 1SAM360000R1012 | MO132-12 | 2/9 | 1SAZ421201R1003 | TA200DU-135 | 6/9 |
| 1SAM201920R1000 | MSH-AR | 2/24 | 1SAM360000R1013 | MO132-20 | 2/9 | 1SAZ421201R1004 | TA200DU-150 | 6/9 |
| 1SAM201920R1001 | MSHD-LB | 2/24 | 1SAM360000R1014 | MO132-25 | 2/9 | 1SAZ421201R1005 | TA200DU-175 | 5/12 |
| 1SAM201920R1002 | MSHD-LY | 2/24 | 1SAM360000R1015 | MO132-32 | 2/9 | 1SAZ421201R1006 | TA200DU-200 | 5/12 |
| 1SAM201920R1011 | MSHD-LTB | 2/24 | 1SAM401901R1001 | HK4-11 | 2/23 | 1SAZ431201R1001 | TF140DU-90 | 6/8 |
| 1SAM201920R1012 | MSHD-LTY | 2/24 | 1SAM401901R1002 | HK4-W | 2/23 | 1SAZ431201R1002 | TF140DU-110 | 5/12 |
| 1SAM250000R1001 | MS116-0.16 | 2/6 | 1SAM401902R1001 | HKS4-11 | 2/23 | 1SAZ431201R1003 | TF140DU-135 | 5/16 |
| 1SAM250000R1002 | MS116-0.25 | 2/6 | 1SAM401902R1002 | HKS4-20 | 2/23 | 1SAZ431201R1004 | TF140DU-142 | 5/12 |
| 1SAM250000R1003 | MS116-0.4 | 2/6 | 1SAM401902R1003 | HKS4-02 | 2/23 | 1SAZ431301R1001 | TF140DU-90-V1000* | 6/8 |
| 1SAM250000R1004 | MS116-0.63 | 2/6 | 1SAM401904R1001 | SK4-11 | 2/23 | 1SAZ431301R1002 | TF140DU-110-V1000* | 6/8 |
| 1SAM250000R1005 | MS116-1.0 | 2/6 | 1SAM401905R1001 | UA4-110 | 2/23 | 1SAZ431301R1003 | TF140DU-135-V1000* | 6/8 |
| 1SAM250000R1006 | MS116-1.6 | 2/6 | 1SAM401905R1002 | UA4-230 | 2/23 | 1SAZ431301R1004 | TF140DU-142-V1000* | 6/8 |
| 1SAM250000R1007 | MS116-2.5 | 2/6 | 1SAM401905R1003 | UA4-400 | 2/23 | 1SAZ701901R0001 | DB16 | 6/4 |
| 1SAM250000R1008 | MS116-4.0 | 2/6 | 1SAM401905R1004 | UA4-24 | 2/23 | 1SAZ701902R0001 | DB42 | 6/5 |
| 1SAM250000R1009 | MS116-6.3 | 2/6 | 1SAM401906R1001 | UA4-HK-230 | 2/23 | 1SAZ701903R1001 | WRH-F | 6/15 |
| 1SAM250000R1010 | MS116-10 | 2/6 | 1SAM401906R1002 | UA4-HK-400 | 2/23 | 1SAZ701903R1011 | WRB-400 | 6/15 |
| 1SAM250000R1011 | MS116-16 | 2/6 | 1SAM401907R1001 | AA4-24 | 2/23 | 1SAZ701903R1012 | WRB-600 | 6/15 |
| 1SAM250000R1012 | MS116-12 | 2/6 | 1SAM401907R1002 | AA4-110 | 2/23 | 1SAZ701903R1013 | WRB-1000 | 6/15 |
| 1SAM250000R1013 | MS116-20 | 2/6 | 1SAM401907R1003 | AA4-230 | 2/23 | 1SAZ701903R1030 | WRB-G | 6/15 |
| 1SAM250000R1014 | MS116-25 | 2/6 | 1SAM401907R1004 | AA4-400 | 2/23 | 1SAZ711201R1005 | T16-0.13 | 6/4 |
| 1SAM250000R1015 | MS116-32 | 2/6 | 1SAM401912R1001 | DX495 | 2/23 | 1SAZ711201R1008 | T16-0.17 | 6/4 |
| 1SAM250005R1001 | MS116-0.16-HKF1-11 | 2/6 | 1SAM401920R1002 | PS2-2-0-125 | 2/17 | 1SAZ711201R1009 | T16-0.23 | 6/4 |
| 1SAM250005R1002 | MS116-0.25-HKF1-11 | 2/6 | 1SAM401920R1003 | PS2-3-0-125 | 2/17 | 1SAZ711201R1013 | T16-0.31 | 6/4 |
| 1SAM250005R1003 | MS116-0.4-HKF1-11 | 2/6 | 1SAM401920R1004 | PS2-4-0-125 | 2/17 | 1SAZ711201R1014 | T16-0.41 | 6/4 |
| 1SAM250005R1004 | MS116-0.63-HKF1-11 | 2/6 | 1SAM401920R1022 | PS2-2-2-125 | 2/17 | 1SAZ711201R1017 | T16-0.55 | 6/4 |
| 1SAM250005R1005 | MS116-1.0-HKF1-11 | 2/6 | 1SAM401920R1023 | PS2-3-2-125 | 2/17 | 1SAZ711201R1021 | T16-0.74 | 6/4 |
| 1SAM250005R1006 | MS116-1.6-HKF1-11 | 2/6 | 1SAM401920R1024 | PS2-4-2-125 | 2/17 | 1SAZ711201R1023 | T16-1.0 | 6/4 |
| 1SAM250005R1007 | MS116-2.5-HKF1-11 | 2/6 | 1SAM401921R1001 | BS2-3 | 2/17 | 1SAZ711201R1025 | T16-1.3 | 6/4 |
| 1SAM250005R1008 | MS116-4.0-HKF1-11 | 2/6 | 1SAM401922R1001 | KA165 | 2/17 | 1SAZ711201R1028 | T16-1.7 | 6/4 |
| 1SAM250005R1009 | MS116-6.3-HKF1-11 | 2/6 | 1SAM451000R1011 | MS165-16 | 2/8 | 1SAZ711201R1031 | T16-2.3 | 6/4 |
| 1SAM250005R1010 | MS116-10.0-HKF1-11 | 2/6 | 1SAM451000R1012 | MS165-20 | 2/8 | 1SAZ711201R1033 | T16-3.1 | 6/4 |
| 1SAM250005R1011 | MS116-16.0-HKF1-11 | 2/6 | 1SAM451000R1013 | MS165-25 | 2/8 | 1SAZ711201R1035 | T16-4.2 | 6/4 |
| 1SAM250005R1012 | MS116-12.0-HKF1-11 | 2/6 | 1SAM451000R1014 | MS165-32 | 2/8 | 1SAZ711201R1038 | T16-5.7 | 6/4 |
| 1SAM250005R1013 | MS116-20-HKF1-11 | 2/6 | 1SAM451000R1015 | MS165-42 | 2/8 | 1SAZ711201R1040 | T16-7.6 | 6/4 |
| 1SAM250005R1014 | MS116-25-HKF1-11 | 2/6 | 1SAM451000R1016 | MS165-54 | 2/8 | 1SAZ711201R1043 | T16-10 | 6/4 |
| 1SAM250005R1015 | MS116-32-HKF1-11 | 2/6 | 1SAM451000R1017 | MS165-65 | 2/8 | 1SAZ711201R1045 | T16-13 | 6/4 |

Index

Order code classification

| Order code | Type | Page | Order code | Type | Page | Order code | Type | Page |
|-----------------|-----------|------|-----------------|----------------|------|-----------------|----------------|------|
| 1SAZ711201R1047 | T16-16 | 6/4 | 1SBH103001R8671 | NSL71E-86 | 4/11 | 1SBL103001R8632 | ASL09-30-32-86 | 4/7 |
| 1SAZ721201R1005 | TF42-0.13 | 6/5 | 1SBH103001R8680 | NSL80E-86 | 4/11 | 1SBL103001R8801 | ASL09-30-01-88 | 4/5 |
| 1SAZ721201R1008 | TF42-0.17 | 6/5 | 1SBH103001R8822 | NSL22E-88 | 4/11 | 1SBL103001R8810 | ASL09-30-10-88 | 4/5 |
| 1SAZ721201R1009 | TF42-0.23 | 6/5 | 1SBH103001R8831 | NSL31E-88 | 4/11 | 1SBL103001R8832 | ASL09-30-32-88 | 4/7 |
| 1SAZ721201R1013 | TF42-0.31 | 6/5 | 1SBH103001R8840 | NSL40E-88 | 4/11 | 1SBL111001R1601 | AS12-30-01-16 | 4/4 |
| 1SAZ721201R1014 | TF42-0.41 | 6/5 | 1SBH103001R8844 | NSL44E-88 | 4/11 | 1SBL111001R1610 | AS12-30-10-16 | 4/4 |
| 1SAZ721201R1017 | TF42-0.55 | 6/5 | 1SBH103001R8853 | NSL53E-88 | 4/11 | 1SBL111001R1632 | AS12-30-32-16 | 4/6 |
| 1SAZ721201R1021 | TF42-0.74 | 6/5 | 1SBH103001R8862 | NSL62E-88 | 4/11 | 1SBL111001R2001 | AS12-30-01-20 | 4/4 |
| 1SAZ721201R1023 | TF42-1.0 | 6/5 | 1SBH103001R8871 | NSL71E-88 | 4/11 | 1SBL111001R2010 | AS12-30-10-20 | 4/4 |
| 1SAZ721201R1025 | TF42-1.3 | 6/5 | 1SBH103001R8880 | NSL80E-88 | 4/11 | 1SBL111001R2032 | AS12-30-32-20 | 4/6 |
| 1SAZ721201R1028 | TF42-1.7 | 6/5 | 1SBH136001R2022 | NFZ22E-20 | 5/61 | 1SBL111001R2601 | AS12-30-01-26 | 4/4 |
| 1SAZ721201R1031 | TF42-2.3 | 6/5 | 1SBH136001R2031 | NFZ31E-20 | 5/61 | 1SBL111001R2610 | AS12-30-10-26 | 4/4 |
| 1SAZ721201R1033 | TF42-3.1 | 6/5 | 1SBH136001R2040 | NFZ40E-20 | 5/61 | 1SBL111001R2632 | AS12-30-32-26 | 4/6 |
| 1SAZ721201R1035 | TF42-4.2 | 6/5 | 1SBH136001R2122 | NFZ22E-21 | 5/61 | 1SBL111001R2801 | AS12-30-01-28 | 4/4 |
| 1SAZ721201R1038 | TF42-5.7 | 6/5 | 1SBH136001R2131 | NFZ31E-21 | 5/61 | 1SBL111001R2810 | AS12-30-10-28 | 4/4 |
| 1SAZ721201R1040 | TF42-7.6 | 6/5 | 1SBH136001R2140 | NFZ40E-21 | 5/61 | 1SBL111001R2832 | AS12-30-32-28 | 4/6 |
| 1SAZ721201R1043 | TF42-10 | 5/16 | 1SBH136001R2222 | NFZ22E-22 | 5/61 | 1SBL133001R8101 | ASL12-30-01-81 | 4/5 |
| 1SAZ721201R1045 | TF42-13 | 5/16 | 1SBH136001R2231 | NFZ31E-22 | 5/61 | 1SBL133001R8110 | ASL12-30-10-81 | 4/5 |
| 1SAZ721201R1047 | TF42-16 | 5/16 | 1SBH136001R2240 | NFZ40E-22 | 5/61 | 1SBL133001R8132 | ASL12-30-32-81 | 4/7 |
| 1SAZ721201R1049 | TF42-20 | 5/22 | 1SBH136001R2322 | NFZ22E-23 | 5/61 | 1SBL133001R8301 | ASL12-30-01-83 | 4/5 |
| 1SAZ721201R1051 | TF42-24 | 5/16 | 1SBH136001R2331 | NFZ31E-23 | 5/61 | 1SBL133001R8310 | ASL12-30-10-83 | 4/5 |
| 1SAZ721201R1052 | TF42-29 | 5/22 | 1SBH136001R2340 | NFZ40E-23 | 5/61 | 1SBL133001R8332 | ASL12-30-32-83 | 4/7 |
| 1SAZ721201R1053 | TF42-35 | 5/16 | 1SBH137001R1222 | NF22E-12 | 5/60 | 1SBL133001R8601 | ASL12-30-01-86 | 4/5 |
| 1SAZ721201R1055 | TF42-38 | 5/16 | 1SBH137001R1231 | NF31E-12 | 5/60 | 1SBL133001R8610 | ASL12-30-10-86 | 4/5 |
| 1SAZ801901R1001 | DB65 | 6/6 | 1SBH137001R1240 | NF40E-12 | 5/60 | 1SBL133001R8632 | ASL12-30-32-86 | 4/7 |
| 1SAZ811201R1001 | TF65-28 | 6/6 | 1SBH137001R1322 | NF22E-13 | 5/60 | 1SBL133001R8801 | ASL12-30-01-88 | 4/5 |
| 1SAZ811201R1002 | TF65-33 | 6/6 | 1SBH137001R1331 | NF31E-13 | 5/60 | 1SBL133001R8810 | ASL12-30-10-88 | 4/5 |
| 1SAZ811201R1003 | TF65-40 | 5/16 | 1SBH137001R1340 | NF40E-13 | 5/60 | 1SBL133001R8832 | ASL12-30-32-88 | 4/7 |
| 1SAZ811201R1004 | TF65-47 | 5/16 | 1SBH137001R1422 | NF22E-14 | 5/60 | 1SBL121001R1601 | AS16-30-01-16 | 4/4 |
| 1SAZ811201R1005 | TF65-53 | 6/6 | 1SBH137001R1431 | NF31E-14 | 5/60 | 1SBL121001R1610 | AS16-30-10-16 | 4/4 |
| 1SAZ811201R1006 | TF65-60 | 5/16 | 1SBH137001R1440 | NF40E-14 | 5/60 | 1SBL121001R1632 | AS16-30-32-16 | 4/6 |
| 1SAZ811201R1007 | TF65-67 | 6/6 | 1SBH137001R4122 | NF22E-41 | 5/60 | 1SBL121001R2001 | AS16-30-01-20 | 4/4 |
| 1SAZ901901R1001 | DB96 | 6/7 | 1SBH137001R4131 | NF31E-41 | 5/60 | 1SBL121001R2010 | AS16-30-10-20 | 4/4 |
| 1SAZ911201R1001 | TF96-51 | 6/7 | 1SBH137001R4140 | NF40E-41 | 5/60 | 1SBL121001R2032 | AS16-30-32-20 | 4/6 |
| 1SAZ911201R1002 | TF96-60 | 6/7 | 1SBK104035R2800 | DRAS09-28P | 7/2 | 1SBL121001R2601 | AS16-30-01-26 | 4/4 |
| 1SAZ911201R1003 | TF96-68 | 5/16 | 1SBK104035R2900 | DRAS09-29P | 7/2 | 1SBL121001R2610 | AS16-30-10-26 | 4/4 |
| 1SAZ911201R1004 | TF96-78 | 5/22 | 1SBK104135R2600 | DRAS09-26N | 7/2 | 1SBL121001R2632 | AS16-30-32-26 | 4/6 |
| 1SAZ911201R1005 | TF96-87 | 5/16 | 1SBK104135R2700 | DRAS09-27N | 7/2 | 1SBL121001R2801 | AS16-30-01-28 | 4/4 |
| 1SAZ911201R1006 | TF96-96 | 5/22 | 1SBK104235R2000 | DRAS09-20S | 7/2 | 1SBL121001R2810 | AS16-30-10-28 | 4/4 |
| 1SBH101001R1622 | NS22E-16 | 4/10 | 1SBK104335R8100 | DRASL09-81S | 7/2 | 1SBL121001R2832 | AS16-30-32-28 | 4/6 |
| 1SBH101001R1631 | NS31E-16 | 4/10 | 1SBK104335R8300 | DRASL09-83S | 7/2 | 1SBL123001R8101 | ASL16-30-01-81 | 4/5 |
| 1SBH101001R1640 | NS40E-16 | 4/10 | 1SBK114035R2800 | DRAS12-28P | 7/2 | 1SBL123001R8110 | ASL16-30-10-81 | 4/5 |
| 1SBH101001R1644 | NS44E-16 | 4/10 | 1SBK114035R2900 | DRAS12-29P | 7/2 | 1SBL123001R8132 | ASL16-30-32-81 | 4/7 |
| 1SBH101001R1653 | NS53E-16 | 4/10 | 1SBK114135R2600 | DRAS12-26N | 7/2 | 1SBL123001R8301 | ASL16-30-01-83 | 4/5 |
| 1SBH101001R1662 | NS62E-16 | 4/10 | 1SBK114135R2700 | DRAS12-27N | 7/2 | 1SBL123001R8310 | ASL16-30-10-83 | 4/5 |
| 1SBH101001R1671 | NS71E-16 | 4/10 | 1SBK114235R2000 | DRAS12-20S | 7/2 | 1SBL123001R8332 | ASL16-30-32-83 | 4/7 |
| 1SBH101001R1680 | NS80E-16 | 4/10 | 1SBK114335R8100 | DRASL12-81S | 7/2 | 1SBL123001R8601 | ASL16-30-01-86 | 4/5 |
| 1SBH101001R2022 | NS22E-20 | 4/10 | 1SBK114335R8300 | DRASL12-83S | 7/2 | 1SBL123001R8610 | ASL16-30-10-86 | 4/5 |
| 1SBH101001R2031 | NS31E-20 | 4/10 | 1SBK124035R2800 | DRAS16-28P | 7/2 | 1SBL123001R8632 | ASL16-30-32-86 | 4/7 |
| 1SBH101001R2040 | NS40E-20 | 4/10 | 1SBK124035R2900 | DRAS16-29P | 7/2 | 1SBL123001R8801 | ASL16-30-01-88 | 4/5 |
| 1SBH101001R2044 | NS44E-20 | 4/10 | 1SBK124135R2600 | DRAS16-26N | 7/2 | 1SBL123001R8810 | ASL16-30-10-88 | 4/5 |
| 1SBH101001R2053 | NS53E-20 | 4/10 | 1SBK124135R2700 | DRAS16-27N | 7/2 | 1SBL123001R8832 | ASL16-30-32-88 | 4/7 |
| 1SBH101001R2062 | NS62E-20 | 4/10 | 1SBK124235R2000 | DRAS16-20S | 7/2 | 1SBL136001R2001 | AF09Z-30-01-20 | 5/29 |
| 1SBH101001R2071 | NS71E-20 | 4/10 | 1SBK124335R8100 | DRASL16-81S | 7/2 | 1SBL136001R2010 | AF09Z-30-10-20 | 5/29 |
| 1SBH101001R2080 | NS80E-20 | 4/10 | 1SBK124335R8300 | DRASL16-83S | 7/2 | 1SBL136001R2101 | AF09Z-30-01-21 | 5/29 |
| 1SBH101001R2622 | NS22E-26 | 4/10 | 1SBK134037R1400 | DRAF09-14P | 7/6 | 1SBL136001R2110 | AF09Z-30-10-21 | 5/4 |
| 1SBH101001R2631 | NS31E-26 | 4/10 | 1SBK134137R1300 | DRAF09-13N | 7/6 | 1SBL136001R2201 | AF09Z-30-01-22 | 5/29 |
| 1SBH101001R2640 | NS40E-26 | 4/10 | 1SBK134237R1100 | DRAF09-11S | 7/6 | 1SBL136001R2210 | AF09Z-30-10-22 | 5/29 |
| 1SBH101001R2644 | NS44E-26 | 4/10 | 1SBK134238R1100 | DRAF09-11U | 7/6 | 1SBL136001R2301 | AF09Z-30-01-23 | 5/29 |
| 1SBH101001R2653 | NS53E-26 | 4/10 | 1SBK134238R1300 | DRAF09-13U | 7/6 | 1SBL136001R2310 | AF09Z-30-10-23 | 5/29 |
| 1SBH101001R2662 | NS62E-26 | 4/10 | 1SBK134238R1400 | DRAF09-14U | 7/6 | 1SBL136201R2000 | AF09Z-40-00-20 | 5/47 |
| 1SBH101001R2671 | NS71E-26 | 4/10 | 1SBK134238R1400 | DRAF12-14P | 7/6 | 1SBL136201R2100 | AF09Z-40-00-21 | 5/47 |
| 1SBH101001R2680 | NS80E-26 | 4/10 | 1SBK154137R1300 | DRAF12-13N | 7/6 | 1SBL136201R2200 | AF09Z-40-00-22 | 5/47 |
| 1SBH101001R2822 | NS22E-28 | 4/10 | 1SBK154237R1100 | DRAF12-11S | 7/6 | 1SBL136201R2300 | AF09Z-40-00-23 | 5/47 |
| 1SBH101001R2831 | NS31E-28 | 4/10 | 1SBK154238R1100 | DRAF12-11U | 7/6 | 1SBL136501R2000 | AF09Z-22-00-20 | 5/47 |
| 1SBH101001R2840 | NS40E-28 | 4/10 | 1SBK154238R1300 | DRAF12-13U | 7/6 | 1SBL136501R2100 | AF09Z-22-00-21 | 5/47 |
| 1SBH101001R2844 | NS44E-28 | 4/10 | 1SBK154238R1400 | DRAF12-14U | 7/6 | 1SBL136501R2200 | AF09Z-22-00-22 | 5/47 |
| 1SBH101001R2853 | NS53E-28 | 4/10 | 1SBK174037R1400 | DRAF16-14P | 7/6 | 1SBL136501R2300 | AF09Z-22-00-23 | 5/47 |
| 1SBH101001R2862 | NS62E-28 | 4/10 | 1SBK174137R1300 | DRAF16-13N | 7/6 | 1SBL137001R1201 | AF09-30-01-12 | 5/28 |
| 1SBH101001R2871 | NS71E-28 | 4/10 | 1SBK174237R1100 | DRAF16-11S | 7/6 | 1SBL137001R1210 | AF09-30-10-12 | 5/28 |
| 1SBH101001R2880 | NS80E-28 | 4/10 | 1SBK174238R1100 | DRAF16-11U | 7/6 | 1SBL137001R1301 | AF09-30-01-13 | 5/28 |
| 1SBH103001R8122 | NSL22E-81 | 4/11 | 1SBK174238R1300 | DRAF16-13U | 7/6 | 1SBL137001R1310 | AF09-30-10-13 | 5/28 |
| 1SBH103001R8131 | NSL31E-81 | 4/11 | 1SBK174238R1400 | DRAF16-14U | 7/6 | 1SBL137001R1401 | AF09-30-01-14 | 5/28 |
| 1SBH103001R8140 | NSL40E-81 | 4/11 | 1SBL101001R1601 | AS09-30-01-16 | 4/4 | 1SBL137001R1410 | AF09-30-10-14 | 5/28 |
| 1SBH103001R8144 | NSL44E-81 | 4/11 | 1SBL101001R1610 | AS09-30-10-16 | 4/4 | 1SBL137001R1610 | AF09-30-01-16 | 5/28 |
| 1SBH103001R8153 | NSL53E-81 | 4/11 | 1SBL101001R1632 | AS09-30-32-16 | 4/6 | 1SBL137001R1710 | AF09-30-10-17 | 5/28 |
| 1SBH103001R8162 | NSL62E-81 | 4/11 | 1SBL101001R2001 | AS09-30-01-20 | 4/4 | 1SBL137201R1200 | AF09-40-00-12 | 5/46 |
| 1SBH103001R8171 | NSL71E-81 | 4/11 | 1SBL101001R2010 | AS09-30-10-20 | 4/4 | 1SBL137201R1300 | AF09-40-00-13 | 5/46 |
| 1SBH103001R8180 | NSL80E-81 | 4/11 | 1SBL101001R2032 | AS09-30-32-20 | 4/6 | 1SBL137201R1400 | AF09-40-00-14 | 5/46 |
| 1SBH103001R8322 | NSL22E-83 | 4/11 | 1SBL101001R2601 | AS09-30-01-26 | 4/4 | 1SBL137201R4100 | AF09-40-00-41 | 5/46 |
| 1SBH103001R8331 | NSL31E-83 | 4/11 | 1SBL101001R2610 | AS09-30-10-26 | 4/4 | 1SBL137501R1200 | AF09-22-00-12 | 5/46 |
| 1SBH103001R8340 | NSL40E-83 | 4/11 | 1SBL101001R2632 | AS09-30-32-26 | 4/6 | 1SBL137501R1300 | AF09-22-00-13 | 5/46 |
| 1SBH103001R8344 | NSL44E-83 | 4/11 | 1SBL101001R2801 | AS09-30-01-28 | 4/4 | 1SBL137501R1400 | AF09-22-00-14 | 5/46 |
| 1SBH103001R8353 | NSL53E-83 | 4/11 | 1SBL101001R2810 | AS09-30-10-28 | 4/4 | 1SBL137501R4100 | AF09-22-00-41 | 5/46 |
| 1SBH103001R8362 | NSL62E-83 | 4/11 | 1SBL101001R2832 | AS09-30-32-28 | 4/6 | 1SBL156001R2001 | AF12Z-30-01-20 | 5/29 |
| 1SBH103001R8371 | NSL71E-83 | 4/11 | 1SBL103001R8101 | ASL09-30-01-81 | 4/5 | 1SBL156001R2010 | AF12Z-30-10-20 | 5/29 |
| 1SBH103001R8380 | NSL80E-83 | 4/11 | 1SBL103001R8110 | ASL09-30-10-81 | 4/5 | 1SBL156001R2101 | AF12Z-30-01-21 | 5/29 |
| 1SBH103001R8622 | NSL22E-86 | 4/11 | 1SBL103001R8132 | ASL09-30-32-81 | 4/5 | 1SBL156001R2110 | AF12Z-30-10-21 | 5/4 |
| 1SBH103001R8631 | NSL31E-86 | 4/11 | 1SBL103001R8301 | ASL09-30-01-83 | 4/5 | 1SBL156001R2201 | AF12Z-30-01-22 | 5/29 |
| 1SBH103001R8640 | NSL40E-86 | 4/11 | 1SBL103001R8310 | ASL09-30-10-83 | 4/5 | 1SBL156001R2210 | AF12Z-30-10-22 | 5/29 |
| 1SBH103001R8644 | NSL44E-86 | 4/11 | 1SBL103001R8332 | ASL09-30-32-83 | 4/7 | 1SBL156001R2301 | AF12Z-30-01-23 | 5/29 |
| 1SBH103001R8653 | NSL53E-86 | 4/11 | 1SBL103001R8601 | ASL09-30-01-86 | 4/5 | 1SBL156001R2310 | AF12Z-30-10-23 | 5/29 |
| 1SBH103001R8662 | NSL62E-86 | 4/11 | 1SBL103001R8610 | ASL09-30-10-86 | 4/5 | 1SBL157001R1201 | AF12Z-30-01-12 | 5/28 |

Index

Order code classification

| Order code | Type | Page | Order code | Type | Page | Order code | Type | Page |
|-----------------|----------------|------|-----------------|---------------|------|-----------------|-----------------|------|
| 1SBL157001R1210 | AF12-30-10-12 | 5/28 | 1SBL297501R4100 | AF38-22-00-41 | 5/46 | 1SBN050100R1001 | RC5-1/133 | 4/9 |
| 1SBL157001R1301 | AF12-30-01-13 | 5/28 | 1SBL347001R1100 | AF40-30-00-11 | 5/4 | 1SBN050100R1002 | RC5-1/250 | 4/9 |
| 1SBL157001R1310 | AF12-30-10-13 | 5/4 | 1SBL347001R1200 | AF40-30-00-12 | 5/30 | 1SBN050100R1003 | RC5-1/440 | 4/9 |
| 1SBL157001R1401 | AF12-30-01-14 | 5/28 | 1SBL347001R1300 | AF40-30-00-13 | 5/4 | 1SBN070156T1000 | LDC4 | 5/63 |
| 1SBL157001R1410 | AF12-30-10-14 | 5/28 | 1SBL347001R1400 | AF40-30-00-14 | 5/30 | 1SBN080906R1001 | BEA7/325 | 3/17 |
| 1SBL157001R4101 | AF12-30-01-41 | 5/28 | 1SBL347001R4100 | AF40-30-00-41 | 5/30 | 1SBN080906R1002 | BEA7/132 | 3/17 |
| 1SBL157001R4110 | AF12-30-10-41 | 5/28 | 1SBL347201R1100 | AF40-40-00-11 | 5/48 | 1SBN081006T1000 | BEA16-3 | 4/9 |
| 1SBL176001R2001 | AF16Z-30-01-20 | 5/29 | 1SBL347201R1200 | AF40-40-00-12 | 5/48 | 1SBN081012R1000 | BER16C-3 | 4/9 |
| 1SBL176001R2010 | AF16Z-30-10-20 | 5/29 | 1SBL347201R1300 | AF40-40-00-13 | 5/48 | 1SBN081018R2000 | BEY16C-3 | 4/9 |
| 1SBL176001R2101 | AF16Z-30-01-21 | 5/29 | 1SBL347201R1400 | AF40-40-00-14 | 5/48 | 1SBN081306T1000 | BEA16-4 | 5/4 |
| 1SBL176001R2110 | AF16Z-30-10-21 | 5/4 | 1SBL347201R4100 | AF40-40-00-41 | 5/48 | 1SBN081311R1000 | BER16-4 | 5/33 |
| 1SBL176001R2201 | AF16Z-30-01-22 | 5/29 | 1SBL347501R1100 | AF40-22-00-11 | 5/48 | 1SBN081313R2000 | BEY16-4 | 5/22 |
| 1SBL176001R2210 | AF16Z-30-10-22 | 5/29 | 1SBL347501R1200 | AF40-22-00-12 | 5/48 | 1SBN082306T1000 | BEA26-4 | 5/5 |
| 1SBL176001R2301 | AF16Z-30-01-23 | 5/29 | 1SBL347501R1300 | AF40-22-00-13 | 5/48 | 1SBN082306T2000 | BEA38-4 | 5/4 |
| 1SBL176001R2310 | AF16Z-30-10-23 | 5/29 | 1SBL347501R1400 | AF40-22-00-14 | 5/48 | 1SBN082311R1000 | BER38-4 | 5/33 |
| 1SBL176201R2000 | AF16Z-40-00-20 | 5/47 | 1SBL347501R4100 | AF40-22-00-41 | 5/48 | 1SBN082713R2000 | BEY38-4 | 5/22 |
| 1SBL176201R2100 | AF16Z-40-00-21 | 5/47 | 1SBL367001R1100 | AF52-30-00-11 | 5/4 | 1SBN083406R1000 | BEA65-4 | 5/4 |
| 1SBL176201R2200 | AF16Z-40-00-22 | 5/47 | 1SBL367001R1200 | AF52-30-00-12 | 5/30 | 1SBN083411R1000 | BER65-4 | 5/33 |
| 1SBL176201R2300 | AF16Z-40-00-23 | 5/47 | 1SBL367001R1300 | AF52-30-00-13 | 5/4 | 1SBN083413R2000 | BEY65-4 | 5/22 |
| 1SBL176501R2000 | AF16Z-22-00-20 | 5/47 | 1SBL367001R1400 | AF52-30-00-14 | 5/30 | 1SBN083911R1000 | BER96-4 | 5/6 |
| 1SBL176501R2100 | AF16Z-22-00-21 | 5/47 | 1SBL367001R4100 | AF52-30-00-41 | 5/30 | 1SBN083913R2000 | BEY96-4 | 5/22 |
| 1SBL176501R2200 | AF16Z-22-00-22 | 5/47 | 1SBL367201R1100 | AF52-40-00-11 | 5/48 | 1SBN101035R1000 | FR16AS-12VARS | 7/2 |
| 1SBL176501R2300 | AF16Z-22-00-23 | 5/47 | 1SBL367201R1200 | AF52-40-00-12 | 5/48 | 1SBN101337R1000 | FR16AF-12 | 7/7 |
| 1SBL177001R1201 | AF16-30-01-12 | 5/28 | 1SBL367201R1300 | AF52-40-00-13 | 5/48 | 1SBN101338R1000 | FR16AF-12U | 7/7 |
| 1SBL177001R1210 | AF16-30-10-12 | 5/28 | 1SBL367201R1400 | AF52-40-00-14 | 5/48 | 1SBN110108T1000 | BX4 | 5/63 |
| 1SBL177001R1301 | AF16-30-01-13 | 5/28 | 1SBL367201R4100 | AF52-40-00-41 | 5/48 | 1SBN110109W1000 | BX4-CA | 5/63 |
| 1SBL177001R1310 | AF16-30-10-13 | 5/4 | 1SBL387001R1100 | AF65-30-00-11 | 5/4 | 1SCA101647R1001 | OX56X85 | 2/24 |
| 1SBL177001R1401 | AF16-30-01-14 | 5/28 | 1SBL387001R1200 | AF65-30-00-12 | 5/30 | 1SCA101655R1001 | OX56X130 | 2/24 |
| 1SBL177001R1410 | AF16-30-10-14 | 5/28 | 1SBL387001R1300 | AF65-30-00-13 | 5/4 | 1SCA101659R1001 | OX56X180 | 2/24 |
| 1SBL177001R4101 | AF16-30-01-41 | 5/28 | 1SBL387001R1400 | AF65-30-00-14 | 5/30 | 1SCA108043R1001 | OX56X105 | 2/24 |
| 1SBL177001R4110 | AF16-30-10-41 | 5/28 | 1SBL387001R4100 | AF65-30-00-41 | 5/30 | 1SFA611610R2001 | MCB-10B | 7/2 |
| 1SBL177201R1200 | AF16-40-00-12 | 5/46 | 1SBL397001R1100 | AF80-30-00-11 | 5/4 | 1SFA616162R1014 | KPR-101L | 6/4 |
| 1SBL177201R1300 | AF16-40-00-13 | 5/46 | 1SBL397001R1200 | AF80-30-00-12 | 5/30 | 1SFA739001R1000 | E1250DU-1250 | 6/14 |
| 1SBL177201R1400 | AF16-40-00-14 | 5/46 | 1SBL397001R1300 | AF80-30-00-13 | 5/4 | 1SFL427001R1111 | AF116-30-11-11 | 5/10 |
| 1SBL177201R4100 | AF16-40-00-41 | 5/46 | 1SBL397001R1400 | AF80-30-00-14 | 5/30 | 1SFL427001R1211 | AF116-30-11-12 | 5/34 |
| 1SBL177501R1200 | AF16-22-00-12 | 5/46 | 1SBL397001R4100 | AF80-30-00-41 | 5/30 | 1SFL427001R1311 | AF116-30-11-13 | 5/34 |
| 1SBL177501R1300 | AF16-22-00-13 | 5/46 | 1SBL397201R1100 | AF80-40-00-11 | 5/48 | 1SFL427001R1411 | AF116-30-11-14 | 5/34 |
| 1SBL177501R1400 | AF16-22-00-14 | 5/46 | 1SBL397201R1200 | AF80-40-00-12 | 5/48 | 1SFL427001R3311 | AF116-30-11-33 | 5/35 |
| 1SBL177501R4100 | AF16-22-00-41 | 5/46 | 1SBL397201R1300 | AF80-40-00-13 | 5/48 | 1SFL427001R3411 | AF116-30-11-34 | 5/35 |
| 1SBL236001R2000 | AF26Z-30-00-20 | 5/29 | 1SBL397201R1400 | AF80-40-00-14 | 5/48 | 1SFL427002R1111 | AF116-30-11B-11 | 5/34 |
| 1SBL236001R2100 | AF26Z-30-00-21 | 5/4 | 1SBL397201R4100 | AF80-40-00-41 | 5/48 | 1SFL427002R1211 | AF116-30-11B-12 | 5/34 |
| 1SBL236001R2200 | AF26Z-30-00-22 | 5/29 | 1SBL397501R1100 | AF80-22-00-11 | 5/48 | 1SFL427002R1311 | AF116-30-11B-13 | 5/34 |
| 1SBL236001R2300 | AF26Z-30-00-23 | 5/29 | 1SBL397501R1200 | AF80-22-00-12 | 5/48 | 1SFL427002R1411 | AF116-30-11B-14 | 5/34 |
| 1SBL236201R2000 | AF26Z-40-00-20 | 5/47 | 1SBL397501R1300 | AF80-22-00-13 | 5/48 | 1SFL427002R3311 | AF116-30-11B-33 | 5/35 |
| 1SBL236201R2100 | AF26Z-40-00-21 | 5/47 | 1SBL397501R1400 | AF80-22-00-14 | 5/48 | 1SFL427002R3411 | AF116-30-11B-34 | 5/35 |
| 1SBL236201R2200 | AF26Z-40-00-22 | 5/47 | 1SBL397501R4100 | AF80-22-00-41 | 5/48 | 1SFL427101R1111 | AF116-40-11-11 | 5/52 |
| 1SBL236201R2300 | AF26Z-40-00-23 | 5/47 | 1SBL407001R1100 | AF96-30-00-11 | 5/4 | 1SFL427101R1211 | AF116-40-11-12 | 5/52 |
| 1SBL236501R2000 | AF26Z-22-00-20 | 5/47 | 1SBL407001R1200 | AF96-30-00-12 | 5/30 | 1SFL427101R1311 | AF116-40-11-13 | 5/52 |
| 1SBL236501R2100 | AF26Z-22-00-21 | 5/47 | 1SBL407001R1300 | AF96-30-00-13 | 5/4 | 1SFL427101R1411 | AF116-40-11-14 | 5/52 |
| 1SBL236501R2200 | AF26Z-22-00-22 | 5/47 | 1SBL407001R1400 | AF96-30-00-14 | 5/30 | 1SFL427102R1111 | AF116-40-11B-11 | 5/52 |
| 1SBL236501R2300 | AF26Z-22-00-23 | 5/47 | 1SBL407001R4100 | AF96-30-00-41 | 5/30 | 1SFL427102R1211 | AF116-40-11B-12 | 5/52 |
| 1SBL237001R1200 | AF26-30-00-12 | 5/28 | 1SBN010013R1010 | CB5-10 | 7/7 | 1SFL427102R1311 | AF116-40-11B-13 | 5/52 |
| 1SBL237001R1300 | AF26-30-00-13 | 5/4 | 1SBN010110R1001 | CA4-01 | 5/33 | 1SFL427102R1411 | AF116-40-11B-14 | 5/52 |
| 1SBL237001R1400 | AF26-30-00-14 | 5/28 | 1SBN010110R1010 | CA4-10 | 5/33 | 1SFL447001R1111 | AF140-30-11-11 | 5/10 |
| 1SBL237001R4100 | AF26-30-00-41 | 5/28 | 1SBN010110T1001 | CA4-01-T | 5/33 | 1SFL447001R1211 | AF140-30-11-12 | 5/34 |
| 1SBL237201R1200 | AF26-40-00-12 | 5/46 | 1SBN010110T1010 | CA4-10-T | 5/33 | 1SFL447001R1311 | AF140-30-11-13 | 5/10 |
| 1SBL237201R1300 | AF26-40-00-13 | 5/46 | 1SBN010111R1001 | CC4-01 | 5/33 | 1SFL447001R1411 | AF140-30-11-14 | 5/34 |
| 1SBL237201R1400 | AF26-40-00-14 | 5/46 | 1SBN010111R1010 | CC4-10 | 5/33 | 1SFL447001R3311 | AF140-30-11-33 | 5/35 |
| 1SBL237201R4100 | AF26-40-00-41 | 5/46 | 1SBN010120R1011 | CAL4-11 | 5/33 | 1SFL447001R3411 | AF140-30-11-34 | 5/35 |
| 1SBL237501R1200 | AF26-22-00-12 | 5/46 | 1SBN010120T1011 | CAL4-11-T | 5/33 | 1SFL447002R1111 | AF140-30-11B-11 | 5/34 |
| 1SBL237501R1300 | AF26-22-00-13 | 5/46 | 1SBN010140R1004 | CA4-04E | 5/51 | 1SFL447002R1211 | AF140-30-11B-12 | 5/34 |
| 1SBL237501R1400 | AF26-22-00-14 | 5/46 | 1SBN010140R1022 | CA4-22E | 5/33 | 1SFL447002R1311 | AF140-30-11B-13 | 5/34 |
| 1SBL237501R4100 | AF26-22-00-41 | 5/46 | 1SBN010140R1031 | CA4-31E | 5/51 | 1SFL447002R1411 | AF140-30-11B-14 | 5/34 |
| 1SBL276001R2000 | AF30Z-30-00-20 | 5/29 | 1SBN010140R1040 | CA4-40E | 5/51 | 1SFL447002R3311 | AF140-30-11B-33 | 5/35 |
| 1SBL276001R2100 | AF30Z-30-00-21 | 5/4 | 1SBN010140R1122 | CA4-22M | 5/33 | 1SFL447002R3411 | AF140-30-11B-34 | 5/35 |
| 1SBL276001R2200 | AF30Z-30-00-22 | 5/29 | 1SBN010140R1204 | CA4-04N | 5/63 | 1SFL447101R1111 | AF140-40-11-11 | 5/52 |
| 1SBL276001R2300 | AF30Z-30-00-23 | 5/29 | 1SBN010140R1213 | CA4-13N | 5/63 | 1SFL447101R1211 | AF140-40-11-12 | 5/52 |
| 1SBL277001R1200 | AF30-30-00-12 | 5/28 | 1SBN010140R1222 | CA4-22N | 5/63 | 1SFL447101R1311 | AF140-40-11-13 | 5/52 |
| 1SBL277001R1300 | AF30-30-00-13 | 5/4 | 1SBN010140R1231 | CA4-31N | 5/63 | 1SFL447101R1411 | AF140-40-11-14 | 5/52 |
| 1SBL277001R1400 | AF30-30-00-14 | 5/28 | 1SBN010140R1240 | CA4-40N | 5/63 | 1SFL447102R1111 | AF140-40-11B-11 | 5/52 |
| 1SBL277001R4100 | AF30-30-00-41 | 5/28 | 1SBN010140R1322 | CA4-22U | 5/33 | 1SFL447102R1211 | AF140-40-11B-12 | 5/52 |
| 1SBL296001R2000 | AF38Z-30-00-20 | 5/29 | 1SBN010151R1011 | CAT4-11E | 5/33 | 1SFL447102R1311 | AF140-40-11B-13 | 5/52 |
| 1SBL296001R2100 | AF38Z-30-00-21 | 5/16 | 1SBN010151R1111 | CAT4-11M | 5/33 | 1SFL447102R1411 | AF140-40-11B-14 | 5/52 |
| 1SBL296001R2200 | AF38Z-30-00-22 | 5/29 | 1SBN010151R1311 | CAT4-11U | 5/33 | 1SFL467001R1111 | AF146-30-11-11 | 5/34 |
| 1SBL296001R2300 | AF38Z-30-00-23 | 5/29 | 1SBN011010T1001 | CA3-01 | 4/9 | 1SFL467001R1211 | AF146-30-11-12 | 5/34 |
| 1SBL296201R2000 | AF38Z-40-00-20 | 5/47 | 1SBN011010T1010 | CA3-10 | 4/9 | 1SFL467001R1311 | AF146-30-11-13 | 5/34 |
| 1SBL296201R2100 | AF38Z-40-00-21 | 5/47 | 1SBN020112R1000 | TEF4-ON | 5/33 | 1SFL467001R1411 | AF146-30-11-14 | 5/34 |
| 1SBL296201R2200 | AF38Z-40-00-22 | 5/47 | 1SBN020114R1000 | TEF4-OFF | 5/33 | 1SFL467001R3311 | AF146-30-11-33 | 5/35 |
| 1SBL296201R2300 | AF38Z-40-00-23 | 5/47 | 1SBN021012R1000 | TEF3-ON | 4/9 | 1SFL467001R3411 | AF146-30-11-34 | 5/35 |
| 1SBL296501R2000 | AF38Z-22-00-20 | 5/47 | 1SBN021014R1000 | TEF3-OFF | 4/9 | 1SFL467002R1111 | AF146-30-11B-11 | 5/34 |
| 1SBL296501R2100 | AF38Z-22-00-21 | 5/47 | 1SBN030105T1000 | VM4 | 5/33 | 1SFL467002R1211 | AF146-30-11B-12 | 5/34 |
| 1SBL296501R2200 | AF38Z-22-00-22 | 5/47 | 1SBN030111R1000 | VM4 | 5/33 | 1SFL467002R1311 | AF146-30-11B-13 | 5/34 |
| 1SBL296501R2300 | AF38Z-22-00-23 | 5/47 | 1SBN031005T1000 | VM3 | 4/9 | 1SFL467002R1411 | AF146-30-11B-14 | 5/34 |
| 1SBL297001R1200 | AF38-30-00-12 | 5/28 | 1SBN033405T1000 | VM96-4 | 5/33 | 1SFL467002R3311 | AF146-30-11B-33 | 5/35 |
| 1SBL297001R1300 | AF38-30-00-13 | 5/16 | 1SBN050010R1000 | RV5/50 | 4/9 | 1SFL487002R1111 | AF190-30-11-11 | 5/10 |
| 1SBL297001R1400 | AF38-30-00-14 | 5/28 | 1SBN050010R1001 | RV5/133 | 4/9 | 1SFL487002R1211 | AF190-30-11-12 | 5/36 |
| 1SBL297001R4100 | AF38-30-00-41 | 5/28 | 1SBN050010R1002 | RV5/250 | 4/9 | 1SFL487002R1311 | AF190-30-11-13 | 5/10 |
| 1SBL297201R1200 | AF38-40-00-12 | 5/46 | 1SBN050010R1003 | RV5/440 | 4/9 | 1SFL487002R1411 | AF190-30-11-14 | 5/36 |
| 1SBL297201R1300 | AF38-40-00-13 | 5/46 | 1SBN050020R1000 | RT5/32 | 4/9 | 1SFL487002R3311 | AF190-30-11-33 | 5/37 |
| 1SBL297201R1400 | AF38-40-00-14 | 5/46 | 1SBN050020R1001 | RT5/65 | 4/9 | 1SFL487 | | |

Index

Order code classification

| Order code | Type | Page | Order code | Type | Page | Order code | Type | Page |
|-----------------|----------------|------|-----------------|----------------|------|-----------------|------------------|------|
| 1SFL527002R1111 | AF205-30-11-11 | 5/10 | 1SFN085213R1000 | BEY205-4 | 5/24 | GJL1201317R0004 | CA6-11N | 3/17 |
| 1SFL527002R1211 | AF205-30-11-12 | 5/36 | 1SFN085406R1000 | BEA370/T5 | 5/10 | GJL1201330R0001 | CAF6-11K | 3/18 |
| 1SFL527002R1311 | AF205-30-11-13 | 5/10 | 1SFN085411R1000 | BER370-4 | 5/19 | GJL1201330R0002 | CAF6-11E | 3/17 |
| 1SFL527002R1411 | AF205-30-11-14 | 5/36 | 1SFN085413R1000 | BEY265-4 | 5/24 | GJL1201330R0003 | CAF6-11M | 3/17 |
| 1SFL527002R3311 | AF205-30-11-33 | 5/37 | 1SFN085813R1000 | BEY370-4 | 5/24 | GJL1201330R0004 | CAF6-11N | 3/17 |
| 1SFL527002R3411 | AF205-30-11-34 | 5/37 | 1SFN124203R1000 | LT140-30L | 5/39 | GJL1201330R0005 | CAF6-20K | 3/18 |
| 1SFL527102R1111 | AF205-40-11-11 | 5/53 | 1SFN124203R2000 | LT140-40L | 5/55 | GJL1201330R0006 | CAF6-20E | 3/17 |
| 1SFL527102R1211 | AF205-40-11-12 | 5/53 | 1SFN124801R1000 | LT205-30C | 5/39 | GJL1201330R0007 | CAF6-20M | 3/17 |
| 1SFL527102R1311 | AF205-40-11-13 | 5/53 | 1SFN124801R2000 | LT205-40C | 5/55 | GJL1201330R0008 | CAF6-20N | 3/17 |
| 1SFL527102R1411 | AF205-40-11-14 | 5/53 | 1SFN124803R1000 | LT205-30L | 5/39 | GJL1201330R0009 | CAF6-02K | 3/18 |
| 1SFL547002R1111 | AF265-30-11-11 | 5/10 | 1SFN124803R2000 | LT205-40L | 5/55 | GJL1201330R0010 | CAF6-02E | 3/17 |
| 1SFL547002R1211 | AF265-30-11-12 | 5/36 | 1SFN124804R1000 | LT205-30Y | 5/39 | GJL1201330R0011 | CAF6-02M | 3/17 |
| 1SFL547002R1311 | AF265-30-11-13 | 5/10 | 1SFN125401R1000 | LT370-30C | 5/39 | GJL1201330R0012 | CAF6-02N | 3/17 |
| 1SFL547002R1411 | AF265-30-11-14 | 5/36 | 1SFN125401R2000 | LT370-40C | 5/55 | GJL1201906R0001 | LT6-B | 3/17 |
| 1SFL547002R3311 | AF265-30-11-33 | 5/37 | 1SFN125403R1000 | LT370-30L | 5/39 | GJL1201907R0001 | LP6 | 3/17 |
| 1SFL547002R3411 | AF265-30-11-34 | 5/37 | 1SFN125403R2000 | LT370-40L | 5/55 | GJL1201908R0001 | BSM6-30 | 3/17 |
| 1SFL547102R1111 | AF265-40-11-11 | 5/53 | 1SFN125404R1000 | LT370-30Y | 5/39 | GJL1211001R0011 | B6-30-01-01 | 3/4 |
| 1SFL547102R1211 | AF265-40-11-12 | 5/53 | 1SFN125404R2000 | LT370-30D | 5/39 | GJL1211001R0012 | B6-30-01-02 | 3/4 |
| 1SFL547102R1311 | AF265-40-11-13 | 5/53 | 1SFN125701R1000 | LT460-AC | 5/43 | GJL1211001R0013 | B6-30-01-03 | 3/4 |
| 1SFL547102R1411 | AF265-40-11-14 | 5/53 | 1SFN125703R1000 | LT460-AL | 5/43 | GJL1211001R0101 | B6-30-10-01 | 3/4 |
| 1SFL577001R6811 | AF400-30-11 | 5/40 | 1SFN126101R1000 | LT750-AC | 5/43 | GJL1211001R0102 | B6-30-10-02 | 3/4 |
| 1SFL577001R6911 | AF400-30-11 | 5/40 | 1SFN126103R1000 | LT750-AL | 5/43 | GJL1211001R0103 | B6-30-10-03 | 3/4 |
| 1SFL577001R7011 | AF400-30-11 | 5/40 | 1SVR730100R0300 | CT-ERS.21S | 5/22 | GJL1211001R8010 | B6-30-01-80 | 3/4 |
| 1SFL577001R7111 | AF400-30-11 | 5/40 | GHV2501902R0002 | RV-BC6/60 | 3/17 | GJL1211001R8014 | B6-30-01-84 | 3/4 |
| 1SFL587002R1111 | AF305-30-11-11 | 5/10 | GHV2501902R0003 | RV-BC6-F/60 | 3/17 | GJL1211001R8015 | B6-30-01-85 | 3/4 |
| 1SFL587002R1211 | AF305-30-11-12 | 5/36 | GHV2501903R0002 | RV-BC6/250 | 3/17 | GJL1211001R8100 | B6-30-10-80 | 3/4 |
| 1SFL587002R1311 | AF305-30-11-13 | 5/10 | GHV2501903R0003 | RV-BC6-F/250 | 3/17 | GJL1211001R8104 | B6-30-10-84 | 3/4 |
| 1SFL587002R1411 | AF305-30-11-14 | 5/36 | GHV2501904R0002 | RV-BC6/380 | 3/17 | GJL1211001R8105 | B6-30-10-85 | 3/4 |
| 1SFL587002R3311 | AF305-30-11-33 | 5/37 | GHV2501904R0003 | RV-BC6-F/380 | 3/17 | GJL1211201R0001 | B6-40-00-01 | 3/10 |
| 1SFL587002R3411 | AF305-30-11-34 | 5/37 | GJF1101903R0001 | SA1 | 2/16 | GJL1211201R0002 | B6-40-00-02 | 3/10 |
| 1SFL587102R1111 | AF305-40-11-11 | 5/53 | GJF1101903R0002 | SA2 | 2/16 | GJL1211201R0003 | B6-40-00-03 | 3/10 |
| 1SFL587102R1211 | AF305-40-11-12 | 5/53 | GJF1101903R0003 | SA3 | 2/16 | GJL1211201R8000 | B6-40-00-80 | 3/10 |
| 1SFL587102R1311 | AF305-40-11-13 | 5/53 | GJH1211001R0221 | K6-22Z-01 | 3/13 | GJL1211201R8004 | B6-40-00-84 | 3/10 |
| 1SFL587102R1411 | AF305-40-11-14 | 5/53 | GJH1211001R0222 | K6-22Z-02 | 3/13 | GJL1211201R0001 | B6-22-00-01 | 3/10 |
| 1SFL597001R6811 | AF460-30-11 | 5/40 | GJH1211001R0223 | K6-22Z-03 | 3/13 | GJL1211501R0002 | B6-22-00-02 | 3/10 |
| 1SFL597001R6911 | AF460-30-11 | 5/40 | GJH1211001R0311 | K6-31Z-01 | 3/13 | GJL1211501R0003 | B6-22-00-03 | 3/10 |
| 1SFL597001R7011 | AF460-30-11 | 5/40 | GJH1211001R0312 | K6-31Z-02 | 3/13 | GJL1211501R8000 | B6-22-00-80 | 3/10 |
| 1SFL597001R7111 | AF460-30-11 | 5/40 | GJH1211001R0313 | K6-31Z-03 | 3/13 | GJL1211501R8004 | B6-22-00-84 | 3/10 |
| 1SFL607002R1111 | AF370-30-11-11 | 5/12 | GJH1211001R0401 | K6-40E-01 | 3/13 | GJL1211501R0011 | VB6-30-01-01 | 3/6 |
| 1SFL607002R1211 | AF370-30-11-12 | 5/36 | GJH1211001R0402 | K6-40E-02 | 3/13 | GJL1211901R0012 | VB6-30-01-02 | 3/6 |
| 1SFL607002R1311 | AF370-30-11-13 | 5/12 | GJH1211001R0403 | K6-40E-03 | 3/13 | GJL1211901R0013 | VB6-30-01-03 | 3/6 |
| 1SFL607002R1411 | AF370-30-11-14 | 5/36 | GJH1211001R8220 | K6-22Z-80 | 3/13 | GJL1211901R0101 | VB6-30-10-01 | 3/6 |
| 1SFL607002R3311 | AF370-30-11-33 | 5/37 | GJH1211001R8224 | K6-22Z-84 | 3/13 | GJL1211901R0102 | VB6-30-10-02 | 3/6 |
| 1SFL607002R3411 | AF370-30-11-34 | 5/37 | GJH1211001R8225 | K6-22Z-85 | 3/13 | GJL1211901R0103 | VB6-30-10-03 | 3/6 |
| 1SFL607102R1111 | AF370-40-11-11 | 5/53 | GJH1211001R8310 | K6-31Z-80 | 3/13 | GJL1211901R8010 | VB6-30-01-80 | 3/6 |
| 1SFL607102R1211 | AF370-40-11-12 | 5/53 | GJH1211001R8314 | K6-31Z-84 | 3/13 | GJL1211901R8014 | VB6-30-01-84 | 3/6 |
| 1SFL607102R1311 | AF370-40-11-13 | 5/53 | GJH1211001R8315 | K6-31Z-85 | 3/13 | GJL1211901R8015 | VB6-30-01-85 | 3/6 |
| 1SFL607102R1411 | AF370-40-11-14 | 5/53 | GJH1211001R8400 | K6-40E-80 | 3/13 | GJL1211901R8100 | VB6-30-10-80 | 3/6 |
| 1SFL617001R6811 | AF580-30-11 | 5/40 | GJH1211001R8404 | K6-40E-84 | 3/13 | GJL1211901R8104 | VB6-30-10-84 | 3/6 |
| 1SFL617001R6911 | AF580-30-11 | 5/40 | GJH1211001R8405 | K6-40E-85 | 3/13 | GJL1211901R8105 | VB6-30-10-85 | 3/6 |
| 1SFL617001R7011 | AF580-30-11 | 5/40 | GJH1213001R0221 | KC6-22Z-01 | 3/14 | GJL1213001R0011 | BC6-30-01-01 | 3/5 |
| 1SFL617001R7111 | AF580-30-11 | 5/40 | GJH1213001R0223 | KC6-22Z-03 | 3/14 | GJL1213001R0013 | BC6-30-01-03 | 3/5 |
| 1SFL637001R6811 | AF750-30-11 | 5/40 | GJH1213001R0224 | KC6-22Z-04 | 3/14 | GJL1213001R0014 | BC6-30-01-04 | 3/5 |
| 1SFL637001R6911 | AF750-30-11 | 5/40 | GJH1213001R0225 | KC6-22Z-05 | 3/14 | GJL1213001R0015 | BC6-30-01-05 | 3/5 |
| 1SFL637001R7011 | AF750-30-11 | 5/40 | GJH1213001R0227 | KC6-22Z-07 | 3/14 | GJL1213001R0017 | BC6-30-01-07 | 3/5 |
| 1SFL637001R7111 | AF750-30-11 | 5/40 | GJH1213001R0311 | KC6-31Z-01 | 3/14 | GJL1213001R0101 | BC6-30-10-01 | 3/5 |
| 1SFL647001R6811 | AF1250-30-11 | 5/41 | GJH1213001R0313 | KC6-31Z-03 | 3/14 | GJL1213001R0103 | BC6-30-10-03 | 3/5 |
| 1SFL647001R6911 | AF1250-30-11 | 5/41 | GJH1213001R0314 | KC6-31Z-04 | 3/14 | GJL1213001R0104 | BC6-30-10-04 | 3/5 |
| 1SFL647001R7011 | AF1250-30-11 | 5/41 | GJH1213001R0315 | KC6-31Z-05 | 3/14 | GJL1213001R0105 | BC6-30-10-05 | 3/5 |
| 1SFL647001R7111 | AF1250-30-11 | 5/41 | GJH1213001R0317 | KC6-31Z-07 | 3/14 | GJL1213001R0107 | BC6-30-10-07 | 3/5 |
| 1SFL657001R7011 | AF1350-30-11 | 5/41 | GJH1213001R0401 | KC6-40E-01 | 3/14 | GJL1213001R1016 | BC6-30-01-16 | 3/5 |
| 1SFL667001R7011 | AF1650-30-11 | 5/41 | GJH1213001R0403 | KC6-40E-03 | 3/14 | GJL1213001R1106 | BC6-30-10-16 | 3/5 |
| 1SFL677001R7011 | AF1650-30-11 | 5/41 | GJH1213001R0404 | KC6-40E-04 | 3/14 | GJL1213001R5011 | BC6-30-01-2.4-51 | 3/8 |
| 1SFL707001R7011 | AF2050-30-11 | 5/41 | GJH1213001R0405 | KC6-40E-05 | 3/14 | GJL1213001R5101 | BC6-30-10-2.4-51 | 3/8 |
| 1SFN010720R1011 | CAL18-11 | 5/43 | GJH1213001R0407 | KC6-40E-07 | 3/14 | GJL1213001R7011 | B6S-30-01-1.7-71 | 3/8 |
| 1SFN010720R3311 | CAL18-11B | 5/43 | GJH1213001R1226 | KC6-22Z-16 | 3/14 | GJL1213001R7012 | B6S-30-01-2.8-72 | 3/8 |
| 1SFN010820R1011 | CAL19-11 | 5/39 | GJH1213001R1316 | KC6-31Z-16 | 3/14 | GJL1213001R7101 | B6S-30-10-1.7-71 | 3/8 |
| 1SFN010820R3311 | CAL19-11B | 5/39 | GJH1213001R1406 | KC6-40E-16 | 3/14 | GJL1213001R7102 | B6S-30-10-2.8-72 | 3/8 |
| 1SFN030300R1000 | VM19 | 5/39 | GJH1213001R5311 | KC6-31Z-2.4-51 | 3/15 | GJL1213001R8011 | BC6-30-01-1.4-81 | 3/8 |
| 1SFN034403R1000 | VM140/190 | 5/39 | GJH1213001R5401 | KC6-40E-2.4-51 | 3/15 | GJL1213001R8101 | BC6-30-10-1.4-81 | 3/8 |
| 1SFN035203R1000 | VM205/265 | 5/39 | GJH1213001R7221 | K6S-22Z-1.7-71 | 3/15 | GJL1213501R0001 | BC6-22-00-01 | 3/11 |
| 1SFN035700R1000 | VM750H | 5/43 | GJH1213001R7222 | K6S-22Z-2.8-72 | 3/15 | GJL1213501R0002 | BC6-22-00-02 | 3/11 |
| 1SFN036503R1000 | VM1650H | 5/43 | GJH1213001R7311 | K6S-31Z-1.7-71 | 3/15 | GJL1213501R0003 | BC6-22-00-03 | 3/11 |
| 1SFN074207R1000 | LW140 | 5/39 | GJH1213001R7312 | K6S-31Z-2.8-72 | 3/15 | GJL1213501R0004 | BC6-22-00-04 | 3/11 |
| 1SFN074210R1000 | LX140 | 5/39 | GJH1213001R7401 | K6S-40E-1.7-71 | 3/15 | GJL1213501R0005 | BC6-22-00-05 | 3/11 |
| 1SFN074807R1000 | LW205 | 5/39 | GJH1213001R7402 | K6S-40E-2.8-72 | 3/15 | GJL1213501R0007 | BC6-22-00-07 | 3/11 |
| 1SFN074807R2000 | LW205-40 | 5/55 | GJH1213001R8311 | KC6-31Z-1.4-81 | 3/15 | GJL1213501R1006 | BC6-22-00-16 | 3/11 |
| 1SFN074810R1000 | LX205 | 5/39 | GJH1213001R8401 | KC6-40E-1.4-81 | 3/15 | GJL1213901R0011 | VBC6-30-01-01 | 3/7 |
| 1SFN075407R1000 | LW370 | 5/39 | GJH1213061R5221 | TKC6-22Z-51 | 3/16 | GJL1213901R0013 | VBC6-30-01-03 | 3/7 |
| 1SFN075407R2000 | LW370-40 | 5/55 | GJH1213061R5225 | TKC6-22Z-55 | 3/16 | GJL1213901R0014 | VBC6-30-01-04 | 3/7 |
| 1SFN075410R1000 | LX370 | 5/39 | GJH1213061R5311 | TKC6-31Z-51 | 3/16 | GJL1213901R0015 | VBC6-30-01-05 | 3/7 |
| 1SFN075707R1000 | LW460 | 5/43 | GJH1213061R5315 | TKC6-31Z-55 | 3/16 | GJL1213901R0017 | VBC6-30-01-07 | 3/7 |
| 1SFN075710R1000 | LX460 | 5/43 | GJH1213061R5401 | TKC6-40E-51 | 3/16 | GJL1213901R0101 | VBC6-30-10-01 | 3/7 |
| 1SFN076107R1000 | LW750 | 5/43 | GJH1213061R5405 | TKC6-40E-55 | 3/16 | GJL1213901R0103 | VBC6-30-10-03 | 3/7 |
| 1SFN076110R1000 | LX750 | 5/43 | GJH1213061R6222 | TKC6-22Z-62 | 3/16 | GJL1213901R0104 | VBC6-30-10-04 | 3/7 |
| 1SFN076407R1000 | LW1250 | 5/43 | GJH1213061R6228 | TKC6-22Z-68 | 3/16 | GJL1213901R0105 | VBC6-30-10-05 | 3/7 |
| 1SFN084206R1000 | BEA140/XT2 | 5/10 | GJH1213061R6312 | TKC6-31Z-62 | 3/16 | GJL1213901R0107 | VBC6-30-10-07 | 3/7 |
| 1SFN084211R1000 | BER140-4 | 5/17 | GJH1213061R6318 | TKC6-31Z-68 | 3/16 | GJL1213901R1016 | VBC6-30-01-16 | 3/7 |
| 1SFN084413R1000 | BEY140-4 | 5/22 | GJH1213061R6402 | TKC6-40E-62 | 3/16 | GJL1213901R1106 | VBC6-30-10-16 | 3/7 |
| 1SFN084806R1000 | BEA205/XT4 | 5/12 | GJH1213061R6408 | TKC6-40E-68 | 3/16 | GJL1311001R0011 | B7-30-01-01 | 3/4 |
| 1SFN084806R1001 | BEA205/T4 | 5/10 | GJL1201317R0001 | CA6-11K | 3/18 | GJL1311001R0012 | B7-30-01-02 | 3/4 |
| 1SFN084811R1000 | BER205-4 | 5/17 | GJL1201317R0002 | CA6-11E | 3/17 | GJL1311001R0013 | B7-30-01-03 | 3/4 |
| 1SFN084813R1000 | BEY190-4 | 5/ | | | | | | |

Index

Type classification

| Type | Order code | Page | Type | Order code | Page | Type | Order code | Page |
|-----------------|------------------|------|------|------------|------|------|------------|------|
| GJL1311001R0102 | B7-30-10-02 | 3/4 | | | | | | |
| GJL1311001R0103 | B7-30-10-03 | 3/4 | | | | | | |
| GJL1311001R8010 | B7-30-01-80 | 3/4 | | | | | | |
| GJL1311001R8014 | B7-30-01-84 | 3/4 | | | | | | |
| GJL1311001R8015 | B7-30-01-85 | 3/4 | | | | | | |
| GJL1311001R8100 | B7-30-10-80 | 3/4 | | | | | | |
| GJL1311001R8104 | B7-30-10-84 | 3/4 | | | | | | |
| GJL1311001R8105 | B7-30-10-85 | 3/4 | | | | | | |
| GJL1311201R0001 | B7-40-00-01 | 3/10 | | | | | | |
| GJL1311201R0002 | B7-40-00-02 | 3/10 | | | | | | |
| GJL1311201R0003 | B7-40-00-03 | 3/10 | | | | | | |
| GJL1311201R8000 | B7-40-00-80 | 3/10 | | | | | | |
| GJL1311201R8004 | B7-40-00-84 | 3/10 | | | | | | |
| GJL1311501R0001 | B7-22-00-01 | 3/10 | | | | | | |
| GJL1311501R0002 | B7-22-00-02 | 3/10 | | | | | | |
| GJL1311501R0003 | B7-22-00-03 | 3/10 | | | | | | |
| GJL1311501R8000 | B7-22-00-80 | 3/10 | | | | | | |
| GJL1311501R8004 | B7-22-00-84 | 3/10 | | | | | | |
| GJL1311901R0011 | VB7-30-01-01 | 3/6 | | | | | | |
| GJL1311901R0012 | VB7-30-01-02 | 3/6 | | | | | | |
| GJL1311901R0013 | VB7-30-01-03 | 3/6 | | | | | | |
| GJL1311901R0101 | VB7-30-10-01 | 3/6 | | | | | | |
| GJL1311901R0102 | VB7-30-10-02 | 3/6 | | | | | | |
| GJL1311901R0103 | VB7-30-10-03 | 3/6 | | | | | | |
| GJL1311901R8010 | VB7-30-01-80 | 3/6 | | | | | | |
| GJL1311901R8014 | VB7-30-01-84 | 3/6 | | | | | | |
| GJL1311901R8015 | VB7-30-01-85 | 3/6 | | | | | | |
| GJL1311901R8100 | VB7-30-10-80 | 3/6 | | | | | | |
| GJL1311901R8104 | VB7-30-10-84 | 3/6 | | | | | | |
| GJL1311901R8105 | VB7-30-10-85 | 3/6 | | | | | | |
| GJL1313001R0011 | BC7-30-01-01 | 3/5 | | | | | | |
| GJL1313001R0013 | BC7-30-01-03 | 3/5 | | | | | | |
| GJL1313001R0014 | BC7-30-01-04 | 3/5 | | | | | | |
| GJL1313001R0015 | BC7-30-01-05 | 3/5 | | | | | | |
| GJL1313001R0017 | BC7-30-01-07 | 3/5 | | | | | | |
| GJL1313001R0101 | BC7-30-10-01 | 3/5 | | | | | | |
| GJL1313001R0104 | BC7-30-10-04 | 3/5 | | | | | | |
| GJL1313001R0105 | BC7-30-10-05 | 3/5 | | | | | | |
| GJL1313001R0107 | BC7-30-10-07 | 3/5 | | | | | | |
| GJL1313001R1016 | BC7-30-01-16 | 3/5 | | | | | | |
| GJL1313001R1103 | BC7-30-10-03 | 3/5 | | | | | | |
| GJL1313001R1106 | BC7-30-10-16 | 3/5 | | | | | | |
| GJL1313001R5011 | BC7-30-01-2.4-51 | 3/8 | | | | | | |
| GJL1313001R5101 | BC7-30-10-2.4-51 | 3/8 | | | | | | |
| GJL1313001R7011 | B7S-30-01-1.7-71 | 3/8 | | | | | | |
| GJL1313001R7012 | B7S-30-01-2.8-72 | 3/8 | | | | | | |
| GJL1313001R7101 | B7S-30-10-1.7-71 | 3/8 | | | | | | |
| GJL1313001R7102 | B7S-30-10-2.8-72 | 3/8 | | | | | | |
| GJL1313001R8011 | BC7-30-01-1.4-81 | 3/8 | | | | | | |
| GJL1313001R8101 | BC7-30-10-1.4-81 | 3/8 | | | | | | |
| GJL1313061R5011 | TBC7-30-01-51 | 3/9 | | | | | | |
| GJL1313061R5015 | TBC7-30-01-55 | 3/9 | | | | | | |
| GJL1313061R5101 | TBC7-30-10-51 | 3/9 | | | | | | |
| GJL1313061R5105 | TBC7-30-10-55 | 3/9 | | | | | | |
| GJL1313061R6012 | TBC7-30-01-62 | 3/9 | | | | | | |
| GJL1313061R6018 | TBC7-30-01-68 | 3/9 | | | | | | |
| GJL1313061R6102 | TBC7-30-10-62 | 3/9 | | | | | | |
| GJL1313061R6108 | TBC7-30-10-68 | 3/9 | | | | | | |
| GJL1313461R5005 | TBC7-31-00-55 | 3/12 | | | | | | |
| GJL1313461R6002 | TBC7-31-00-62 | 3/12 | | | | | | |
| GJL1313461R6008 | TBC7-31-00-68 | 3/12 | | | | | | |
| GJL1313561R5005 | TBC7-22-00-55 | 3/12 | | | | | | |
| GJL1313561R6002 | TBC7-22-00-62 | 3/12 | | | | | | |
| GJL1313561R6008 | TBC7-22-00-68 | 3/12 | | | | | | |
| GJL1313901R0011 | VBC7-30-01-01 | 3/7 | | | | | | |
| GJL1313901R0013 | VBC7-30-01-03 | 3/7 | | | | | | |
| GJL1313901R0014 | VBC7-30-01-04 | 3/7 | | | | | | |
| GJL1313901R0015 | VBC7-30-01-05 | 3/7 | | | | | | |
| GJL1313901R0017 | VBC7-30-01-07 | 3/7 | | | | | | |
| GJL1313901R0101 | VBC7-30-10-01 | 3/7 | | | | | | |
| GJL1313901R0103 | VBC7-30-10-03 | 3/7 | | | | | | |
| GJL1313901R0104 | VBC7-30-10-04 | 3/7 | | | | | | |
| GJL1313901R0105 | VBC7-30-10-05 | 3/7 | | | | | | |
| GJL1313901R0107 | VBC7-30-10-07 | 3/7 | | | | | | |
| GJL1313901R1016 | VBC7-30-01-16 | 3/7 | | | | | | |
| GJL1313901R1106 | VBC7-30-10-16 | 3/7 | | | | | | |
| GJL1317001R0011 | B7D-30-01-01 | 3/5 | | | | | | |
| GJL1317001R0015 | B7D-30-01-05 | 3/5 | | | | | | |
| GJL1317001R0101 | B7D-30-10-01 | 3/5 | | | | | | |
| GJL1317001R0105 | B7D-30-10-05 | 3/5 | | | | | | |
| GJL1317201R0001 | B7D-40-00-01 | 3/11 | | | | | | |
| GJL1317201R0005 | B7D-40-00-05 | 3/11 | | | | | | |

Index

Type classification

| Type | Order code | Page | Type | Order code | Page | Type | Order code | Page |
|------------------|-----------------|------|-----------------|-----------------|------|----------------|-----------------|------|
| AA1-110 | 1SAM201910R1002 | 2/14 | AF140-40-11-13 | 1SFL447101R1311 | 5/52 | AF265-40-11-14 | 1SFL547102R1411 | 5/53 |
| AA1-230 | 1SAM201910R1003 | 2/14 | AF140-40-11-14 | 1SFL447101R1411 | 5/52 | AF26Z-22-00-20 | 1SBL236501R2000 | 5/47 |
| AA1-24 | 1SAM201910R1001 | 2/14 | AF140-40-11B-11 | 1SFL447102R1111 | 5/52 | AF26Z-22-00-21 | 1SBL236501R2100 | 5/47 |
| AA1-400 | 1SAM201910R1004 | 2/14 | AF140-40-11B-12 | 1SFL447102R1211 | 5/52 | AF26Z-22-00-22 | 1SBL236501R2200 | 5/47 |
| AA4-110 | 1SAM401907R1002 | 2/23 | AF140-40-11B-13 | 1SFL447102R1311 | 5/52 | AF26Z-22-00-23 | 1SBL236501R2300 | 5/47 |
| AA4-230 | 1SAM401907R1003 | 2/23 | AF140-40-11B-14 | 1SFL447102R1411 | 5/52 | AF26Z-30-00-20 | 1SBL236001R2000 | 5/29 |
| AA4-24 | 1SAM401907R1001 | 2/23 | AF146-30-11-11 | 1SFL467001R1111 | 5/34 | AF26Z-30-00-21 | 1SBL236001R2100 | 5/4 |
| AA4-400 | 1SAM401907R1004 | 2/23 | AF146-30-11-12 | 1SFL467001R1211 | 5/34 | AF26Z-30-00-22 | 1SBL236001R2200 | 5/29 |
| AF09-22-00-12 | 1SBL137501R1200 | 5/46 | AF146-30-11-13 | 1SFL467001R1311 | 5/34 | AF26Z-30-00-23 | 1SBL236001R2300 | 5/29 |
| AF09-22-00-13 | 1SBL137501R1300 | 5/46 | AF146-30-11-14 | 1SFL467001R1411 | 5/34 | AF26Z-40-00-20 | 1SBL236201R2000 | 5/47 |
| AF09-22-00-14 | 1SBL137501R1400 | 5/46 | AF146-30-11-33 | 1SFL467001R3311 | 5/35 | AF26Z-40-00-21 | 1SBL236201R2100 | 5/47 |
| AF09-22-00-41 | 1SBL137501R4100 | 5/46 | AF146-30-11-34 | 1SFL467001R3411 | 5/35 | AF26Z-40-00-22 | 1SBL236201R2200 | 5/47 |
| AF09-30-01-12 | 1SBL137001R1201 | 5/28 | AF146-30-11B-11 | 1SFL467002R1111 | 5/34 | AF26Z-40-00-23 | 1SBL236201R2300 | 5/47 |
| AF09-30-01-13 | 1SBL137001R1301 | 5/28 | AF146-30-11B-12 | 1SFL467002R1211 | 5/34 | AF30-30-00-12 | 1SBL277001R1200 | 5/28 |
| AF09-30-01-14 | 1SBL137001R1401 | 5/28 | AF146-30-11B-13 | 1SFL467002R1311 | 5/34 | AF30-30-00-13 | 1SBL277001R1300 | 5/4 |
| AF09-30-01-41 | 1SBL137001R4101 | 5/28 | AF146-30-11B-14 | 1SFL467002R1411 | 5/34 | AF30-30-00-14 | 1SBL277001R1400 | 5/28 |
| AF09-30-10-12 | 1SBL137001R1210 | 5/28 | AF146-30-11B-33 | 1SFL467002R3311 | 5/35 | AF30-30-00-41 | 1SBL277001R4100 | 5/28 |
| AF09-30-10-13 | 1SBL137001R1310 | 5/4 | AF16-22-00-12 | 1SBL177501R1200 | 5/46 | AF305-30-11-11 | 1SFL587002R1111 | 5/10 |
| AF09-30-10-14 | 1SBL137001R1410 | 5/28 | AF16-22-00-13 | 1SBL177501R1300 | 5/46 | AF305-30-11-12 | 1SFL587002R1211 | 5/36 |
| AF09-30-10-41 | 1SBL137001R4110 | 5/28 | AF16-22-00-14 | 1SBL177501R1400 | 5/46 | AF305-30-11-13 | 1SFL587002R1311 | 5/10 |
| AF09Z-40-00-12 | 1SBL136501R1200 | 5/46 | AF16-22-00-41 | 1SBL177501R4100 | 5/46 | AF305-40-11-14 | 1SFL587002R1411 | 5/36 |
| AF09-40-00-13 | 1SBL137201R1300 | 5/46 | AF16-30-01-12 | 1SBL177001R1201 | 5/28 | AF305-30-11-33 | 1SFL587002R3311 | 5/37 |
| AF09-40-00-14 | 1SBL137201R1400 | 5/46 | AF16-30-01-13 | 1SBL177001R1301 | 5/28 | AF305-30-11-34 | 1SFL587002R3411 | 5/37 |
| AF09-40-00-41 | 1SBL137201R4100 | 5/46 | AF16-30-01-14 | 1SBL177001R1401 | 5/28 | AF305-40-11-11 | 1SFL587102R1111 | 5/53 |
| AF09Z-22-00-20 | 1SBL136501R2000 | 5/47 | AF16-30-01-41 | 1SBL177001R4101 | 5/28 | AF305-40-11-12 | 1SFL587102R1211 | 5/53 |
| AF09Z-22-00-21 | 1SBL136501R2100 | 5/47 | AF16-30-10-12 | 1SBL177001R1210 | 5/28 | AF305-40-11-13 | 1SFL587102R1311 | 5/53 |
| AF09Z-22-00-22 | 1SBL136501R2200 | 5/47 | AF16-30-10-13 | 1SBL177001R1310 | 5/4 | AF305-40-11-14 | 1SFL587102R1411 | 5/53 |
| AF09Z-22-00-23 | 1SBL136501R2300 | 5/47 | AF16-30-10-14 | 1SBL177001R1410 | 5/28 | AF30Z-30-00-20 | 1SBL276001R2000 | 5/29 |
| AF09Z-30-01-20 | 1SBL136001R2001 | 5/29 | AF16-30-10-41 | 1SBL177001R4110 | 5/28 | AF30Z-30-00-21 | 1SBL276001R2100 | 5/4 |
| AF09Z-30-01-21 | 1SBL136001R2101 | 5/29 | AF16-40-00-12 | 1SBL177201R1200 | 5/46 | AF30Z-30-00-22 | 1SBL276001R2200 | 5/29 |
| AF09Z-30-01-22 | 1SBL136001R2201 | 5/29 | AF16-40-00-13 | 1SBL177201R1300 | 5/46 | AF30Z-30-00-23 | 1SBL276001R2300 | 5/29 |
| AF09Z-30-01-23 | 1SBL136001R2301 | 5/29 | AF16-40-00-14 | 1SBL177201R1400 | 5/46 | AF370-30-11-11 | 1SFL607002R1111 | 5/12 |
| AF09Z-30-10-20 | 1SBL136001R2010 | 5/29 | AF16-40-00-41 | 1SBL177201R4100 | 5/46 | AF370-30-11-12 | 1SFL607002R1211 | 5/36 |
| AF09Z-30-10-21 | 1SBL136001R2110 | 5/4 | AF1650-30-11 | 1SFL677001R7011 | 5/41 | AF370-30-11-13 | 1SFL607002R1311 | 5/12 |
| AF09Z-30-10-22 | 1SBL136001R2210 | 5/29 | AF16Z-22-00-20 | 1SBL176501R2000 | 5/47 | AF370-30-11-14 | 1SFL607002R1411 | 5/36 |
| AF09Z-30-10-23 | 1SBL136001R2310 | 5/29 | AF16Z-22-00-21 | 1SBL176501R2100 | 5/47 | AF370-30-11-33 | 1SFL607002R3311 | 5/37 |
| AF09Z-40-00-20 | 1SBL136201R2000 | 5/47 | AF16Z-22-00-22 | 1SBL176501R2200 | 5/47 | AF370-30-11-34 | 1SFL607002R3411 | 5/37 |
| AF09Z-40-00-21 | 1SBL136201R2100 | 5/47 | AF16Z-22-00-23 | 1SBL176501R2300 | 5/47 | AF370-40-11-11 | 1SFL607102R1111 | 5/53 |
| AF09Z-40-00-22 | 1SBL136201R2200 | 5/47 | AF16Z-30-01-20 | 1SBL176001R2001 | 5/29 | AF370-40-11-12 | 1SFL607102R1211 | 5/53 |
| AF09Z-40-00-23 | 1SBL136201R2300 | 5/47 | AF16Z-30-01-21 | 1SBL176001R2101 | 5/29 | AF370-40-11-13 | 1SFL607102R1311 | 5/53 |
| AF116-30-11-11 | 1SFL427001R1111 | 5/10 | AF16Z-30-01-22 | 1SBL176001R2201 | 5/29 | AF370-40-11-14 | 1SFL607102R1411 | 5/53 |
| AF116-30-11-11 (| 1SFL427001R1111 | 5/22 | AF16Z-30-01-23 | 1SBL176001R2301 | 5/29 | AF38-22-00-12 | 1SBL297501R1200 | 5/46 |
| AF116-30-11-12 | 1SFL427001R1211 | 5/34 | AF16Z-30-10-20 | 1SBL176001R2010 | 5/29 | AF38-22-00-13 | 1SBL297501R1300 | 5/46 |
| AF116-30-11-13 | 1SFL427001R1311 | 5/10 | AF16Z-30-10-21 | 1SBL176001R2110 | 5/4 | AF38-22-00-14 | 1SBL297501R1400 | 5/46 |
| AF116-30-11-14 | 1SFL427001R1411 | 5/34 | AF16Z-30-10-22 | 1SBL176001R2210 | 5/29 | AF38-22-00-41 | 1SBL297501R4100 | 5/46 |
| AF116-30-11-33 | 1SFL427001R3311 | 5/35 | AF16Z-30-10-23 | 1SBL176001R2310 | 5/29 | AF38-30-00-12 | 1SBL297001R1200 | 5/28 |
| AF116-30-11-34 | 1SFL427001R3411 | 5/35 | AF16Z-40-00-20 | 1SBL176201R2000 | 5/47 | AF38-30-00-13 | 1SBL297001R1300 | 5/16 |
| AF116-30-11B-11 | 1SFL427002R1111 | 5/34 | AF16Z-40-00-21 | 1SBL176201R2100 | 5/47 | AF38-30-00-14 | 1SBL297001R1400 | 5/28 |
| AF116-30-11B-12 | 1SFL427002R1211 | 5/34 | AF16Z-40-00-22 | 1SBL176201R2200 | 5/47 | AF38-30-00-41 | 1SBL297001R4100 | 5/28 |
| AF116-30-11B-13 | 1SFL427002R1311 | 5/34 | AF16Z-40-00-23 | 1SBL176201R2300 | 5/47 | AF38-40-00-12 | 1SBL297201R1200 | 5/46 |
| AF116-30-11B-14 | 1SFL427002R1411 | 5/34 | AF190-30-11-11 | 1SFL487002R1111 | 5/10 | AF38-40-00-13 | 1SBL297201R1300 | 5/46 |
| AF116-30-11B-33 | 1SFL427002R3311 | 5/35 | AF190-30-11-12 | 1SFL487002R1211 | 5/36 | AF38-40-00-14 | 1SBL297201R1400 | 5/46 |
| AF116-30-11B-34 | 1SFL427002R3411 | 5/35 | AF190-30-11-13 | 1SFL487002R1311 | 5/10 | AF38-40-00-41 | 1SBL297201R4100 | 5/46 |
| AF116-40-11-11 | 1SFL427101R1111 | 5/52 | AF190-30-11-14 | 1SFL487002R1411 | 5/36 | AF38Z-22-00-20 | 1SBL296501R2000 | 5/47 |
| AF116-40-11-12 | 1SFL427101R1211 | 5/52 | AF190-30-11-33 | 1SFL487002R3311 | 5/37 | AF38Z-22-00-21 | 1SBL296501R2100 | 5/47 |
| AF116-40-11-13 | 1SFL427101R1311 | 5/52 | AF190-30-11-34 | 1SFL487002R3411 | 5/37 | AF38Z-22-00-22 | 1SBL296501R2200 | 5/47 |
| AF116-40-11-14 | 1SFL427101R1411 | 5/52 | AF190-40-11-11 | 1SFL487102R1111 | 5/53 | AF38Z-22-00-23 | 1SBL296501R2300 | 5/47 |
| AF116-40-11B-11 | 1SFL427102R1111 | 5/52 | AF190-40-11-12 | 1SFL487102R1211 | 5/53 | AF38Z-30-00-20 | 1SBL296001R2000 | 5/29 |
| AF116-40-11B-12 | 1SFL427102R1211 | 5/52 | AF190-40-11-13 | 1SFL487102R1311 | 5/53 | AF38Z-30-00-21 | 1SBL296001R2100 | 5/16 |
| AF116-40-11B-13 | 1SFL427102R1311 | 5/52 | AF190-40-11-14 | 1SFL487102R1411 | 5/53 | AF38Z-30-00-22 | 1SBL296001R2200 | 5/29 |
| AF116-40-11B-14 | 1SFL427102R1411 | 5/52 | AF2050-30-11 | 1SFL707001R7011 | 5/41 | AF38Z-30-00-23 | 1SBL296001R2300 | 5/29 |
| AF12-30-01-12 | 1SBL157001R1201 | 5/28 | AF205-30-11-11 | 1SFL527002R1111 | 5/10 | AF38Z-40-00-20 | 1SBL296201R2000 | 5/47 |
| AF12-30-01-13 | 1SBL157001R1301 | 5/28 | AF205-30-11-12 | 1SFL527002R1211 | 5/36 | AF38Z-40-00-21 | 1SBL296201R2100 | 5/47 |
| AF12-30-01-14 | 1SBL157001R1401 | 5/28 | AF205-30-11-13 | 1SFL527002R1311 | 5/10 | AF38Z-40-00-22 | 1SBL296201R2200 | 5/47 |
| AF12-30-01-41 | 1SBL157001R4101 | 5/28 | AF205-30-11-14 | 1SFL527002R1411 | 5/36 | AF38Z-40-00-23 | 1SBL296201R2300 | 5/47 |
| AF12-30-10-12 | 1SBL157001R1210 | 5/28 | AF205-30-11-33 | 1SFL527002R3311 | 5/37 | AF400-30-11 | 1SFL577001R6811 | 5/40 |
| AF12-30-10-13 | 1SBL157001R1310 | 5/4 | AF205-30-11-34 | 1SFL527002R3411 | 5/37 | AF40-22-00-11 | 1SBL347501R1100 | 5/48 |
| AF12-30-10-14 | 1SBL157001R1410 | 5/28 | AF205-40-11-11 | 1SFL527102R1111 | 5/53 | AF40-22-00-12 | 1SBL347501R1200 | 5/48 |
| AF12-30-10-41 | 1SBL157001R4110 | 5/28 | AF205-40-11-12 | 1SFL527102R1211 | 5/53 | AF40-22-00-13 | 1SBL347501R1300 | 5/48 |
| AF1250-30-11 | 1SFL647001R6811 | 5/41 | AF205-40-11-13 | 1SFL527102R1311 | 5/53 | AF40-22-00-14 | 1SBL347501R1400 | 5/48 |
| AF12Z-30-01-20 | 1SBL156001R2001 | 5/29 | AF205-40-11-14 | 1SFL527102R1411 | 5/53 | AF40-22-00-41 | 1SBL347501R4100 | 5/48 |
| AF12Z-30-01-21 | 1SBL156001R2101 | 5/29 | AF26-22-00-12 | 1SBL237501R1200 | 5/46 | AF40-30-00-11 | 1SBL347001R1100 | 5/4 |
| AF12Z-30-01-22 | 1SBL156001R2201 | 5/29 | AF26-22-00-13 | 1SBL237501R1300 | 5/46 | AF40-30-00-12 | 1SBL347001R1200 | 5/30 |
| AF12Z-30-01-23 | 1SBL156001R2301 | 5/29 | AF26-22-00-14 | 1SBL237501R1400 | 5/46 | AF40-30-00-13 | 1SBL347001R1300 | 5/4 |
| AF12Z-30-10-20 | 1SBL156001R2010 | 5/29 | AF26-22-00-41 | 1SBL237501R4100 | 5/46 | AF40-30-00-14 | 1SBL347001R1400 | 5/30 |
| AF12Z-30-10-21 | 1SBL156001R2110 | 5/4 | AF26-30-00-12 | 1SBL237001R1200 | 5/28 | AF40-30-00-41 | 1SBL347001R4100 | 5/30 |
| AF12Z-30-10-22 | 1SBL156001R2210 | 5/29 | AF26-30-00-13 | 1SBL237001R1300 | 5/4 | AF40-40-00-11 | 1SBL347201R1100 | 5/48 |
| AF12Z-30-10-23 | 1SBL156001R2310 | 5/29 | AF26-30-00-14 | 1SBL237001R1400 | 5/28 | AF40-40-00-12 | 1SBL347201R1200 | 5/48 |
| AF1350-30-11 | 1SFL657001R7011 | 5/41 | AF26-30-00-41 | 1SBL237001R4100 | 5/28 | AF40-40-00-13 | 1SBL347201R1300 | 5/48 |
| AF140-30-11-11 | 1SFL447001R1111 | 5/10 | AF26-40-00-12 | 1SBL237201R1200 | 5/46 | AF40-40-00-14 | 1SBL347201R1400 | 5/48 |
| AF140-30-11-12 | 1SFL447001R1211 | 5/34 | AF26-40-00-13 | 1SBL237201R1300 | 5/46 | AF40-40-00-41 | 1SBL347201R4100 | 5/48 |
| AF140-30-11-13 | 1SFL447001R1311 | 5/10 | AF26-40-00-14 | 1SBL237201R1400 | 5/46 | AF460-30-11 | 1SFL597001R6811 | 5/40 |
| AF140-30-11-14 | 1SFL447001R1411 | 5/34 | AF26-40-00-41 | 1SBL237201R4100 | 5/46 | AF52-30-00-11 | 1SFL367001R1100 | 5/4 |
| AF140-30-11-33 | 1SFL447001R3311 | 5/35 | AF2650-30-11 | 1SFL667001R7011 | 5/41 | AF52-30-00-12 | 1SBL367001R1200 | 5/30 |
| AF140-30-11-34 | 1SFL447001R3411 | 5/35 | AF265-30-11-11 | 1SFL547002R1111 | 5/10 | AF52-30-00-13 | 1SBL367001R1300 | 5/4 |
| AF140-30-11B-11 | 1SFL447002R1111 | 5/34 | AF265-30-11-12 | 1SFL547002R1211 | 5/36 | AF52-30-00-14 | 1SBL367001R1400 | 5/30 |
| AF140-30-11B-12 | 1SFL447002R1211 | 5/34 | AF2 | | | | | |

Index

Type classification

| Type | Order code | Page | Type | Order code | Page | Type | Order code | Page |
|----------------|-----------------|------|------------------|-----------------|------|------------------|------------------|------|
| AF65-30-00-11 | 1SBL387001R1100 | 5/4 | ASL16-30-32-81 | 1SBL123001R8132 | 4/7 | BC7-30-10-03 | GJL1313001R1103 | 3/5 |
| AF65-30-00-12 | 1SBL387001R1200 | 5/30 | ASL16-30-32-83 | 1SBL123001R8332 | 4/7 | BC7-30-10-04 | GJL1313001R0104 | 3/5 |
| AF65-30-00-13 | 1SBL387001R1300 | 5/4 | ASL16-30-32-86 | 1SBL123001R8632 | 4/7 | BC7-30-10-05 | GJL1313001R0105 | 3/5 |
| AF65-30-00-14 | 1SBL387001R1400 | 5/30 | ASL16-30-32-88 | 1SBL123001R8832 | 4/7 | BC7-30-10-07 | GJL1313001R0107 | 3/5 |
| AF65-30-00-41 | 1SBL387001R4100 | 5/30 | B6-22-00-01 | GJL1211501R0001 | 3/10 | BC7-30-10-1.4-81 | GJL1313001R8101 | 3/8 |
| AF750-30-11 | 1SFL637001R6811 | 5/40 | B6-22-00-02 | GJL1211501R0002 | 3/10 | BC7-30-10-16 | GJL1313001R1106 | 3/5 |
| AF80-22-00-11 | 1SBL397501R1100 | 5/48 | B6-22-00-03 | GJL1211501R0003 | 3/10 | BC7-30-10-2.4-51 | GJL1313001R5101 | 3/8 |
| AF80-22-00-12 | 1SBL397501R1200 | 5/48 | B6-22-00-80 | GJL1211501R8000 | 3/10 | BEA140/XT2 | 1SFN084206R1000 | 5/10 |
| AF80-22-00-13 | 1SBL397501R1300 | 5/48 | B6-22-00-84 | GJL1211501R8004 | 3/10 | BEA16-3 | 1SBN081006T1000 | 4/9 |
| AF80-22-00-14 | 1SBL397501R1400 | 5/48 | B6-30-01-01 | GJL1211001R0011 | 3/4 | BEA16-4 | 1SBN081306T1000 | 5/33 |
| AF80-22-00-41 | 1SBL397501R4100 | 5/48 | B6-30-01-02 | GJL1211001R0012 | 3/4 | BEA205/T4 | 1SFN084806R1001 | 5/10 |
| AF80-30-00-11 | 1SBL397001R1100 | 5/4 | B6-30-01-03 | GJL1211001R0013 | 3/4 | BEA205/XT4 | 1SFN084806R1000 | 5/12 |
| AF80-30-00-12 | 1SBL397001R1200 | 5/30 | B6-30-01-80 | GJL1211001R8010 | 3/4 | BEA26-4 | 1SBN082306T1000 | 5/33 |
| AF80-30-00-13 | 1SBL397001R1300 | 5/4 | B6-30-01-84 | GJL1211001R8014 | 3/4 | BEA370/T5 | 1SFN085406R1000 | 5/10 |
| AF80-30-00-14 | 1SBL397001R1400 | 5/30 | B6-30-01-85 | GJL1211001R8015 | 3/4 | BEA38-4 | 1SBN082306T2000 | 5/33 |
| AF80-30-00-41 | 1SBL397001R4100 | 5/30 | B6-30-10-01 | GJL1211001R0101 | 3/4 | BEA65-4 | 1SBN083406R1000 | 5/33 |
| AF80-40-00-11 | 1SBL397201R1100 | 5/48 | B6-30-10-02 | GJL1211001R0102 | 3/4 | BEA7/132 | 1SBN080906R1002 | 3/17 |
| AF80-40-00-12 | 1SBL397201R1200 | 5/48 | B6-30-10-03 | GJL1211001R0103 | 3/4 | BEA7/325 | 1SBN080906R1001 | 3/17 |
| AF80-40-00-13 | 1SBL397201R1300 | 5/48 | B6-30-10-80 | GJL1211001R8100 | 3/4 | BER140-4 | 1SFN084211R1000 | 5/17 |
| AF80-40-00-14 | 1SBL397201R1400 | 5/48 | B6-30-10-84 | GJL1211001R8104 | 3/4 | BER16-4 | 1SBN081311R1000 | 5/33 |
| AF80-40-00-41 | 1SBL397201R4100 | 5/48 | B6-30-10-85 | GJL1211001R8105 | 3/4 | BER16C-3 | 1SBN081012R1000 | 4/9 |
| AF96-30-00-11 | 1SBL407001R1100 | 5/4 | B6-40-00-01 | GJL1211201R0001 | 3/10 | BER205-4 | 1SFN084811R1000 | 5/17 |
| AF96-30-00-12 | 1SBL407001R1200 | 5/30 | B6-40-00-02 | GJL1211201R0002 | 3/10 | BER370-4 | 1SFN085411R1000 | 5/19 |
| AF96-30-00-13 | 1SBL407001R1300 | 5/4 | B6-40-00-03 | GJL1211201R0003 | 3/10 | BER38-4 | 1SBN082311R1000 | 5/33 |
| AF96-30-00-14 | 1SBL407001R1400 | 5/30 | B6-40-00-80 | GJL1211201R8000 | 3/10 | BER65-4 | 1SBN083411R1000 | 5/33 |
| AF96-30-00-41 | 1SBL407001R4100 | 5/30 | B6-40-00-84 | GJL1211201R8004 | 3/10 | BER96-4 | 1SBN083911R1000 | 5/33 |
| AS09-30-01-16 | 1SBL101001R1601 | 4/4 | B6S-30-01-1.7-71 | GJL1213001R7011 | 3/8 | BEY140-4 | 1SFN084413R1000 | 5/22 |
| AS09-30-01-20 | 1SBL101001R2001 | 4/4 | B6S-30-01-2.8-72 | GJL1213001R7012 | 3/8 | BEY16-4 | 1SBN081313R2000 | 5/33 |
| AS09-30-01-26 | 1SBL101001R2601 | 4/4 | B6S-30-10-1.7-71 | GJL1213001R7101 | 3/8 | BEY16C-3 | 1SBN081018R2000 | 4/9 |
| AS09-30-01-28 | 1SBL101001R2801 | 4/4 | B6S-30-10-2.8-72 | GJL1213001R7102 | 3/8 | BEY190-4 | 1SFN084813R1000 | 5/22 |
| AS09-30-10-16 | 1SBL101001R1610 | 4/4 | B7-22-00-01 | GJL1311501R0001 | 3/10 | BEY205-4 | 1SFN085213R1000 | 5/24 |
| AS09-30-10-20 | 1SBL101001R2010 | 4/4 | B7-22-00-02 | GJL1311501R0002 | 3/10 | BEY265-4 | 1SFN085413R1000 | 5/24 |
| AS09-30-10-26 | 1SBL101001R2610 | 4/4 | B7-22-00-03 | GJL1311501R0003 | 3/10 | BEY370-4 | 1SFN085813R1000 | 5/24 |
| AS09-30-10-28 | 1SBL101001R2810 | 4/4 | B7-22-00-80 | GJL1311501R8000 | 3/10 | BEY38-4 | 1SBN082713R2000 | 5/33 |
| AS09-30-32-16 | 1SBL101001R1632 | 4/6 | B7-22-00-84 | GJL1311501R8004 | 3/10 | BEY65-4 | 1SBN083413R2000 | 5/33 |
| AS09-30-32-20 | 1SBL101001R2032 | 4/6 | B7-30-01-01 | GJL1311001R0011 | 3/4 | BEY96-4 | 1SBN083913R2000 | 5/33 |
| AS09-30-32-26 | 1SBL101001R2632 | 4/6 | B7-30-01-02 | GJL1311001R0012 | 3/4 | BS1-3 | 1SAM201908R1001 | 2/16 |
| AS09-30-32-28 | 1SBL101001R2832 | 4/6 | B7-30-01-03 | GJL1311001R0013 | 3/4 | BS2-3 | 1SAM401921R1001 | 2/17 |
| AS12-30-01-16 | 1SBL111001R1601 | 4/4 | B7-30-01-80 | GJL1311001R8010 | 3/4 | BSM6-30 | GJL1201908R0001 | 3/17 |
| AS12-30-01-20 | 1SBL111001R2001 | 4/4 | B7-30-01-84 | GJL1311001R8014 | 3/4 | BX4 | 1SBN110108T1000 | 5/63 |
| AS12-30-01-26 | 1SBL111001R2601 | 4/4 | B7-30-01-85 | GJL1311001R8015 | 3/4 | BX4-CA | 1SBN110109W1000 | 5/63 |
| AS12-30-01-28 | 1SBL111001R2801 | 4/4 | B7-30-10-01 | GJL1311001R0101 | 3/4 | CA3-01 | 1SBN011010T1001 | 4/9 |
| AS12-30-10-16 | 1SBL111001R1610 | 4/4 | B7-30-10-02 | GJL1311001R0102 | 3/4 | CA3-10 | 1SBN011010T1010 | 4/9 |
| AS12-30-10-20 | 1SBL111001R2010 | 4/4 | B7-30-10-03 | GJL1311001R0103 | 3/4 | CA4-01 | 1SBN011010R1001 | 5/33 |
| AS12-30-10-26 | 1SBL111001R2610 | 4/4 | B7-30-10-80 | GJL1311001R8100 | 3/4 | CA4-01-T | 1SBN0110110T1001 | 5/33 |
| AS12-30-10-28 | 1SBL111001R2810 | 4/4 | B7-30-10-84 | GJL1311001R8104 | 3/4 | CA4-04E | 1SBN0110140R1004 | 5/51 |
| AS12-30-32-16 | 1SBL111001R1632 | 4/6 | B7-30-10-85 | GJL1311001R8105 | 3/4 | CA4-04N | 1SBN0110140R1204 | 5/63 |
| AS12-30-32-20 | 1SBL111001R2032 | 4/6 | B7-40-00-01 | GJL1311201R0001 | 3/10 | CA4-10 | 1SBN011010R1010 | 5/33 |
| AS12-30-32-26 | 1SBL111001R2632 | 4/6 | B7-40-00-02 | GJL1311201R0002 | 3/10 | CA4-10-T | 1SBN0110110T1010 | 5/33 |
| AS12-30-32-28 | 1SBL111001R2832 | 4/6 | B7-40-00-03 | GJL1311201R0003 | 3/10 | CA4-13N | 1SBN0110140R1213 | 5/63 |
| AS16-30-01-16 | 1SBL121001R1601 | 4/4 | B7-40-00-80 | GJL1311201R8000 | 3/10 | CA4-22E | 1SBN0110140R1022 | 5/33 |
| AS16-30-01-20 | 1SBL121001R2001 | 4/4 | B7-40-00-84 | GJL1311201R8004 | 3/10 | CA4-22M | 1SBN0110140R1122 | 5/33 |
| AS16-30-01-26 | 1SBL121001R2601 | 4/4 | B7D-30-01-01 | GJL1317001R0011 | 3/5 | CA4-22N | 1SBN0110140R1222 | 5/63 |
| AS16-30-01-28 | 1SBL121001R2801 | 4/4 | B7D-30-01-05 | GJL1317001R0015 | 3/5 | CA4-22U | 1SBN0110140R1322 | 5/33 |
| AS16-30-10-16 | 1SBL121001R1610 | 4/4 | B7D-30-10-01 | GJL1317001R0101 | 3/5 | CA4-31E | 1SBN0110140R1031 | 5/51 |
| AS16-30-10-20 | 1SBL121001R2010 | 4/4 | B7D-30-10-05 | GJL1317001R0105 | 3/5 | CA4-31N | 1SBN0110140R1231 | 5/63 |
| AS16-30-10-26 | 1SBL121001R2610 | 4/4 | B7D-40-00-01 | GJL1317201R0001 | 3/11 | CA4-40E | 1SBN0110140R1040 | 5/51 |
| AS16-30-10-28 | 1SBL121001R2810 | 4/4 | B7D-40-00-05 | GJL1317201R0005 | 3/11 | CA4-40N | 1SBN0110140R1240 | 5/63 |
| AS16-30-32-16 | 1SBL121001R1632 | 4/6 | B7S-30-01-1.7-71 | GJL1313001R7011 | 3/8 | CA6-11E | GJL1201317R0002 | 3/17 |
| AS16-30-32-20 | 1SBL121001R2032 | 4/6 | B7S-30-01-2.8-72 | GJL1313001R7012 | 3/8 | CA6-11K | GJL1201317R0001 | 3/18 |
| AS16-30-32-26 | 1SBL121001R2632 | 4/6 | B7S-30-10-1.7-71 | GJL1313001R7101 | 3/8 | CA6-11M | GJL1201317R0003 | 3/17 |
| AS16-30-32-28 | 1SBL121001R2832 | 4/6 | B7S-30-10-2.8-72 | GJL1313001R7102 | 3/8 | CA6-11N | GJL1201317R0004 | 3/17 |
| ASL09-30-01-81 | 1SBL103001R8101 | 4/5 | BC6-22-00-01 | GJL1213501R0001 | 3/11 | CAF6-02E | GJL1201330R0010 | 3/17 |
| ASL09-30-01-83 | 1SBL103001R8301 | 4/5 | BC6-22-00-02 | GJL1213501R0002 | 3/11 | CAF6-02K | GJL1201330R0009 | 3/17 |
| ASL09-30-01-86 | 1SBL103001R8601 | 4/5 | BC6-22-00-03 | GJL1213501R0003 | 3/11 | CAF6-02M | GJL1201330R0011 | 3/17 |
| ASL09-30-01-88 | 1SBL103001R8801 | 4/5 | BC6-22-00-04 | GJL1213501R0004 | 3/11 | CAF6-02N | GJL1201330R0012 | 3/17 |
| ASL09-30-10-81 | 1SBL103001R8110 | 4/5 | BC6-22-00-05 | GJL1213501R0005 | 3/11 | CAF6-11E | GJL1201330R0002 | 3/17 |
| ASL09-30-10-83 | 1SBL103001R8310 | 4/5 | BC6-22-00-07 | GJL1213501R0007 | 3/11 | CAF6-11K | GJL1201330R0001 | 3/18 |
| ASL09-30-10-86 | 1SBL103001R8610 | 4/5 | BC6-22-00-16 | GJL1213501R1006 | 3/11 | CAF6-11M | GJL1201330R0003 | 3/17 |
| ASL09-30-10-88 | 1SBL103001R8810 | 4/5 | BC6-30-01-01 | GJL1213001R0011 | 3/5 | CAF6-11N | GJL1201330R0004 | 3/17 |
| ASL09-30-32-81 | 1SBL103001R8132 | 4/7 | BC6-30-01-03 | GJL1213001R0013 | 3/5 | CAF6-20E | GJL1201330R0006 | 3/17 |
| ASL09-30-32-83 | 1SBL103001R8332 | 4/7 | BC6-30-01-04 | GJL1213001R0014 | 3/5 | CAF6-20K | GJL1201330R0005 | 3/18 |
| ASL09-30-32-86 | 1SBL103001R8632 | 4/7 | BC6-30-01-05 | GJL1213001R0015 | 3/5 | CAF6-20M | GJL1201330R0007 | 3/17 |
| ASL09-30-32-88 | 1SBL103001R8832 | 4/7 | BC6-30-01-07 | GJL1213001R0017 | 3/5 | CAF6-20N | GJL1201330R0008 | 3/17 |
| ASL12-30-01-81 | 1SBL113001R8101 | 4/5 | BC6-30-01-1.4-81 | GJL1213001R8011 | 3/8 | CAL18-11 | 1SFN010720R1011 | 5/43 |
| ASL12-30-01-83 | 1SBL113001R8301 | 4/5 | BC6-30-01-16 | GJL1213001R1016 | 3/5 | CAL18-11B | 1SFN010720R3311 | 5/43 |
| ASL12-30-01-86 | 1SBL113001R8601 | 4/5 | BC6-30-01-2.4-51 | GJL1213001R5011 | 3/8 | CAL19-11 | 1SFN010820R1011 | 5/39 |
| ASL12-30-01-88 | 1SBL113001R8801 | 4/5 | BC6-30-10-01 | GJL1213001R0101 | 3/5 | CAL19-11B | 1SFN010820R3311 | 5/39 |
| ASL12-30-10-81 | 1SBL113001R8110 | 4/5 | BC6-30-10-03 | GJL1213001R0103 | 3/5 | CAL4-11 | 1SBN0110120R1011 | 5/33 |
| ASL12-30-10-83 | 1SBL113001R8310 | 4/5 | BC6-30-10-04 | GJL1213001R0104 | 3/5 | CAL4-11-T | 1SBN0110120T1011 | 5/33 |
| ASL12-30-10-86 | 1SBL113001R8610 | 4/5 | BC6-30-10-05 | GJL1213001R0105 | 3/5 | CAT4-11E | 1SBN0110151R1011 | 5/33 |
| ASL12-30-10-88 | 1SBL113001R8810 | 4/5 | BC6-30-10-07 | GJL1213001R0107 | 3/5 | CAT4-11M | 1SBN0110151R1111 | 5/33 |
| ASL12-30-32-81 | 1SBL113001R8132 | 4/7 | BC6-30-10-1.4-81 | GJL1213001R8101 | 3/8 | CAT4-11U | 1SBN0110151R1311 | 5/33 |
| ASL12-30-32-83 | 1SBL113001R8332 | 4/7 | BC6-30-10-16 | GJL1213001R1106 | 3/5 | CC4-01 | 1SBN011011R1001 | 5/33 |
| ASL12-30-32-86 | 1SBL113001R8632 | 4/7 | BC6-30-10-2.4-51 | GJL1213001R5101 | 3/8 | CC4-10 | 1SBN011011R1010 | 5/33 |
| ASL12-30-32-88 | 1SBL113001R8832 | 4/7 | BC7-30-01-01 | GJL1313001R0011 | 3/5 | CK1-02 | 1SAM301901R1003 | 2/13 |
| ASL16-30-01-81 | 1SBL123001R8101 | 4/5 | BC7-30-01-03 | GJL1313001R0013 | 3/5 | CK1-11 | 1SAM301901R1001 | 2/13 |
| ASL16-30-01-83 | 1SBL123001R8301 | 4/5 | BC7-30-01-04 | GJL1313001R0014 | 3/5 | CK1-20 | 1SAM301901R1002 | 2/13 |
| ASL16-30-01-86 | 1SBL123001R8601 | 4/5 | BC7-30-01-05 | GJL1313001R0015 | 3/5 | CT-ERS.21S | 1SVR730100R0300 | 5/22 |
| ASL16-30-01-88 | 1SBL123001R8801 | 4/5 | BC7-30-01-07 | GJL1313001R0017 | 3/5 | DB16 | 1SAZ701901R0001 | 6/4 |
| ASL16-30-10-81 | 1SBL123001R8110 | 4/5 | BC7-30-01-1.4-81 | GJL1313001R8011 | 3/8 | DB16E | 1SAX101110R0001 | 6/10 |
| ASL16-30-10-83 | 1SBL123001R8310 | 4/5 | BC7-30-01-16 | GJL1313001R1016 | 3/5 | DB19EF | 1SAX101910R1001 | 6/10 |
| ASL16-30-10-8 | | | | | | | | |

Index

Type classification

| Type | Order code | Page | Type | Order code | Page | Type | Order code | Page |
|---------------|-----------------|------|----------------|-----------------|------|--------------------|-----------------|------|
| DB45EF | 1SAX201910R0001 | 6/10 | K6-31Z-03 | GJH1211001R0313 | 3/13 | MO165-25 | 1SAM461000R1013 | 2/10 |
| DB65 | 1SAZ801901R1001 | 6/6 | K6-31Z-80 | GJH1211001R8310 | 3/13 | MO165-32 | 1SAM461000R1014 | 2/10 |
| DB96 | 1SAZ901901R1001 | 6/7 | K6-31Z-84 | GJH1211001R8314 | 3/13 | MO165-42 | 1SAM461000R1015 | 2/10 |
| DMS132-G | 1SAM201912R1010 | 2/18 | K6-31Z-85 | GJH1211001R8315 | 3/13 | MO165-54 | 1SAM461000R1016 | 2/10 |
| DMS132-Y | 1SAM201912R1011 | 2/18 | K6-40E-01 | GJH1211001R0401 | 3/13 | MO165-65 | 1SAM461000R1017 | 2/10 |
| DRAF09-11S | 1SBK134237R1100 | 7/6 | K6-40E-02 | GJH1211001R0402 | 3/13 | MO495-100 | 1SAM560000R1010 | 2/20 |
| DRAF09-11U | 1SBK134238R1100 | 7/6 | K6-40E-03 | GJH1211001R0403 | 3/13 | MO495-63 | 1SAM560000R1007 | 2/20 |
| DRAF09-13N | 1SBK134137R1300 | 7/6 | K6-40E-80 | GJH1211001R8400 | 3/13 | MO495-75 | 1SAM560000R1008 | 2/20 |
| DRAF09-13U | 1SBK134238R1300 | 7/6 | K6-40E-84 | GJH1211001R8404 | 3/13 | MO495-90 | 1SAM560000R1009 | 2/20 |
| DRAF09-14P | 1SBK134037R1400 | 7/6 | K6-40E-85 | GJH1211001R8405 | 3/13 | MO496-100 | 1SAM590000R1010 | 2/20 |
| DRAF09-14U | 1SBK134238R1400 | 7/6 | K6S-22Z-1.7-71 | GJH1213001R7221 | 3/15 | MO496-32 | 1SAM590000R1004 | 2/20 |
| DRAF12-11S | 1SBK154237R1100 | 7/6 | K6S-22Z-2.8-72 | GJH1213001R7222 | 3/15 | MO496-40 | 1SAM590000R1005 | 2/20 |
| DRAF12-11U | 1SBK154238R1100 | 7/6 | K6S-31Z-1.7-71 | GJH1213001R7311 | 3/15 | MO496-50 | 1SAM590000R1006 | 2/20 |
| DRAF12-13N | 1SBK154137R1300 | 7/6 | K6S-31Z-2.8-72 | GJH1213001R7312 | 3/15 | MO496-63 | 1SAM590000R1007 | 2/20 |
| DRAF12-13U | 1SBK154238R1300 | 7/6 | K6S-40E-1.7-71 | GJH1213001R7401 | 3/15 | MO496-75 | 1SAM590000R1008 | 2/20 |
| DRAF12-14P | 1SBK154037R1400 | 7/6 | K6S-40E-2.8-72 | GJH1213001R7402 | 3/15 | MO496-90 | 1SAM590000R1009 | 2/20 |
| DRAF12-14U | 1SBK154238R1400 | 7/6 | KA165 | 1SAM401922R1001 | 2/17 | MS116-0.16 | 1SAM250000R1001 | 2/6 |
| DRAF16-11S | 1SBK174237R1100 | 7/6 | KA495 | 1SAM501901R1001 | 2/23 | MS116-0.16-HKF1-11 | 1SAM250005R1001 | 2/6 |
| DRAF16-11U | 1SBK174238R1100 | 7/6 | KA495C | 1SAM501902R1001 | 2/23 | MS116-0.25 | 1SAM250000R1002 | 2/6 |
| DRAF16-13N | 1SBK174137R1300 | 7/6 | KC6-22Z-01 | GJH1213001R0221 | 3/14 | MS116-0.25-HKF1-11 | 1SAM250005R1002 | 2/6 |
| DRAF16-13U | 1SBK174238R1300 | 7/6 | KC6-22Z-03 | GJH1213001R0223 | 3/14 | MS116-0.4 | 1SAM250000R1003 | 2/6 |
| DRAF16-14P | 1SBK174037R1400 | 7/6 | KC6-22Z-04 | GJH1213001R0224 | 3/14 | MS116-0.4-HKF1-11 | 1SAM250005R1003 | 2/6 |
| DRAF16-14U | 1SBK174238R1400 | 7/6 | KC6-22Z-05 | GJH1213001R0225 | 3/14 | MS116-0.63 | 1SAM250000R1004 | 2/6 |
| DRAS09-20S | 1SBK104235R2000 | 7/2 | KC6-22Z-07 | GJH1213001R0227 | 3/14 | MS116-0.63-HKF1-11 | 1SAM250005R1004 | 2/6 |
| DRAS09-26N | 1SBK104135R2600 | 7/2 | KC6-22Z-16 | GJH1213001R1226 | 3/14 | MS116-1.0 | 1SAM250000R1005 | 2/6 |
| DRAS09-27N | 1SBK104135R2700 | 7/2 | KC6-31Z-01 | GJH1213001R0311 | 3/14 | MS116-1.0-HKF1-11 | 1SAM250005R1005 | 2/6 |
| DRAS09-28P | 1SBK104035R2800 | 7/2 | KC6-31Z-03 | GJH1213001R0313 | 3/14 | MS116-1.6 | 1SAM250000R1006 | 2/6 |
| DRAS09-29P | 1SBK104035R2900 | 7/2 | KC6-31Z-04 | GJH1213001R0314 | 3/14 | MS116-1.6-HKF1-11 | 1SAM250005R1006 | 2/6 |
| DRAS12-20S | 1SBK114235R2000 | 7/2 | KC6-31Z-05 | GJH1213001R0315 | 3/14 | MS116-10 | 1SAM250000R1010 | 2/6 |
| DRAS12-26N | 1SBK114135R2600 | 7/2 | KC6-31Z-07 | GJH1213001R0317 | 3/14 | MS116-10.0-HKF1-11 | 1SAM250005R1010 | 2/6 |
| DRAS12-27N | 1SBK114135R2700 | 7/2 | KC6-31Z-1.4-81 | GJH1213001R8311 | 3/15 | MS116-12 | 1SAM250000R1012 | 2/6 |
| DRAS12-28P | 1SBK114035R2800 | 7/2 | KC6-31Z-16 | GJH1213001R1316 | 3/14 | MS116-12.0-HKF1-11 | 1SAM250005R1012 | 2/6 |
| DRAS12-29P | 1SBK114035R2900 | 7/2 | KC6-31Z-2.4-51 | GJH1213001R5311 | 3/15 | MS116-16 | 1SAM250000R1011 | 2/6 |
| DRAS16-20S | 1SBK124235R2000 | 7/2 | KC6-40E-01 | GJH1213001R0401 | 3/14 | MS116-16.0-HKF1-11 | 1SAM250005R1011 | 2/6 |
| DRAS16-26N | 1SBK124135R2600 | 7/2 | KC6-40E-03 | GJH1213001R0403 | 3/14 | MS116-2.5 | 1SAM250000R1007 | 2/6 |
| DRAS16-27N | 1SBK124135R2700 | 7/2 | KC6-40E-04 | GJH1213001R0404 | 3/14 | MS116-2.5-HKF1-11 | 1SAM250005R1007 | 2/6 |
| DRAS16-28P | 1SBK124035R2800 | 7/2 | KC6-40E-05 | GJH1213001R0405 | 3/14 | MS116-20 | 1SAM250000R1013 | 2/6 |
| DRAS16-29P | 1SBK124035R2900 | 7/2 | KC6-40E-07 | GJH1213001R0407 | 3/14 | MS116-20-HKF1-11 | 1SAM250005R1013 | 2/6 |
| DRASL09-81S | 1SBK104335R8100 | 7/2 | KC6-40E-1.4-81 | GJH1213001R8401 | 3/15 | MS116-25 | 1SAM250000R1014 | 2/6 |
| DRASL09-83S | 1SBK104335R8300 | 7/2 | KC6-40E-16 | GJH1213001R1406 | 3/14 | MS116-25-HKF1-11 | 1SAM250005R1014 | 2/6 |
| DRASL12-81S | 1SBK114335R8100 | 7/2 | KC6-40E-2.4-51 | GJH1213001R5401 | 3/15 | MS116-32 | 1SAM250000R1015 | 2/6 |
| DRASL12-83S | 1SBK114335R8300 | 7/2 | KPR-101L | 1SFA616162R1014 | 6/4 | MS116-32-HKF1-11 | 1SAM250005R1015 | 2/6 |
| DRASL16-81S | 1SBK124335R8100 | 7/2 | LD4 | 1SBN070156T1000 | 5/63 | MS116-4.0 | 1SAM250000R1008 | 2/6 |
| DRASL16-83S | 1SBK124335R8300 | 7/2 | LP6 | GJL1201907R0001 | 3/17 | MS116-4.0-HKF1-11 | 1SAM250005R1008 | 2/6 |
| DX495 | 1SAM401912R1001 | 2/23 | LT140-30L | 1SFN124203R1000 | 5/39 | MS116-6.3 | 1SAM250000R1009 | 2/6 |
| E1250DU-1250 | 1SFA739001R1000 | 6/14 | LT140-40L | 1SFN124203R2000 | 5/55 | MS116-6.3-HKF1-11 | 1SAM250005R1009 | 2/6 |
| E16DU-0.32 | 1SAX111001R1101 | 6/10 | LT200/A | 1SAZ401901R1001 | 6/9 | MS132-0.16 | 1SAM350000R1001 | 2/7 |
| E16DU-1.0 | 1SAX111001R1102 | 6/10 | LT205-30C | 1SFN124801R1000 | 5/39 | MS132-0.16-HKF1-11 | 1SAM350005R1001 | 2/7 |
| E16DU-18.9 | 1SAX111001R1105 | 6/10 | LT205-30L | 1SFN124803R1000 | 5/39 | MS132-0.16T | 1SAM340000R1001 | 2/11 |
| E16DU-2.7 | 1SAX111001R1103 | 6/10 | LT205-30Y | 1SFN124804R1000 | 5/39 | MS132-0.25 | 1SAM350000R1002 | 2/7 |
| E16DU-6.3 | 1SAX111001R1104 | 6/10 | LT205-40C | 1SFN124801R2000 | 5/55 | MS132-0.25-HKF1-11 | 1SAM350005R1002 | 2/7 |
| EF146-150 | 1SAX351001R1101 | 5/12 | LT205-40L | 1SFN124803R2000 | 5/55 | MS132-0.25T | 1SAM340000R1002 | 2/11 |
| EF19-0.32 | 1SAX121001R1101 | 6/10 | LT370-30C | 1SFN125401R1000 | 5/39 | MS132-0.4 | 1SAM350000R1003 | 2/7 |
| EF19-1.0 | 1SAX121001R1102 | 6/10 | LT370-30D | 1SFN125406R1000 | 5/39 | MS132-0.4-HKF1-11 | 1SAM350005R1003 | 2/7 |
| EF19-18.9 | 1SAX121001R1105 | 5/18 | LT370-30L | 1SFN125403R1000 | 5/39 | MS132-0.4T | 1SAM340000R1003 | 2/11 |
| EF19-2.7 | 1SAX121001R1103 | 6/10 | LT370-30Y | 1SFN125404R1000 | 5/39 | MS132-0.63 | 1SAM350000R1004 | 2/7 |
| EF19-6.3 | 1SAX121001R1104 | 6/10 | LT370-40C | 1SFN125401R2000 | 5/55 | MS132-0.63-HKF1-11 | 1SAM350005R1004 | 2/7 |
| EF205-210 | 1SAX531001R1101 | 5/12 | LT370-40L | 1SFN125403R2000 | 5/55 | MS132-0.63T | 1SAM340000R1004 | 2/11 |
| EF370-380 | 1SAX611001R1101 | 5/12 | LT460-AC | 1SFN125701R1000 | 5/43 | MS132-1.0 | 1SAM350000R1005 | 2/7 |
| EF45-30 | 1SAX221001R1101 | 5/18 | LT460-AL | 1SFN125703R1000 | 5/43 | MS132-1.0-HKF1-11 | 1SAM350005R1005 | 2/7 |
| EF45-45 | 1SAX221001R1102 | 5/18 | LT6-B | GJL1201906R0001 | 3/17 | MS132-1.0T | 1SAM340000R1005 | 2/11 |
| EF460-500 | 1SAX721001R1101 | 6/13 | LT750-AC | 1SFN126101R1000 | 5/43 | MS132-1.6 | 1SAM350000R1006 | 2/7 |
| EF65-56 | 1SAX331001R1102 | 6/11 | LT750-AL | 1SFN126103R1000 | 5/43 | MS132-1.6-HKF1-11 | 1SAM350005R1006 | 2/7 |
| EF65-70 | 1SAX331001R1101 | 5/18 | LW1250 | 1SFN076407R1000 | 5/43 | MS132-1.6T | 1SAM340000R1006 | 2/11 |
| EF750-800 | 1SAX821001R1101 | 6/13 | LW140 | 1SFN074207R1000 | 5/39 | MS132-10 | 1SAM350000R1010 | 2/7 |
| EF96-100 | 1SAX341001R1101 | 5/18 | LW205 | 1SFN074807R1000 | 5/39 | MS132-10.0-HKF1-11 | 1SAM350005R1010 | 2/7 |
| FR16AF-12 | 1SBN101337R1000 | 7/7 | LW205-40 | 1SFN074807R2000 | 5/55 | MS132-10T | 1SAM340000R1010 | 2/11 |
| FR16AF-12U | 1SBN101338R1000 | 7/7 | LW370 | 1SFN075407R1000 | 5/39 | MS132-12 | 1SAM350000R1012 | 2/7 |
| FR16AS-12VARS | 1SBN101035R1000 | 7/2 | LW370-40 | 1SFN075407R2000 | 5/55 | MS132-12.0-HKF1-11 | 1SAM350005R1012 | 2/7 |
| FS116 | 1SAM201909R1001 | 2/16 | LW460 | 1SFN075707R1000 | 5/43 | MS132-12T | 1SAM340000R1012 | 2/11 |
| HK1-02 | 1SAM201902R1003 | 2/13 | LW750 | 1SFN076107R1000 | 5/43 | MS132-16 | 1SAM350000R1011 | 2/7 |
| HK1-11 | 1SAM201902R1001 | 2/13 | LX140 | 1SFN074210R1000 | 5/39 | MS132-16.0-HKF1-11 | 1SAM350005R1011 | 2/7 |
| HK1-20 | 1SAM201902R1002 | 2/13 | LX205 | 1SFN074810R1000 | 5/39 | MS132-16T | 1SAM340000R1011 | 2/11 |
| HK1-20L | 1SAM201902R1004 | 2/13 | LX370 | 1SFN075410R1000 | 5/39 | MS132-2.5 | 1SAM350000R1007 | 2/7 |
| HK4-11 | 1SAM401901R1001 | 2/23 | LX460 | 1SFN075710R1000 | 5/43 | MS132-2.5-HKF1-11 | 1SAM350005R1007 | 2/7 |
| HK4-W | 1SAM401901R1002 | 2/23 | LX750 | 1SFN076110R1000 | 5/43 | MS132-2.5T | 1SAM340000R1007 | 2/11 |
| HKF1-01 | 1SAM201901R1004 | 2/13 | MO132-0.16 | 1SAM360000R1001 | 2/9 | MS132-20 | 1SAM350000R1013 | 2/7 |
| HKF1-10 | 1SAM201901R1003 | 2/13 | MO132-0.25 | 1SAM360000R1002 | 2/9 | MS132-20-HKF1-11 | 1SAM350005R1013 | 2/7 |
| HKF1-11 | 1SAM201901R1001 | 2/13 | MO132-0.4 | 1SAM360000R1003 | 2/9 | MS132-20T | 1SAM340000R1013 | 2/11 |
| HKF1-20 | 1SAM201901R1002 | 2/13 | MO132-0.63 | 1SAM360000R1004 | 2/9 | MS132-25 | 1SAM350000R1014 | 2/7 |
| HKS4-02 | 1SAM401902R1003 | 2/23 | MO132-1.0 | 1SAM360000R1005 | 2/9 | MS132-25-HKF1-11 | 1SAM350005R1014 | 2/7 |
| HKS4-11 | 1SAM401902R1001 | 2/23 | MO132-1.6 | 1SAM360000R1006 | 2/9 | MS132-25T | 1SAM340000R1014 | 2/11 |
| HKS4-20 | 1SAM401902R1002 | 2/23 | MO132-10 | 1SAM360000R1010 | 2/9 | MS132-32 | 1SAM350000R1015 | 2/7 |
| IB132-G | 1SAM201911R1010 | 2/18 | MO132-12 | 1SAM360000R1012 | 2/9 | MS132-32-HKF1-11 | 1SAM350005R1015 | 2/7 |
| IB132-Y | 1SAM201911R1011 | 2/18 | MO132-16 | 1SAM360000R1011 | 2/9 | MS132-4.0 | 1SAM350000R1008 | 2/7 |
| K6-22Z-01 | GJH1211001R0221 | 3/13 | MO132-2.5 | 1SAM360000R1007 | 2/9 | MS132-4.0-HKF1-11 | 1SAM350005R1008 | 2/7 |
| K6-22Z-02 | GJH1211001R0222 | 3/13 | MO132-20 | 1SAM360000R1013 | 2/9 | MS132-4.0T | 1SAM340000R1008 | 2/11 |
| K6-22Z-03 | GJH1211001R0223 | 3/13 | MO132-25 | 1SAM360000R1014 | 2/9 | MS132-6.3 | 1SAM350000R1009 | 2/7 |
| K6-22Z-80 | GJH1211001R8220 | 3/13 | MO132-32 | 1SAM360000R1015 | 2/9 | MS132-6.3-HKF1-11 | 1SAM350005R1009 | 2/7 |
| K6-22Z-84 | GJH1211001R8224 | 3/13 | MO132-4.0 | 1SAM360000R1008 | 2/9 | MS132-6.3T | 1SAM340000R1009 | 2/11 |
| K6-22Z-85 | GJH1211001R8225 | 3/13 | MO132-6.3 | 1SAM360000R1009 | 2/9 | MS165-16 | 1SAM451000R1011 | 2/8 |
| K6-31Z-01 | GJH1211001R0311 | 3/13 | MO165-16 | 1SAM461000R1011 | 2/10 | MS165-20 | 1SAM451000R1012 | 2/8 |
| K6-31Z-02 | GJH1211001R0312 | 3/13 | MO165-20 | 1SAM461000R1012 | 2/10 | MS165-25 | 1SAM451000R1013 | 2/8 |

Index

Type classification

| Type | Order code | Page | Type | Order code | Page | Type | Order code | Page |
|-----------|-----------------|------|--------------|-----------------|------|--------------------|-----------------|------|
| MS165-32 | 1SAM451000R1014 | 2/8 | NSL44E-86 | 1SBH103001R8644 | 4/11 | T16-3.1 | 1SAZ711201R1033 | 6/4 |
| MS165-42 | 1SAM451000R1015 | 2/8 | NSL44E-88 | 1SBH103001R8844 | 4/11 | T16-4.2 | 1SAZ711201R1035 | 6/4 |
| MS165-54 | 1SAM451000R1016 | 2/8 | NSL53E-81 | 1SBH103001R8153 | 4/11 | T16-5.7 | 1SAZ711201R1038 | 6/4 |
| MS165-65 | 1SAM451000R1017 | 2/8 | NSL53E-83 | 1SBH103001R8353 | 4/11 | T16-7.6 | 1SAZ711201R1040 | 6/4 |
| MS495-100 | 1SAM550000R1010 | 2/19 | NSL53E-86 | 1SBH103001R8653 | 4/11 | TA200DU-110 | 1SAZ421201R1002 | 6/9 |
| MS495-63 | 1SAM550000R1007 | 2/19 | NSL53E-88 | 1SBH103001R8853 | 4/11 | TA200DU-135 | 1SAZ421201R1003 | 6/9 |
| MS495-75 | 1SAM550000R1008 | 2/19 | NSL62E-81 | 1SBH103001R8162 | 4/11 | TA200DU-150 | 1SAZ421201R1004 | 6/9 |
| MS495-90 | 1SAM550000R1009 | 2/19 | NSL62E-83 | 1SBH103001R8362 | 4/11 | TA200DU-175 | 1SAZ421201R1005 | 5/12 |
| MS497-100 | 1SAM580000R1010 | 2/19 | NSL62E-86 | 1SBH103001R8662 | 4/11 | TA200DU-200 | 1SAZ421201R1006 | 5/12 |
| MS497-32 | 1SAM580000R1004 | 2/19 | NSL62E-88 | 1SBH103001R8862 | 4/11 | TA200DU-90 | 1SAZ421201R1001 | 6/9 |
| MS497-40 | 1SAM580000R1005 | 2/19 | NSL71E-81 | 1SBH103001R8171 | 4/11 | TBC7-22-00-55 | GJL1313561R5005 | 3/12 |
| MS497-50 | 1SAM580000R1006 | 2/19 | NSL71E-83 | 1SBH103001R8371 | 4/11 | TBC7-22-00-62 | GJL1313561R6002 | 3/12 |
| MS497-63 | 1SAM580000R1007 | 2/19 | NSL71E-86 | 1SBH103001R8671 | 4/11 | TBC7-22-00-68 | GJL1313561R6008 | 3/12 |
| MS497-75 | 1SAM580000R1008 | 2/19 | NSL71E-88 | 1SBH103001R8871 | 4/11 | TBC7-30-01-51 | GJL1313061R5011 | 3/9 |
| MS497-90 | 1SAM580000R1009 | 2/19 | NSL80E-81 | 1SBH103001R8180 | 4/11 | TBC7-30-01-55 | GJL1313061R5015 | 3/9 |
| MSAH1 | 1SAM201909R1021 | 2/24 | NSL80E-83 | 1SBH103001R8380 | 4/11 | TBC7-30-01-62 | GJL1313061R6012 | 3/9 |
| MSH-AR | 1SAM201920R1000 | 2/24 | NSL80E-86 | 1SBH103001R8680 | 4/11 | TBC7-30-01-68 | GJL1313061R6018 | 3/9 |
| MSHD-LB | 1SAM201920R1011 | 2/24 | NSL80E-88 | 1SBH103001R8880 | 4/11 | TBC7-30-10-51 | GJL1313061R5101 | 3/9 |
| MSHD-LTB | 1SAM201920R1011 | 2/24 | OX56X105 | 1SCA108043R1001 | 2/24 | TBC7-30-10-55 | GJL1313061R5105 | 3/9 |
| MSHD-LTY | 1SAM201920R1012 | 2/24 | OX56X130 | 1SCA101655R1001 | 2/24 | TBC7-30-10-62 | GJL1313061R6102 | 3/9 |
| MSHD-LY | 1SAM201920R1002 | 2/24 | OX56X180 | 1SCA101659R1001 | 2/24 | TBC7-30-10-68 | GJL1313061R6108 | 3/9 |
| MSMN | 1SAM101923R0002 | 2/24 | OX56X85 | 1SCA101647R1001 | 2/24 | TBC7-31-00-55 | GJL1313461R5005 | 3/12 |
| MSMNO | 1SAM101923R0012 | 2/24 | PB1-1-32 | 1SAM201914R1001 | 2/16 | TBC7-31-00-62 | GJL1313461R6002 | 3/12 |
| NF22E-12 | 1SBH137001R1222 | 5/60 | PS1-2-0-65 | 1SAM201906R1102 | 2/16 | TBC7-31-00-68 | GJL1313461R6008 | 3/12 |
| NF22E-13 | 1SBH137001R1322 | 5/60 | PS1-2-1-65 | 1SAM201906R1112 | 2/16 | TEF3-OFF | 1SBN020104R1000 | 4/9 |
| NF22E-14 | 1SBH137001R1422 | 5/60 | PS1-2-2-65 | 1SAM201906R1122 | 2/16 | TEF3-ON | 1SBN020102R1000 | 4/9 |
| NF22E-41 | 1SBH137001R4122 | 5/60 | PS1-3-0-100 | 1SAM201916R1103 | 2/16 | TEF4-OFF | 1SBN020114R1000 | 5/33 |
| NF31E-12 | 1SBH137001R1231 | 5/60 | PS1-3-0-65 | 1SAM201906R1103 | 2/16 | TEF4-ON | 1SBN020112R1000 | 5/33 |
| NF31E-13 | 1SBH137001R1331 | 5/60 | PS1-3-1-100 | 1SAM201916R1113 | 2/16 | TF140DU-110 | 1SAZ431201R1002 | 5/12 |
| NF31E-14 | 1SBH137001R1431 | 5/60 | PS1-3-1-65 | 1SAM201906R1113 | 2/16 | TF140DU-110-V1000* | 1SAZ431301R1002 | 6/8 |
| NF31E-41 | 1SBH137001R4131 | 5/60 | PS1-3-2-100 | 1SAM201916R1123 | 2/16 | TF140DU-135 | 1SAZ431201R1003 | 5/16 |
| NF40E-12 | 1SBH137001R1240 | 5/60 | PS1-3-2-65 | 1SAM201906R1123 | 2/16 | TF140DU-135-V1000* | 1SAZ431301R1003 | 6/8 |
| NF40E-13 | 1SBH137001R1340 | 5/60 | PS1-4-0-100 | 1SAM201916R1104 | 2/16 | TF140DU-142 | 1SAZ431201R1004 | 5/12 |
| NF40E-14 | 1SBH137001R1440 | 5/60 | PS1-4-0-65 | 1SAM201906R1104 | 2/16 | TF140DU-142-V1000* | 1SAZ431301R1004 | 6/8 |
| NF40E-41 | 1SBH137001R4140 | 5/60 | PS1-4-1-100 | 1SAM201916R1114 | 2/16 | TF140DU-90 | 1SAZ431201R1001 | 6/8 |
| NFZ22E-20 | 1SBH136001R2022 | 5/61 | PS1-4-1-65 | 1SAM201906R1114 | 2/16 | TF140DU-90-V1000* | 1SAZ431301R1001 | 6/8 |
| NFZ22E-21 | 1SBH136001R2122 | 5/61 | PS1-4-2-65 | 1SAM201906R1124 | 2/16 | TF42-0.13 | 1SAZ721201R1005 | 6/5 |
| NFZ22E-22 | 1SBH136001R2222 | 5/61 | PS1-5-0-100 | 1SAM201916R1105 | 2/16 | TF42-0.17 | 1SAZ721201R1008 | 6/5 |
| NFZ22E-23 | 1SBH136001R2322 | 5/61 | PS1-5-0-65 | 1SAM201906R1105 | 2/16 | TF42-0.23 | 1SAZ721201R1009 | 6/5 |
| NFZ31E-20 | 1SBH136001R2031 | 5/61 | PS1-5-1-100 | 1SAM201916R1115 | 2/16 | TF42-0.31 | 1SAZ721201R1013 | 6/5 |
| NFZ31E-21 | 1SBH136001R2131 | 5/61 | PS1-5-1-65 | 1SAM201906R1115 | 2/16 | TF42-0.41 | 1SAZ721201R1014 | 6/5 |
| NFZ31E-22 | 1SBH136001R2231 | 5/61 | PS1-5-2-65 | 1SAM201906R1125 | 2/16 | TF42-0.55 | 1SAZ721201R1017 | 6/5 |
| NFZ31E-23 | 1SBH136001R2331 | 5/61 | PS2-2-0-125 | 1SAM401920R1002 | 2/17 | TF42-0.74 | 1SAZ721201R1021 | 6/5 |
| NFZ40E-20 | 1SBH136001R2040 | 5/61 | PS2-2-2-125 | 1SAM401920R1022 | 2/17 | TF42-1.0 | 1SAZ721201R1023 | 6/5 |
| NFZ40E-21 | 1SBH136001R2140 | 5/61 | PS2-3-0-125 | 1SAM401920R1003 | 2/17 | TF42-1.3 | 1SAZ721201R1025 | 6/5 |
| NFZ40E-22 | 1SBH136001R2240 | 5/61 | PS2-3-2-125 | 1SAM401920R1023 | 2/17 | TF42-1.7 | 1SAZ721201R1028 | 6/5 |
| NFZ40E-23 | 1SBH136001R2340 | 5/61 | PS2-4-0-125 | 1SAM401920R1004 | 2/17 | TF42-1.0 | 1SAZ721201R1043 | 5/16 |
| NS22E-16 | 1SBH101001R1622 | 4/10 | PS2-4-2-125 | 1SAM401920R1024 | 2/17 | TF42-13 | 1SAZ721201R1045 | 5/16 |
| NS22E-20 | 1SBH101001R2022 | 4/10 | RC5-1/133 | 1SBN050100R1001 | 4/9 | TF42-16 | 1SAZ721201R1047 | 5/16 |
| NS22E-26 | 1SBH101001R2622 | 4/10 | RC5-1/250 | 1SBN050100R1002 | 4/9 | TF42-2.3 | 1SAZ721201R1031 | 6/5 |
| NS22E-28 | 1SBH101001R2822 | 4/10 | RC5-1/440 | 1SBN050100R1003 | 4/9 | TF42-20 | 1SAZ721201R1049 | 5/22 |
| NS31E-16 | 1SBH101001R1631 | 4/10 | RC5-1/50 | 1SBN050100R1000 | 4/9 | TF42-24 | 1SAZ721201R1051 | 5/16 |
| NS31E-20 | 1SBH101001R2031 | 4/10 | RT5/150 | 1SBN050020R1003 | 4/9 | TF42-29 | 1SAZ721201R1052 | 5/22 |
| NS31E-26 | 1SBH101001R2631 | 4/10 | RT5/264 | 1SBN050020R1004 | 4/9 | TF42-3.1 | 1SAZ721201R1033 | 6/5 |
| NS31E-28 | 1SBH101001R2831 | 4/10 | RT5/32 | 1SBN050020R1000 | 4/9 | TF42-35 | 1SAZ721201R1053 | 5/16 |
| NS40E-16 | 1SBH101001R1640 | 4/10 | RT5/65 | 1SBN050020R1001 | 4/9 | TF42-38 | 1SAZ721201R1055 | 5/16 |
| NS40E-20 | 1SBH101001R2040 | 4/10 | RT5/90 | 1SBN050020R1002 | 4/9 | TF42-4.2 | 1SAZ721201R1035 | 6/5 |
| NS40E-26 | 1SBH101001R2640 | 4/10 | RV5/133 | 1SBN050010R1001 | 4/9 | TF42-5.7 | 1SAZ721201R1038 | 6/5 |
| NS40E-28 | 1SBH101001R2840 | 4/10 | RV5/250 | 1SBN050010R1002 | 4/9 | TF42-7.6 | 1SAZ721201R1040 | 6/5 |
| NS44E-16 | 1SBH101001R1644 | 4/10 | RV5/440 | 1SBN050010R1003 | 4/9 | TF65-28 | 1SAZ811201R1001 | 6/6 |
| NS44E-20 | 1SBH101001R2044 | 4/10 | RV5/50 | 1SBN050010R1000 | 4/9 | TF65-33 | 1SAZ811201R1002 | 6/6 |
| NS44E-26 | 1SBH101001R2644 | 4/10 | RV-BC6/250 | GHV2501903R0002 | 3/17 | TF65-40 | 1SAZ811201R1003 | 5/16 |
| NS44E-28 | 1SBH101001R2844 | 4/10 | RV-BC6/380 | GHV2501904R0002 | 3/17 | TF65-47 | 1SAZ811201R1004 | 5/16 |
| NS53E-16 | 1SBH101001R1653 | 4/10 | RV-BC6/60 | GHV2501902R0002 | 3/17 | TF65-53 | 1SAZ811201R1005 | 6/6 |
| NS53E-20 | 1SBH101001R2053 | 4/10 | RV-BC6-F/250 | GHV2501903R0003 | 3/17 | TF65-60 | 1SAZ811201R1006 | 5/16 |
| NS53E-26 | 1SBH101001R2653 | 4/10 | RV-BC6-F/380 | GHV2501904R0003 | 3/17 | TF65-67 | 1SAZ811201R1007 | 6/6 |
| NS53E-28 | 1SBH101001R2853 | 4/10 | RV-BC6-F/60 | GHV2501902R0003 | 3/17 | TF96-51 | 1SAZ911201R1001 | 6/7 |
| NS62E-16 | 1SBH101001R1662 | 4/10 | S1-M1-25 | 1SAM201907R1101 | 2/16 | TF96-60 | 1SAZ911201R1002 | 6/7 |
| NS62E-20 | 1SBH101001R2062 | 4/10 | S1-M2-25 | 1SAM201907R1102 | 2/16 | TF96-68 | 1SAZ911201R1003 | 5/16 |
| NS62E-26 | 1SBH101001R2662 | 4/10 | S1-M3-25 | 1SAM201907R1103 | 2/16 | TF96-78 | 1SAZ911201R1004 | 5/22 |
| NS62E-28 | 1SBH101001R2862 | 4/10 | S1-M3-35 | 1SAM201913R1103 | 2/16 | TF96-87 | 1SAZ911201R1005 | 5/16 |
| NS71E-16 | 1SBH101001R1671 | 4/10 | S1-PB1-25 | 1SAM201914R1002 | 2/16 | TF96-96 | 1SAZ911201R1006 | 5/22 |
| NS71E-20 | 1SBH101001R2071 | 4/10 | SA1 | GJF1101903R0001 | 2/16 | TKC6-222-51 | GJH1213061R5221 | 3/16 |
| NS71E-26 | 1SBH101001R2671 | 4/10 | SA2 | GJF1101903R0002 | 2/16 | TKC6-222-55 | GJH1213061R5225 | 3/16 |
| NS71E-28 | 1SBH101001R2871 | 4/10 | SA3 | GJF1101903R0003 | 2/16 | TKC6-222-62 | GJH1213061R6222 | 3/16 |
| NS80E-16 | 1SBH101001R1680 | 4/10 | SK1-02 | 1SAM201903R1003 | 2/13 | TKC6-222-68 | GJH1213061R6228 | 3/16 |
| NS80E-20 | 1SBH101001R2080 | 4/10 | SK1-11 | 1SAM201903R1001 | 2/13 | TKC6-31Z-51 | GJH1213061R5311 | 3/16 |
| NS80E-26 | 1SBH101001R2680 | 4/10 | SK1-20 | 1SAM201903R1002 | 2/13 | TKC6-31Z-55 | GJH1213061R5315 | 3/16 |
| NS80E-28 | 1SBH101001R2880 | 4/10 | SK4-11 | 1SAM401904R1001 | 2/23 | TKC6-31Z-62 | GJH1213061R6312 | 3/16 |
| NSL22E-81 | 1SBH103001R8122 | 4/11 | T16-0.13 | 1SAZ711201R1005 | 6/4 | TKC6-31Z-68 | GJH1213061R6318 | 3/16 |
| NSL22E-83 | 1SBH103001R8322 | 4/11 | T16-0.17 | 1SAZ711201R1008 | 6/4 | TKC6-40E-51 | GJH1213061R5401 | 3/16 |
| NSL22E-86 | 1SBH103001R8622 | 4/11 | T16-0.23 | 1SAZ711201R1009 | 6/4 | TKC6-40E-55 | GJH1213061R5405 | 3/16 |
| NSL22E-88 | 1SBH103001R8822 | 4/11 | T16-0.31 | 1SAZ711201R1013 | 6/4 | TKC6-40E-62 | GJH1213061R6402 | 3/16 |
| NSL31E-81 | 1SBH103001R8131 | 4/11 | T16-0.41 | 1SAZ711201R1014 | 6/4 | TKC6-40E-68 | GJH1213061R6408 | 3/16 |
| NSL31E-83 | 1SBH103001R8331 | 4/11 | T16-0.55 | 1SAZ711201R1017 | 6/4 | CB5-10 | 1SBN010013R1010 | 7/7 |
| NSL31E-86 | 1SBH103001R8631 | 4/11 | T16-0.74 | 1SAZ711201R1021 | 6/4 | MCB-10B | 1SFA611610R2001 | 7/2 |
| NSL31E-88 | 1SBH103001R8831 | 4/11 | T16-1.0 | 1SAZ711201R1023 | 6/4 | UA1-110 | 1SAM201904R1004 | 2/14 |
| NSL40E-81 | 1SBH103001R8140 | 4/11 | T16-1.3 | 1SAZ711201R1025 | 6/4 | UA1-20 | 1SAM201904R1010 | 2/14 |
| NSL40E-83 | 1SBH103001R8340 | 4/11 | T16-1.7 | 1SAZ711201R1028 | 6/4 | UA1-208 | 1SAM201904R1008 | 2/14 |
| NSL40E-86 | 1SBH103001R8640 | 4/11 | T16-10 | 1SAZ711201R1043 | 6/4 | UA1-230 | 1SAM201904R1005 | 2/14 |
| NSL40E-88 | 1SBH103001R8840 | 4/11 | T16-13 | 1SAZ711201R1045 | 6/4 | UA1-24 | 1SAM201904R1001 | 2/14 |
| NSL44E-81 | 1SBH103001R8144 | 4/11 | T16-16 | 1SAZ711201R1047 | 6/4 | UA1-400 | 1SAM201904R1006 | 2/14 |
| NSL44E-83 | 1SBH103001R8344 | 4/11 | T16-2.3 | 1SAZ711201R1031 | 6/4 | UA1-415 | 1SAM201904R1007 | 2/14 |

Index

Type classification

| Type | Order code | Page |
|---------------|-----------------|------|
| UA1-48 | 1SAM201904R1002 | 2/14 |
| UA1-575 | 1SAM201904R1009 | 2/14 |
| UA1-60 | 1SAM201904R1003 | 2/14 |
| UA4-110 | 1SAM401905R1001 | 2/23 |
| UA4-230 | 1SAM401905R1002 | 2/23 |
| UA4-24 | 1SAM401905R1004 | 2/23 |
| UA4-400 | 1SAM401905R1003 | 2/23 |
| UA4-HK-230 | 1SAM401906R1001 | 2/23 |
| UA4-HK-400 | 1SAM401906R1002 | 2/23 |
| VB6-30-01-01 | GJL1211901R0011 | 3/6 |
| VB6-30-01-02 | GJL1211901R0012 | 3/6 |
| VB6-30-01-03 | GJL1211901R0013 | 3/6 |
| VB6-30-01-80 | GJL1211901R8010 | 3/6 |
| VB6-30-01-84 | GJL1211901R8014 | 3/6 |
| VB6-30-01-85 | GJL1211901R8015 | 3/6 |
| VB6-30-10-01 | GJL1211901R0101 | 3/6 |
| VB6-30-10-02 | GJL1211901R0102 | 3/6 |
| VB6-30-10-03 | GJL1211901R0103 | 3/6 |
| VB6-30-10-80 | GJL1211901R8100 | 3/6 |
| VB6-30-10-84 | GJL1211901R8104 | 3/6 |
| VB6-30-10-85 | GJL1211901R8105 | 3/6 |
| VB7-30-01-01 | GJL1311901R0011 | 3/6 |
| VB7-30-01-02 | GJL1311901R0012 | 3/6 |
| VB7-30-01-03 | GJL1311901R0013 | 3/6 |
| VB7-30-01-80 | GJL1311901R8010 | 3/6 |
| VB7-30-01-84 | GJL1311901R8014 | 3/6 |
| VB7-30-01-85 | GJL1311901R8015 | 3/6 |
| VB7-30-10-01 | GJL1311901R0101 | 3/6 |
| VB7-30-10-02 | GJL1311901R0102 | 3/6 |
| VB7-30-10-03 | GJL1311901R0103 | 3/6 |
| VB7-30-10-80 | GJL1311901R8100 | 3/6 |
| VB7-30-10-84 | GJL1311901R8104 | 3/6 |
| VB7-30-10-85 | GJL1311901R8105 | 3/6 |
| VBC6-30-01-01 | GJL1213901R0011 | 3/7 |
| VBC6-30-01-03 | GJL1213901R0013 | 3/7 |
| VBC6-30-01-04 | GJL1213901R0014 | 3/7 |
| VBC6-30-01-05 | GJL1213901R0015 | 3/7 |
| VBC6-30-01-07 | GJL1213901R0017 | 3/7 |
| VBC6-30-01-16 | GJL1213901R1016 | 3/7 |
| VBC6-30-10-01 | GJL1213901R0101 | 3/7 |
| VBC6-30-10-03 | GJL1213901R0103 | 3/7 |
| VBC6-30-10-04 | GJL1213901R0104 | 3/7 |
| VBC6-30-10-05 | GJL1213901R0105 | 3/7 |
| VBC6-30-10-07 | GJL1213901R0107 | 3/7 |
| VBC6-30-10-16 | GJL1213901R1106 | 3/7 |
| VBC7-30-01-01 | GJL1313901R0011 | 3/7 |
| VBC7-30-01-03 | GJL1313901R0013 | 3/7 |
| VBC7-30-01-04 | GJL1313901R0014 | 3/7 |
| VBC7-30-01-05 | GJL1313901R0015 | 3/7 |
| VBC7-30-01-07 | GJL1313901R0017 | 3/7 |
| VBC7-30-01-16 | GJL1313901R1016 | 3/7 |
| VBC7-30-10-01 | GJL1313901R0101 | 3/7 |
| VBC7-30-10-03 | GJL1313901R0103 | 3/7 |
| VBC7-30-10-04 | GJL1313901R0104 | 3/7 |
| VBC7-30-10-05 | GJL1313901R0105 | 3/7 |
| VBC7-30-10-07 | GJL1313901R0107 | 3/7 |
| VBC7-30-10-16 | GJL1313901R1106 | 3/7 |
| VEM4 | 1SBN030111R1000 | 5/33 |
| VM140/190 | 1SFN034403R1000 | 5/39 |
| VM1650H | 1SFN036503R1000 | 5/43 |
| VM19 | 1SFN030300R1000 | 5/39 |
| VM205/265 | 1SFN035203R1000 | 5/39 |
| VM3 | 1SBN031005T1000 | 4/9 |
| VM4 | 1SBN030105T1000 | 5/33 |
| VM750H | 1SFN035700R1000 | 5/43 |
| VM96-4 | 1SBN033405T1000 | 5/33 |
| WRB-1000 | 1SAZ701903R1013 | 6/15 |
| WRB-400 | 1SAZ701903R1011 | 6/15 |
| WRB-600 | 1SAZ701903R1012 | 6/15 |
| WRBG | 1SAZ701903R1030 | 6/15 |
| WRH-F | 1SAZ701903R1001 | 6/15 |

Marketing material

<http://new.abb.com/low-voltage/products/motor-protection>


HOME • PRODUCTS • LOW VOLTAGE PRODUCTS • MOTOR PROTECTION AND CONTROL

GLOBAL SITE Power and productivity for a better world™ **ABB**

Motor protection and control




To keep it running, you need Control

ABB's motor protection and control offering is among the widest on the market. From system integrator, OEM, engineering consultant and distributor to panel builder and industrial end-user, our comprehensive range of motor starting solutions, products and services delivers the certainty of consistent quality and performance.













Are you looking for support or purchase information?
↓ [Contact us](#)

Highlights

-  [AF contactor launch](#)
-  [Gamesa chooses AF](#)
-  [ADL and Free Tech cuts logistic costs](#)

Our offering

-  Starting solutions
Get the perfect match
→ [Link](#)
-  Motor protection
A complete motor protection concept
→ [Link](#)
-  3-pole contactors and overload relays
For motor starting and power switching
→ [Link](#)
-  4-pole contactors
For power switching
→ [Link](#)
-  R bar contactors for advanced and heavy duty applications
Tailored to your needs
→ [Link](#)
-  Contactor relays
For switching control and auxiliary circuits
→ [Link](#)
-  Contactors for capacitor switching
Withstand unlimited peak current
→ [Link](#)
-  Contactors for DC switching
For a compact and efficient way of DC switching
→ [Link](#)
-  Contactors for railway applications
Meeting the most stringent standards and requirements
→ [Link](#)
-  Installation contactors
Noiseless control
→ [Link](#)

Products and documents

[Documents](#) [Tools](#)

Download related documents for Contactors

You now see 5 documents within → [Advanced search](#) → [Documents in all languages](#)

| Category | Document Title | Language | Date | Size | Download |
|-------------------------|--------------------------------------------------------------------------------------------------------------------|-----------------|------------|----------|---------------------|
| Popular documents (5) | ESB Installation contactors - Technical catalogue | English | 2010-02-08 | 0,66 MB | PDF |
| Brochure (10) | ePLAN Electric P8 product data - Mini Contactors, Mini Contactor Relays, Mini Reversing Contactors and Accessories | English, German | 2011-06-17 | 0,08 MB | ZIP |
| CAD outline drawing (1) | Block contactors | English | 2005-01-27 | 5,80 MB | PDF |
| Catalogue (30) | Main catalog Motor protection and control | English | 2013-06-04 | 94,02 MB | PDF |
| Certificate (500) | Modular DIN rail components - Installation contactors | English | 2014-03-27 | 0,75 MB | PDF |
| Circuit diagram (12) | | | | | |
| Course description (1) | | | | | |

News

- 2014-11-20: No job too dirty for ABB products
- 2014-11-06: Prost! ABB keeps Oktoberfest beer flowing
- 2014-09-26: ABB's Business Unit Control Products attends first Automation & Power World in Mexico
- 2014-07-24: Product of the year - ABB's AF contactor
- 2014-07-09: New ABB AF range contactors reduce SKUs by 90 percent
- 2014-06-19: ABB inaugurates new factory in Bulgaria


Videos, prints, technical presentations and more



Videos



Success stories

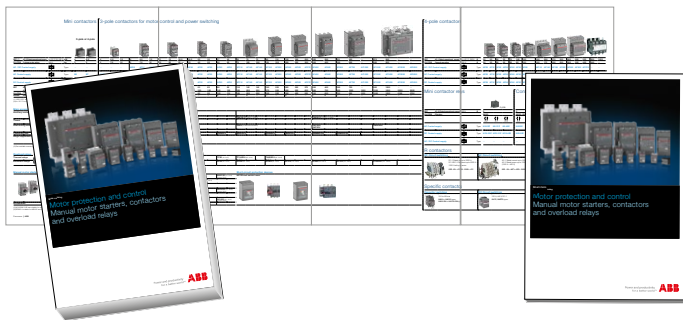

Main catalog : 1SBC100192C0203
 Short form catalog : 1SBC100195C0202
 Panorama : 1SBC100191L0203

For direct product details information,
 use product type or order code, ex:
www.abb.com/productdetails/AF09-30-10-13 or
www.abb.com/productdetails/1SBL137001R1310

Block Contactors

Overview Data Contacts

AF09-30-10-13

General information

Extended Product Type: AF09-30-10-13
 Product ID: 1SBL137001R1310
 EAN: 3471223110038
 Catalog Description: AF09-30-10-13 100-250V/50/60Hz DC Contactor

Long Description:
 AF09 contactors are used for controlling power circuits up to 690 V AC and 220 V DC. They are mainly used for controlling 3-phase motors, non-inductive or slightly inductive loads. AF⁺ contactors include an electronic coil interface accepting a wide control voltage DC min. - DC max. Only four coils cover control voltages between 24 - 500 V (500V/10 or 25 - 500 V DC). AF⁺ contactors can manage large control voltage variations. One coil can be used for different control voltages used worldwide without any coil change. AF⁺ contactors have built-in surge protection and do not require additional surge suppressors. The AF⁺ series is back 3.




Print View
Print to Pdf
Downloads

Userfriendly web design



Tools

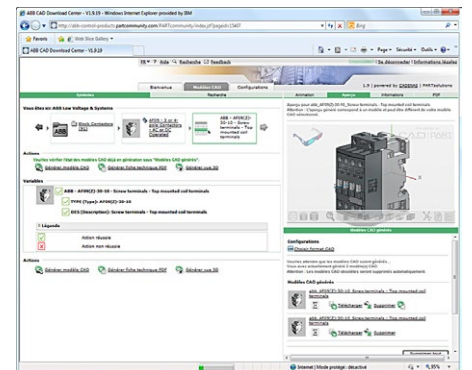

Cadenas portal: Download 2D or 3D files according to your needs (STEP, IGES...)

Coordination tables for motor protection

Selected Optimized Coordination

63 records (24 selected) Show record ABB products only Number of Records to show: 20

The oldest tables matching your search are shown (Current and Voltage Smart Search is on)

| Coordination | Protection Device | Rated Voltage | Short-Circuit Current (kA) | Starter Type | Coordination Type | Overload Relay | Motor Name | Power (kW) |
|--------------|-------------------|---------------|----------------------------|--------------|-------------------|----------------|------------|------------|
| ABB | ABB | 400V AC | 5 | DDC/MS | IEC Type 1 | Embedded | | 0.06 |
| ABB | ABB | 400V AC | 5 | DDC/MS | IEC Type 2 | TOL | | 0.06 |
| ABB | ABB | 400V AC | 10 | DDC/MS | UL Type A | EDL | | 0.09 |
| ABB | ABB | 400V AC | 10 | DDC/MS | UL Type C | AWC | | 0.10 |
| ABB | ABB | 400V AC | 16 | DDC/MS | UL Type D | | | 0.10 |
| ABB | ABB | 400V AC | 20 | UL | UL Type E | | | 0.17 |
| ABB | ABB | 400V AC | 20 | UL | UL Type F | | | 0.17 |
| ABB | ABB | 400V AC | 27 | | | | | 0.20 |
| ABB | ABB | 400V AC | 27 | | | | | 0.20 |

| Motor | Rated Power (kW) | Rated Current (A) | Short-Circuit Current (kA) | Coordination Type | Overload Relay | Max. allowed load current (A) | Table |
|------------------------------|------------------|-------------------|----------------------------|-------------------|----------------|-------------------------------|-------|
| MPSA 400 Vac, 10 kVA, DDC/MS | 0.06 | 0.20 | 10 | IEC Type 1 | Embedded | 0.20 | 10 |
| MPSA 400 Vac, 10 kVA, DDC/MS | 0.06 | 0.20 | 10 | IEC Type 2 | TOL | 0.20 | 10 |
| MPSA 400 Vac, 10 kVA, DDC/MS | 0.09 | 0.25 | 10 | UL Type A | EDL | 0.25 | 10 |
| MPSA 400 Vac, 10 kVA, DDC/MS | 0.09 | 0.25 | 10 | UL Type C | AWC | 0.25 | 10 |
| MPSA 400 Vac, 10 kVA, DDC/MS | 0.10 | 0.25 | 16 | UL Type D | | 0.25 | 10 |
| MPSA 400 Vac, 10 kVA, DDC/MS | 0.17 | 0.30 | 20 | UL Type E | | 0.30 | 10 |
| MPSA 400 Vac, 10 kVA, DDC/MS | 0.17 | 0.30 | 20 | UL Type F | | 0.30 | 10 |

SOC II: Select the Optimized Coordination tables for your starter according to IEC or UL standard

Contact us

ABB France
Low Voltage Products Division
3, rue Jean Perrin
F-69687 Chassieu cedex / France

ABB STOTZ-KONTAKT GmbH
Eppelheimer Straße 82
D-69123 Heidelberg / Germany

ABB AB
Control Products
Low Voltage Products
SE-721 61 Västerås / Sweden

You can find the address of your local sales organisation
on the [ABB home page](#)



<http://new.abb.com/low-voltage/products/motor-protection>



<http://www.abb.com/lowvoltage>

Note

We reserve the right to make technical changes or modify the contents of this document without prior notice.

ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB.

Copyright© 2015 ABB - All rights reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Contactor Accessories](#) category:

Click to view products by [ABB](#) manufacturer:

Other Similar products are found below :

[3RT1945-5AP61](#) [YC9Z-RHU10A16P](#) [YC9Z-RHU5A1P6](#) [YC9Z-CI6](#) [YC9Z-CNA211M](#) [LR3D06](#) [LR3D08](#) [1SAX351001R1101](#)
[1SBN050100R1002](#) [1SBN050020R1003](#) [022.63](#) [F4-22](#) [EH04-11N](#) [CA4-31E](#) [F5-T0](#) [CA5X-22M](#) [YC9Z-LCU38A24](#) [YC9Z-RHU5A2P5](#)
[49AB20](#) [75D73251A](#) [GHV2501910R0001](#) [022.18.0](#) [LA4DA2U](#) [LA4KA1U](#) [022.33](#) [DILA-XHI40-PI](#) [11BA135](#) [P1X1011](#) [A9C15915](#)
[DILA-XHI20-PI](#) [1SBN082306T2000](#) [DILA-XHI11-PI](#) [SPM-05-11](#) [A9C15914](#) [1SAX531001R1101](#) [022.35](#) [022.18](#) [DILM32-XHI11-PI](#)
[DILM32-XHI22-PI](#) [GHV2501903R0002](#) [DILA-XHI13-PI](#) [1SBN020114R1000](#) [1SBN081306T1000](#) [LAD9V5](#) [1SAX721001R1101](#)
[1SBN020312R1000](#) [1SAX121001R1105](#) [1SAX221001R1101](#) [BFX1211](#) [LXD1B7](#)