


PCL-726

PCL-728

12-bit, 6-ch Analog Output ISA Card with 32-ch Digital I/O

12-bit, 2-ch Isolated Analog Output ISA Card

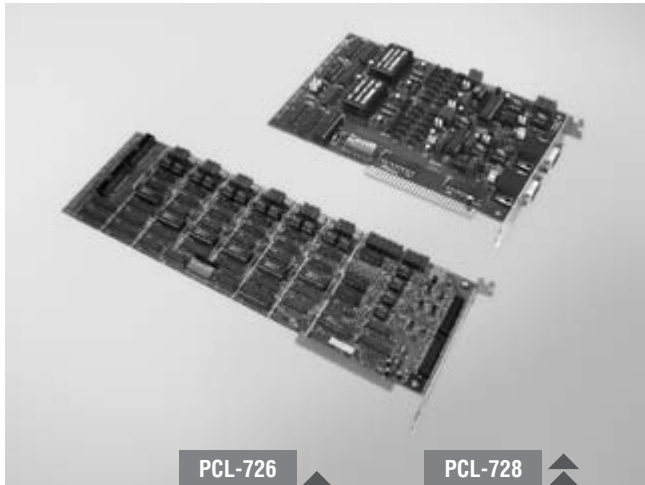

PCL-726

PCL-728



Features

- Independent analog output channels
- 12-bit resolution double-buffered D/A converter
- Multiple voltage ranges: ± 10 V, ± 5 V, $0 \sim 5$ V, $0 \sim 10$ V and $4 \sim 20$ mA current loop (sink)
- 16 digital input and 16 digital output channels (PCL-726)
- Two DB9 connectors for easy wiring (PCL-728)

Introduction

PCL-726, and PCL-728 are analog output cards with 12-bit analog output channels. You can individually configure each channel to any of the following ranges: $0 \sim 5$ V, $0 \sim 10$ V, ± 5 V, ± 10 V and $4 \sim 20$ mA current loop (sink). Designed for use in industrial environments, these cards are ideal, economical solutions for applications that require multiple analog outputs or current loops.

Specifications

Analog Output

- **Channels** PCL-726: 6
PCL-728: 2 isolated
- **Resolution** 12 bits, double buffered
- **Output Rate** Static update
- **Reference Voltage** Internal: -5 V (± 0.05 V)
 -10 V (± 0.05 V)
External: DC or AC, ± 10 V max.
- **Output Range** (Software programmable)

Internal Reference	Bipolar (V)	± 5
	Unipolar (V)	$0 \sim 5, 0 \sim 10$
	Current Loop (mA)	$4 \sim 20$
External Reference	Bipolar (V)	± 10

- **Isolation Protection** $500 V_{DC}$ (PCL-728)
- **Driving Capability** 5 mA
- **Output Impedance** 0.1Ω
- **Operation Modes** Software polling
- **Accuracy** 0.012%
- **Excitation Voltage** $8 \sim 36$ V for $4 \sim 20$ mA current loop

Digital Input (PCL-726)

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.
Logic 1: 2.0 V min.

Digital Output (PCL-726)

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.5 V, Logic 1: 2.4 V
- **Output Capability** Sink: 0.5 V @ 0.4 mA max.
Source: 2.7 V @ 50 mA max.

General

- **Bus Type** ISA
- **I/O Connectors** PCL-726: 4 x 20-pin box header
PCL-728: 2 x DB9 female connector
- **Dimensions (L x H)** PCL-726: 340 x 100 mm (13.4" x 3.9")
PCL-728: 184 x 119 mm (7.25" x 4.7")
- **Power Consumption**
PCL-726: 5 V @ 500 mA typical, 1 A max.
12 V @ 80 mA typical, 110 mA max.
12 V @ 60 mA typical, 90 mA max.
PCL-728: 5V @ 800 mA max.
- **Operating Temperature** $0 \sim 50^\circ \text{C}$ ($32 \sim 122^\circ \text{F}$)
- **Storage Temperature** $0 \sim 65^\circ \text{C}$ ($32 \sim 149^\circ \text{F}$)
- **Operating Humidity** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)

Ordering Information

- **PCL-726** 12-bit, 6-ch AO ISA Card w/ Digital I/O
- **PCL-728** 12-bit, 2-ch Isolated AO ISA Card
- **PCL-10120-1** 20-pin Flat Cable, 1 m
- **PCL-10120-2** 20-pin Flat Cable, 2 m
- **PCLD-780** Screw Terminal Board w/ Two 20-pin Flat Cables
- **PCLD-782** 16-ch Isolated DI Board w/ 1m 20-pin Flat Cable
- **PCLD-785** 16-ch Relay Board w/ One 1m 20-pin Flat Cable
- **PCLD-880** Wiring Board w/ Two 20-pin Flat Cables & Adapter
- **ADAM-3909** DB9 DIN-rail Wiring Board
- **ADAM-3920** 20-pin DIN-rail Flat Cable Wiring Board

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [ADAM-5051S-AE](#)