



| | | |
|-----------------------|----------------------|---------|
| inserts: | | page |
| CD | 64 poles + ⊕ | 45 |
| CT, CTS (10A) | 64 poles + ⊕ | 51 |
| CDD | 108 poles + ⊕ | 58 |
| CQE | 46 poles + ⊕ | 77 |
| CN | 24 poles + ⊕ | 83 |
| CCE | 24 poles + ⊕ | 92 |
| CNE, CSE | 24 poles + ⊕ | 93 |
| CSS | 24 poles + ⊕ | 101 |
| CTE, CTSE (16A) | 24 poles + ⊕ | 109 |
| CMSE | 10+2 (aux) poles + ⊕ | 118 |
| CMCE | 10+2 (aux) poles + ⊕ | 118 |
| CX | 4/8 poles + ⊕ | 133 |
| MIXO | 6 modules | 137÷151 |

insert centre distance:
104 x 27 mm

bulkhead mounting housings with 2 levers or 4 pegs



bulkhead mounting housings with single lever




| description | part No. | part No. |
|---|------------------|------------------|
| with one or two levers | CHI 24 | CHI 24 L |
| with pegs ¹⁾ | CHI 24 C | |
| with pegs and aluminium cover ¹⁾ | CHI 24 CS | |
| with pegs and plastic cover ¹⁾ | CHI 24 CP | |
| with lever and cover | | CHI 24 LS |

¹⁾ May be combined with hoods:
- CHO/CAO 24 X and CHV/CAV 24 X
- MHO/MAO 24 X and MHV/MAV 24 X


N.B.: the enclosures ensure IP66 protection (or IP65 cover versions) rating when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

panel cut-out for bulkhead mounting housings in mm

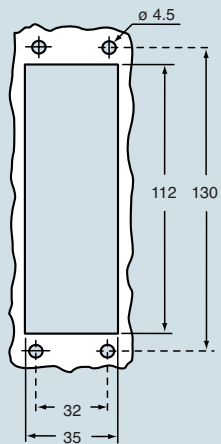


dimensions in mm


CHI

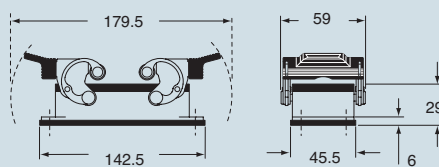

CHI C

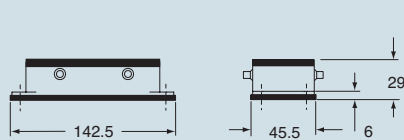


CHI CS/CP

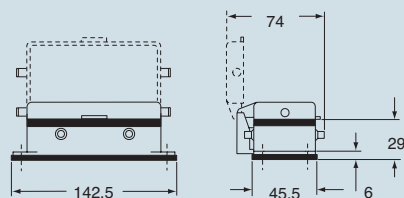


dimensions in mm

CHI L

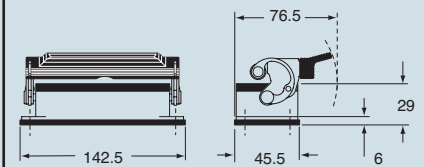

CHI LS

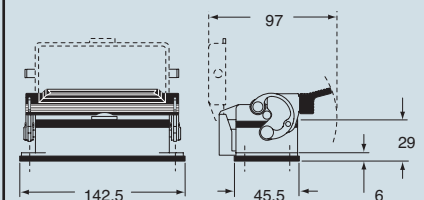

CAVUS® Type 4/4X/12

(excluding enclosures with plastic cover)

dimensions indicated are not binding and may be changed without notice

size 104.27




| inserts: | | page |
|---------------|----------------------|---------|
| CD | 64 poles + ⊕ | 45 |
| CDD | 108 poles + ⊕ | 58 |
| CQE | 46 poles + ⊕ | 77 |
| CN | 24 poles + ⊕ | 83 |
| CCE | 24 poles + ⊕ | 92 |
| CNE, CSE..... | 24 poles + ⊕ | 93 |
| CSS | 24 poles + ⊕ | 101 |
| CMSE | 10+2 (aux) poles + ⊕ | 118 |
| CMCE | 10+2 (aux) poles + ⊕ | 118 |
| CX | 4/8 poles + ⊕ | 133 |
| MIXO | 6 modules | 137+151 |

insert centre distance:
104 x 27 mm

surface mounting housings with 2 levers or 4 pegs



surface mounting housings with single lever

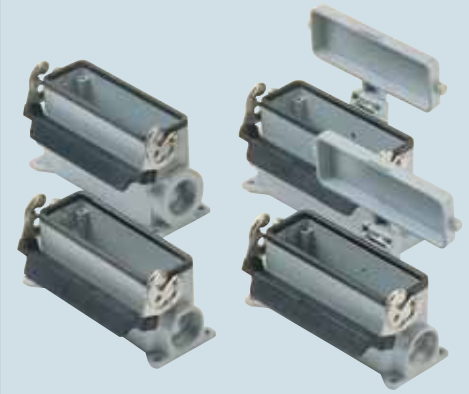


| description | part No. | entry Pg | part No. | entry M | part No. | entry Pg | part No. | entry M |
|--|--------------|----------|--------------|---------|--------------|----------|--------------|---------|
| with levers | CHP 24 | 21 | MHP 24.25 | 25 | CHP 24 L | 21 | MHP 24 L25 | 25 |
| with levers | CHP 24.2 | 21 x 2 | MHP 24.225 | 25 x 2 | CHP 24 L2 | 21 x 2 | MHP 24 L225 | 25 x 2 |
| with levers, high construction | CAP 24.21 | 21 | MAP 24.32 | 32 | CAP 24 L | 21 | MAP 24 L32 | 32 |
| with levers, high construction | CAP 24.221 | 21 x 2 | MAP 24.232 | 32 x 2 | CAP 24 L2 | 21 x 2 | MAP 24 L232 | 32 x 2 |
| with levers, high construction | CAP 24.29 | 29 | MAP 24.40 | 40 | CAP 24 L29 | 29 | MAP 24 L40 | 40 |
| with levers, high construction | CAP 24.229 | 29 x 2 | MAP 24.240 | 40 x 2 | CAP 24 L229 | 29 x 2 | MAP 24 L240 | 40 x 2 |
| with pegs and aluminium cover ¹⁾ | CHP 24 CS | 21 | MHP 24 CS25 | 25 | | | | |
| with pegs and aluminium cover ¹⁾ | CHP 24 CS2 | 21 x 2 | MHP 24 CS225 | 25 x 2 | | | | |
| with pegs and aluminium cover, high construction ¹⁾ | CAP 24 CS | 21 | MAP 24 CS32 | 32 | | | | |
| with pegs and aluminium cover, high construction ¹⁾ | CAP 24 CS2 | 21 x 2 | MAP 24 CS232 | 32 x 2 | | | | |
| with pegs and aluminium cover, high construction ¹⁾ | CAP 24 CS29 | 29 | MAP 24 CS40 | 40 | | | | |
| with pegs and aluminium cover, high construction ¹⁾ | CAP 24 CS229 | 29 x 2 | MAP 24 CS240 | 40 x 2 | | | | |
| with pegs and plastic cover ¹⁾ | CHP 24 CP | 21 | MHP 24 CP25 | 25 | | | | |
| with pegs and plastic cover ¹⁾ | CHP 24 CP2 | 21 x 2 | MHP 24 CP225 | 25 x 2 | | | | |
| with pegs and plastic cover, high construction ¹⁾ | CAP 24 CP | 21 | MAP 24 CP32 | 32 | | | | |
| with pegs and plastic cover, high construction ¹⁾ | CAP 24 CP2 | 21 x 2 | MAP 24 CP232 | 32 x 2 | | | | |
| with pegs and plastic cover, high construction ¹⁾ | CAP 24 CP29 | 29 | MAP 24 CP40 | 40 | | | | |
| with pegs and plastic cover, high construction ¹⁾ | CAP 24 CP229 | 29 x 2 | MAP 24 CP240 | 40 x 2 | | | | |
| with lever and cover | | | | | CHP 24 LS | 21 | MHP 24 LS25 | 25 |
| with lever and cover | | | | | CHP 24 LS2 | 21 x 2 | MHP 24 LS225 | 25 x 2 |
| with lever and cover, high construction | | | | | CAP 24 LS | 21 | MAP 24 LS32 | 32 |
| with lever and cover, high construction | | | | | CAP 24 LS2 | 21 x 2 | MAP 24 LS232 | 32 x 2 |
| with lever and cover, high construction | | | | | CAP 24 LS29 | 29 | MAP 24 LS40 | 40 |
| with lever and cover, high construction | | | | | CAP 24 LS229 | 29 x 2 | MAP 24 LS240 | 40 x 2 |

¹⁾ May be combined with hoods:
- CHO/CAO 24 X and CHV/CAV 24 X
- MHO/MAO 24 X and MHV/MAV 24 X


N.B.: the enclosures ensure IP66 protection (or IP65 cover versions) rating when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

dimensions in mm

CHP - CAP and MHP - MAP

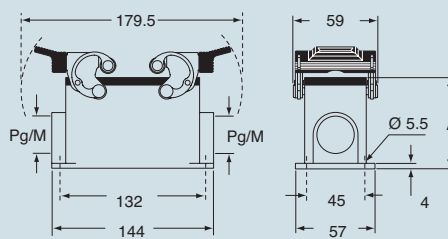


CHP CS/CP - CAP CS/CP and MHP CS/CP - MAP CS/CP

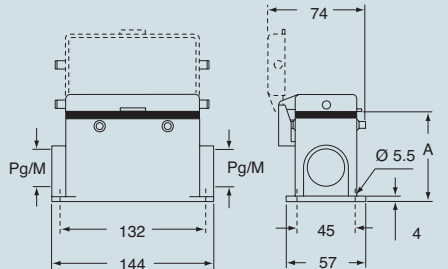


| type | A |
|-----------------|----|
| CHP / MHP | 63 |
| CAP / MAP | 81 |
| CHP CS / MHP CS | 63 |
| CAP CS / MAP CS | 81 |
| CHP CP / MHP CP | 63 |
| CAP CP / MAP CP | 81 |

dimensions in mm

CHP L - CAP L and MHP L - MAP L

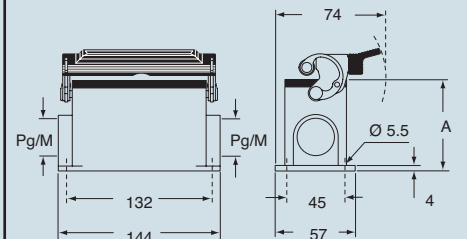

CHP LS - CAP LS and MHP LS - MAP LS

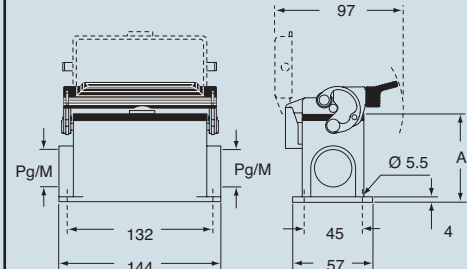

| type | A |
|-----------------|----|
| CHP L / MHP L | 63 |
| CAP L / MAP L | 81 |
| CHP LS / MHP LS | 63 |
| CAP LS / MAP LS | 81 |

CAVUS® Type 4/4X/12

(excluding enclosures with plastic cover)

dimensions indicated are not binding and may be changed without notice



| | | |
|---------------|----------------------|---------|
| inserts: | | page |
| CD | 64 poles + ⊕ | 45 |
| CDD | 108 poles + ⊕ | 58 |
| CQE | 46 poles + ⊕ | 77 |
| CN | 24 poles + ⊕ | 83 |
| CCE | 24 poles + ⊕ | 92 |
| CNE, CSE..... | 24 poles + ⊕ | 93 |
| CSS | 24 poles + ⊕ | 101 |
| CMSE | 10+2 (aux) poles + ⊕ | 118 |
| CMCE | 10+2 (aux) poles + ⊕ | 118 |
| CX | 4/8 poles + ⊕ | 133 |
| MIXO | 6 modules | 137+151 |

insert centre distance:
104 x 27 mm

hoods with 4 pegs



hoods with 2 pegs




| description | part No. | | entry | | part No. | | entry | |
|--|------------------|--|-------|---|---------------------|--|-------|---|
| | | | Pg | M | | | Pg | M |
| with pegs, side entry | CHO 24 | | 21 | | MHO 24.25 | | 25 | |
| with pegs, side entry | | | | | MHO 24.32 | | 32 | |
| with pegs, side entry, high construction | CAO 24.21 | | 21 | | MAO 24.32 | | 32 | |
| with pegs, side entry, high construction | CAO 24.29 | | 29 | | MAO 24.40 | | 40 | |
| with pegs, top entry | CHV 24 | | 21 | | MHV 24.25 ** | | 25 | |
| with pegs, top entry | | | | | MHV 24.32 | | 32 | |
| with pegs, top entry | CHV 24.29 | | 29 | | MHV 24.40 | | 40 | |
| with pegs, top entry, high construction | CAV 24.21 | | 21 | | MAV 24.32 | | 32 | |
| with pegs, top entry, high construction | CAV 24.29 | | 29 | | MAV 24.40 | | 40 | |
| with pegs, frontal entry, high construction | CAF 24.21 | | 21 | | MAF 24.25 | | 25 | |
| with pegs, frontal entry, high construction | CAF 24.29 | | 29 | | MAF 24.32 | | 32 | |
| with pegs, frontal entry, high construction, without adaptor * | CFF 24.21 | | 21 | | MFF 24.25 | | 25 | |
| with pegs, frontal entry, high construction, without adaptor * | CFF 24.29 | | 29 | | MFF 24.32 | | 32 | |

* enclosure without adaptor, threaded on the body, to be used only with a complete cable clamp.

** can only be used with a complete cable clamp (to be purchased separately)


dimensions in mm

CHO (CAO) and MHO (MAO)

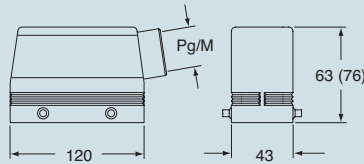


dimensions in mm

CHO L (CAO L) and MHO L (MAO L)

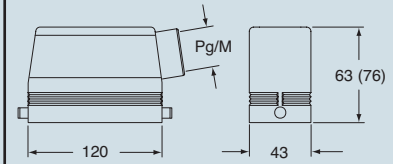


CHV (CAV) and MHV (MAV)

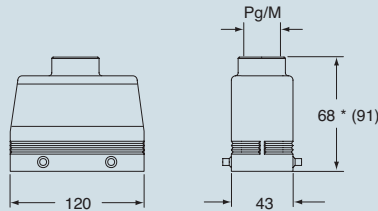


* 69.5 for Pg 29 - M 40 versions

CHV L (CAV L) and MHV L (MAV L)

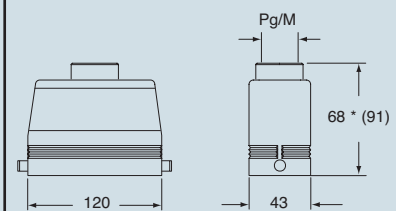

* 69.5 for Pg 29 - M 40 versions

CAF/CFF and MAF/MFF



CALUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice



| | | |
|---------------|----------------------|---------|
| inserts: | | page |
| CD | 64 poles + ⊕ | 45 |
| CDD | 108 poles + ⊕ | 58 |
| CQE | 46 poles + ⊕ | 77 |
| CN | 24 poles + ⊕ | 83 |
| CCE | 24 poles + ⊕ | 92 |
| CNE, CSE..... | 24 poles + ⊕ | 93 |
| CSS | 24 poles + ⊕ | 101 |
| CMSE | 10+2 (aux) poles + ⊕ | 118 |
| CMCE | 10+2 (aux) poles + ⊕ | 118 |
| CX | 4/8 poles + ⊕ | 133 |
| MIXO | 6 modules | 137÷151 |

insert centre distance:
104 x 27 mm

hoods with 2 levers



hoods with single lever




| description | part No. | | part No. | | part No. | | part No. | |
|--|-------------------|---------|-------------------|---------|--------------------|---------|--------------------|---------|
| | entry Pg | entry M | entry Pg | entry M | entry Pg | entry M | entry Pg | entry M |
| with levers and gasket, top entry | CHV 24 G | 21 | MHV 24 G32 | 32 | CHV 24 LG | 21 | MHV 24 LG32 | 32 |
| with levers and gasket, top entry, high construction | CAV 24 G | 21 | MAV 24 G25 | 25 | CAV 24 LG21 | 21 | MAV 24 LG25 | 25 |
| with levers and gasket, top entry, high construction | CAV 24 G29 | 29 | MAV 24 G32 | 32 | CAV 24 LG29 | 29 | MAV 24 LG32 | 32 |
| with levers and gasket, top entry, high constr., without adaptor * | CFV 24 G | 21 | MFV 24 G25 | 25 | CFV 24 LG21 | 21 | MFV 24 LG25 | 25 |
| with levers and gasket, top entry, high constr., without adaptor * | CFV 24 G29 | 29 | MFV 24 G32 | 32 | CFV 24 LG29 | 29 | MFV 24 LG32 | 32 |

* enclosure without adaptor, threaded on the body, to be used only with a complete cable clamp.


dimensions in mm

**CHV G (CAV G) and [CFV G],
MHV G (MAV G) and [MFV G]**

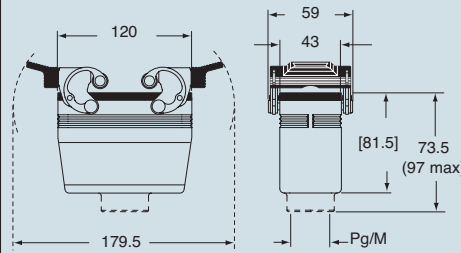

dimensions in mm

**CHV LG (CAV LG) and [CFV LG],
MHV LG (MAV LG) and [MFV LG]**

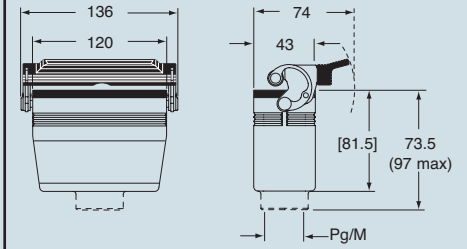

dimensions indicated are not binding and may be changed without notice

size 104.27



| inserts: | page |
|---------------------------------|---------|
| CD 64 poles + ⊕ | 45 |
| CDD 108 poles + ⊕ | 58 |
| CQE 46 poles + ⊕ | 77 |
| CN 24 poles + ⊕ | 83 |
| CCE 24 poles + ⊕ | 92 |
| CNE, CSE 24 poles + ⊕ | 93 |
| CSS 24 poles + ⊕ | 101 |
| CMSE 10+2 (aux) poles + ⊕ | 118 |
| CMCE 10+2 (aux) poles + ⊕ | 118 |
| CX 4/8 poles + ⊕ | 133 |
| MIXO 6 modules | 137÷151 |


insert centre distance: 104 x 27 mm

The covers for C, G and LG, versions cannot be used together with coding pins. If this application is required, please contact ILME SpA.

hoods with two levers



covers

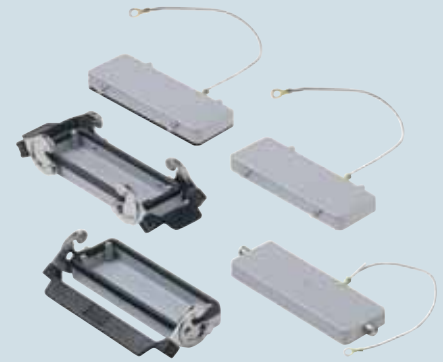


| description | part No. | entry Pg | part No. | entry M | part No. |
|---|-------------------|----------|-------------------|---------|------------------|
| with levers, side entry ¹⁾ | CHO 24 X | 21 | MHO 24 X25 | 25 | |
| with levers, side entry ¹⁾ | | | MHO 24 X32 | 32 | |
| with levers, side entry, high construction ¹⁾ | CAO 24 X | 21 | MAO 24 X32 | 32 | |
| with levers, side entry, high construction ¹⁾ | CAO 24 X29 | 29 | MAO 24 X40 | 40 | |
| with levers, top entry ¹⁾ | CHV 24 X | 21 | MHV 24 X25 | 25 | |
| with levers, top entry ¹⁾ | | | MHV 24 X32 | 32 | |
| with levers, top entry, high construction ¹⁾ | CAV 24 X | 21 | MAV 24 X32 | 32 | |
| with levers, top entry, high construction ¹⁾ | CAV 24 X29 | 29 | MAV 24 X40 | 40 | |
| with 4 pegs (for enclosures with 2 levers with gasket) | | | | | CHC 24 |
| with 4 pegs and gasket (for enclosures with 2 levers) ²⁾ | | | | | CHC 24 C |
| with 2 pegs (for enclosures with 1 lever with gasket) | | | | | CHC 24 L |
| with 2 levers (for hoods with 4 pegs) | | | | | CHC 24 G |
| with 1 lever (for hoods with 2 pegs) | | | | | CHC 24 LG |

¹⁾ May be combined with housings:
 - CHI/CHP/CAP 24 CS/CP/C
 - MHP/MAP 24 CS/CP


²⁾ May be combined with hoods:
 - CHO/CAO 24 X and CHV/CAV 24 X
 - MHO/MAO 24 X and MHV/MAV 24 X

dimensions in mm

CHO X (CAO X) and MHO X (MAO X)

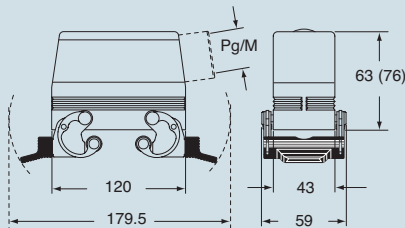

CHV X (CAV X) and MHV X (MAV X)

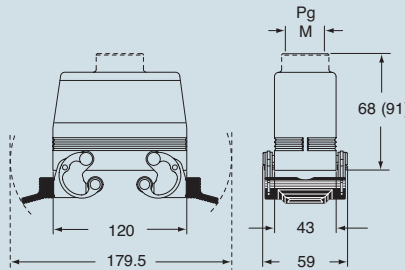

dimensions in mm


CHC




CHC C




CHC L



CHC G



CHC LG



CALUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 104.27



| | |
|---|------|
| inserts: | page |
| CME 10 + 2 (aux) poles + ⊕ | 119 |
| CME, CMCE 16 + 2 (aux) poles + ⊕ | 124 |

insert centre distance:
104 x 27 mm

bulkhead mounting housings with 2 levers or 4 pegs



bulkhead mounting housings with single lever




| description | part No. | part No. |
|---|------------------|------------------|
| with one or two levers | CMI 16 | CMI 16 L |
| with pegs and aluminium cover ¹⁾ | CMI 16 CS | |
| with pegs and plastic cover ¹⁾ | CMI 16 CP | |
| with lever and cover | | CMI 16 LS |

¹⁾ May be combined with hoods:
- CMO/CMAO 16 X and CMV/CMAV 16 X
- MMO/MMAO 16 X and MMV/MMAV 16 X


N.B.: the enclosures ensure IP66 protection (or IP65 cover versions) rating when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

panel cut-out for bulkhead mounting housings in mm

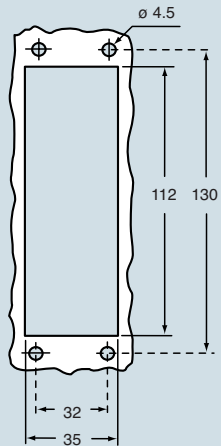


dimensions in mm

CMI

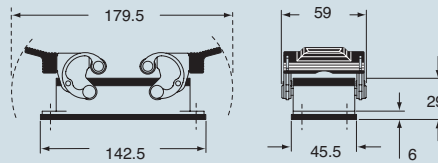


dimensions in mm


CMI L

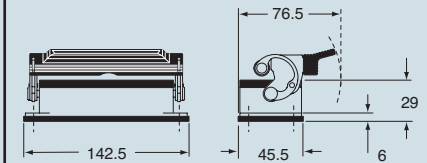

CMI CS/CP

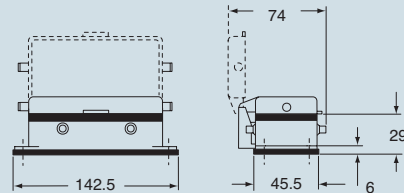

CMI LS

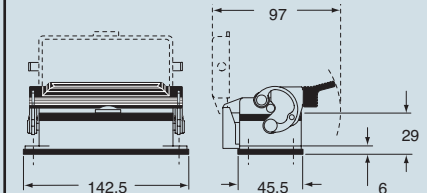

CAUS® Type 4/4X/12
(excluding enclosures with plastic cover)

dimensions indicated are not binding and may be changed without notice

size 104.27



| | |
|----------------------------------|------|
| inserts: | page |
| CME 10 + 2 (aux) poles + ⊕ | 119 |
| CME, CMCE 16 + 2 (aux) poles + ⊕ | 124 |

insert centre distance:
104 x 27 mm

surface mounting housings with 2 levers or 4 pegs



surface mounting housings with single lever




| description | part No. | entry Pg | part No. | entry M | part No. | entry Pg | part No. | entry M |
|--|---------------------|----------|---------------------|---------|---------------------|----------|---------------------|---------|
| with levers | CMP 16 | 21 | MMP 16.25 | 25 | CMP 16 L | 21 | MMP 16 L25 | 25 |
| with levers | CMP 16.2 | 21 x 2 | MMP 16.225 | 25 x 2 | CMP 16 L2 | 21 x 2 | MMP 16 L225 | 25 x 2 |
| with levers, high construction | CMAP 16.21 | 21 | MMAP 16.32 | 32 | CMAP 16 L | 21 | MMAP 16 L32 | 32 |
| with levers, high construction | CMAP 16.221 | 21 x 2 | MMAP 16.232 | 32 x 2 | CMAP 16 L2 | 21 x 2 | MMAP 16 L232 | 32 x 2 |
| with levers, high construction | CMAP 16.29 | 29 | MMAP 16.40 | 40 | CMAP 16 L29 | 29 | MMAP 16 L40 | 40 |
| with levers, high construction | CMAP 16.229 | 29 x 2 | MMAP 16.240 | 40 x 2 | CMAP 16 L229 | 29 x 2 | MMAP 16 L240 | 40 x 2 |
| with pegs and aluminium cover ¹⁾ | CMP 16 CS | 21 | MMP 16 CS25 | 25 | | | | |
| with pegs and aluminium cover ¹⁾ | CMP 16 CS2 | 21 x 2 | MMP 16 CS225 | 25 x 2 | | | | |
| with pegs and aluminium cover, high construction ¹⁾ | CMAP 16 CS | 21 | MMAP 16 CS32 | 32 | | | | |
| with pegs and aluminium cover, high construction ¹⁾ | CMAP 16 CS2 | 21 x 2 | MMAP 16CS232 | 32 x 2 | | | | |
| with pegs and aluminium cover, high construction ¹⁾ | CMAP 16 CS29 | 29 | MMAP 16 CS40 | 40 | | | | |
| with pegs and aluminium cover, high construction ¹⁾ | CMAP 16CS229 | 29 x 2 | MMAP 16CS240 | 40 x 2 | | | | |
| with pegs and plastic cover ¹⁾ | CMP 16 CP | 21 | MMP 16 CP25 | 25 | | | | |
| with pegs and plastic cover ¹⁾ | CMP 16 CP2 | 21 x 2 | MMP 16 CP225 | 25 x 2 | | | | |
| with pegs and plastic cover, high construction ¹⁾ | CMAP 16 CP | 21 | MMAP 16 CP32 | 32 | | | | |
| with pegs and plastic cover, high construction ¹⁾ | CMAP 16 CP2 | 21 x 2 | MMAP 16CP232 | 32 x 2 | | | | |
| with pegs and plastic cover, high construction ¹⁾ | CMAP 16 CP29 | 29 | MMAP 16 CP40 | 40 | | | | |
| with pegs and plastic cover, high construction ¹⁾ | CMAP 16CP229 | 29 x 2 | MMAP 16CP240 | 40 x 2 | | | | |
| with lever and cover | | | | | CMP 16 LS | 21 | MMP 16 LS25 | 25 |
| with lever and cover | | | | | CMP 16 LS2 | 21 x 2 | MMP 16 LS225 | 25 x 2 |
| with lever and cover, high construction | | | | | CMAP 16 LS | 21 | MMAP 16 LS32 | 32 |
| with lever and cover, high construction | | | | | CMAP 16 LS2 | 21 x 2 | MMAP 16LS232 | 32 x 2 |
| with lever and cover, high construction | | | | | CMAP 16 LS29 | 29 | MMAP 16 LS40 | 40 |
| with lever and cover, high construction | | | | | CMAP 16LS229 | 29 x 2 | MMAP 16LS240 | 40 x 2 |


¹⁾ May be combined with hoods:
- CMO/CMAO 16 X and CMV/CMAV 16 X
- MMO/MMAO 16 X and MMV/MMAV 16 X

N.B.: the enclosures ensure IP66 protection (or IP65 cover versions) rating when mated and locked with the closing levers.
The cover (CS, CP) only ensures mechanical protection, but does not ensure IP65 protection rating.

dimensions in mm
CMP - CMAP and MMP - MMAP

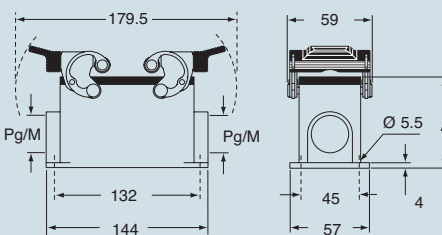


CMP CS/CP - CMAP CS/CP and MMP CS/CP - MMAP CS/CP

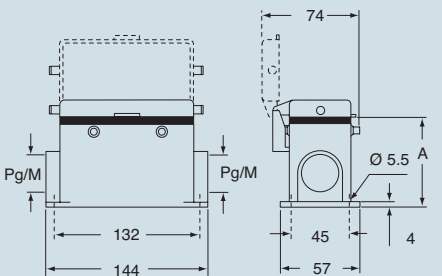


| type | A |
|------------------|----|
| CMP / MMP | 63 |
| CMA / MMAP | 81 |
| CMP CS / MMP CS | 63 |
| CMA CS / MMAP CS | 81 |
| CMP CP / MMP CP | 63 |
| CMA CP / MMAP CP | 81 |

dimensions in mm
CMP L - CMAP L and MMP L - MMAP L

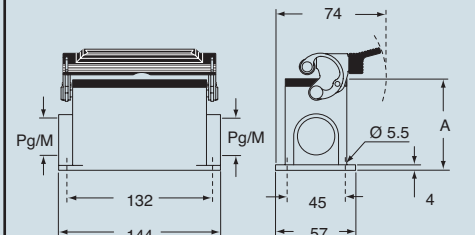

CMP LS - CMAP LS and MMP LS - MMAP LS

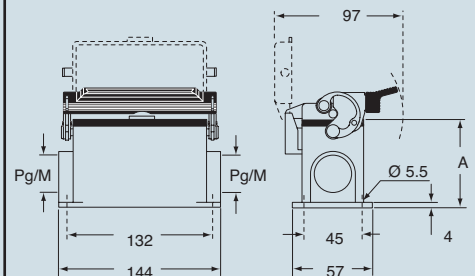

| type | A |
|------------------|----|
| CMP L / MMP L | 63 |
| CMA L / MMAP L | 81 |
| CMP LS / MMP LS | 63 |
| CMA LS / MMAP LS | 81 |

CMAUS® Type 4/4X/12
(excluding enclosures with plastic cover)

dimensions indicated are not binding and may be changed without notice

size 104.27



| | |
|---|------|
| inserts: | page |
| CME 10 + 2 (aux) poles + ⊕ | 119 |
| CME, CMCE 16 + 2 (aux) poles + ⊕ | 124 |

insert centre distance:
104 x 27 mm

hoods with 4 pegs



hoods with 2 pegs




| description | part No. | | part No. | | part No. | | part No. | |
|---|-------------------|----------|---------------------|---------|--------------------|----------|--------------------|---------|
| | | entry Pg | | entry M | | entry Pg | | entry M |
| with pegs, side entry | CMO 16 | 21 | MMO 16.25 | 25 | CMO 16 L | 21 | MMO 16 L25 | 25 |
| with pegs, side entry | | | MMO 16.32 | 32 | | | MMO 16 L32 | 32 |
| with pegs, side entry, high construction | CMAO 16.21 | 21 | MMAO 16.32 | 32 | CMAO 16 L21 | 21 | MMAO 16 L32 | 32 |
| with pegs, side entry, high construction | CMAO 16.29 | 29 | MMAO 16.40 | 40 | CMAO 16 L29 | 29 | MMAO 16 L40 | 40 |
| with pegs, top entry | CMV 16 | 21 | MMV 16.25 ** | 25 | CMV 16 L | 21 | MMV 16 L25 | 25 |
| with pegs, top entry | | | MMV 16.32 | 32 | | | MMV 16 L32 | 32 |
| with pegs, top entry | CMV 16.29 | 29 | MMV 16.40 | 40 | CMV 16 L29 | 29 | MMV 16 L40 | 40 |
| with pegs, top entry, high construction | CMAV 16.21 | 21 | MMAV 16.32 | 32 | CMAV 16 L21 | 21 | MMAV 16 L32 | 32 |
| with pegs, top entry, high construction | CMAV 16.29 | 29 | MMAV 16.40 | 40 | CMAV 16 L29 | 29 | MMAV 16 L40 | 40 |
| with pegs, frontal entry, high construction | CMAF 16.21 | 21 | MMAF 16.25 | 25 | | | | |
| with pegs, frontal entry, high construction | CMAF 16.29 | 29 | MMAF 16.32 | 32 | | | | |
| with pegs, frontal entry, high constr., without adaptor * | CMFF 16.21 | 21 | MMFF 16.25 | 25 | | | | |
| with pegs, frontal entry, high constr., without adaptor * | CMFF 16.29 | 29 | MMFF 16.32 | 32 | | | | |

* enclosure without adaptor, threaded on the body, to be used only with a complete cable clamp.

** can only be used with a complete cable clamp (to be purchased separately)


dimensions in mm

CMO (CMAO) and MMO (MMAO)

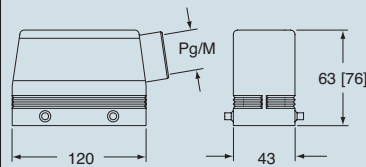


dimensions in mm

CMO L (CMAO L) and MMO L (MMAO L)

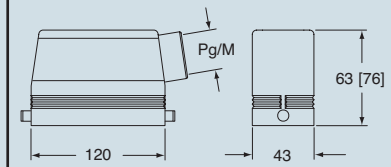


CMV (CMAV) and MMV (MMAV)

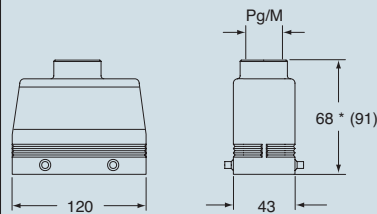


* 69.5 for Pg 29 - M 40 versions

CMV L (CMAV L) and MMV L (MMAV L)

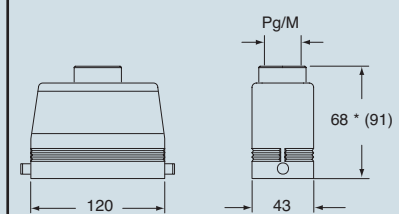

* 69.5 for Pg 29 - M 40 versions

CMAF/CMFF and MMAF/MMFF

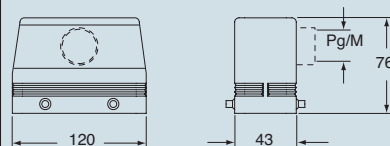

CALUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 104.27



inserts: page

CME 10 + 2 (aux) poles + ⊕ 119
 CME, CMCE 16 + 2 (aux) poles + ⊕ 124

insert centre distance:
 104 x 27 mm

hoods with 2 levers



hoods with single lever




| description | part No. | | entry | | part No. | | entry | |
|--|--------------------|----|--------------------|----|---------------------|----|---------------------|----|
| | | | Pg | M | | | Pg | M |
| with levers and gasket, top entry | CMV 16 G | 21 | MMV 16 G32 | 32 | CMV 16 LG | 21 | MMV 16 LG32 | 32 |
| with levers and gasket, top entry, high construction | CMAV 16 G | 21 | MMAV 16 G25 | 25 | CMAV 16 LG21 | 21 | MMAV 16 LG25 | 25 |
| with levers and gasket, top entry, high construction | CMAV 16 G29 | 29 | MMAV 16 G32 | 32 | CMAV 16 LG29 | 29 | MMAV 16 LG32 | 32 |
| with levers and gasket, top entry, high constr., without adaptor * | CMFV 16 G | 21 | MMFV 16 G25 | 25 | CMFV 16 LG21 | 21 | MMFV 16 LG25 | 25 |
| with levers and gasket, top entry, high constr., without adaptor * | CMFV 16 G29 | 29 | MMFV 16 G32 | 32 | CMFV 16 LG29 | 29 | MMFV 16 LG32 | 32 |

* enclosure without adaptor, threaded on the body, to be used only with a complete cable clamp.


dimensions in mm

**CMV G (CMAV G) and [CMFV G],
 MMV G (MMAV G) and [MMFV G]**

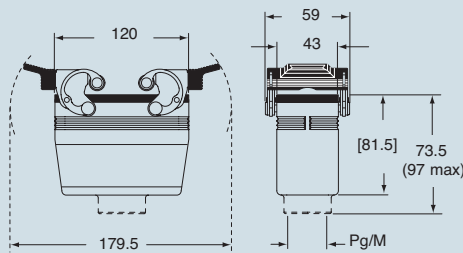

dimensions in mm

**CMV LG (CMAV LG) and [CMFV LG],
 MMV LG (MMAV LG) and [MMFV LG]**

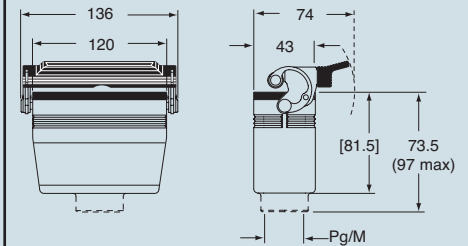

size 104.27

CRUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice



| | |
|---|------|
| inserts: | page |
| CME 10 + 2 (aux) poles + ⊕ | 119 |
| CME, CMCE 16 + 2 (aux) poles + ⊕ | 124 |


insert centre distance:
104 x 27 mm

Covers G and LG version are not suitable to be used with code pins. If this application is required please contact ILME SpA.

hoods with 2 levers



covers

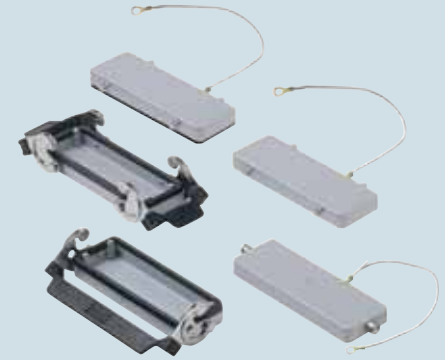


| description | part No. | entry Pg | part No. | entry M | part No. |
|---|--------------------|----------|--------------------|---------|------------------|
| with levers, side entry ¹⁾ | CMO 16 X | 21 | MMO 16 X25 | 25 | |
| with levers, side entry ¹⁾ | | | MMO 16 X32 | 32 | |
| with levers, side entry, high construction ¹⁾ | CMAO 16 X | 21 | MMAO 16 X32 | 32 | |
| with levers, side entry, high construction ¹⁾ | CMAO 16 X29 | 29 | MMAO 16 X40 | 40 | |
| with levers, top entry ¹⁾ | CMV 16 X | 21 | MMV 16 X25 | 25 | |
| with levers, top entry ¹⁾ | | | MMV 16 X32 | 32 | |
| with levers, top entry, high construction ¹⁾ | CMAV 16 X | 21 | MMAV 16 X32 | 32 | |
| with levers, top entry, high construction ¹⁾ | CMAV 16 X29 | 29 | MMAV 16 X40 | 40 | |
| with 4 pegs (for enclosures with 2 levers with gasket) | | | | | CHC 24 |
| with 4 pegs and gasket (for enclosures with 2 levers) ²⁾ | | | | | CHC 24 C |
| with 2 pegs (for enclosures with 1 lever with gasket) | | | | | CHC 24 L |
| with 2 levers (for hoods with 4 pegs) | | | | | CHC 24 G |
| with 1 lever (for hoods with 2 pegs) | | | | | CHC 24 LG |

¹⁾ May be combined with housings:
- CMI/CMP/CMAV 16 CS
- MMP/MMAV 16 CS


²⁾ May be combined with housings:
- CMO/CMAO 16 X and CMV/CMAV 16 X
- MMO/MMAO 16 X and MMV/MMAV 16 X

dimensions in mm

CMO X (CMAO X) and MMO X (MMAO X)

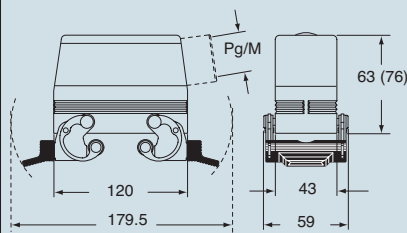

CMV X (CMAV X) and MMV X (MMAV X)

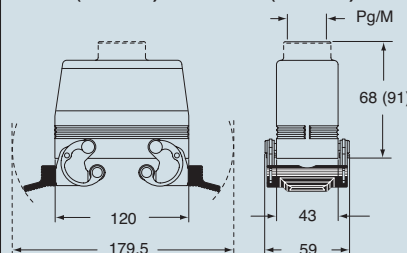

dimensions in mm


CHC




CHC C




CHC L



CHC G

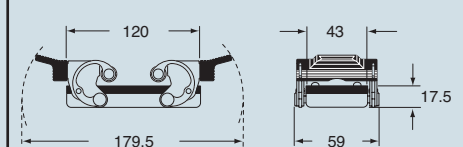

CHC LG



CALUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 104.27




| | | |
|---------------------|--------------|------|
| inserts: | | page |
| CN RY | 24 poles + ⊕ | 83 |
| CNE RY | 24 poles + ⊕ | 93 |
| CP RY | 6 poles + ⊕ | 127 |

insert centre distance:
104 x 27 mm

The covers for G versions cannot be used together with coding pins. If this application is required, please contact ILME SpA.

housings and cover

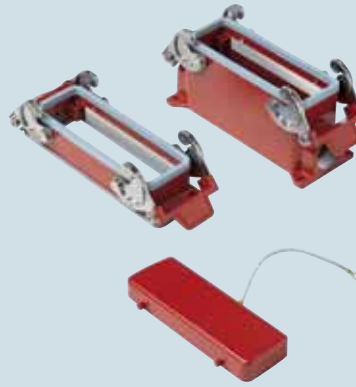


hoods and cover




| description | part No. | | part No. | | part No. | | part No. | |
|--|-------------------|---------|-------------------|---------|-------------------|---------|-------------------|---------|
| | entry Pg | entry M | entry Pg | entry M | entry Pg | entry M | entry Pg | entry M |
| bulkhead mounting, with levers | | | | | | | | |
| surface mounting, with levers, high construction | CHIR 24 | --- | MAPR 24.32 | 32 | | | | |
| cover with 4 pegs (for housings) | CAPR 24.21 | 21 | | | | | | |
| with pegs, side entry | | | | | CHOR 24 | 21 | MHOR 24.25 | 25 |
| with pegs, side entry, high construction | | | | | CAOR 24.29 | 29 | MAOR 24.40 | 40 |
| with pegs, top entry | | | | | CHVR 24 | 21 | MHVR 24.25 | 25 |
| with pegs, top entry, high construction | | | | | CAVR 24.29 | 29 | MAVR 24.40 | 40 |
| cover with 2 levers (for hoods) | | | | | CHCR 24 G | | | |

panel cut-out for bulkhead mounting housings in mm

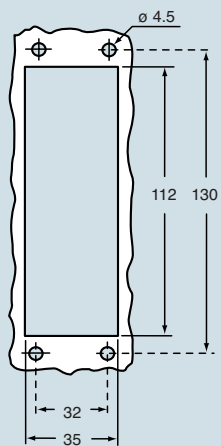


dimensions in mm

CHIR

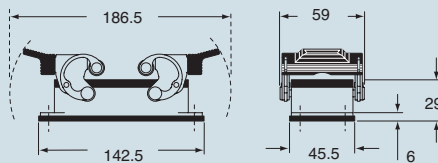

CAPR and MAPR

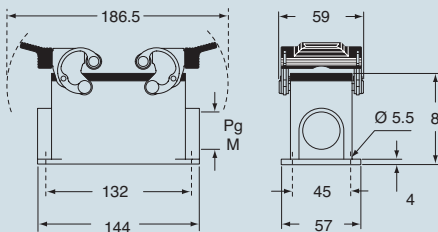


CHCR




dimensions in mm

CHOR (CAOR) and MHOR (MAOR)

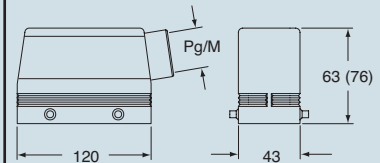


CHVR (CAVR) and MHVR (MAVR)

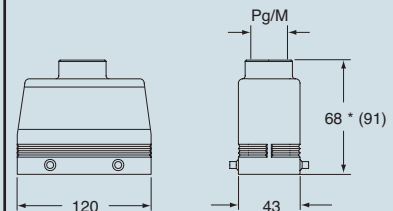

* 69.5 for Pg 29 - M 40 versions

CHCR G



CALUS® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 104.27



| inserts: | page |
|--------------------|---------|
| CD | 45 |
| CT, CTS *) (10A) | 51 |
| CDD | 58 |
| CQE | 77 |
| CN | 83 |
| CCE | 92 |
| CNE, CSE | 93 |
| CSS | 101 |
| CTE, CTSE *) (16A) | 109 |
| CMSE | 118 |
| CMCE | 118 |
| CME | 119 |
| CME | 124 |
| CMCE | 124 |
| CX | 133 |
| MIXO | 137÷151 |

insert centre distance: 104 x 27 mm

*) only for enclosure CHIW 24

housings and cover




hoods and cover



| description | part No. | entry Pg | part No. | entry M | part No. | entry Pg | part No. | entry M |
|--|-------------------|----------|-------------------|---------|-------------------|----------|--------------------|---------|
| bulkhead mounting, with levers | CHIW 24 | --- | | | | | | |
| surface mounting, with levers, high construction | CAPW 24.21 | 21 | MAPW 24.32 | 32 | | | | |
| cover with 4 pegs (for enclosures with 2 levers) | CHCW 24 | | | | | | | |
| with pegs, side entry | | | | | CHOW 24 | 21 | MHOW 24.25 | 25 |
| with pegs, side entry, high construction | | | | | CAOW 24.29 | 29 | MHOW 24.32 | 32 |
| with pegs, side entry, high construction | | | | | | | MAOW 24.32 | 32 |
| with pegs, side entry, high construction | | | | | | | MAOW 24.40 | 40 |
| with pegs, top entry | | | | | CHVW 24 | 21 | MHVW 24.25 | 25 |
| with pegs, top entry, high construction | | | | | | | MHVW 24.32 | 32 |
| with pegs, top entry, high construction | | | | | CAVW 24.29 | 29 | MAVW 24.32 | 32 |
| with pegs, top entry, high construction | | | | | | | MAVW 24.40 | 40 |
| cover with 2 levers (for enclosures with 4 pegs) | | | | | CHCW 24 G | | | |
| with lever and gasket, top entry | | | | | CHVW 24 G | 21 | MHVW 24 G32 | 32 |

panel cut-out for bulkhead mounting housings in mm

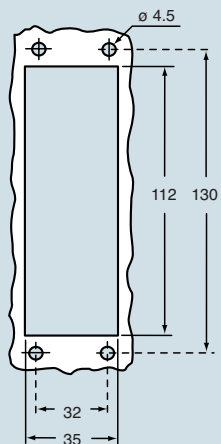


The covers for G versions cannot be used together with coding pins. If this application is required, please contact ILME SpA.

ILME® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

dimensions in mm

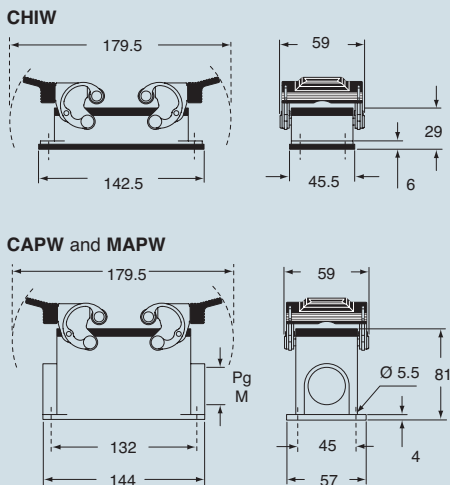


CHCW




dimensions in mm


CHOW (CAOW) and MHOW (MAOW)

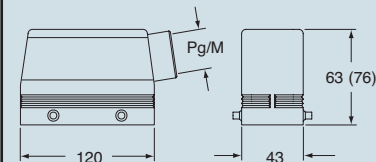


CHVW (CAVW) and MHVW (MAVW)

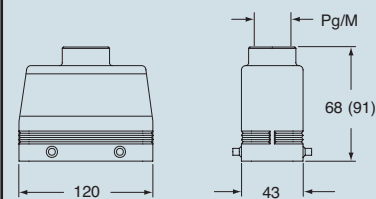

CHCW G



CHVW G and MHVW G

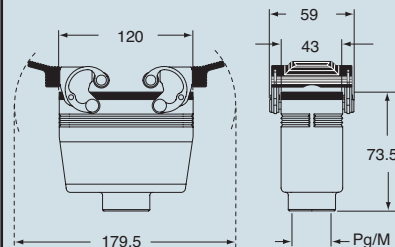

size 104.27




| inserts: | | page |
|-----------------------|----------------------|---------|
| CD | 64 poles + ⊕ | 45 |
| CT, CTS *) (10A) | 64 poles + ⊕ | 51 |
| CDD | 108 poles + ⊕ | 58 |
| CQE | 46 poles + ⊕ | 77 |
| CN | 24 poles + ⊕ | 83 |
| CCE | 24 poles + ⊕ | 92 |
| CNE, CSE..... | 24 poles + ⊕ | 93 |
| CSS | 24 poles + ⊕ | 101 |
| CTE, CTSE *) (16A) 24 | poles + ⊕ | 109 |
| CMSE | 10+2 (aux) poles + ⊕ | 118 |
| CMCE | 10+2 (aux) poles + ⊕ | 118 |
| CX | 4/8 poles + ⊕ | 133 |
| MIXO | 6 modules | 137÷151 |

insert centre distance: 104 x 27 mm

*) only for enclosure CHIS 24

housings and cover for electromagnetic compatibility




hoods and cover for electromagnetic compatibility




| description | part No. | | part No. | | part No. | | part No. | |
|--|-------------------|----------|-------------------|---------|-------------------|----------|-------------------|---------|
| | | entry Pg | | entry M | | entry Pg | | entry M |
| bulkhead mounting, with levers | CHIS 24 | --- | | | | | | |
| surface mounting, with levers, high construction | CAPS 24.21 | 21 | MAPS 24.32 | 32 | | | | |
| cover with 4 pegs (for enclosures with 2 levers) | CHCS 24 | | | | | | | |
| with pegs, side entry | | | | | CHOS 24 | 21 | MHOS 24.25 | 25 |
| with pegs, side entry | | | | | CAOS 24.29 | 29 | MHOS 24.32 | 32 |
| with pegs, side entry, high construction | | | | | | | MAOS 24.32 | 32 |
| with pegs, side entry, high construction | | | | | | | MAOS 24.40 | 40 |
| with pegs, top entry | | | | | CHVS 24 | 21 | MHVS 24.25 | 25 |
| with pegs, top entry | | | | | | | MHVS 24.32 | 32 |
| with pegs, top entry, high construction | | | | | CAVS 24.29 | 29 | MAVS 24.32 | 32 |
| with pegs, top entry, high construction | | | | | | | MAVS 24.40 | 40 |
| cover with 2 levers (for enclosures with 4 pegs) | | | | | CHCS 24 G | | | |

panel cut-out for bulkhead mounting housings in mm

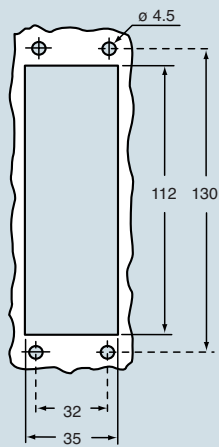


dimensions in mm


CHIS

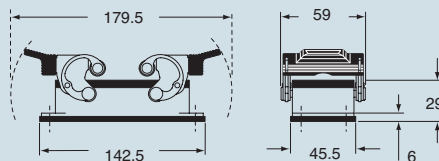

CAPS and MAPS

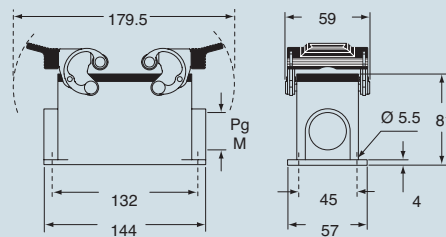


CHCS




dimensions in mm


CHOS (CAOS) and MHOS (MAOS)

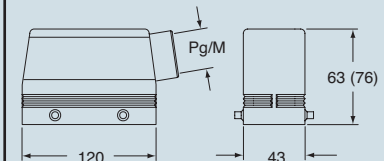

CHVS (CAVS) and MHVS (MAVS)

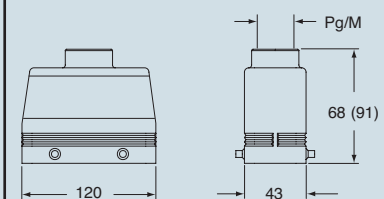

CHCS G



The covers for G versions cannot be used together with coding pins. If this application is required, please contact ILME SpA.

ILME® Type 4/4X/12

dimensions indicated are not binding and may be changed without notice

size 104.27

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Circular Connector](#) category:

Click to view products by [ILME](#) manufacturer:

Other Similar products are found below :

[C015 10F006 001 1](#) [5M2530B10P](#) [600247N007](#) [600259N006](#) [600273N007](#) [600432N009](#) [6280-2PG-519](#) [6280-3PG-311](#) [6280-3SG-311](#)
[6280-7SG-3DC](#) [6280-7SG-522](#) [6282-5PG-311](#) [6282-6PG-519](#) [6282-8SG-311](#) [6283-11](#) [6283-15](#) [6290](#) [6293](#) [6382-2PG-311](#) [6382-2PG-3DC](#)
[6382-2SG-321](#) [6382-2SG-3DC](#) [6382-4SG-516](#) [67-03E20-37P](#) [681-PMG](#) [CXS3102A14S2P](#) [CXS3102A181S](#) [CXS3106A14S6S](#)
[D38999/20FC8SA L/C](#) [MB12P-1](#) [MB12R-6](#) [7251-2PG-300](#) [7251-2SG-300](#) [7251-4PG-300](#) [7251-4SG-300](#) [7251-5PG-300](#) [7251-5SG-300](#)
[7251-6SG-300](#) [7251-7PG-300](#) [7251-8PG-300](#) [7271-6SG-300](#) [7282-3PG-300-CH3](#) [73000005663](#) [75-190011-03P](#) [75-190216-08S](#) [75-190218-](#)
[10P](#) [75-214636-52P](#) [75-474118-10P](#) [75-474211-03P](#) [75-474218-19S](#)