


SPECIFICATION CONTROL DRAWING

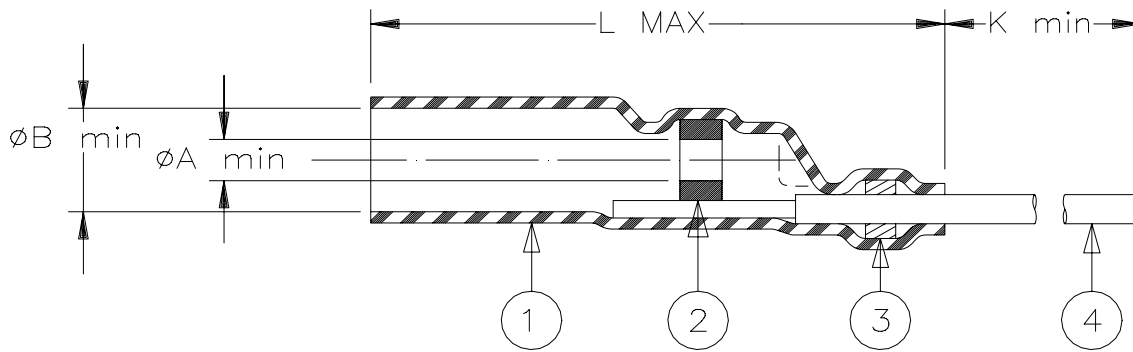

Product Revisions		"XY" Wire Gauge (AWG)				Cable Dimensions			
		Product Dimensions				D	F	M±0.5 (M±0.02)	
Product Names		L max	A min	B min	K min				
B-801-62	F	17.5 (0.690)	1.4 (0.055)	2.8 (0.110)	150 (5.900)	22	0.6 (0.025)	0.3 (0.015)	5 (0.200)
B-801-64	F					24	to	to	
B-801-66	G					26	2.4 (0.095)	1.3 (0.050)	


MATERIAL

1. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
2. SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Sn63 per ANSI J-STD-006.
 FLUX: TYPE ROL1 per ANSI J-STD-004.
3. MELTABLE RING: Thermally stabilized thermoplastic. Color: red.
4. CONDUCTOR LEAD: Raychem 55A0111-XY in accordance with MIL-W-22759/32 AWGXY (see table) stranded tin plated copper wire. Color: white.

APPLICATION

1. These controlled soldering devices are designed to terminate with a stranded extension lead:
 - A metallic pin or
 - the primary of a coaxial cable or
 - one or several tin or silver plated wire(s), having an insulation rated for at least +125°C.
2. Temperature range: -55°C to +150°C.
3. Install using Raychem-approved convection or infrared tools in accordance with Raychem installation procedure RPIP-825-00.

For best results, prepare the wire(s) as shown:

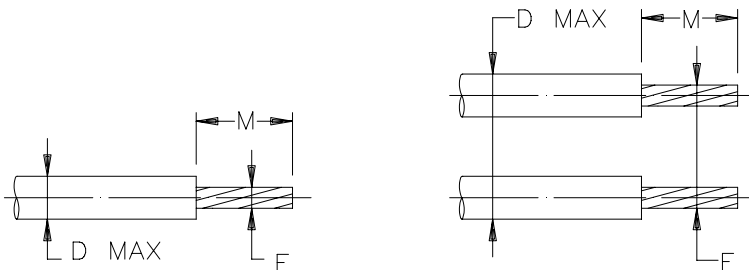

Raychem	THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: SOLDERSLEEVE* DEVICE EXTENSION			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS.			DOCUMENT NO.: B-801-6X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: D981701		REPLACES: B8016X	
DRAWN BY: R. MAPALO	DATE: 16-Oct-98	REV.: SEE TABLE	DOC ISSUE: 3	SCALE: NONE	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.

SPECIFICATION CONTROL DRAWING

*A trademark of Raychem Corporation.

Raychem	THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: SOLDERSLEEVE* DEVICE EXTENSION			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE IN BETWEEN BRACKETS.			DOCUMENT NO.: B-801-6X			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DCR NUMBER: D981701	REPLACES: B8016X		
DRAWN BY: R. MAPALO	DATE: 16-Oct-98	REV.: SEE TABLE	DOC ISSUE: 3	SCALE: NONE	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Solder & Shield Tubing](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[CTC-0062-20-9/5-9](#) [CTC-0062-22-9/5-9](#) [650076N001](#) [680441-000](#) [D-150-0331CS2902](#) [D-181-1222-90/9CS2800](#) [D-300-01CS1108](#) [982127-1](#) [D-436-0127CS391](#) [D-436-0182CS246](#) [D-436-37CS2651](#) [D-436-58CS246](#) [D-436-61CS246](#) [D-436-82-CS2621](#) [D-659-0087](#) [D-750-0005CS2493](#) [E53797N001](#) [S200-2-01](#) [S200-4-00CS2904](#) [LSS-81-16AA-CS5575](#) [SO63-2-9036-22CS2677](#) [SO63-3-01CS293](#) [SO63-3-9036-20CS2677](#) [SO63-3-9036-22CS2677](#) [SO63-4-9036-20CS2677](#) [SO63-5-9036-22CS2677](#) [CC1525-000](#) [CTA-0025](#) [CTA-0025CS072](#) [D-108-01CS227](#) [D-108-07CS436](#) [D-128-0010](#) [D-141-0108CS404](#) [D-142-51-202-7754](#) [D-144-41CS1371](#) [D-150-0231-NRCS2896](#) [B-801-18-01](#) [B-801-58](#) [515-9](#) [C67137-000](#) [D-436-36CS2908](#) [D-436-37CS2908](#) [D-436-52CS246](#) [D-436-83CS2705](#) [D-438-0102](#) [LSS-26-8A](#) [427243-000](#) [D-106-2012](#) [D-300-08CS1108](#) [UWCS-2U/7.6-1C/5.8](#)