




# MIDI VAL<sup>®</sup> BLADE TYPE FUSE

MidiVAL<sup>®</sup> fuses are compliant with ISO 8820-5 Standard, applicable to automotive bolt-on Fuses. They allow space reduction compared to MegaVAL<sup>®</sup> for high current wiring protection. The operating features are characterized by strong time delay characteristics. MidiVAL<sup>®</sup> are made of Zinc alloy, a good choice to avoid high temperatures inside the box..

**Breaking capacity:** 2000[A]  
**Voltage rating:** 32[Vdc]  
**Ambient temperature:** -40°C to +125°C



MTA/ISO MidiVAL <sup>®</sup> operating time limits		
% I <sub>N</sub>	min [s]	max [s]
100	360000	-
110	14400	-
150	90	3600
200	3	100
300	0,3	3
500	0,1	1

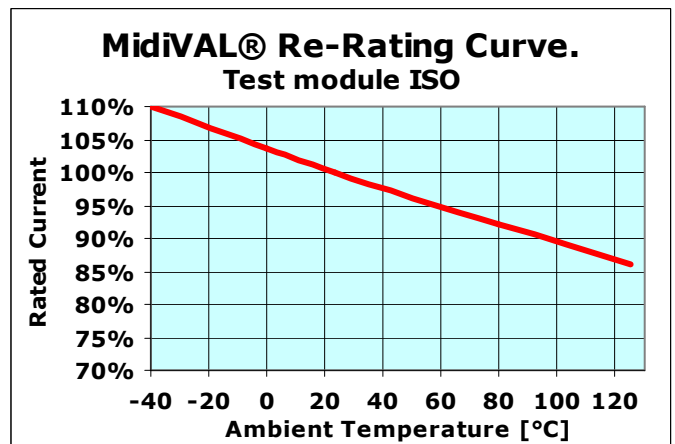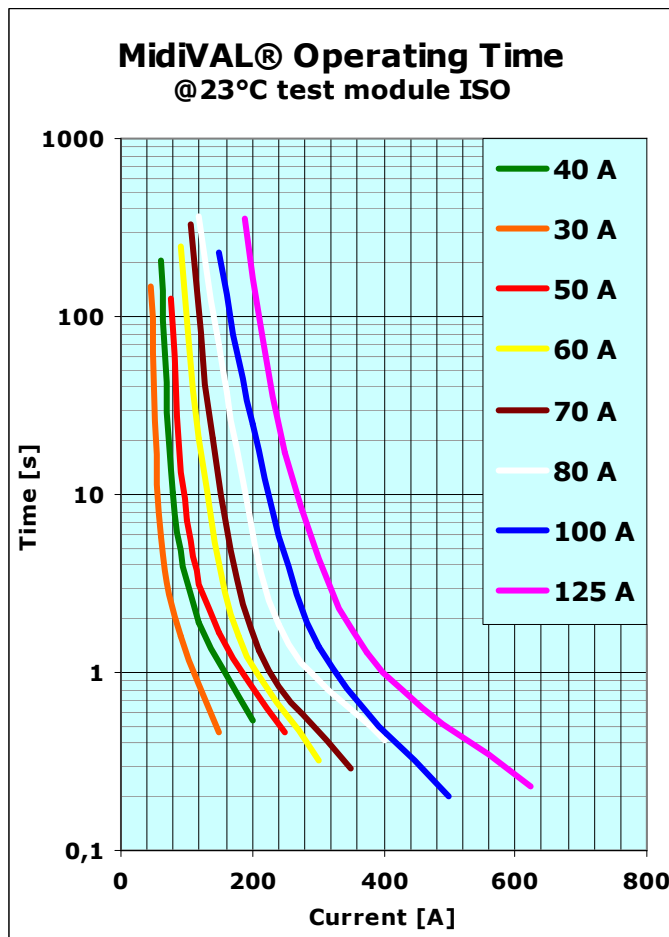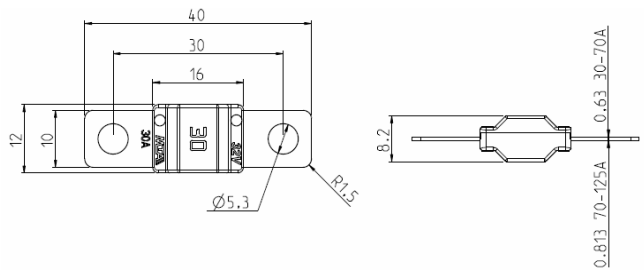

CURRENT RATING [A]	VOLTAGE DROP @ current rating [mV]	CABLE SIZE [mm <sup>2</sup> ]	I <sup>2</sup> t
30	80,5	2,5	10523
40	70,9	4,0	18929
50	74,2	6,0	26320
60	60,5	10,0	30804
70	68,2		26728
80	66,0	16,0	56298
100	63,7		34524
125	62,0	25,0	48601

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Automotive Fuses](#) category:*

*Click to view products by [MTA](#) manufacturer:*

Other Similar products are found below :

[HBO-10](#) [HBO-100](#) [HBO-150](#) [HBO-25](#) [HBO-40](#) [HBO-50](#) [AFX-150](#) [AT-10](#) [AT-30](#) [AT-5](#) [ATM-4LP](#) [ACL-30](#) [ACL-50](#) [AFX-50](#) [HBO-15](#)  
[HBO-70](#) [AT-20](#) [AT-25](#) [AT-3](#) [142.7010.5502](#) [BK-HBH-I](#) [BK-AGX-1-2](#) [142.0020.6152](#) [FMM-15](#) [0695030.PXPS](#) [0695040.PXPS](#)  
[0297003.WXT](#) [0695025.PXPS](#) [0695015.PXPS](#) [0200300](#) [02400106P](#) [0297002.WXT](#) [0297004.WXT](#) [0297010.WXT](#) [0297015.WXT](#)  
[0297020.WXT](#) [0297025.WXT](#) [0297030.WXT](#) [029707.5WXT](#) [0602930](#) [0602935](#) [0602940](#) [0602950](#) [0602960](#) [0611100](#) [0611125](#) [0611150](#)  
[0611175](#) [0611200](#) [0611225](#)