

LTM4676AEY

130A Step-Down μ Module Regulator with PMBus Power System Management

DESCRIPTION

Demonstration circuit 2106B-B is a high efficiency, high density, μ Module regulator with 4.5V to 16V input range. The output voltage is adjustable from 0.5V to 1.8V, and it can supply 130A maximum load current. The demo board has 1 \times LTM[®]4676A and 3 \times LTM4630 μ Module regulators. The LTM4676A is a dual 13A or single 26A step-down regulator with PMBus power system management, and the LTM4630 is a dual 18A or single 36A step-down regulator. Please see LTM4676A and LTM4630 data sheets for more detailed information.

DC2106B-B powers up to default settings and produces power based on configuration resistors without the need for any serial bus communication. This allows easy evaluation of the DC/DC converter. To fully explore the extensive power system management features of the part, download the GUI software LTpowerPlay[™] onto your PC and use

LTC's I²C/SMBus/PMBus dongle DC1613A to connect to the board. LTpowerPlay allows the user to reconfigure the part on the fly and store the configuration in EEPROM, and view telemetry of voltage, current, temperature and fault status.

GUI Download

The software can be downloaded from:

<http://www.linear.com/ltpowerplay>

For more details and instructions of LTpowerPlay, please refer to LTpowerPlay GUI for LTM4676A Quick Start Guide.

Design files for this circuit board are available at
<http://www.linear.com/demo/DC2106B-B>

LT, LT, LTC, LTM, Linear Technology, the Linear logo, Dust Networks, Dust and PolyPhase are registered trademarks and LTpowerPlay is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners.

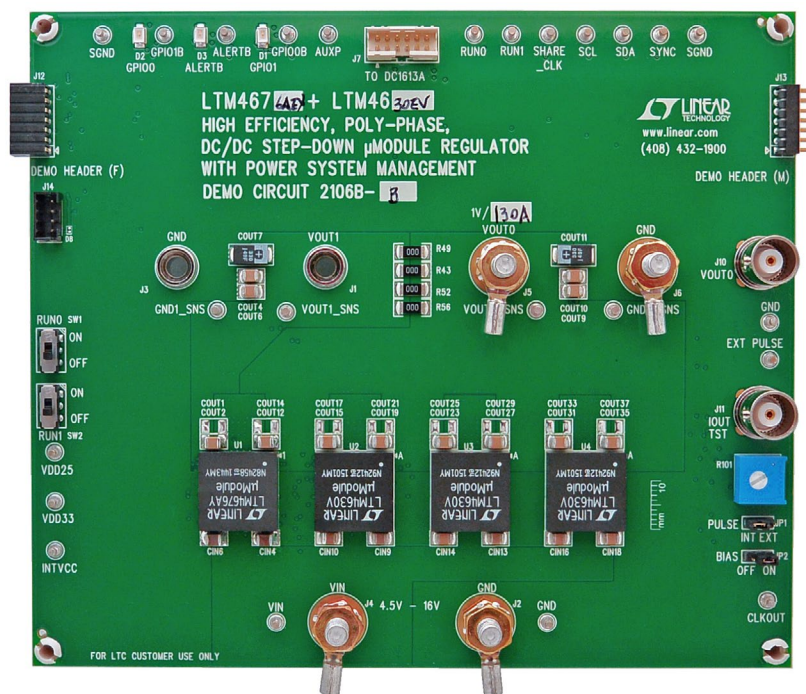


Figure 1. LTM4676A/DC2106B-B Demo Circuit

DEMO MANUAL DC2106B-B

PERFORMANCE SUMMARY Specifications are at $T_A = 25^\circ\text{C}$

PARAMETER	CONDITION	VALUE
Input Voltage Range		4.5V to 16V
Output Voltage, V_{OUT0}	$V_{IN} = 4.5\text{V to }16\text{V}$, $I_{OUT0} = 0\text{A to }130\text{A}$	0.5V to 1.8V, Default: 1V
Maximum Output Current, I_{OUT0}	$V_{IN} = 4.5\text{V to }16\text{V}$, $V_{OUT} = 0.5\text{V to }1.8\text{V}$	130A
Typical Efficiency	$V_{IN} = 12\text{V}$, $V_{OUT} = 1\text{V}$, $I_{OUT} = 130\text{A}$	82.9%
Default Switching Frequency		350kHz

QUICK START PROCEDURE

Demonstration circuit 2106B-B is easy to set up to evaluate the performance of the LTM4676AEY. Refer to Figure 2 for the proper measurement equipment setup and follow the procedure below.

1. With power off, connect the input power supply to V_{IN} (4.5V to 16V) and GND (input return).
2. Connect the output load between V_{OUT0} and GND (Initial load: no load).
3. Connect the DVMs to the input and outputs. Set default switch position: SW1: ON; SW2: ON.
4. Turn on the input power supply and check for the proper output voltages. V_{OUT0} should be $1\text{V} \pm 1\%$.
5. Once the proper output voltages are established, adjust the loads within the operating range and observe the output voltage regulation, ripple voltage and other parameters.

6. Connect the dongle and control the output voltages from the GUI. See “LTpowerPlay GUI for the LTM4676A Quick Start Guide” for details.

Note: When measuring the output or input voltage ripple, do not use the long ground lead on the oscilloscope probe. See Figure 3 for the proper scope probe technique. Short, stiff leads need to be soldered to the (+) and (–) terminals of an output capacitor. The probe’s ground ring needs to touch the (–) lead and the probe tip needs to touch the (+) lead.

Connecting a PC to DC2106B-B

You can use a PC to reconfigure the power management features of the LTM4676A such as: nominal V_{OUT} , margin set points, OV/UV limits, temperature fault limits, sequencing parameters, the fault log, fault responses, GPIOs and other functionality. The DC1613A dongle may be plugged when V_{IN} is present.

Table 1. LTM4676/LTM4676A Demo Cards for Up to 130A Point-of-Load Regulation

MAXIMUM OUTPUT CURRENT	NUMBER OF OUTPUT VOLTAGES	NUMBER OF LTM4676/LTM4676A μ MODULE REGULATORS ON THE BOARD	DEMO BOARD NUMBER
13A, 13A	2	1x LTM4676	DC1811A/DC1811B-A
13A, 13A	2	1x LTM4676A	DC1811B-B
26A	1	1x LTM4676	DC2087A
50A	1	2x LTM4676	DC1989A-A
75A	1	3x LTM4676	DC1989A-B
100A	1	4x LTM4676	DC1989A-C
100A	1	1x LTM4676 (+ 3x LTM4620A)	DC2106A-A
130A	1	1x LTM4676 (+ 3x LTM4630)	DC2106A-B
100A	1	1x LTM4676A (+ 3x LTM4620A)	DC2106B-A
130A	1	1x LTM4676A (+ 3x LTM4630)	DC2106B-B

QUICK START PROCEDURE

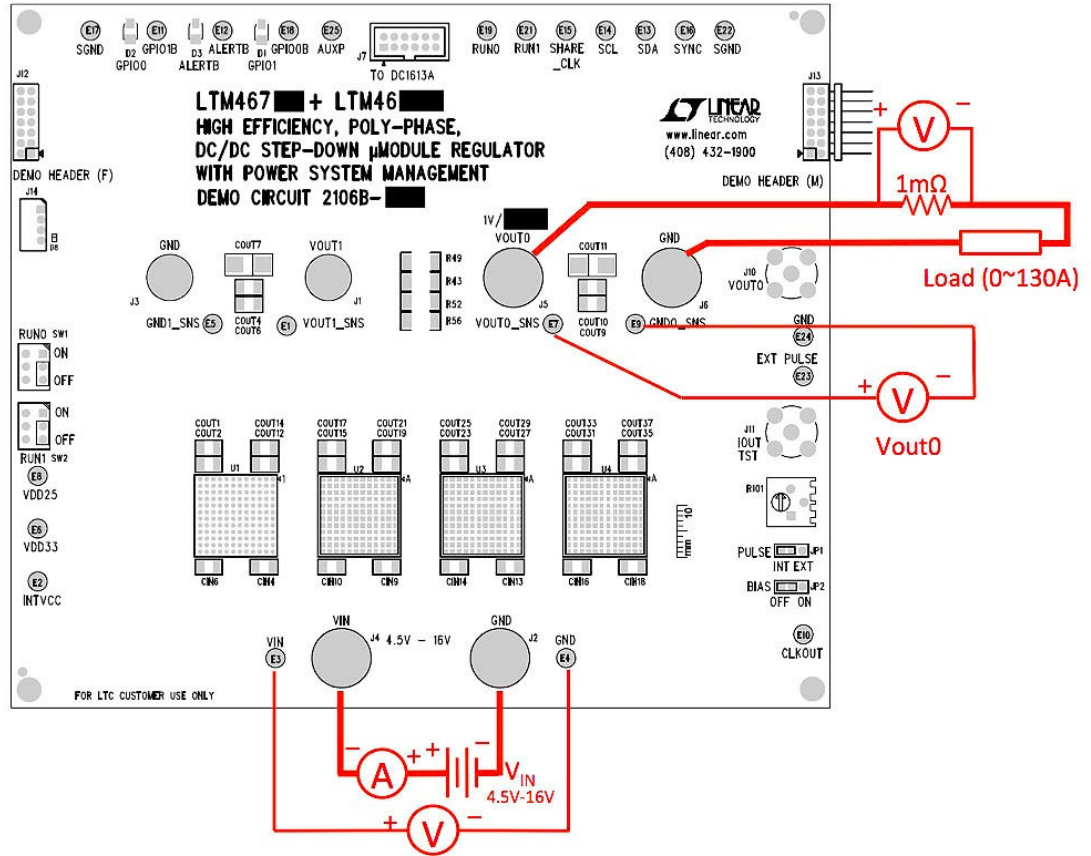


Figure 2. Proper Measurement Equipment Setup

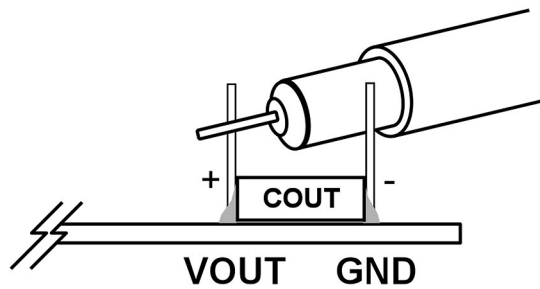


Figure 3. Measuring Output Voltage Ripple

QUICK START PROCEDURE

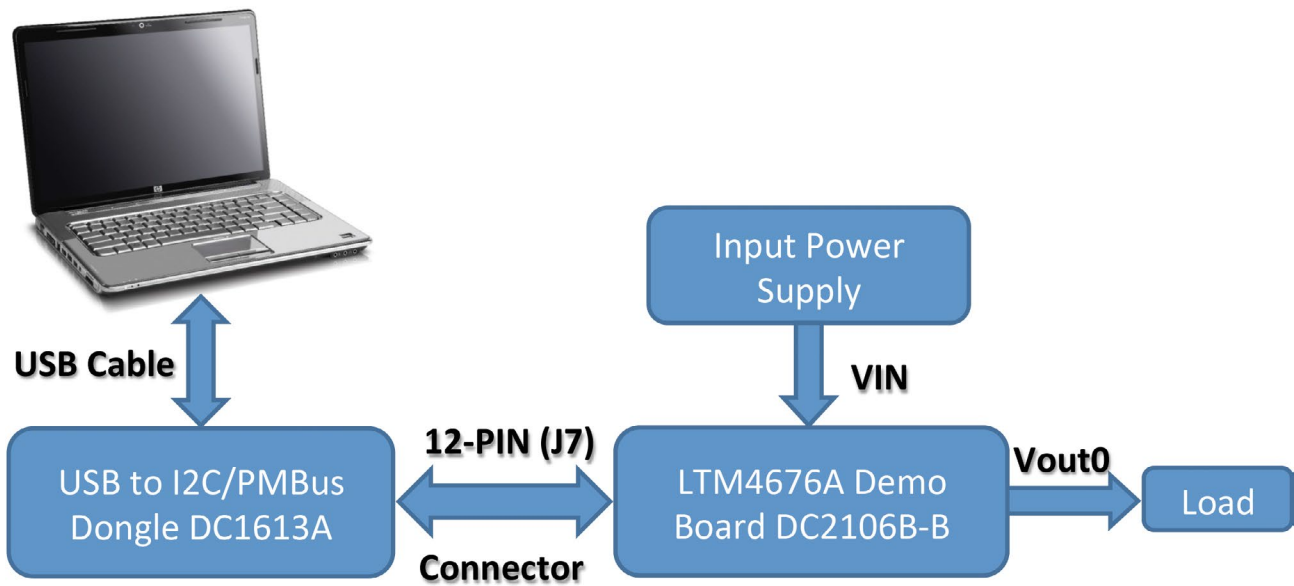


Figure 4. Demo Setup with PC

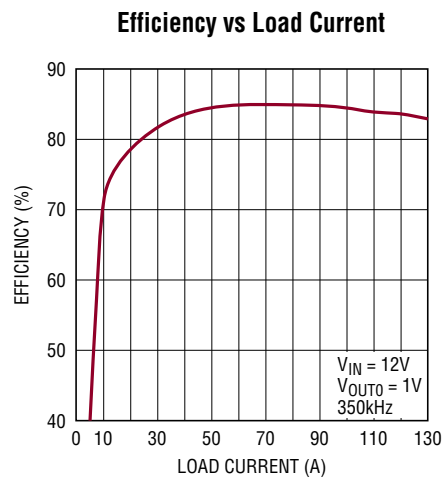


Figure 5. Efficiency vs Load Current at $V_{IN} = 12V$

QUICK START PROCEDURE

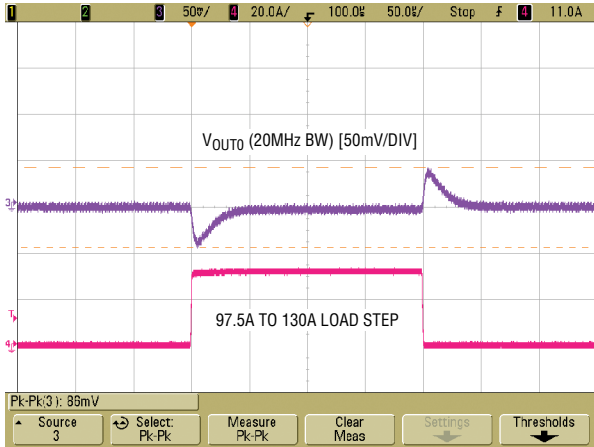


Figure 6. Output Voltage V_{OUTO} vs Load Current (V_{OUTO} RANGE = 0)

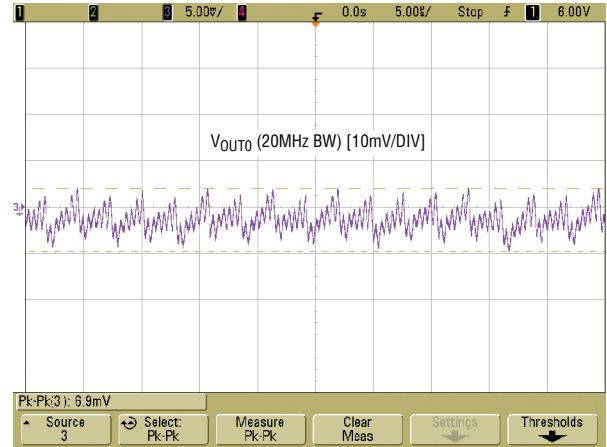


Figure 7. Output Voltage Ripple at $V_{IN} = 12V$, $V_{OUTO} = 1V$, $I_{OUTO} = 130A$

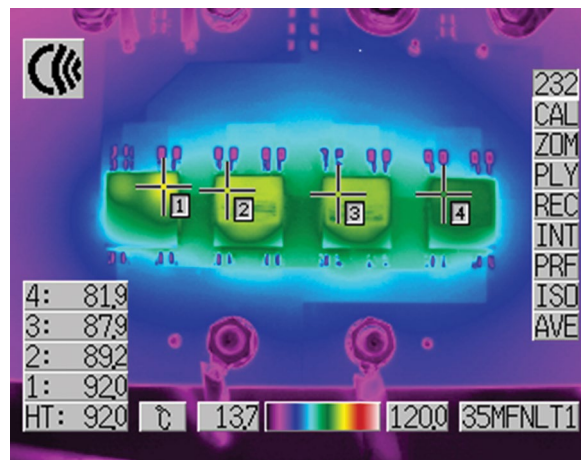


Figure 8. Thermal Performance at $V_{IN} = 12V$, $V_{OUTO} = 1V$, $I_{OUTO} = 130A$, $T_A = 23.3^\circ C$, Air Flow 300LFM

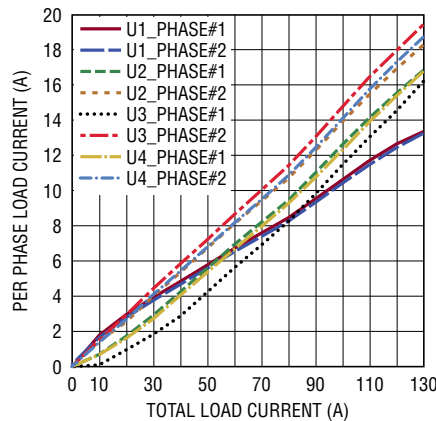


Figure 9. Current Sharing Performance at $V_{IN} = 12V$, $V_{OUTO} = 1V$

QUICK START PROCEDURE

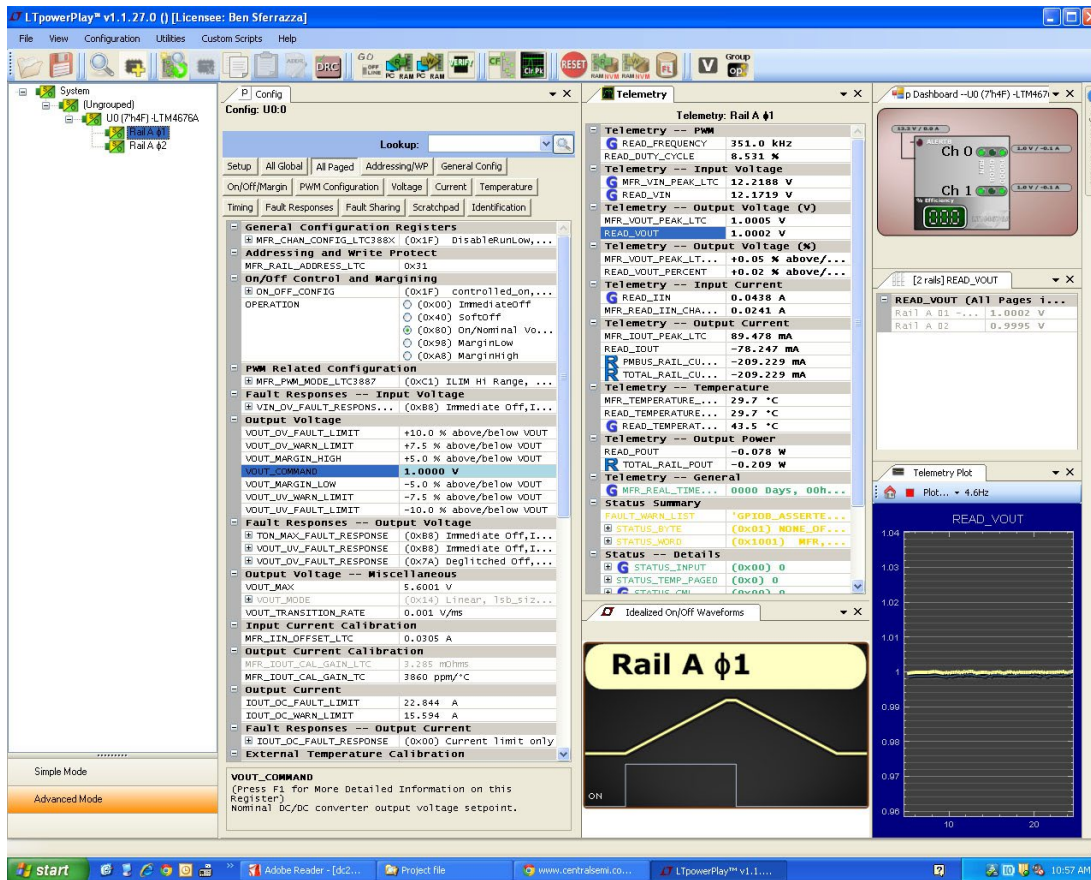


Figure 10. LTpowerPlay Main Interface

LTpowerPlay Software GUI

LTpowerPlay is a powerful Windows based development environment that supports Linear Technology power system management ICs, including the LTM4676A, LTC3880, LTC3883, LTC2974 and LTC2978. The software supports a variety of different tasks. You can use LTpowerPlay to evaluate Linear Technology ICs by connecting to a demo board system. LTpowerPlay can also be used in an offline mode (with no hardware present) in order to build a multichip configuration file that can be saved and reloaded at a later time. LTpowerPlay provides unprecedented diagnostic and debug features. It becomes a valuable diagnostic tool during board bring-up to program or tweak the power management scheme in a system, or to diagnose power issues when bringing up rails. LTpowerPlay utilizes the DC1613A USB-to-SMBus controller to communicate with one of many potential targets, including the LTM4676, the

LTC3880 and the LTC3883's demo system, or a customer board. The software also provides an automatic update feature to keep the software current with the latest set of device drivers and documentation. The LTpowerPlay software can be downloaded from:

<http://linear.com/ltpowerplay>

To access technical support documents for LTC Digital Power Products visit Help. View online help on the LTpowerPlay menu.

LTpowerPlay QUICK START PROCEDURE

The following procedure describes how to use LTpowerPlay to monitor and change the settings of LTM4676A.

1. Download and install the LTpowerPlay GUI:

<http://linear.com/ltpowerplay>


QUICK START PROCEDURE

2. Launch the LTpowerPlay GUI.

- a. The GUI should automatically identify the DC2106B-B. The system tree on the left hand side should look like this:




- b. A green message box shows for a few seconds in the lower left hand corner, confirming that LTM4676A is communicating:

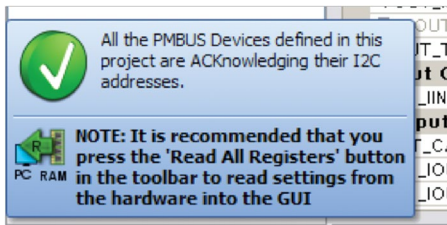

- c. In the Toolbar, click the “R” (RAM to PC) icon to read the RAM from the LTM4676A. This reads the configuration from the RAM of LTM4676A and loads it into the GUI.



- d. If you want to change the output voltage to a different value, like 1.5V. In the Config tab, type in 1.5 in the VOUT_COMMAND box, like this:

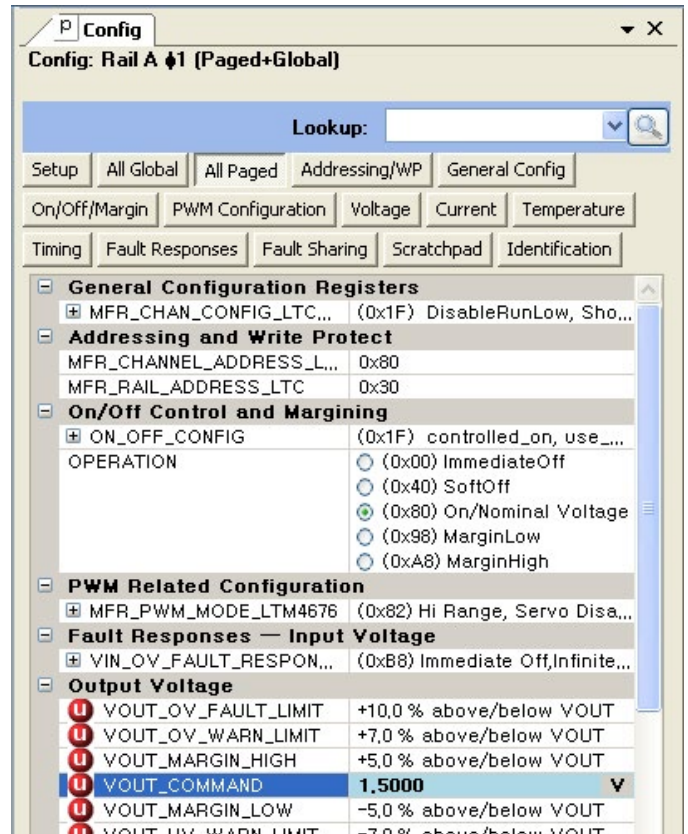

Then, click the “W” (PC to RAM) icon to write these register values to the LTM4676A. After finishing this step, you will see the output voltage will change to 1.5V.



If the write is successful, you will see the following message:



- e. You can save the changes into the NVM. In the tool bar, click “RAM to NVM” button, as following



- f. Save the demo board configuration to a (*.proj) file. Click the Save icon and save the file. Name it whatever you want.

DEMO MANUAL DC2106B-B

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	18	CIN1, CIN2, CIN4, CIN5, CIN6, CIN7, CIN8, CIN9, CIN10, CIN11, CIN12, CIN13, CIN14, CIN15, CIN16, CIN17, CIN18, CIN19	CAP, X5R, 10µF, 35V, 10%, 1210	NIC NMC1210X5R106K35TRPLPF
2	1	CIN3	CAP, 150µF, 35V, ALUMINUM ELECTR	SUN ELECT, 35CE150AX
3	21	COUT1, COUT2, COUT3, COUT4, COUT6, COUT9, COUT10, COUT12, COUT13, COUT15, COUT16, COUT19, COUT20, COUT23, COUT24, COUT27, COUT28, COUT31, COUT32, COUT35, COUT36	CAP, X5R, 100µF, 6.3V, 20% 1210	MURATA, GRM32ER60J107M20L
4	10	COUT5, COUT7, COUT18, COUT22, COUT26, COUT30, COUT34, COUT38, COUT8, COUT11	CAP, 330µF, 6.3V, POSCAP, D4	SANYO, 6TPF330M9L
5	1	C5	CAP, X7R, 2.2nF, 16V, 10%, 0603	AVX, 0603YC222KAT2A
6	4	C7, C8, C33, C34	CAP, X7R, 10nF, 16V, 10%, 0603	AVX, 0603YC103KAT2A
7	3	C11, C18, C22	CAP, X5R, 2.2µF, 16V, 10%, 0603	TDK, C1608X5R1C225K
8	3	C12, C19, C23	CAP, X7R, 1µF, 16V, 10%, 0603	AVX, 0603YC105KAT2A
9	2	C31, C28	CAP, X7R, 1µF, 25V, 10%, 1206	AVX, 12063C105KAT2A
10	1	C25	CAP, X7R, 0.22µF, 25V, 10%, 0805	AVX, 08053D224KAT2A
11	1	C26	CAP, X7R, 0.1µF, 25V, 10%, 1206	AVX, 12063C104KAT2A
12	1	C29	CAP, X5R, 1µF, 25V, 10%, 0805	AVX, 08053D105KAT2A
13	1	C27	CAP, X7R, 150pF, 25V, 10%, 0603	AVX, 06033C151KAT2A
14	1	C30	CAP, X5R, 4.7µF, 10V, 10%, 0603	AVX, 0603ZD475KAT2A
15	2	D1, D2	LED GREEN S-GW TYPE SMD	ROHM SML-010FTT86
16	1	D3	LED RED S-TYPE GULL WING SMD	ROHM SML-010VTT86
17	1	D10	DIODE, ULTRA LOW SCHOTTKY RECTIFIER	NXP SEMI PMEG2005AEL, 315
18	3	Q1, Q3, Q4	MOSFET N-CH 60V 115MA SOT-23	FAIRCHILD 2N7002K
19	1	Q2	MOSFET P-CH 20V 0.58A SOT-23	VISHAY TP0101K-T1-E3
20	2	Q5, Q6	MOSFET SPEED SRS 30V 30A LPAK	RENESAS RJK0305DPB
21	1	Q19	P-CHANNEL 30-V MOSFET	DIODE IN, DMP3130L-7
22	1	R25	RES, CHIP, 22.6k, 1%, 0603	VISHAY CRCW060322K6FKEA
23	24	R2, R4, R8, R23, R31, R32, R34, R37, R38, R50, R61, R66, R42, R44, R46, R47, R41, R64, R51, R55, R109, R75, R80, R114	RES, CHIP, 0, 1%, 0603	VISHAY CRCW06030000Z0EA
24	4	R43, R49, R52, R56,	RES, CHIP, 0, 1%, 2010	VISHAY CRCW20100000Z0EA
25	9	R10, R11, R12, R13, R16, R17, R21, R77, R94	RES, CHIP, 10k, 1%, 0603	VISHAY CRCW060310K0FKEA
26	1	R9	RES, CHIP, 7.15k, 1%, 0603	VISHAY CRCW06037K15FKEA
27	4	R22, R26, R70, R73	RES, CHIP, 10, 1%, 0603	NIC NRC06F10R0TRF
28	1	R102	RES, CHIP, 732, 1%, 0603	VISHAY CRCW0603732RFKEA
29	3	R33, R60, R65	RES, CHIP, 121k, 1%, 0603	VISHAY CRCW0603121KFKEA
30	4	R40, R63, R68, R58	RES, CHIP, 80.6k, 1%, 0603	VISHAY CRCW060380K6FKEA
31	1	R35	RES, CHIP, 60.4k, 1%, 0603	VISHAY CRCW060360K4FKEA
32	1	R36	RES, CHIP, 8.25k, 1%, 0603	VISHAY CRCW06038K25FKEA
33	1	R19	RES, CHIP, 7.15k, 1%, 0603	VISHAY CRCW06037K15FKEA
34	4	R45, R84, R85, R98	RES, CHIP, 200, 1%, 0603	VISHAY CRCW0603200RFKEA
35	3	R54, R89, R92	RES, CHIP, 20k, 1%, 0603	VISHAY CRCW060320K0FKEA

dc2106bbf

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
36	2	R76, R115	RES, CHIP, 4.99k, 1%, 0603	PANASONIC ERJ-3EKF4991V
37	1	R86	RES, CHIP, 127, 1%, 0603	VISHAY CRCW0603127RFKEA
38	1	R87	RES, CHIP, 2, 1%, 0603	VISHAY CRCW06032R00FKEA
39	1	R88	RES, CHIP, 1M, 1%, 0603	NIC NRC06F1004TRF
40	1	R90	RES, CHIP, 154k, 1%, 0603	VISHAY CRCW0603154KFKEA
41	1	R91	RES, CHIP, 3.3, 1%, 0603	VISHAY CRCW06033R30FKEA
42	1	R93	RES, CHIP, 681k, 1%, 0603	VISHAY CRCW0603681KFKEA
43	1	R95	RES, CHIP, 82.5, 1%, 0603	VISHAY CRCW060382R5FKEA
44	1	R112	RES, CHIP, 15.8k, 1%, 0603	VISHAY CRCW060315K8FKEA
45	2	R99, R100	RES, CHIP, 0.01, 1%, 2010	VISHAY WSL2010R0100FEA
46	1	R101	TRIMMING POTENTIOMETER, 5k	BOURNS, 3386P-1-502LF
47	1	R103	RES, CHIP, 100k, 1%, 0603	VISHAY CRCW0603100KFKEA
48	1	U1	IC, LTM4676AEY	LINEAR TECH LTM4676AEY
49	3	U2, U3, U4	IC, LTM4630EV	LINEAR TECH LTM4630EV
50	1	U5	IC, LT1801CMS8, MSOP	LINEAR TECH LT1801CMS8
51	1	U6	IC, 24LC025T-E/OT SOT-23 6-LEAD	MICROCHIP, 24LC025T-E/OT
52	1	U7	IC, LTC6992-1, S6-TSOT23	LINEAR TECH LTC6992CS6-1
53	1	U8	IC, LT1803IS5, S5-TSOT23	LINEAR TECH LT1803IS5
54	1	U9	IC, LT1129CS8-5, S8	LINEAR TECH LT1129CS8-5

Additional Demo Board Circuit Components


1	0	C1, C2, C3, C4, C6, C13, COUT14, COUT17, COUT21, COUT25, COUT29, COUT33, COUT37, C9, C10, C16, C17, C20, C21,	CAP, OPTIONAL	
2	0	R1, R3, R5, R6, R7, R14, R15, R18, R20, R24, R27 TO R30, R39, R48, R59, R62, R67, R69, R72, R78, R79, R96, R97, R104 TO R108, R39, R41, R62, R67, R69	RES, OPTIONAL	

Hardware: for Demo Board Only

1	24	E1 TO E24	TESTPOINT, TURRET, 0.062"	MILL-MAX, 2308-2-00-80-00-00-07-0
2	2	JP1, JP2	0.079 SINGLE ROW HEADER, 3 PIN	SAMTEC, TMM-103-02-L-S
3	2	XJP1, XJP2	SHUNT	SAMTEC, 2SN-BK-G
4	2	J1, J3	JACK, BANANA	KEYSTONE 575-4
5	4	J2, J4, J5, J6	STUD, TESTPIN	PEM KFH-032-10
6	8	J1, J2, J3, J4, J5, J6 (x2)	NUT, BRASS 10-32	ANY #10-32
7	4	J1, J2, J3, J4, J5, J6	RING, LUG #10	KEYSTONE, 8205, #10
8	4	J1, J2, J3, J4, J5, J6	WASHER, TIN PLATED BRASS	ANY #10, #10EXT BZ TN
9	2	SW1, SW2	CONN, SUB MINIATURE SLIDE SWITCHES	C&K, JS202011CQN
10	1	J7	CONN HEADER 12POS 2MM STR DL PCB	FCI 98414-G06-12ULF
11	2	J10, J11	CONN, BNC, 5PINS	CONNEX, 112404
12	1	J14	HEADER, 4 PINS, SHROUDED	HIROSE, DF3A-4P-2DSA
13	1	J12	CONN RECEIPT 2MM DUAL R/A 14POS (F)	SULLINS, NPPN072FJFN-RC
14	1	J13	HEADER 14POS 2MM R/A GOLD (M)	MOLEX, 87760-1416
15	4	(STAND-OFF)	STAND-OFF, NYLON 0.50" TALL	KEYSTONE, 8833(SNAP ON)

DEMO MANUAL DC2106B-B

SCHEMATIC DIAGRAM

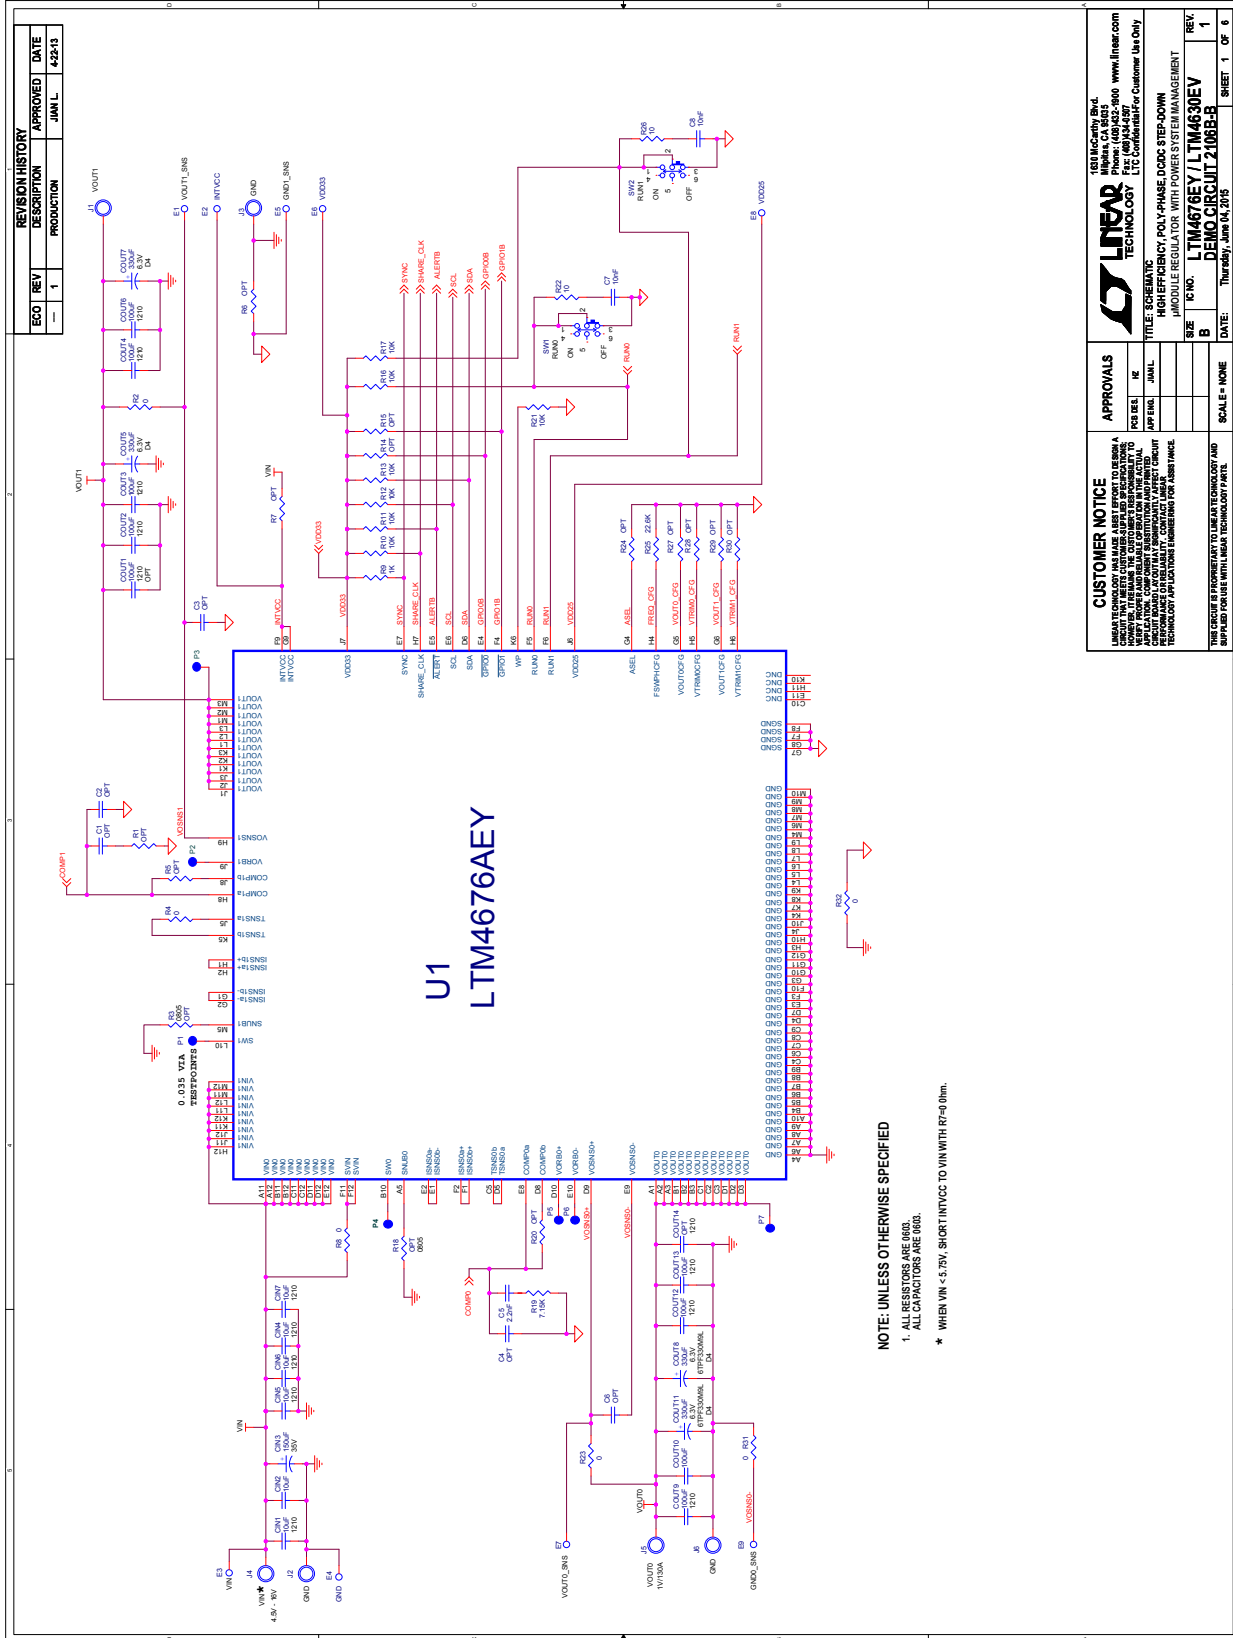

CUSTOMER NOTICE
 LINEAR TECHNOLOGY'S POLY-PHASE DCDC STEP-DOWN CONVERTER WITH CURRENT MODE CONTROL AND INDUCTOR CURRENT SENSING IS THE ACTUAL PRODUCT. THIS SCHEMATIC IS A DEMO CIRCUIT. CUSTOMER SHOULD CONSULT WITH LINEAR TECHNOLOGY APPLICATION ENGINEERING FOR ASSET TAGS.

APPROVALS

FOR B/E	RE
APP ENCL	JMIL

SCALE = NONE

LINEAR TECHNOLOGY
 1630 McCarty Blvd.
 Milpitas, CA 95035
 Tel: (415) 764-0000 www.linear.com
 Fax: (415) 764-0071
 LITE Confidential For Customer Use Only


TITLE: ESCHEMATIC
IC NO: LTM4676EY
MODULE REGULATOR WITH POWER SYSTEM MANAGEMENT
DEMO CIRCUIT 2106B-B

DATE: Thursday, June 04, 2015

REV. 1 OF 1
 SHEET 1 OF 6

NOTE: UNLESS OTHERWISE SPECIFIED
 1. ALL RESISTORS ARE 0603.
 ALL CAPACITORS ARE 0603.
 * WHEN VIN < 5.75V, SHORT INVCC TO VIN WITH RT=0 Ohm.


SCHEMATIC DIAGRAM

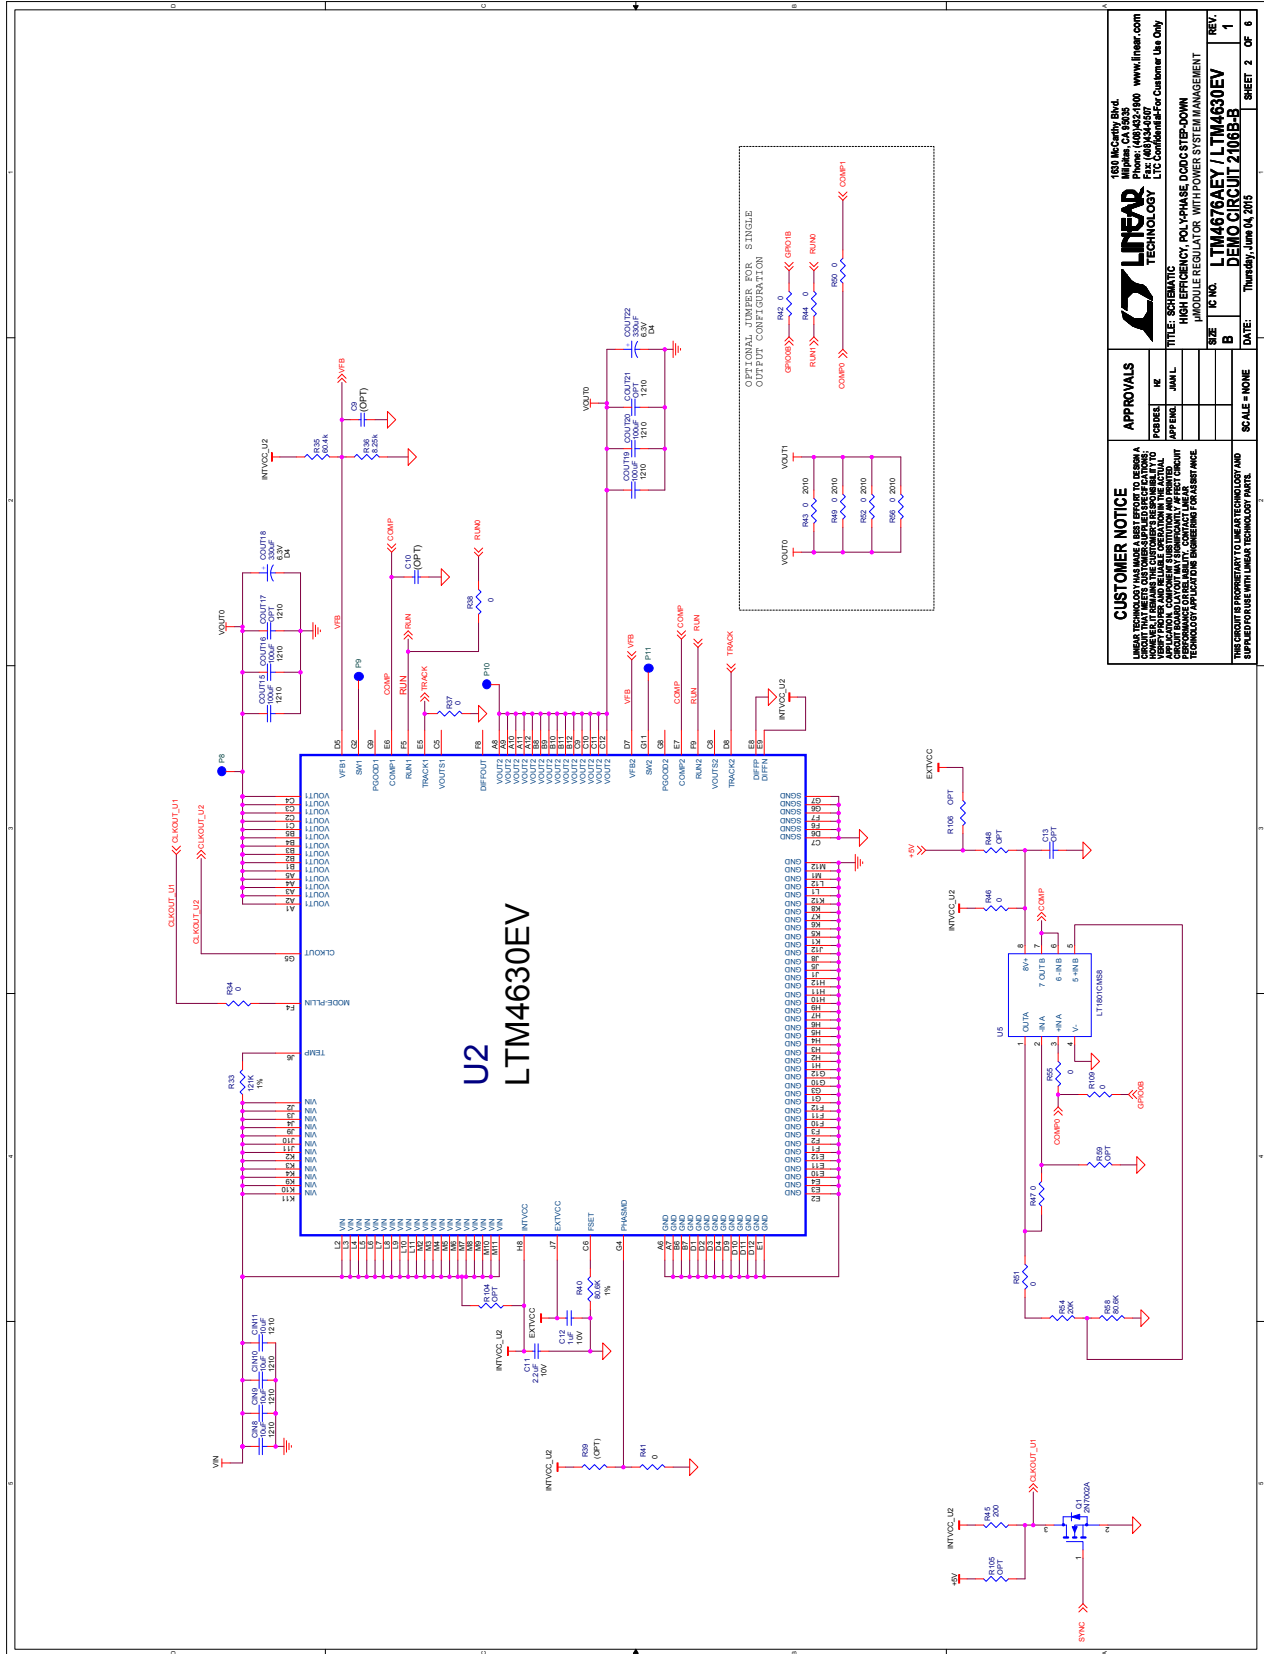

CUSTOMER NOTICE		APPROVALS	
<p>LINER TECHNOLOGY AND ITS DESIGNERS MAKE NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, REGARDING THE PERFORMANCE OF THIS DEMO BOARD. THE BOARD IS PROVIDED AS A GUIDE ONLY. CUSTOMERS ARE RESPONSIBLE FOR THE DESIGN AND PERFORMANCE OF THEIR FINAL PRODUCTS. CONTACT YOUR LOCAL SALES REPRESENTATIVE FOR MORE INFORMATION.</p>		<p>DESIGNER: JIM L</p> <p>DATE: 1/11/05</p>	<p>SCALE: NONE</p> <p>SHEET 2 OF 6</p>
<p>THIS CIRCUIT IS PROPRIETARY TO LINER TECHNOLOGY AND IS SUPERSEDED BY ANY LATER TECHNOLOGY AND SUPPLEMENTED BY ANY LATER TECHNOLOGY PARTS.</p>		<p>100 McCarty Blvd Folsom, CA 95630 Phone: (916) 232-1000 www.linear.com</p> <p>LINER TECHNOLOGY</p> <p>HIGH EFFICIENCY POLY-PHASE DDC/STEP-DOWN MODULE REGULATOR WITH POWER STEERING LTM4630EV / LTM4630EV DEMO CIRCUIT 2106B-B</p>	

DEMO MANUAL DC2106B-B

SCHEMATIC DIAGRAM

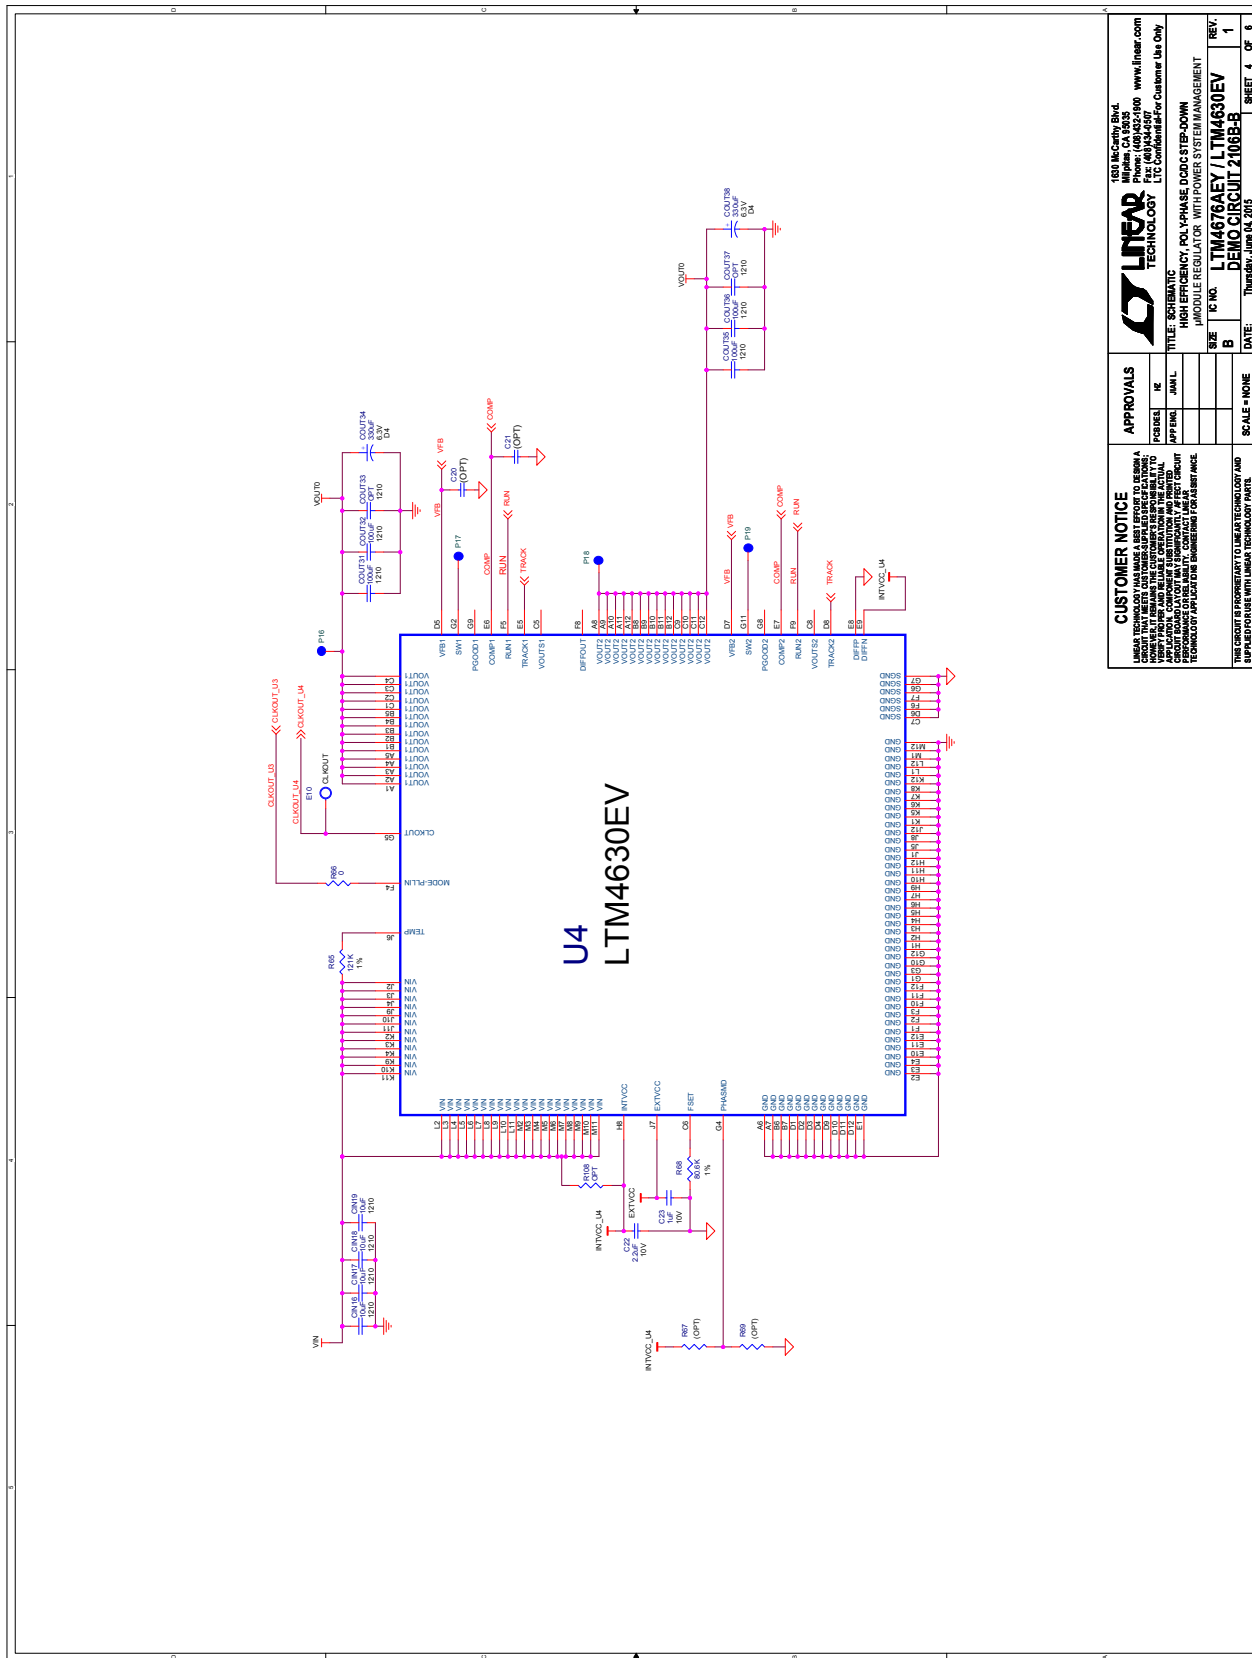

CUSTOMER NOTICE
 LINAER TECHNOLOGY AND ITS SUPPLIERS MAKE NO WARRANTY, REPRESENTATION OR GUARANTEE, EXPRESS OR IMPLIED, REGARDING THE ACCURACY, COMPLETENESS, OR TIMELINESS OF THE INFORMATION PROVIDED IN THIS DOCUMENT. THE INFORMATION IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. LINAER TECHNOLOGY AND ITS SUPPLIERS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING CONSEQUENTIAL DAMAGES, ARISING FROM THE USE OF THIS INFORMATION.

APPROVALS

DESIGNED BY	IK
APPROVED BY	JML

SCALE - NONE

DATE: Thursday, June 14, 2015

REV: 1


SHEET 4 OF 6

**1630 McCarty Blvd.
 Milpitas, CA 95026
 Phone: 408.255.1000
 Fax: 408.255.2500
 LTM4630EV - LTM4630EV**

LINER TECHNOLOGY
 LTM4630EV - LTM4630EV
 MOBILE REGULATOR WITH POWER SYSTEM MANAGEMENT

LTM4630EV / LTM4630EV

SCHEMATIC DIAGRAM

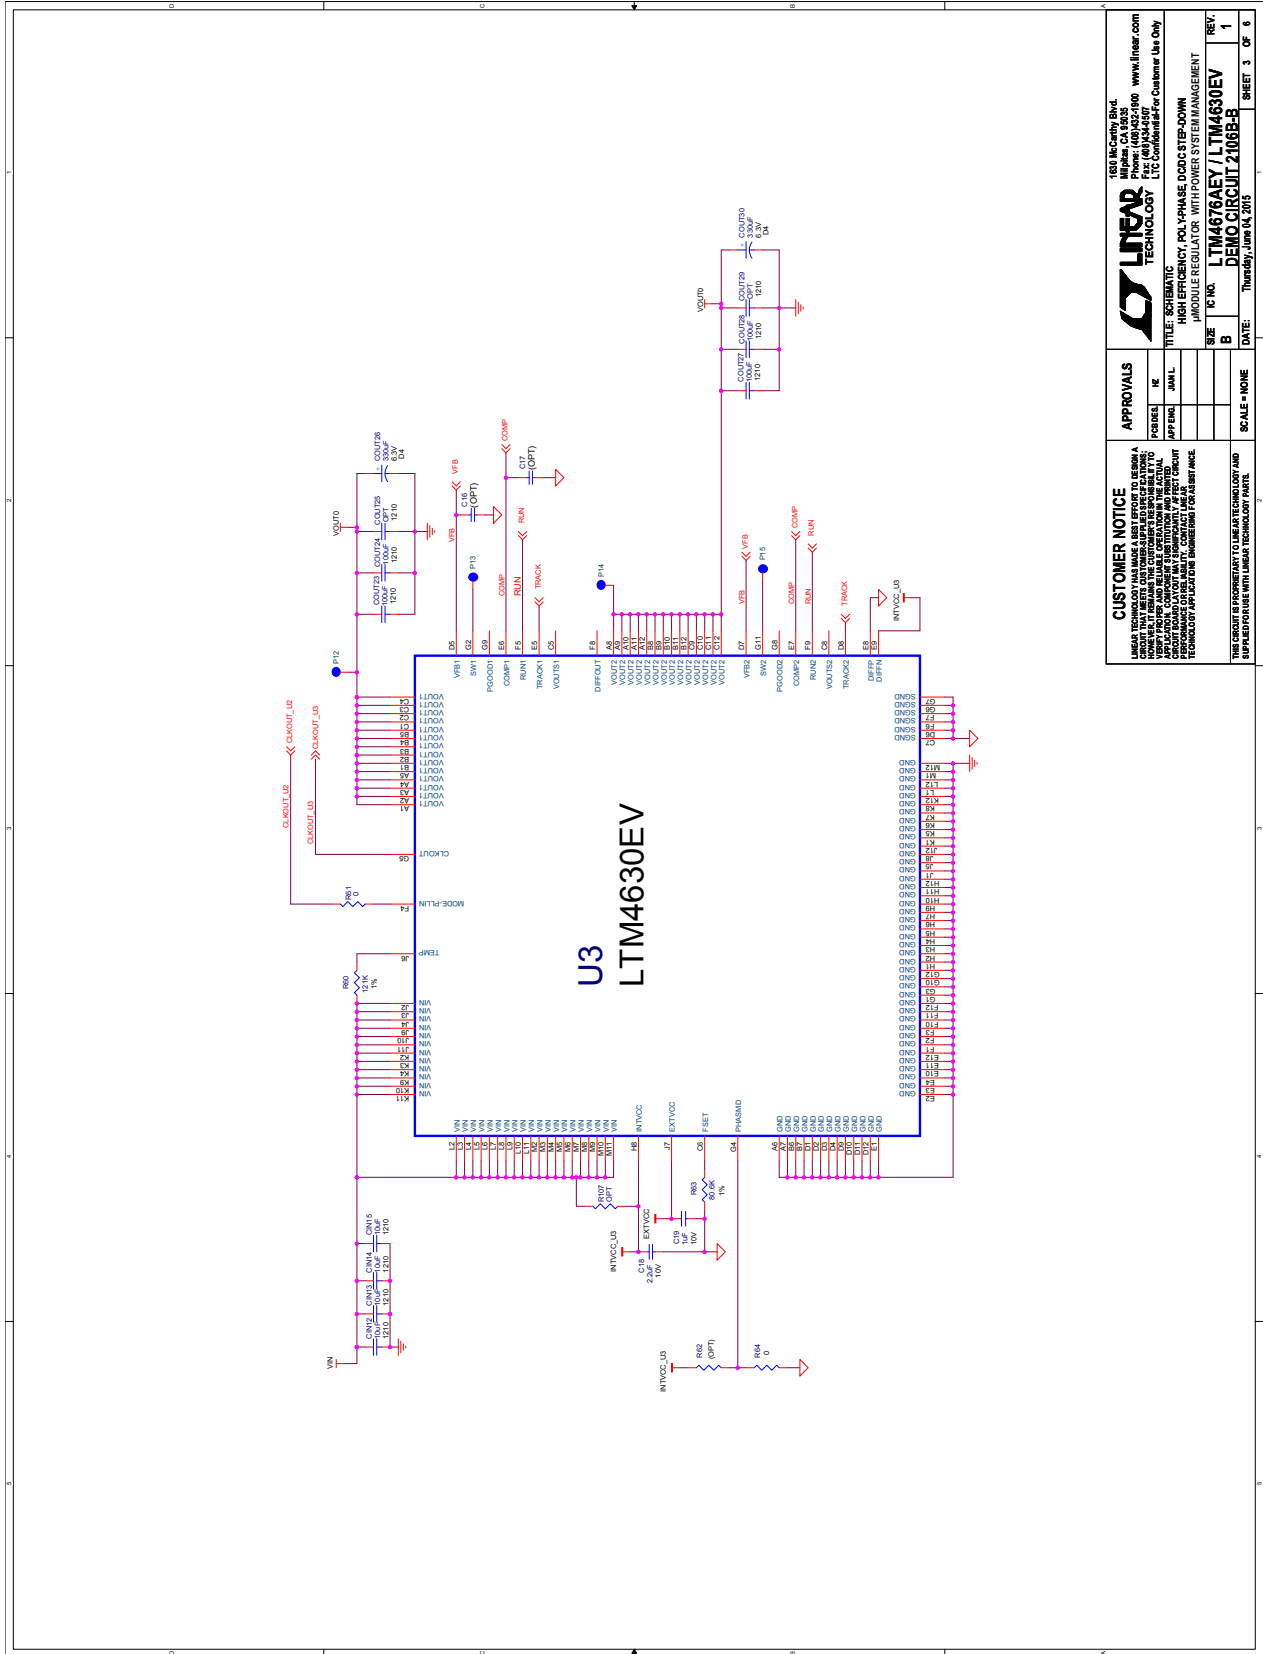

CUSTOMER NOTICE
 LINEAR TECHNOLOGY HAS MADE A BEST EFFORT TO DESIGN A POWER MANAGEMENT CIRCUIT THAT IS SUITABLE FOR GENERAL APPLICATIONS. CUSTOMER RESPONSIBILITY TO THE USER OF THIS CIRCUIT INCLUDES THE NECESSITY TO OBTAIN NECESSARY APPROVALS AND PERFORMANCES TO MEET ALL CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERING REQUIREMENTS.

APPROVALS

DESIGNER	IC
APPROVER	JMALL
DATE	Thursday, June 14, 2015

SCALE = NONE

REVISIONS

REV.	1
DATE	Thursday, June 14, 2015
SHEET	3 OF 6


LINEAR TECHNOLOGY
 180 McCarty Blvd.
 Phone: (408) 432-1000 www.linear.com
 Fax: (408) 432-4500
 LTO Combustible For Customer Use Only

TITLE: SCHEMATIC
 HIGH EFFICIENCY, POLY-PHASE DDC5 STEP-DOWN
 μMODULE REGULATOR WITH POWER SYSTEM MANAGEMENT

U3 LTM4630EV
 DEMO CIRCUIT 2106B-B

DEMO MANUAL DC2106B-B

SCHEMATIC DIAGRAM

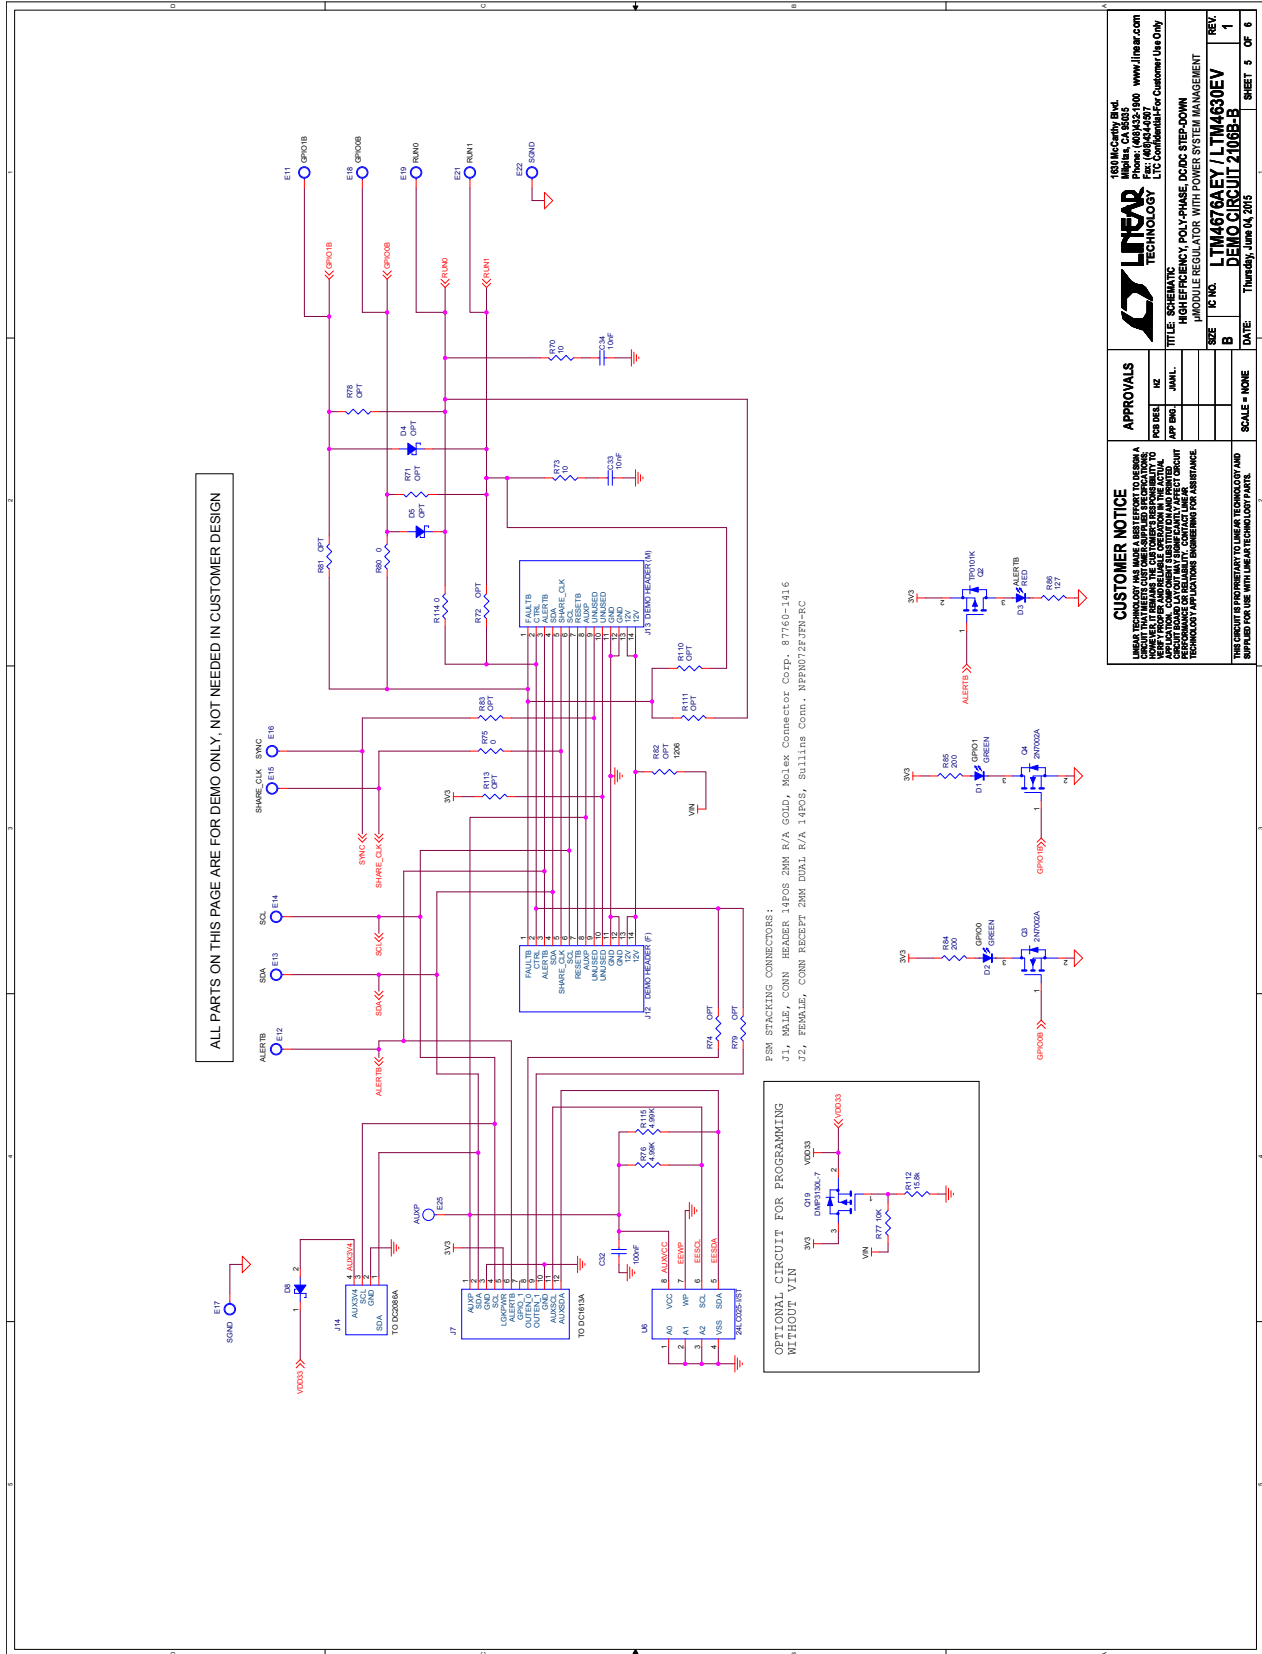

LINEAR TECHNOLOGY, INC.
 3891 DEER CREEK ROAD
 FOLSOM, CA 95630
 (916) 444-0000
 www.linear.com

LINEAR TECHNOLOGY

TITLE: SCHEMATIC
 HIGH EFFICIENCY, POLY-PHASE, DODIC STEP-DOWN
 μMODULE REGULATOR WITH POWER SYSTEM MANAGEMENT

REV: 1
 DATE: Thursday, June 04, 2015

SCALE: NONE

SHEET 5 OF 6

CUSTOMER NOTICE

LINEAR TECHNOLOGY AND MAKE A BEST EFFORT TO DESIGN A PRODUCT THAT MEETS THE CUSTOMER'S REQUIREMENTS TO THE EXTENT OF THE INFORMATION PROVIDED TO LINEAR TECHNOLOGY. CUSTOMER'S APPLICATIONS, OPERATING ENVIRONMENT, AND USER'S PERFORMANCE REQUIREMENTS ARE NOT WITHIN THE SCOPE OF LINEAR TECHNOLOGY'S DESIGN RESPONSIBILITY. CUSTOMER'S PERFORMANCE REQUIREMENTS FOR INDIVIDUAL TECHNOLOGY APPLICATIONS ARE NOT WITHIN THE SCOPE OF LINEAR TECHNOLOGY'S DESIGN RESPONSIBILITY.

THIS CIRCUIT IS PROPRIETARY TO LINEAR TECHNOLOGY AND SUPPLIED FOR USE WITH LINEAR TECHNOLOGY PARTS.

SCHEMATIC DIAGRAM

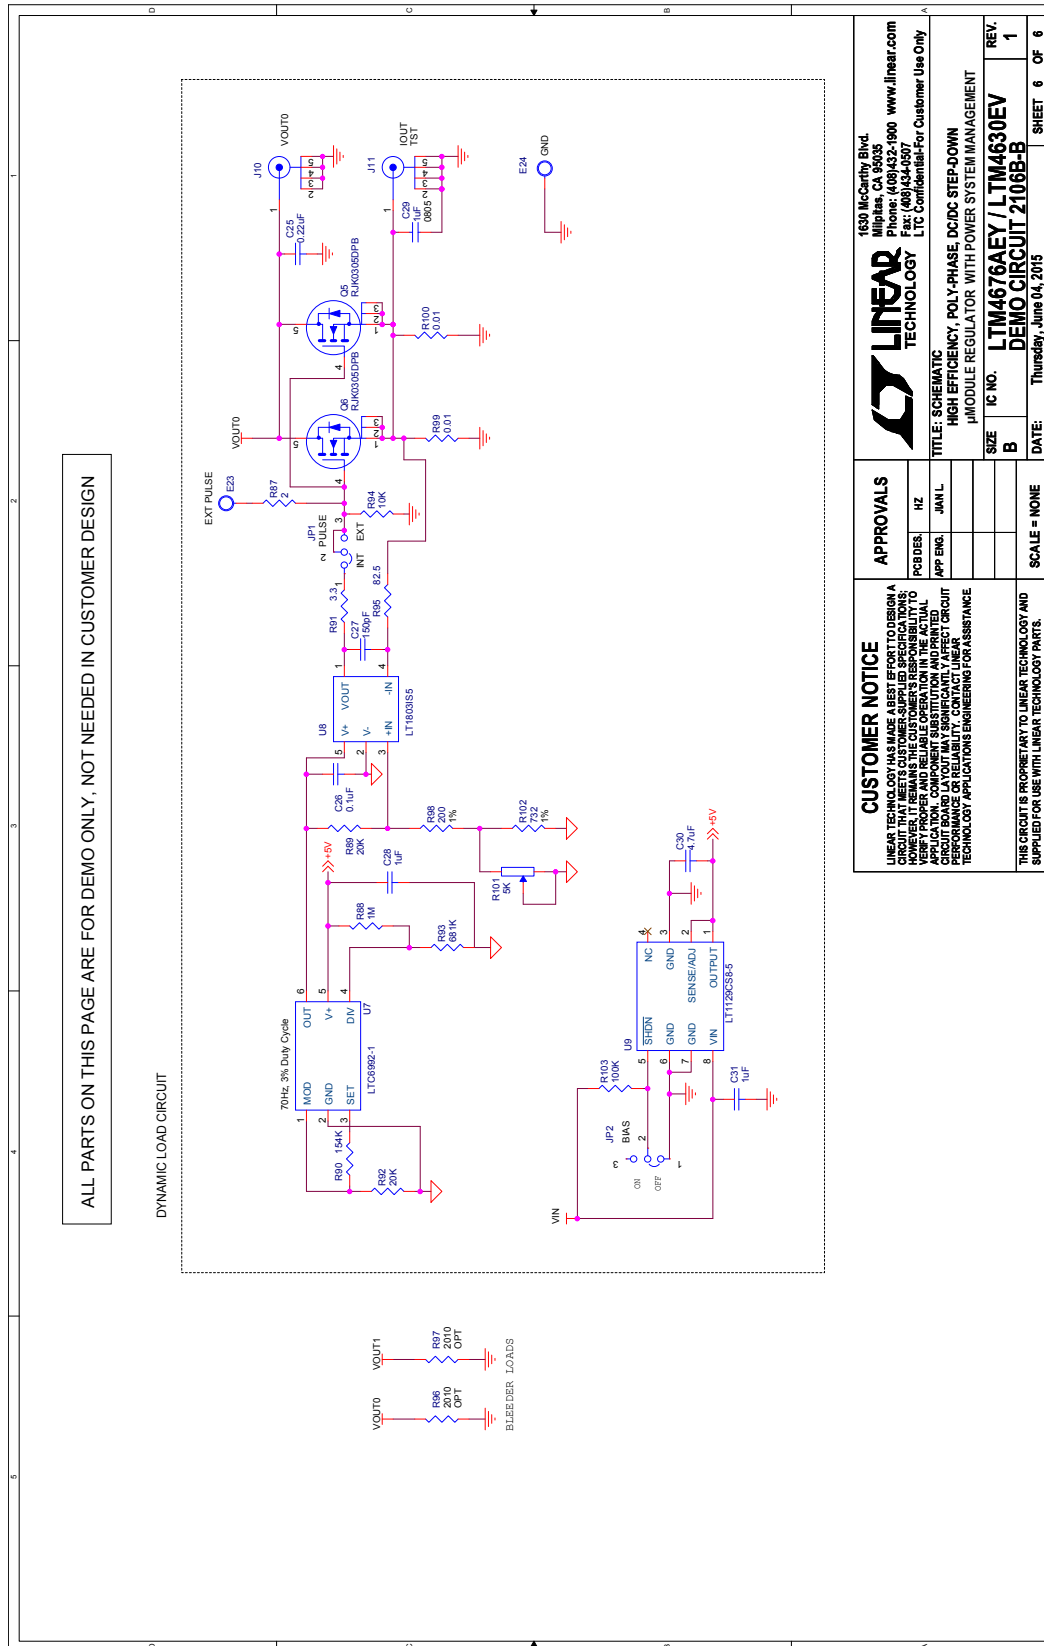


Figure 7. Circuit Schematic

DEMO MANUAL DC2106B-B

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Management IC Development Tools](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[EVAL-ADM1168LQEBZ](#) [EVB-EP5348UI](#) [MIC23451-AAAYFL EV](#) [MIC5281YMME EV](#) [DA9063-EVAL](#) [ADP122-3.3-EVALZ](#) [ADP130-0.8-EVALZ](#) [ADP130-1.2-EVALZ](#) [ADP130-1.5-EVALZ](#) [ADP130-1.8-EVALZ](#) [ADP1714-3.3-EVALZ](#) [ADP1716-2.5-EVALZ](#) [ADP1740-1.5-EVALZ](#) [ADP1752-1.5-EVALZ](#) [ADP1828LC-EVALZ](#) [ADP1870-0.3-EVALZ](#) [ADP1871-0.6-EVALZ](#) [ADP1873-0.6-EVALZ](#) [ADP1874-0.3-EVALZ](#) [ADP1882-1.0-EVALZ](#) [ADP199CB-EVALZ](#) [ADP2102-1.25-EVALZ](#) [ADP2102-1.875EVALZ](#) [ADP2102-1.8-EVALZ](#) [ADP2102-2-EVALZ](#) [ADP2102-3-EVALZ](#) [ADP2102-4-EVALZ](#) [ADP2106-1.8-EVALZ](#) [ADP2147CB-110EVALZ](#) [AS3606-DB](#) [BQ24010EVM](#) [BQ24075TEVM](#) [BQ24155EVM](#) [BQ24157EVM-697](#) [BQ24160EVM-742](#) [BQ24296MEVM-655](#) [BQ25010EVM](#) [BQ3055EVM](#) [NCV891330PD50GEVB](#) [ISLUSBI2CKIT1Z](#) [LM2744EVAL](#) [LM2854EVAL](#) [LM3658SD-AEV/NOPB](#) [LM3658SDEV/NOPB](#) [LM3691TL-1.8EV/NOPB](#) [LM4510SDEV/NOPB](#) [LM5033SD-EVAL](#) [LP38512TS-1.8EV](#) [EVAL-ADM1186-1MBZ](#) [EVAL-ADM1186-2MBZ](#)