

LTC5566
**300MHz to 6GHz Dual Programmable
Gain Downconverting Mixer**
DESCRIPTION

Demonstration circuit 2460A is optimized for evaluation of the [LTC®5566](#) dual programmable gain downconverting mixer. Each channel incorporates an active mixer and a digital IF VGA with 15.5dB gain control range. The IF gain of each channel is independently programmable through the SPI in 0.5dB steps. Its single-ended RF ports are tunable via the SPI or parallel control lines and have a range from 300MHz to 6GHz. The LO port is always matched to 50Ω from 150MHz to 6GHz with 10dB return loss. The differential IF port is usable from 1MHz to 500MHz. There is a reduced power mode available through the SPI, which lowers the total current consumption by 25%.

Design files for this circuit board are available at
<http://www.linear.com/demo/DC2460A>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

**ABSOLUTE MAXIMUM
INPUT RATINGS**
Supply Voltage

(V _{DD} , V _{CC1} , V _{CC2} , IF1 ⁺ , IF1 ⁻ , IF2 ⁺ , IF2 ⁻)	4V
EN1, EN2, T0, T1 Input Voltages	-0.3V to V _{CC} + 0.3V
LO ⁺ , LO ⁻ Input Power (150MHz to 6GHz)	+10dBm
RF1, RF2 Input Power (300MHz to 6GHz)	+20dBm
LO ⁺ , LO ⁻ Input DC Voltage	±0.5V
IF DVGA Peak Differential Input Voltage	±4V
SDI, CLK, CSB, PS Input Voltages	-0.3V to V _{DD} + 0.3V
SDO Output Current	±10mA
Operating Temperature Range (T _C)	-40°C to 105°C
Junction Temperature (T _J)	150°C
Storage Temperature Range	-65°C to 150°C

Caution: This part is sensitive to electrostatic discharge (ESD). Observe proper ESD precautions when handling the LTC5566.

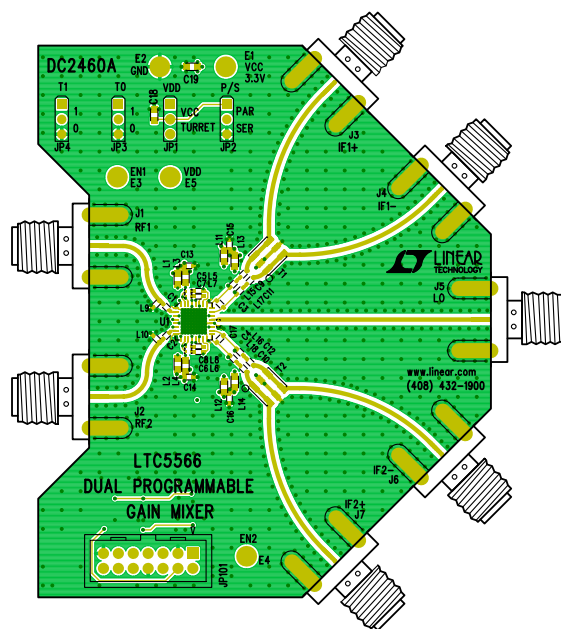
BOARD LAYOUT


Figure 1. DC2460A

PROPER TEST SETUP

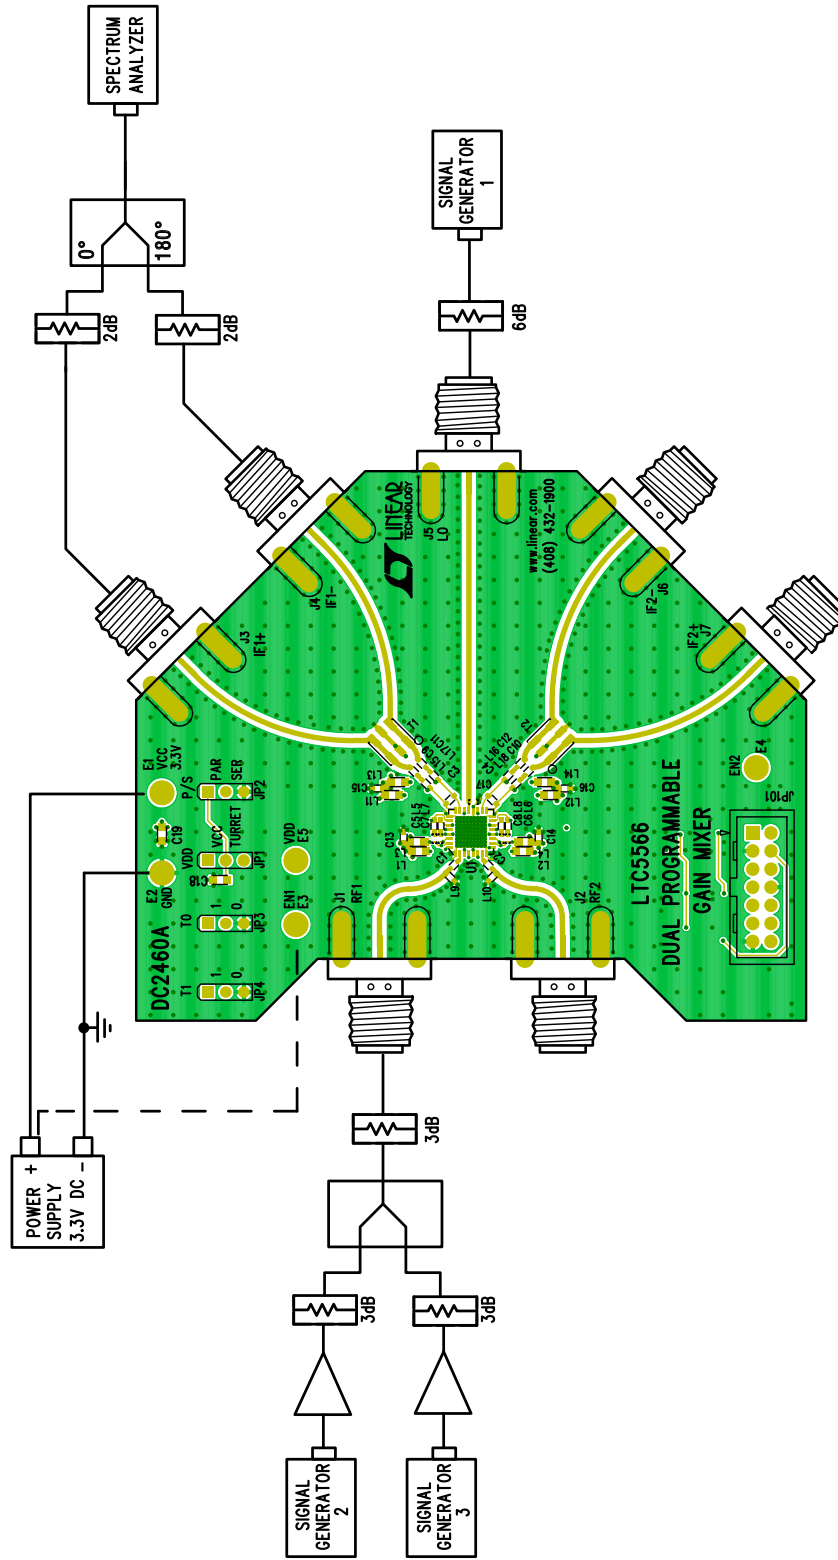


Figure 2. Test Setup for Downconverting Mixer 2-Tone Measurement

NOTES ON TEST EQUIPMENT AND SETUP

- High performance signal generators with low harmonic outputs should be used for 2-tone measurements. Otherwise, low pass filters at the signal generator outputs should be used to suppress harmonics.
- High quality combiners should be used to present a broadband 50Ω termination on all ports as well as provide good port-to-port isolation. Adding attenuator pads further improves source isolation and helps prevent the signal generators from producing intermodulation products.
- Spectrum analyzers can produce significant internal distortion products if they are overdriven. Generally, spectrum analyzers are designed to operate at their best with about -30dBm to -40dBm at their input. The spectrum analyzer's input attenuation setting should be used to avoid saturating the instrument.
- Set the spectrum analyzer's input attenuation depending on the spectrum analyzer used.
- Before performing measurements on the DUT, the system performance should be evaluated to ensure that a clean input signal is obtained and that the spectrum analyzer's internal distortion is minimized.

QUICK START PROCEDURE

1. Connect all test equipment as shown in Figure 2.
2. Set the power supply output voltage to 3.3V, and set the current limit to 500mA.
3. Connect the ground and V_{CC} turrets to the power supply. **BE SURE TO CONNECT THE V_{CC} TURRET BEFORE THE EN TURRET TO ENSURE THAT THE PART DOES NOT GET DAMAGED. ALSO, REMOVE POWER FROM EN TURRET BEFORE REMOVING POWER FROM THE V_{CC} TURRET.**
4. Connect the EN turret to the power supply.
5. Set the LO signal generator to provide a 2753MHz CW signal at about 0dBm to the demo board's LO port.
6. Set the RF signal generators to provide one 2599MHz CW signal and one 2601MHz CW signal. The signals should be applied to the 2-way combiner. The output of the combiner should be applied to the demo board's RF1 input port. The two tones should be set to -8dBm each at the mixer's RF1 input port.
7. Set the spectrum analyzer's center frequency to 153MHz with a span of 10MHz. Combine the DC2460A IF1⁺ and IF1⁻ Outputs using a 180° combiner. Connect the combiner's output to the spectrum analyzer.
8. Perform various measurements (Conversion Gain, OIP3, LO leakage, etc).

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	2	C1, C2	CAP, 4.3pF, C0G, 50V, ±0.1pF, 0402	Murata, GJM1555C1H4R3BB01
2	6	C3, C4, C102-C105	CAP, 2.2pF, C0G, 50V, ±0.1pF, 0402	Murata, GJM1555C1H2R2BB01
3	4	C5-C8	CAP, 1000pF, X7R, 50V, 10%, 0201	Murata, GRM033R71H102KA12
4	8	C9-C16	CAP, 10nF, X7R, 50V, 10%, 0402	Murata, GRM155R71H103KA88
5	1	C17	CAP, 0.3pF, C0G, 25V, ±0.05pF, 0201	Murata, GRM0335C1HR30WA01
6	2	C18, C19	CAP, 1µF, X5R, 50V, 10%, 0603	Murata, GRM188R61H105KAAL
7	2	C101, C106	CAP, 0.1µF, X7R, 50V, 10%, 0402	Murata, GRM155R71H104KE14
8	5	E1-E5	TEST POINT, TURRET, .064 MTG. HOLE	MILL-MAX,2308-2-00-80-00-00-07-0
9	4	JP1-JP4	JMP, 3PIN 1 ROW .079CC	SAMTEC, TMM-103-02-L-S
10	1	JP101	HEADER, 2 × 7PIN, 0.079CC	MOLEX, 87831-1420
11	7	J1-J7	CON., SMA, 50Ω, EDGE-LANCH	EF JOHNSON, 142-0701-851
12	8	L1-L4, L11-L14	IND., 680nH, 5%, 0603	COILCRAFT, 0603AF-681XJE
13	4	L5-L8	IND., 47nH, 2%, 0402	COILCRAFT, 0402HP-47NXGL
14	2	L9, L10	DNI	DNI
15	4	L15-L18	IND., 33nH, 2%, 0402	COILCRAFT, 0402HP-33NXGL
16	2	R101, R107	RES., 200k, 1%, 0402	Vishay, CRCW0402200KFKED
17	5	R102-R106	RES., 1k, 1%, 0402	Vishay, CRCW04021K00FKED
18	3	R108-R110	DNI	DNI
19	2	T1, T2	DNI	DNI
20	1	U1	300MHz to 6GHz Dual Programmable Gain Downconverting Mixer	Linear Tech., LTC5566IUH#PBF
21	1	U101	DNI	DNI
22	1	U102	Dual Supply Translating Transciever, 3-state	NXP, 74LVC1T45GW
23	2	U103,U104	Dual Buffer with 3-state output	FAIRCHILD, NC7WZ17P6X
24	1		CABLE ASSY., 8" STRIP	LINEAR RIBBON CABLE CA-2440

DEMO MANUAL DC2460A

SCHEMATIC DIAGRAM

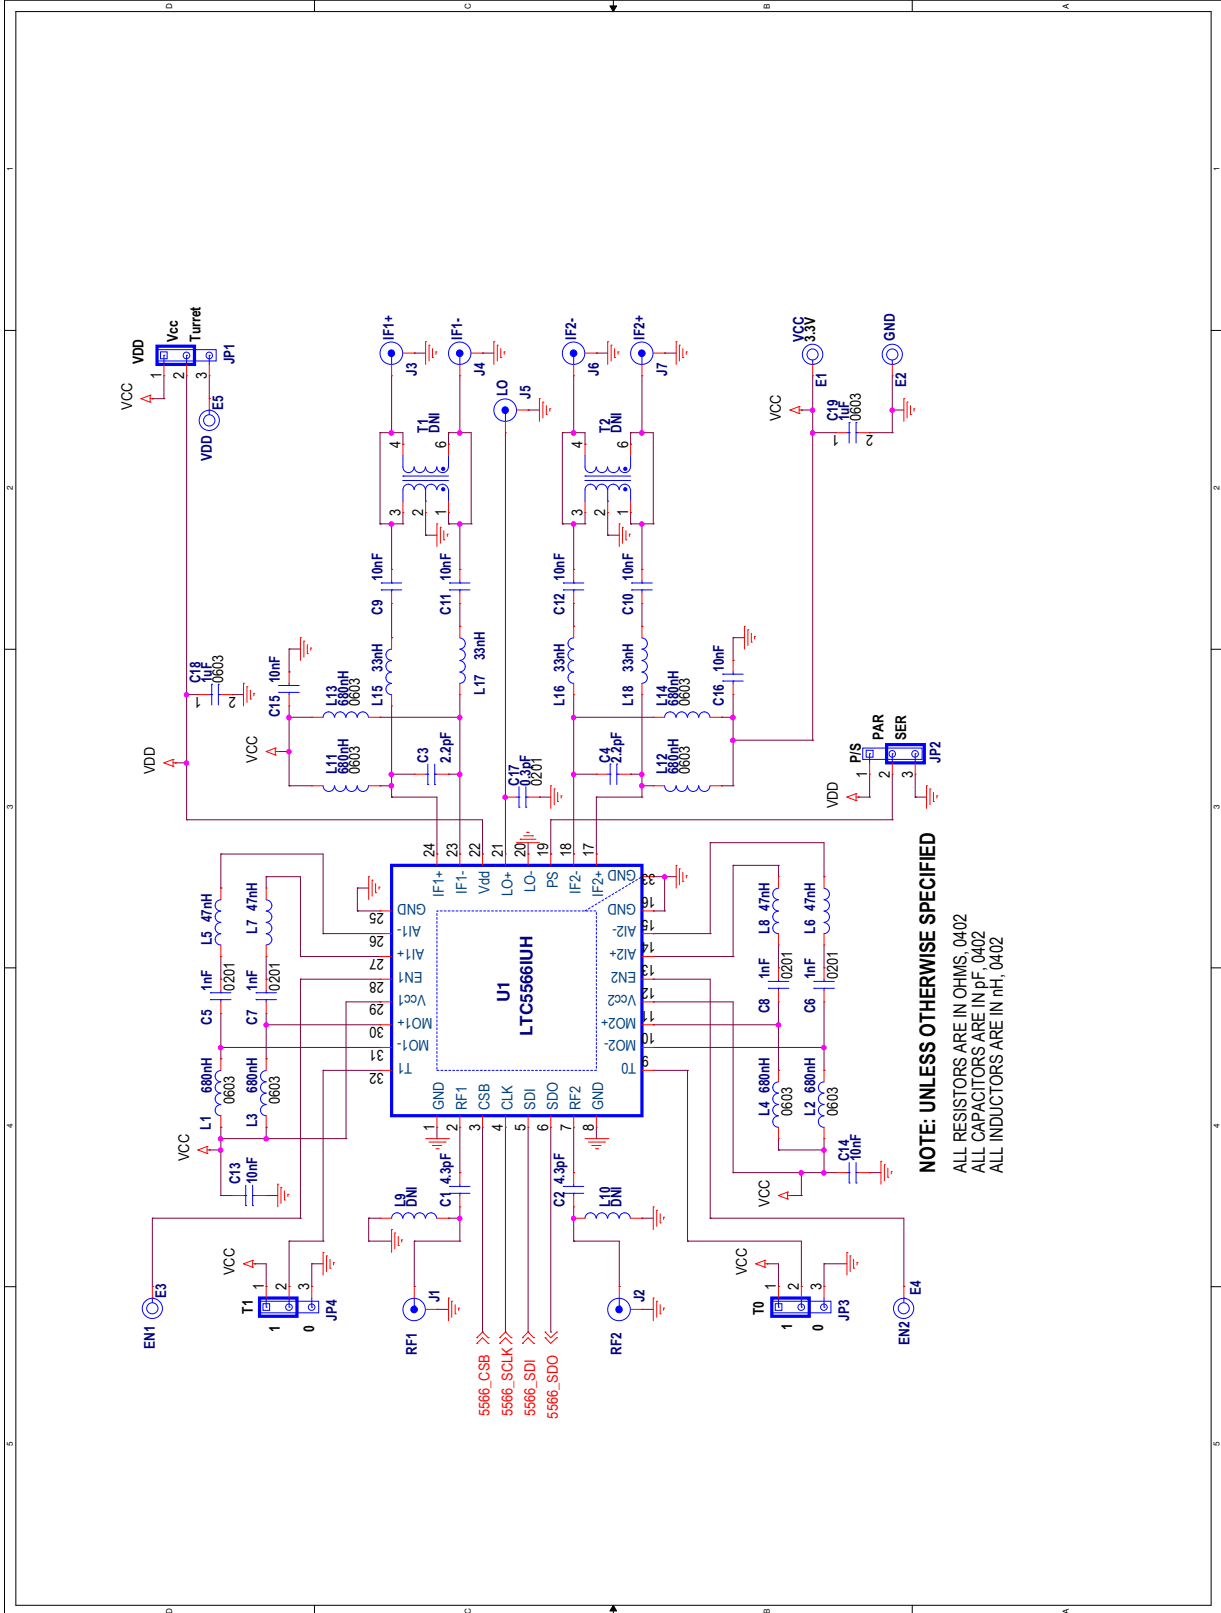


Figure 3. DC2460A Schematic Page 1

SCHEMATIC DIAGRAM

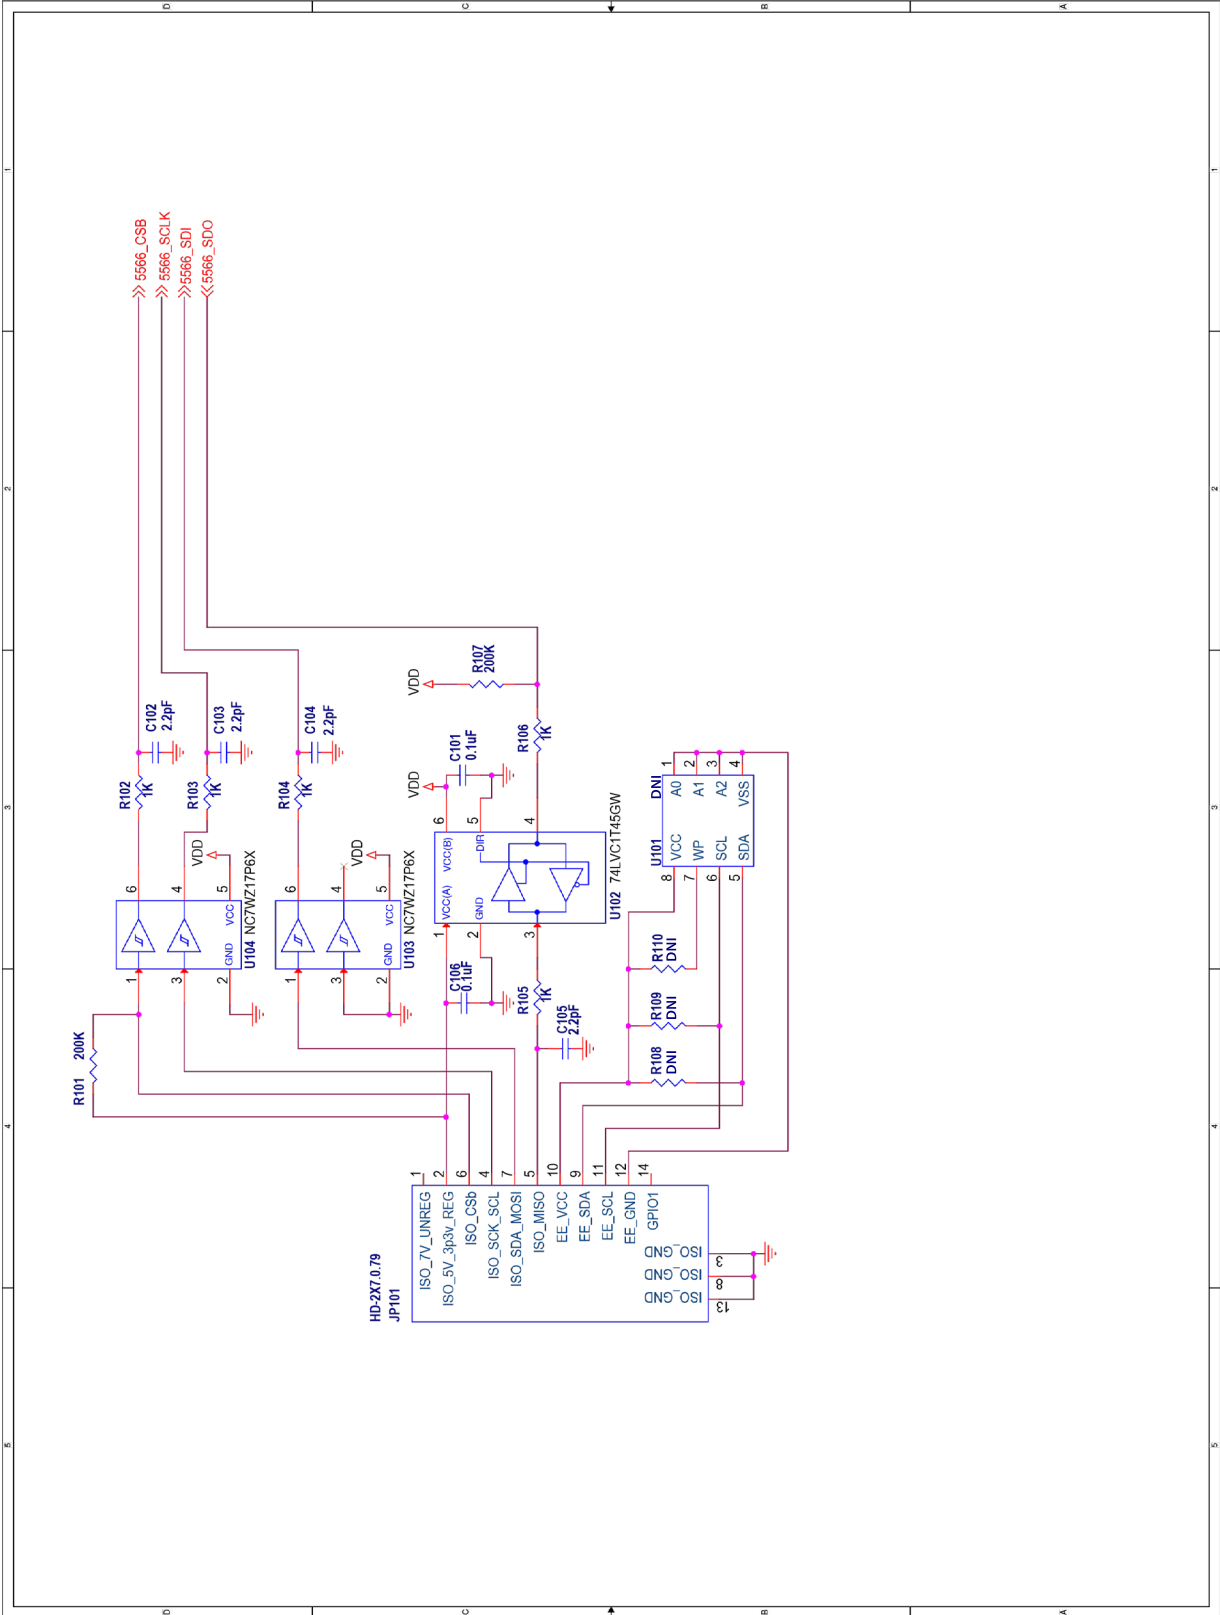


Figure 4. DC2460A Schematic Page 2

DEMO MANUAL DC2460A

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Development Tools](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[MAAM-011117](#) [MAAP-015036-DIEEV2](#) [EV1HMC1113LP5](#) [EV1HMC6146BLC5A](#) [EV1HMC637ALP5](#) [EVAL-ADG919EBZ](#) [ADL5363-EVALZ](#) [LMV228SDEVAL](#) [SKYA21001-EVB](#) [SMP1331-085-EVB](#) [EV1HMC618ALP3](#) [EVAL01-HMC1041LC4](#) [MAAL-011111-000SMB](#)
[MAAM-009633-001SMB](#) [107712-HMC369LP3](#) [107780-HMC322ALP4](#) [SP000416870](#) [EV1HMC470ALP3](#) [EV1HMC520ALC4](#)
[EV1HMC244AG16](#) [MAX2614EVKIT#](#) [124694-HMC742ALP5](#) [SC20ASATEA-8GB-STD](#) [MAX2837EVKIT+](#) [MAX2612EVKIT#](#)
[MAX2692EVKIT#](#) [SKY12343-364LF-EVB](#) [108703-HMC452QS16G](#) [EV1HMC863ALC4](#) [EV1HMC427ALP3E](#) [119197-HMC658LP2](#)
[EV1HMC647ALP6](#) [ADL5725-EVALZ](#) [106815-HMC441LM1](#) [EV1HMC1018ALP4](#) [UXN14M9PE](#) [MAX2016EVKIT](#) [EV1HMC939ALP4](#)
[MAX2410EVKIT](#) [MAX2204EVKIT+](#) [EV1HMC8073LP3D](#) [SIMSA868-DKL](#) [SIMSA868C-DKL](#) [SKY65806-636EK1](#) [SKY68020-11EK1](#)
[SKY67159-396EK1](#) [SKY66181-11-EK1](#) [SKY65804-696EK1](#) [SKY13396-397LF-EVB](#) [SKY13380-350LF-EVB](#)