

AIR ULTRASONIC TRANSDUCERS

Open type model list

1. Features

- High sensitivity, high sound pressure level, uniform in quality
- Excellent vibration and shock resistance.
- Big operation range.

2. Applications

- Remote control of electronic appliance.
- Burglar alarm
- Level meter
- Sensor for counter



3. Ratings

Part number	Center frequency (KHz)	Sound pressure level At 10V 30cm (0dB=0.02mPa)	Sensitivity at 10V, 30 cm (0dB=10v/Pa)	Capacitnce (±30%PF)
TR4010 T1	40	>110dB		1700
TR4010R1	40		<-70dB	1700
TR4010T2	40	>110dB		1700
TR4010R2	40		<-70dB	1700
TR4012T1	40	>110dB		2000
TR4012R1	40		<-70dB	2000
TR4016T1	40	>120dB		2000
TR4016R1	40		<-63dB	2000
TR2516T1	25	>115dB		2000
TR2516R1	25		<-66dB	2000

Part number meaning:

TR 40 10 T 1
(1) (2) (3) (4) (5)

(1) TR: Transmitter & Receiver Separated type. C: Combine transmittre & receiver in one unit.


(2) 40: Center Frequency. (KHz)

(3) 10: Transducer diameter. (mm)

(4) T : Transmitter unit. R: Receiver unit.

(5) 1: Part number.


4. dimensions

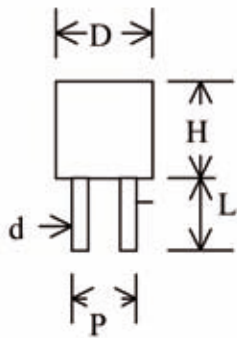


Part number	D (mm)	H (mm)	L (mm)	P (mm)	d (mm)	Case material
TR4010T/R1	9.9	7	7.6	5	0.7	ABS
TR4010T/R2	9.9	7	7.6	5	0.7	Aluminum
TR4012T/R1	12.6	9.5	7.2	8.5	0.7	Aluminum
TR4016T/R1	16.2	12	12.6	10	1.0	Aluminum
TR2516T/R1	16.2	12	12.6	10	1.0	Aluminum

5. Test Circuits Diagram

a) Test Circuit Diagram for Receiving

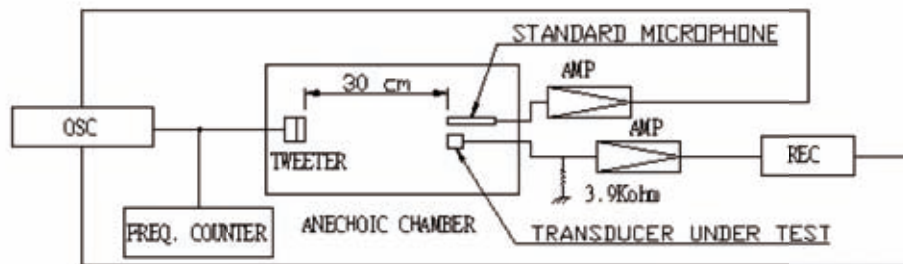

b) Test Circuit Diagram for Transmitting

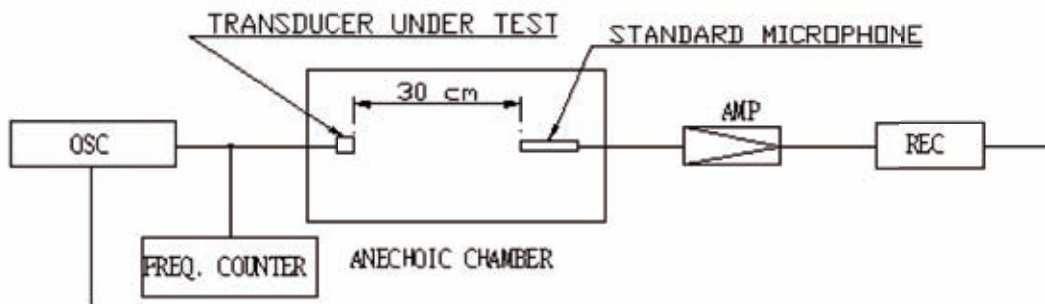

6. Environmental Characteristics

Item	Conditions	Variation of Sensitivity
Temperature Characteristics	-20~70°C	Within 10 dB
Humidity	40±2°C, 90 %RH, 2Hrs	Within 4 dB
Shock	50G impact Directions : 3 perpendicular directions Times : 3 times	Within 4 dB
Vibration	Directions : 3 perpendicular Directions Times : 1000 times Single harmonic vibration a) Amplitude: 1.5mm b) Sweep Frequency : 10-50-10Hz with interval of 1 minute	Within 4 dB

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Proximity Sensors](#) category:

Click to view products by [Sencera](#) manufacturer:

Other Similar products are found below :

[01.001.5653.1](#) [70.340.1028.0](#) [70.360.2428.0](#) [70.364.4828.0](#) [70.810.1053.0](#) [72.360.1628.0](#) [73.363.6428.0](#) [980659-1](#) [QT-12](#)
[E2ECQC2D1M1GJT03M](#) [E2EX10D1NN](#) [E2E-X14MD1-G](#) [E2E-X2D1-G](#) [E2EX2ME2N](#) [E2E-X3D1-N 10M](#) [E2E-X4MD1-G](#) [E2FMX1R5D12M](#)
[E2K-F10MC1 5M](#) [EC3016PPASL-1](#) [EI1204TBOSL-6](#) [EI5515NPAP](#) [BSA-08-25-08](#) [IC08ANC15PO-K](#) [25.161.3253.0](#) [25.332.0653.1](#) [25.352.0653.0](#)
[25.352.0753.0](#) [25.523.3253.0](#) [922FS1.5C-A4P-Z774](#) [SC606ABV0S30](#) [SM552A100](#) [SM952A126100LE](#) [SM956A132600](#) [A1220EUA-T](#) [F3S-](#)
[A162-U](#) [CL18](#) [QT-08L](#) [34.110.0010.0](#) [TL-C2MF1-M3-E4](#) [IA08BLF15NOM5](#) [IA08BSF15NOM5](#) [IA12ASF04DOM1](#) [IS2](#) [IS31SE5000-UTLS2-TR](#)
[34.110.0021.0](#) [34.110.0022.0](#) [CA150-120VACDC](#) [VM18VA3000Q](#) [XS508BSCBL2](#) [XS512BLNAM12](#)