

LM78Mxx Precision 500mA regulators

Features

- Output current to 0.5 A
- Output voltages of 5; 6; 8; 9; 10; 12; 15; 24 V
- Thermal overload protection
- Short circuit protection
- Output transition SOA protection
- $\pm 2\%$ output voltage tolerance
- Guaranteed in extended temperature range




Ordering Information

| DEVICE | PACKAGE TYPE | MARKING | PACKING | PACKING QTY |
|--------------|--------------|---------|---------|--------------|
| LM78M05KTPRG | TO-252-2 | 78M05 | REEL | 2500pcs/reel |
| LM78M06KTPRG | TO-252-2 | 78M06 | REEL | 2500pcs/reel |
| LM78M08KTPRG | TO-252-2 | 78M08 | REEL | 2500pcs/reel |
| LM78M09KTPRG | TO-252-2 | 78M09 | REEL | 2500pcs/reel |
| LM78M12KTPRG | TO-252-2 | 78M12 | REEL | 2500pcs/reel |
| LM78M15KTPRG | TO-252-2 | 78M15 | REEL | 2500pcs/reel |
| LM78M18KTPRG | TO-252-2 | 78M18 | REEL | 2500pcs/reel |
| LM78M24KTPRG | TO-252-2 | 78M24 | REEL | 2500pcs/reel |
| LM78M05DCYRG | SOT-223 | 78M05 | REEL | 2500pcs/reel |
| LM78M06DCYRG | SOT-223 | 78M06 | REEL | 2500pcs/reel |
| LM78M08DCYRG | SOT-223 | 78M08 | REEL | 2500pcs/reel |
| LM78M09DCYRG | SOT-223 | 78M09 | REEL | 2500pcs/reel |
| LM78M12DCYRG | SOT-223 | 78M12 | REEL | 2500pcs/reel |
| LM78M15DCYRG | SOT-223 | 78M15 | REEL | 2500pcs/reel |
| LM78M18DCYRG | SOT-223 | 78M18 | REEL | 2500pcs/reel |
| LM78M24DCYRG | SOT-223 | 78M24 | REEL | 2500pcs/reel |


Description

The LM78Mxx series of three-terminal positive regulators is available in DPAK .packages and with several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation eliminating the distribution problems associated with single point regulation. Each type employs internal current limiting, thermal shutdown and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 0.5 A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltage and currents.


Pin Configuration



SOT-223



TO-252-2

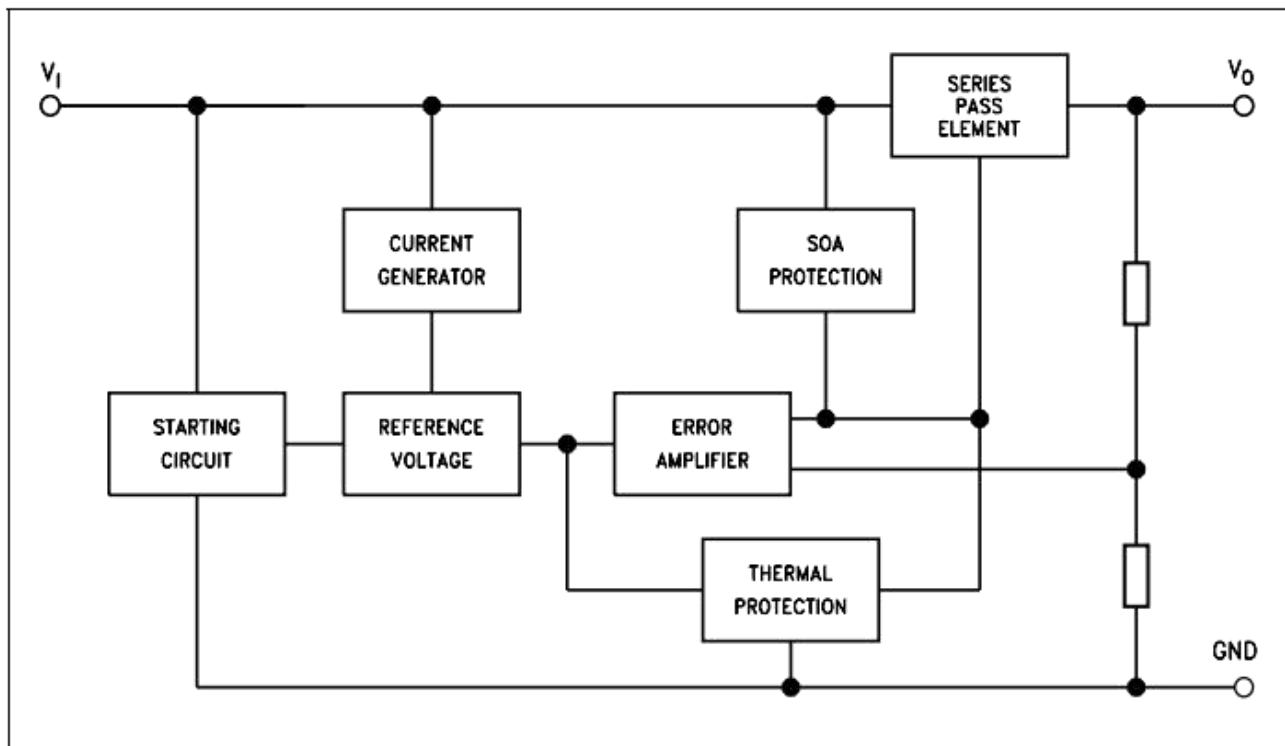Figure 1. Block diagram

Maximum ratings

Table 2. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|------------------|--|--------------------------------|------|
| V _I | DC input voltage | for V _O = 5 to 18 V | 35 |
| | | for V _O = 20, 24 V | 40 |
| I _O | Output current | Internally limited | mA |
| P _D | Power dissipation | Internally limited | mW |
| T _{STG} | Storage temperature range | -65 to 150 | °C |
| T _{OP} | Operating junction temperature range | 0 to 125 | °C |
| T _L | Lead Temperature (Soldering, 10 seconds) | 245 | °C |


Note: Absolute maximum ratings are those values beyond which damage to the device may occur.

Functional operation under these condition is not implied.

Table 3. Thermal data

| Symbol | Parameter | DPAK | Unit |
|-------------------|-------------------------------------|------|------|
| R _{thJC} | Thermal resistance junction-case | 8 | °C/W |
| R _{thJA} | Thermal resistance junction-ambient | 100 | °C/W |

Figure 4. Application circuit

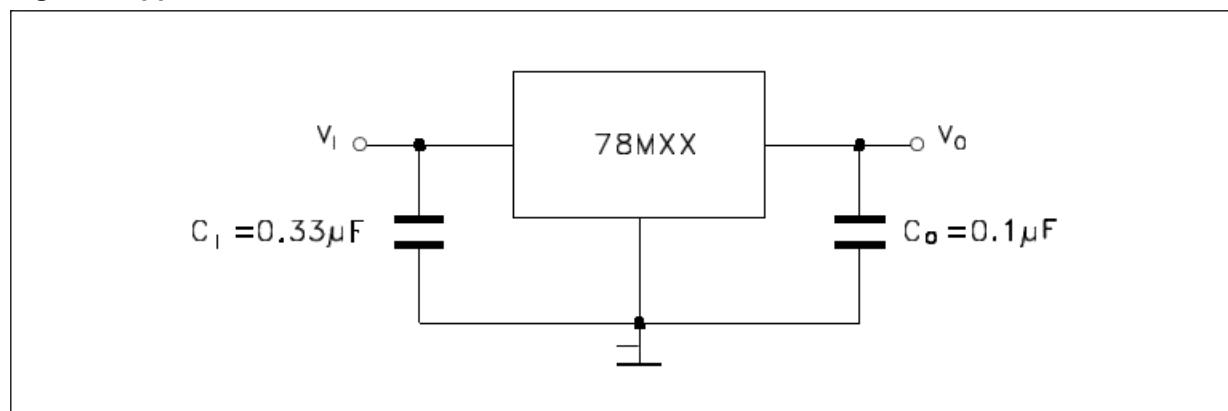

Electrical characteristics

Table 4.Electrical characteristics of LM78M05

Refer to the test circuits, $V_I = 10$ V, $I_O = 350$ mA, $C_I = 0.33\mu F$, $C_O = 0.1\mu F$, $T_J = 0$ to $125^\circ C$ unless otherwise specified.

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|--|------|------|------|-------|
| V_O | Output voltage | $T_J = 25^\circ C$ | 4.9 | 5 | 5.1 | V |
| V_O | Output voltage | $I_O = 5$ to 350 mA, $V_I = 7$ to 20 V | 4.8 | 5 | 5.2 | V |
| ΔV_O | Line regulation | $V_I = 7$ to 25 V, $I_O = 200$ mA, $T_J = 25^\circ C$ | | | 100 | mV |
| | | $V_I = 8$ to 25 V, $I_O = 200$ mA, $T_J = 25^\circ C$ | | | 50 | |
| V_O | Load regulation | $I_O = 5$ to 500 mA, $T_J = 25^\circ C$ | | | 100 | mV |
| | | $I_O = 5$ to 200 mA, $T_J = 25^\circ C$ | | | 50 | |
| I_d | Quiescent current | $T_J = 25^\circ C$ | | | 6 | mA |
| ΔI_d | Quiescent current change | $I_O = 5$ to 350 mA | | | 0.5 | mA |
| | | $I_O = 200$ mA, $V_I = 8$ to 25 V | | | 0.8 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5$ mA | | -0.5 | | mV/°C |
| SVR | Supply voltage rejection | $V_I = 8$ to 18 V, $f = 120$ Hz, $I_O = 300$ mA, $T_J = 25^\circ C$ | 62 | | | dB |
| eN | Output noise voltage | $B = 10$ Hz to 100 kHz, $T_J = 25^\circ C$ | | 40 | | μV |
| V_d | Dropout voltage | $T_J = 25^\circ C$ | | 2 | | V |
| I_{sc} | Short circuit current | $T_J = 25^\circ C$, $V_I = 35$ V | | 300 | | mA |
| I_{scp} | Short circuit peak current | $T_J = 25^\circ C$ | | 700 | | mA |

Table 5.Electrical characteristics of LM78M06

Refer to the test circuits, $V_I = 11$ V, $I_O = 350$ mA, $C_I = 0.33\mu F$, $C_O = 0.1\mu F$, $T_J = 0$ to $125^\circ C$ unless otherwise specified.

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|--|------|------|------|-------|
| V_o | Output voltage | $T_J = 25^\circ C$ | 5.88 | 6 | 6.12 | V |
| V_o | Output voltage | $I_O = 5$ to 350 mA, $V_I = 8$ to 21 V | 5.75 | 6 | 6.3 | V |
| ΔV_o | Line regulation | $V_I = 8$ to 25 V, $I_O = 200$ mA, $T_J = 25^\circ C$ | | | 100 | mV |
| | | $V_I = 9$ to 25 V, $I_O = 200$ mA, $T_J = 25^\circ C$ | | | 30 | |
| ΔV_o | Load regulation | $I_O = 5$ to 500 mA, $T_J = 25^\circ C$ | | | 120 | mV |
| | | $I_O = 5$ to 200 mA, $T_J = 25^\circ C$ | | | 60 | |
| I_d | Quiescent current | $T_J = 25^\circ C$ | | | 6 | mA |
| ΔI_d | Quiescent current change | $I_O = 5$ to 350 mA | | | 0.5 | mA |
| | | $I_O = 200$ mA, $V_I = 9$ to 25 V | | | 0.8 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5$ mA | | -0.5 | | mV/°C |
| SVR | Supply voltage rejection | $V_I = 9$ to 19 V, $f = 120$ Hz, $I_O = 300$ mA, $T_J = 25^\circ C$ | 59 | | | dB |
| eN | Output noise voltage | $B = 10$ Hz to 100 kHz | | 45 | | μV |
| V_d | Dropout voltage | $T_J = 25^\circ C$ | | 2 | | V |
| I_{sc} | Short circuit current | $T_J = 25^\circ C$, $V_I = 35$ V | | 270 | | mA |
| I_{scp} | Short circuit peak current | $T_J = 25^\circ C$ | | 700 | | mA |

Table 6.Electrical characteristics of LM78M08

Refer to the test circuits, $V_I = 14$ V, $I_O = 350$ mA, $C_I = 0.33\mu F$, $C_O = 0.1\mu F$, $T_J = 0$ to $125^\circ C$ unless otherwise specified.

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|--|-------------|-------------|-------------|-------------|
| V_O | Output voltage | $T_J = 25^\circ C$ | 7.84 | 8 | 8.16 | V |
| V_O | Output voltage | $I_O = 5$ to 350 mA, $V_I = 10.5$ to 23 V | 7.7 | 8 | 8.3 | V |
| ΔV_O | Line regulation | $V_I = 10.5$ to 25 V, $I_O = 200$ mA, $T_J = 25^\circ C$ | | | 100 | mV |
| | | $V_I = 11$ to 25 V, $I_O = 200$ mA, $T_J = 25^\circ C$ | | | 30 | |
| ΔV_O | Load regulation | $I_O = 5$ to 500 mA, $T_J = 25^\circ C$ | | | 160 | mV |
| | | $I_O = 5$ to 200 mA, $T_J = 25^\circ C$ | | | 80 | |
| I_d | Quiescent current | $T_J = 25^\circ C$ | | | 6 | mA |
| ΔI_d | Quiescent current change | $I_O = 5$ to 350 mA | | | 0.5 | mA |
| | | $I_O = 200$ mA, $V_I = 10.5$ to 25 V | | | 0.8 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5$ mA | | -0.5 | | mV/°C |
| SVR | Supply voltage rejection | $V_I = 11.5$ to 21.5 V, $f = 120$ Hz $I_O = 300$ mA, $T_J = 25^\circ C$ | 56 | | | dB |
| eN | Output noise voltage | $B = 10$ Hz to 100 kHz, $T_J = 25^\circ C$ | | 52 | | μV |
| V_d | Dropout voltage | $T_J = 25^\circ C$ | | 2 | | V |
| I_{sc} | Short circuit current | $T_J = 25^\circ C$, $V_I = 35$ V | | 250 | | mA |
| I_{scp} | Short circuit peak current | $T_J = 25^\circ C$ | | 700 | | mA |

Table 7.Electrical characteristics of LM78M09

Refer to the test circuits, $V_I = 15$ V, $I_O = 350$ mA, $C_I = 0.33\mu F$, $C_O = 0.1\mu F$, $T_J = 0$ to $125^\circ C$ unless otherwise specified.

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|---|-------------|-------------|-------------|-------------|
| V_O | Output voltage | $T_J = 25^\circ C$ | 8.82 | 9 | 9.18 | V |
| V_O | Output voltage | $I_O = 5$ to 350 mA, $V_I = 11.5$ to 24 V | 8.64 | 9 | 9.36 | V |
| ΔV_O | Line regulation | $V_I = 11.5$ to 25 V, $I_O = 200$ mA, $T_J = 25^\circ C$ | | | 100 | mV |
| | | $V_I = 12$ to 25 V, $I_O = 200$ mA, $T_J = 25^\circ C$ | | | 30 | |
| ΔV_O | Load regulation | $I_O = 5$ to 500 mA, $T_J = 25^\circ C$ | | | 180 | mV |
| | | $I_O = 5$ to 200 mA, $T_J = 25^\circ C$ | | | 90 | |
| I_d | Quiescent current | $T_J = 25^\circ C$ | | | 6 | mA |
| ΔI_d | Quiescent current change | $I_O = 5$ to 350 mA | | | 0.5 | mA |
| | | $I_O = 200$ mA, $V_I = 11.5$ to 25 V | | | 0.8 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5$ mA | | -0.5 | | mV/°C |
| SVR | Supply voltage rejection | $V_I = 12.5$ to 23 V, $f = 120$ Hz, $I_O = 300$ mA, $T_J = 25^\circ C$ | 56 | | | dB |
| eN | Output noise voltage | $B = 10$ Hz to 100 kHz, $T_J = 25^\circ C$ | | 52 | | μV |
| V_d | Dropout voltage | $T_J = 25^\circ C$ | | 2 | | V |
| I_{sc} | Short circuit current | $V_I = 35$ V, $T_J = 25^\circ C$ | | 250 | | mA |
| I_{scp} | Short circuit peak current | $T_J = 25^\circ C$ | | 700 | | mA |

Table 8.Electrical characteristics of LM78M010

Refer to the test circuits, $V_I = 16 \text{ V}$, $I_O = 350 \text{ mA}$, $C_I = 0.33\mu\text{F}$, $C_O = 0.1\mu\text{F}$, $T_J = 0 \text{ to } 125^\circ\text{C}$ unless otherwise specified.

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|--|-------------|-------------|-------------|-------------|
| V_O | Output voltage | $T_J = 25^\circ\text{C}$ | 9.8 | 10 | 10.2 | V |
| V_O | Output voltage | $I_O = 5 \text{ to } 350 \text{ mA}$, $V_I = 12.5 \text{ to } 25 \text{ V}$ | 9.6 | 10 | 10.4 | V |
| ΔV_O | Line regulation | $V_I = 12.5 \text{ to } 30 \text{ V}$, $I_O = 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 100 | mV |
| | | $V_I = 13 \text{ to } 30 \text{ V}$, $I_O = 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 30 | |
| ΔV_O | Load regulation | $I_O = 5 \text{ to } 500 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 200 | mV |
| | | $I_O = 5 \text{ to } 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 100 | |
| I_d | Quiescent current | $T_J = 25^\circ\text{C}$ | | | 6 | mA |
| ΔI_d | Quiescent current change | $I_O = 5 \text{ to } 350 \text{ mA}$ | | | 0.5 | mA |
| | | $I_O = 200 \text{ mA}$, $V_I = 12.5 \text{ to } 30 \text{ V}$ | | | 0.8 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5 \text{ mA}$ | | -0.5 | | mV/°C |
| SVR | Supply voltage rejection | $V_I = 13.5 \text{ to } 24 \text{ V}$, $f = 120\text{Hz}$, $I_O = 300\text{mA}$, $T_J = 25^\circ\text{C}$ | 56 | | | dB |
| eN | Output noise voltage | $B = 10\text{Hz} \text{ to } 100\text{kHz}$, $T_J = 25^\circ\text{C}$ | | 64 | | μV |
| V_d | Dropout voltage | $T_J = 25^\circ\text{C}$ | | 2 | | V |
| I_{sc} | Short circuit current | $V_I = 35 \text{ V}$, $T_J = 25^\circ\text{C}$ | | 245 | | mA |
| I_{scp} | Short circuit peak current | $T_J = 25^\circ\text{C}$ | | 700 | | mA |

Table 9.Electrical characteristics of LM78M012

Refer to the test circuits, $V_I = 19 \text{ V}$, $I_O = 350 \text{ mA}$, $C_I = 0.33\mu\text{F}$, $C_O = 0.1\mu\text{F}$, $T_J = 0 \text{ to } 125^\circ\text{C}$ unless otherwise specified.

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|--|-------------|-------------|-------------|-------------|
| V_O | Output voltage | $T_J = 25^\circ\text{C}$ | 11.75 | 12 | 12.25 | V |
| V_O | Output voltage | $I_O = 5 \text{ to } 350 \text{ mA}$, $V_I = 14.5 \text{ to } 27 \text{ V}$ | 11.5 | 12 | 12.5 | V |
| ΔV_O | Line regulation | $V_I = 14.5 \text{ to } 30 \text{ V}$, $I_O = 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 100 | mV |
| | | $V_I = 16 \text{ to } 30 \text{ V}$, $I_O = 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 30 | |
| ΔV_O | Load regulation | $I_O = 5 \text{ to } 500 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 240 | mV |
| | | $I_O = 5 \text{ to } 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 120 | |
| I_d | Quiescent current | $T_J = 25^\circ\text{C}$ | | | 6 | mA |
| ΔI_d | Quiescent current change | $I_O = 5 \text{ to } 350 \text{ mA}$ | | | 0.5 | mA |
| | | $I_O = 200 \text{ mA}$, $V_I = 14.5 \text{ to } 30 \text{ V}$ | | | 0.8 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5 \text{ mA}$ | | -1 | | mV/°C |
| SVR | Supply voltage rejection | $V_I = 15 \text{ to } 25 \text{ V}$, $f = 120\text{Hz}$, $I_O = 300\text{mA}$, $T_J = 25^\circ\text{C}$ | 55 | | | dB |
| eN | Output noise voltage | $B = 10\text{Hz} \text{ to } 100\text{kHz}$, $T_J = 25^\circ\text{C}$ | | 75 | | μV |
| V_d | Dropout voltage | $T_J = 25^\circ\text{C}$ | | 2 | | V |
| I_{sc} | Short circuit current | $V_I = 35 \text{ V}$, $T_J = 25^\circ\text{C}$ | | 240 | | mA |
| I_{scp} | Short circuit peak current | $T_J = 25^\circ\text{C}$ | | 700 | | mA |

Table 10.Electrical characteristics of LM78M015

Refer to the test circuits, $V_I = 23 \text{ V}$, $I_O = 350 \text{ mA}$, $C_I = 0.33\mu\text{F}$, $C_O = 0.1\mu\text{F}$, $T_J = 0 \text{ to } 125^\circ\text{C}$ unless otherwise specified.

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|---|-------------|-------------|-------------|-------------|
| V_O | Output voltage | $T_J = 25^\circ\text{C}$ | 14.7 | 15 | 15.3 | V |
| V_O | Output voltage | $I_O = 5 \text{ to } 350 \text{ mA}$, $V_I = 17.5 \text{ to } 30 \text{ V}$ | 14.4 | 15 | 15.6 | V |
| ΔV_O | Line regulation | $V_I = 17.5 \text{ to } 30 \text{ V}$, $I_O = 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 100 | mV |
| | | $V_I = 20 \text{ to } 30 \text{ V}$, $I_O = 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 30 | |
| ΔV_O | Load regulation | $I_O = 5 \text{ to } 500 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 300 | mV |
| | | $I_O = 5 \text{ to } 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 150 | |
| I_d | Quiescent current | $T_J = 25^\circ\text{C}$ | | | 6 | mA |
| ΔI_d | Quiescent current change | $I_O = 5 \text{ to } 350 \text{ mA}$ | | | 0.5 | mA |
| | | $I_O = 200 \text{ mA}$, $V_I = 17.5 \text{ to } 30 \text{ V}$ | | | 0.8 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5 \text{ mA}$ | | -1 | | mV/°C |
| SVR | Supply voltage rejection | $V_I = 18.5 \text{ to } 28.5 \text{ V}$, $f = 120\text{Hz}$, $I_O = 300\text{mA}$, $T_J = 25^\circ\text{C}$ | 54 | | | dB |
| eN | Output noise voltage | $B = 10\text{Hz} \text{ to } 100\text{kHz}$, $T_J = 25^\circ\text{C}$ | | 90 | | µV |
| V_d | Dropout voltage | $T_J = 25^\circ\text{C}$ | | 2 | | V |
| I_{sc} | Short circuit current | $V_I = 35 \text{ V}$, $T_J = 25^\circ\text{C}$ | | 240 | | mA |
| I_{scp} | Short circuit peak current | $T_J = 25^\circ\text{C}$ | | 700 | | mA |

Table 11.Electrical characteristics of LM78M024

Refer to the test circuits, $V_I = 33 \text{ V}$, $I_O = 350 \text{ mA}$, $C_I = 0.33\mu\text{F}$, $C_O = 0.1\mu\text{F}$, $T_J = 0 \text{ to } 125^\circ\text{C}$ unless otherwise specified.

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|-----------------------|----------------------------|---|-------------|-------------|-------------|-------------|
| V_O | Output voltage | $T_J = 25^\circ\text{C}$ | 23.5 | 24 | 24.5 | V |
| V_O | Output voltage | $I_O = 5 \text{ to } 350 \text{ mA}$, $V_I = 27 \text{ to } 38 \text{ V}$ | 23 | 24 | 25 | V |
| ΔV_O | Line regulation | $V_I = 27 \text{ to } 38 \text{ V}$, $I_O = 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 100 | mV |
| | | $V_I = 28 \text{ to } 38 \text{ V}$, $I_O = 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 30 | |
| ΔV_O | Load regulation | $I_O = 5 \text{ to } 500 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 480 | mV |
| | | $I_O = 5 \text{ to } 200 \text{ mA}$, $T_J = 25^\circ\text{C}$ | | | 240 | |
| I_d | Quiescent current | $T_J = 25^\circ\text{C}$ | | | 6 | mA |
| ΔI_d | Quiescent current change | $I_O = 5 \text{ to } 350 \text{ mA}$ | | | 0.5 | mA |
| | | $I_O = 200 \text{ mA}$, $V_I = 27 \text{ to } 38 \text{ V}$ | | | 0.8 | |
| $\Delta V_O/\Delta T$ | Output voltage drift | $I_O = 5 \text{ mA}$ | | -1.2 | | mV/°C |
| SVR | Supply voltage rejection | $V_I = 28 \text{ to } 38 \text{ V}$, $f = 120\text{Hz}$, $I_O = 300\text{mA}$, $T_J = 25^\circ\text{C}$ | 50 | | | dB |
| eN | Output noise voltage | $B = 10\text{Hz} \text{ to } 100\text{kHz}$, $T_J = 25^\circ\text{C}$ | | 170 | | µV |
| V_d | Dropout voltage | $T_J = 25^\circ\text{C}$ | | 2 | | V |
| I_{sc} | Short circuit current | $V_I = 35 \text{ V}$, $T_J = 25^\circ\text{C}$ | | 240 | | mA |
| I_{scp} | Short circuit peak current | $T_J = 25^\circ\text{C}$ | | 700 | | mA |

Typical performance

Figure 8. Dropout voltage vs. junction temp.

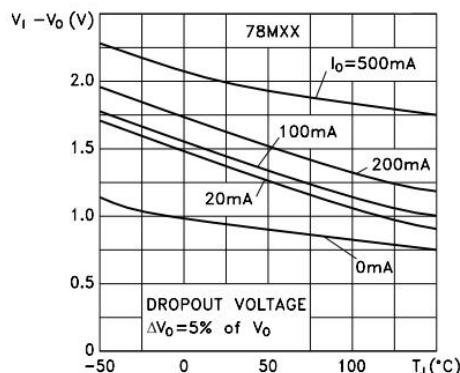


Figure 9. Dropout characteristics

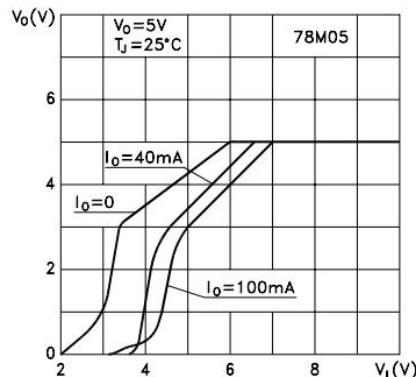


Figure 10. Peak output current vs. inputoutput differential voltage

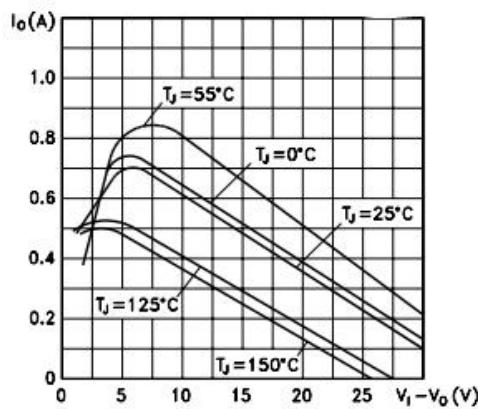


Figure 11. Output voltage vs. junction temperature

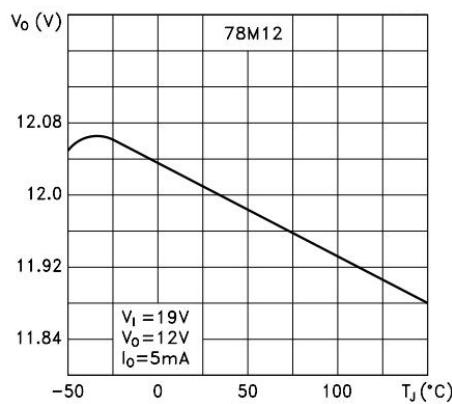


Figure 12. Supply voltage rejection vs. frequency


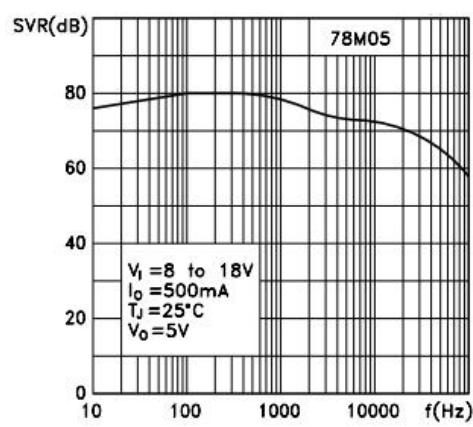


Figure 13. Quiescent current vs. junction temperature

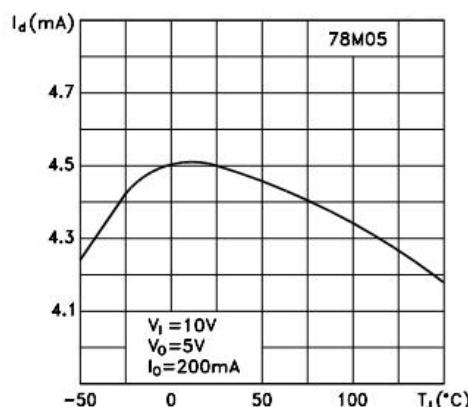

Typical performance

Figure 14. Load transient response

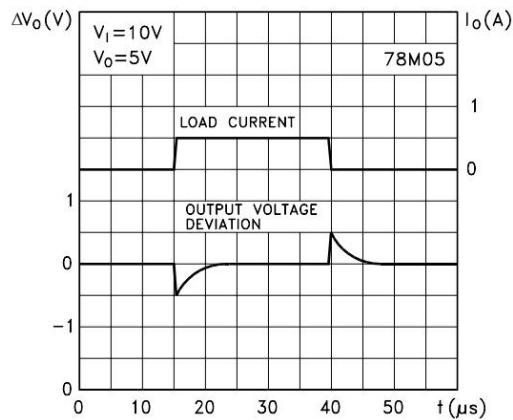


Figure 15. Line transient response



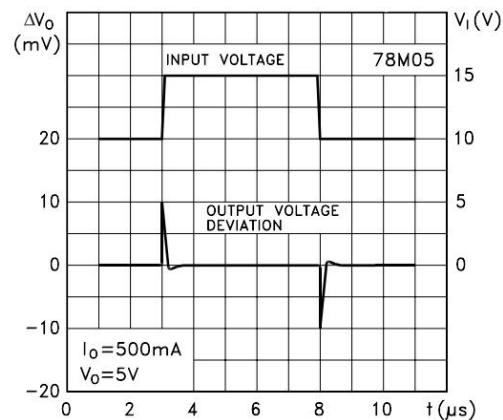


Figure 16. Quiescent current vs. input voltage

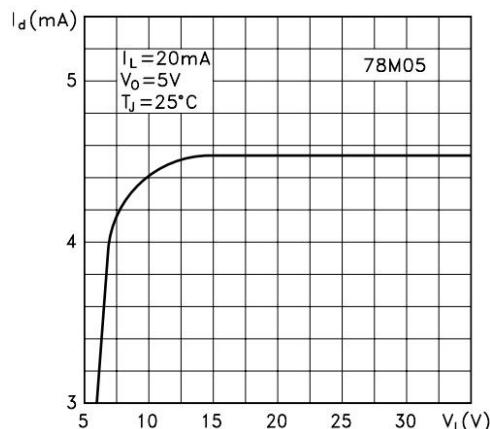

Physical Dimensions


TO-252-2

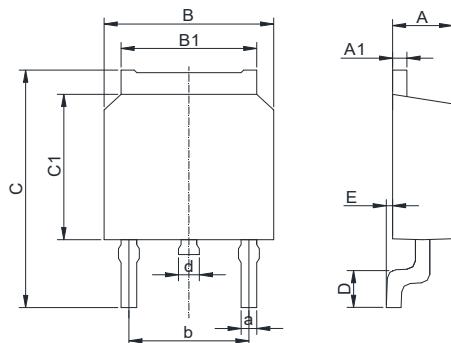

Dimensions In Millimeters(TO-252-2)

| Symbol: | A | A1 | B | B1 | C | C1 | D | E | a | b | d |
|---------|------|------|------|------|------|------|------|------|------|------|------|
| Min: | 2.10 | 0.45 | 6.30 | 5.10 | 9.20 | 5.30 | 0.90 | 0 | 0.50 | 4.45 | 0.70 |
| Max: | 2.50 | 0.70 | 6.75 | 5.50 | 10.6 | 6.30 | 1.75 | 0.23 | 0.80 | 4.75 | 1.20 |

SOT-223

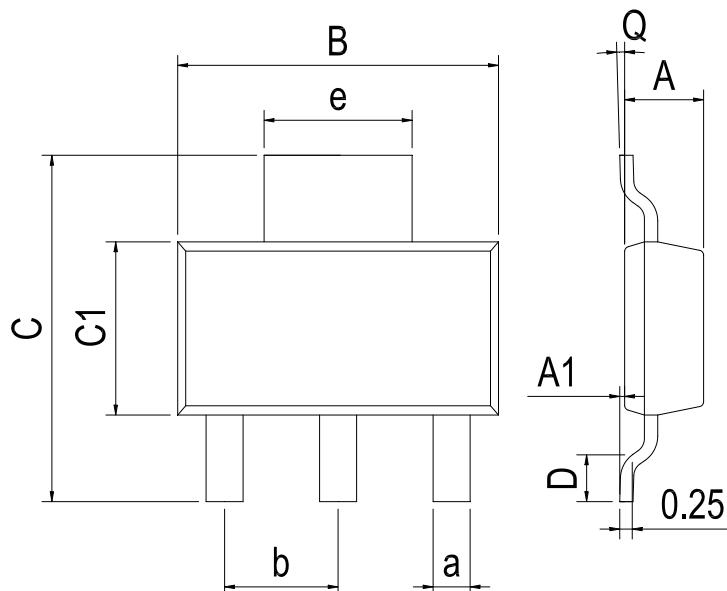

Dimensions In Millimeters(SOT-223)

| Symbol: | A | A1 | B | C | C1 | D | Q | a | b | e |
|---------|------|------|------|------|------|------|----|------|----------|----------|
| Min: | 1.50 | 0.05 | 6.30 | 6.70 | 3.30 | 0.65 | 0° | 0.66 | 2.30 BSC | 3.00 BSC |
| Max: | 1.70 | 0.20 | 6.70 | 7.30 | 3.70 | 1.10 | 8° | 0.84 | | |

Revision History

| DATE | REVISION | PAGE |
|-----------|---|------|
| 2014-6-8 | New | 1-12 |
| 2023-7-24 | Update encapsulation type、Update Lead Temperature | 1、3 |

IMPORTANT STATEMENT:

Hanschip Semiconductor reserves the right to change its products and services without notice. Before ordering, the customer shall obtain the latest relevant information and verify whether the information is up to date and complete. Hanschip Semiconductor does not assume any responsibility or obligation for the altered documents.

Customers are responsible for complying with safety standards and taking safety measures when using Hanschip Semiconductor products for system design and machine manufacturing. You will bear all the following responsibilities: select the appropriate Hanschip Semiconductor products for your application; Design, validate and test your application; Ensure that your application meets the appropriate standards and any other safety, security or other requirements. To avoid the occurrence of potential risks that may lead to personal injury or property loss.

Hanschip Semiconductor products have not been approved for applications in life support, military, aerospace and other fields, and Hanschip Semiconductor will not bear the consequences caused by the application of products in these fields. All problems, responsibilities and losses arising from the user's use beyond the applicable area of the product shall be borne by the user and have nothing to do with Hanschip Semiconductor, and the user shall not claim any compensation liability against Hanschip Semiconductor by the terms of this Agreement.

The technical and reliability data (including data sheets), design resources (including reference designs), application or other design suggestions, network tools, safety information and other resources provided for the performance of semiconductor products produced by Hanschip Semiconductor are not guaranteed to be free from defects and no warranty, express or implied, is made. The use of testing and other quality control technologies is limited to the quality assurance scope of Hanschip Semiconductor. Not all parameters of each device need to be tested.

The documentation of Hanschip Semiconductor authorizes you to use these resources only for developing the application of the product described in this document. You have no right to use any other Hanschip Semiconductor intellectual property rights or any third party intellectual property rights. It is strictly forbidden to make other copies or displays of these resources. You should fully compensate Hanschip Semiconductor and its agents for any claims, damages, costs, losses and debts caused by the use of these resources. Hanschip Semiconductor accepts no liability for any loss or damage caused by infringement.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Linear Voltage Regulators](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[LV5684PVD-XH](#) [MCDTSA6-2R](#) [L7815ACV-DG](#) [714954EB](#) [ZMR500QFTA](#) [BA033LBSG2-TR](#) [LV5680P-E](#) [L79M05T-E](#) [L78LR05D-MA-E](#) [NCV317MBTG](#) [NTE7227](#) [MP2018GZD-33-P](#) [MP2018GZD-5-P](#) [LV5680NPVC-XH](#) [LT1054CN8](#) [UA78L09CLP](#) [UA78L09CLPR](#) [CAT6221-PPTD-GT3](#) [MC78M09CDTRK](#) [NCV51190MNTAG](#) [78M05](#) [HT7150-1](#) [UM1540DB-18](#) [XC6234H281VR-G](#) [WL2834CA-6/TR](#) [TPL730F33-5TR](#) [TLS850F1TA V50](#) [TPS549B22RVFR](#) [UM1540DB-33](#) [WL9200P3-50B](#) [WL9100P3-33B](#) [XC6219B152MR](#) [WL2855K33-3/TR](#) [PJ54BM33SE](#) [PJ9500M25SA](#) [MD7218E33PC1](#) [H7533-2PR](#) [SK7812AU](#) [SD1A30](#) [78L33](#) [TP78L33T3](#) [SK6513ST3A-50](#) [SK6054D4-09](#) [SK6054D4-18](#) [SK6054D4-11](#) [SK6054D4-10](#) [LM79L12F](#) [HLP2985AIM5X-5.0](#) [HLP2992AIM5X-5.0/NOPB](#) [HMIC5205-5.0YM5-TR](#)