




Encased transformers TTZ make G are designed for powering 110V devices from 230V mains. Thanks to "American" type socket and connection cable fitted with a plug the connection of such devices is quick and convenient. The transformers are made with Class II insulation and protection grade IP30. Maximum ambient temperature 25°C, thermal class of insulation B (130°C). Manufactured in compliance with EN 61558-2-4.



Rated power: 50 - 200 VA

Rated voltage PRI: 230 V 50/60 Hz

Rated voltage SEC: 110 - 120 V

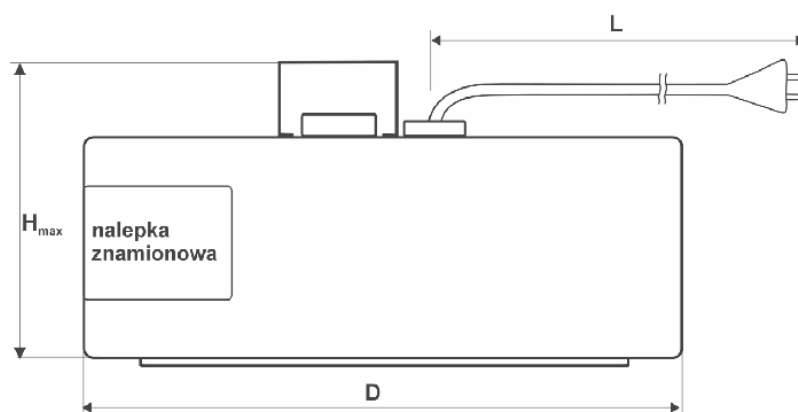

Type	Power (VA)	Dimensions (mm)			Weight (kg)
		D	H	L	
TTZ 50/G 230/110V	50	82	60	1 600	0,80
TTZ 100/G 230/110V	100	98	66	1 600	1,30
TTZ 200/G 230/110V	200	105	75	1 600	2,00

As a result of constant development of product construction and changes concerning technical requirements, Breve Tufvassons reserves the right to change the parameters mentioned above.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Power Transformers](#) category:

Click to view products by [Breve Tufvassons](#) manufacturer:

Other Similar products are found below :

[1-1672275-3](#) [A41-43-20A20](#) [DST5-120B39](#) [14A-56-36B42](#) [EN2997SE61808F8](#) [9-1611461-2](#) [29768](#) [1654308-1](#) [170R](#) [ST2-12B42](#) [ST3-12B5](#) [ST6118T-R](#) [PE-68421NL](#) [PL2.5-12-130B-C](#) [PoE4W3x5.0-R](#) [POE7W3X3.3-R](#) [4000-20C02K999](#) [4001-09W15AE777](#) [48RO-5000G-SIL](#) [TRA-0130-R](#) [XON7-15/2](#) [47045010](#) [1-1611462-6](#) [1-1611760-0](#) [EN2997SE61808F9](#) [OPT110F-EAS00004AU](#) [XON25-9/24](#) [XON01349](#) [XON01200](#) [XDCA001/INER01](#) [PE-68414NL](#) [F-91X](#) [F-29U](#) [DST4-16B10](#) [DP241-8-24A55](#) [DP241-5-10A21](#) [P-8577](#) [T50-24M3](#) [1-1672277-2](#) [1-1672277-0](#) [1-1672275-5](#) [1-1672275-0](#) [4000-01V18BC999](#) [PC-24-180B18](#) [750315837](#) [750315125](#) [POE13W2VERS-R](#) [PA2380NL](#) [14A-10-12B9](#) [PE-68411NL](#)