

Optolinx FCU-100

10/100BaseTX to 100BaseFX Media Converter




Features


- ▶ Complies with IEEE 802.3 100BaseT & 802.3u 100BaseTX/FX Standards
- ▶ Store-and-Forward Switching Mechanism
- ▶ Auto-Crossover for MDI/MDIX in TP Port
- ▶ 10/100Mbps Auto Negotiation
- ▶ Supports Link-Fault-Pass-Through
- ▶ LED: Power, FDX, TP 100, TP Link/Act, Fiber 100, Fiber Link/Act
- ▶ Supports 1K MAC Address
- ▶ Supports 48K Byte Packet Buffer
- ▶ Configuration DIP Switch Supports Auto, Speed, Duplex, Auto MDI/MDIX, & Link-Fault-Pass-Through
- ▶ 5-Year Warranty




▶ Specifications

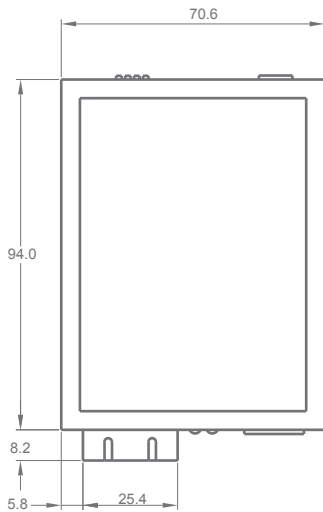


Top View (SC)

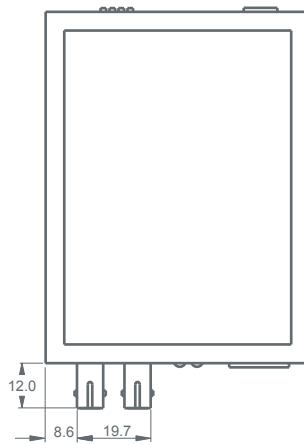


Top View (ST)

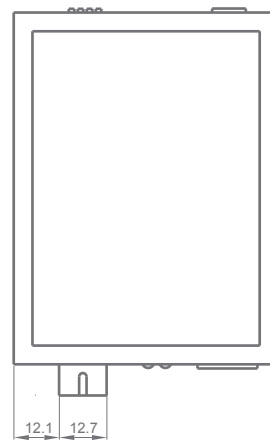


Top View (WDM)

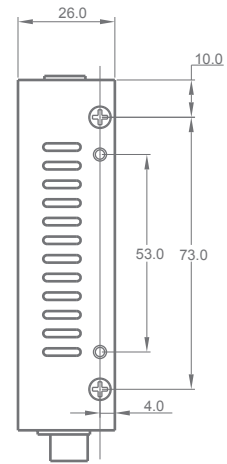


Side View



Panel View (SC)



Panel View (ST)



Panel View (WDM)



Rear View

► Specifications

Standard

IEEE 802.3 100BaseT
IEEE 802.3u 100BaseTX & 100BaseFX

Interface

10/100BaseT: 1 x RJ45 Port
100BaseFX: 1 x SC Port

Connector Type

FCU-100SC/SC-Sx/WA/WB-Sx: SC Connector
FCU-100ST: ST Connector

Wavelength

FCU-100SC/ST/SC-Sx: 1310nm
FCU-100WA-Sx: TX-1310nm; RX-1550nm
FCU-100WB-Sx: TX-1550nm; RX-1310nm

Typical Distance

FCU-100SC/ST: 2 Km
FCU-100SC-S3: 30 Km
FCU-100SC-S5: 50 Km
FCU-100SC-S8: 80 Km
FCU-100WA/WB-S2: 20 Km
FCU-100WA/WB-S8: 80 Km

Minimum TX Power

FCU-100SC/ST: -19.0 dBm
FCU-100SC-Sx: -15.0 ~ 0 dBm
FCU-100WA/WB-S2: -14.0 dBm
FCU-100WA/WB-S8: -2.0/-3.0 dBm

Maximum TX Power

FCU-100SC/ST: -14.0 dBm
FCU-100SC-Sx: -8.0 ~ 5.0 dBm
FCU-100WA/WB-S2: -8.0 dBm
FCU-100WA/WB-S8: 3.0 dBm

Sensitivity

FCU-100SC/ST: -30.0 dBm
FCU-100SC-Sx: -36.0 ~ -34.0 dBm
FCU-100WA/WB-S2: -33.0 dBm
FCU-100WA/WB-S8: -35.0 dBm

Link Budget

FCU-100SC/ST: 11.0 dB
FCU-100SC-Sx: 19.0 ~ 36.0 dB
FCU-100WA/WB-S2: 19.0 dB
FCU-100WA/WB-S8: 33.0/32.0 dB

Switching Method

Store and Forward

Data Transfer Rate

200 Mbps - Full Duplex

MAC Table

1K

Memory Buffer

48K

Forward/Filter Rate

Filtering Rate (Ethernet) - 14,880 pps
Filtering Rate (Fast Ethernet) - 148,800 pps

LED

Power, FDX, TP100, TP Link/ACT, FX100, FX Link/ACT

Power

External Power Supply: DC 5V, 1.6A

Power Consumption

5 Watts

Operation Temperature

0° C to 50° C (32° F to 122° F)

Storage Temperature

-20° C to 60° C (-4° F to 140° F)

Operation Humidity

5% to 90% (Non-condensing)

Mechanical

Casing: IP30 Metal Case
Dimension (W x H x D): 71 x 94 x 26 mm (2.80 x 3.70 x 1.02 inches)
Weight: 0.6 Kg (1.3 lbs)
Installation: DIN-Rail/Wall Mountable

Emission/Safety

FCC Class A, CE

Warranty

5-Year Warranty

► Ordering Information

FCU-100SC	10/100TX - 100FX Media Converter, Standalone Module, Multi-Mode, SC, 2Km
FCU-100ST	10/100TX - 100FX Media Converter, Standalone Module, Multi-Mode, ST, 2Km
FCU-100SC-S3	10/100TX - 100FX Media Converter, Standalone Module, Single-Mode, SC, 30Km
FCU-100SC-S5	10/100TX - 100FX Media Converter, Standalone Module, Single-Mode, SC, 50Km
FCU-100SC-S8	10/100TX - 100FX Media Converter, Standalone Module, Single-Mode, SC, 80Km
FCU-100WA-S2	10/100TX - 100FX Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 20Km, TX-1310nm; RX-1550nm
FCU-100WB-S2	10/100TX - 100FX Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 20Km, TX-1550nm; RX-1310nm
FCU-100WA-S8	10/100TX - 100FX Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 80Km, TX-1310nm; RX-1550nm
FCU-100WB-S8	10/100TX - 100FX Single-Strand Fiber (WDM), Standalone Module, Single-Mode, SC, 80Km, TX-1550nm; RX-1310nm

Optional Accessories

AD-SCM-STF-M	SC (Male) to ST (Female) Duplex Adapter (Multi-Mode)
AD-SCM-STF-S	SC (Male) to ST (Female) Duplex Adapter (Single-Mode)
FCU-BK	Mounting Brackets for FCU Modules
DIN-RAIL-KIT	DIN-Rail Mounting Kit

Antaira Technologies

Toll-Free: (877) 229-3665
Phone: (714) 671-9000
FAX: (714) 671-9944

e-Mail: info@antaira.com
Website: <http://www.antaira.com>


www.antaira.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [ANTAIRA](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)