

BOARD-TO-BOARD HEADERS & RECEPTACLES





✓ Active



PRODUCT DRAWING



3D PDF

TE CONNECTIVITY (TE)

HDI PIN ASSY 3 ROW 135 POS

AMP-HDI | HDI

532433-6

TE Internal Number: 532433-6

5 of 6 EU RoHS/ELV Compliant Find Compliant Alternatives

Connector Style Plug

Centerline 2.54 mm [.1 in]

Number of Positions 135

Packaging Method **Tube**

Contact Mating Area Plating Material **Gold**

Product Drawings HDI, 3 ROW, PIN ASSEMBLY, 4.83 [.190] LONG SOLDER PINS

PDF **English**

CAD Files Customer View Model

3D_IGS.ZIP English

Customer View Model

3D_STP.ZIP English

Customer View Model

2D_DXF.ZIP **English**

3D PDF PDF English

Product Specifications

Product Specification Connector, Interconnect, High Density

PDF **English**

Application Specification AMP-HDI Connectors

PDF **English**

Qualification Test Report AMP-HDI Connectors

PDF **Japanese**

AMP-HDI Connectors

PDF **English**

AMP-HDI Connectors

TIF English

Instruction Sheets


Instruction Sheet (U.S.)

AMP-HDI High Density Interconnection Printed Circuit (PC) Board Connectors

PDF **English** Please review product documents or contact us for the latest agency approval information. Please Note: Use the Product Drawing for all design activity.

Product Type Features	Connector Style	Plug
	PCB Mounting Orientation	Vertical
	Row-to-Row Spacing	2.54 mm [.1 in]
	Product Type	Connector
	Boss	Without
	Make First / Break Last	No
Configuration Features	Number of Positions	135
	Center Guide	Without
	Number of Rows	3
	Stackable	No
Contact Features	Contact Mating Area Plating Material	Gold
	Contact Mating Area Plating Thickness (µin)	30
	Contact Current Rating (A)	3
	Contact Type	Pin
	Contact Configuration	Four-Beam
	Solder Tail Contact Plating Material	Tin
	Contact Layout	Matrix
	Underplate Material	Nickel
	Contact Base Material	Phosphor Bronze
Termination Features	Termination Method to PC Board	Through Hole
	Termination Post Length	4.83 mm [.19 in]
Mechanical Attachment	Mating Alignment	Without
	Mating Alignment Type	Keyed
	PCB Mount Retention	Without
Housing Features	Centerline	2.54 mm [.1 in]
	Housing Material	Thermoplastic
	Housing Color	Black

Dimensions	Tail Length	4.83 mm [.19 in]
	Height	11.73 mm [.46 in]
	PCB Thickness (Recommended)	1.57 – 3.18 mm [.062 – .125 in]
	Mating Post Length (mm)	5.33
Usage Conditions	Housing Material Temperature	High
	Operating Temperature Range (°C)	-65 – 125
Operation/Application	Pick and Place Cover	Without
	Assembly Process Feature	Board Standoff
Industry Standards	UL Flammability Rating	UL 94V-0
Packaging Features	Packaging Method	Tube
	Packaging Quantity	4
Product Compliance	Statement of Compliance PDF VIEW ALL PRODUCT COMPLIANCE	

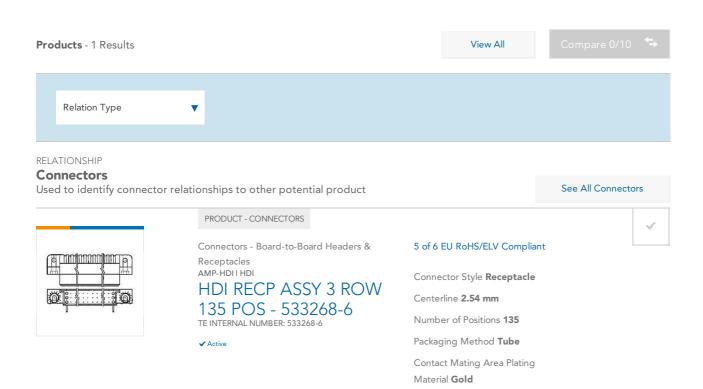

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for High Speed/Modular Connectors category:

Click to view products by TE Connectivity manufacturer:

Other Similar products are found below:

2332816-1 89006-1137LF 650827-1 65762-001LF 73474-201LF 74040-1346 74075-0267 88911-201LF 9514M0C20D 1410191-1 1410337-1 1410368-3 1410964-2 1410326-3 1410367-3 1410971-4 1467833-1 2000877-1 2000878-1 2041314-1 2065387-1 2187307-1 2187462-1 2226278-6 KA81-07 91290-101LF 1934290-1 2000875-1 2065917-1 2102736-2 FSR-40 2169868-2 2226279-2 22354-8 437-5040-000 5-1393565-0 532449-3 532803-2 34745-0001 0740618502 0760151403 0760551105 0760551608 0761451128 0761651124 0761655108 0761659807 0769853208 0736440217 0758324203